

# PCMCIA DC/DC Converter

Low Profile SMD Isolation Modules



## Product Features:


- The TGM-P3 series of 8 pin transformers provide the isolation and voltage outputs required for small, low cost DC/DC converter circuits.
- Designed specifically for use with the Maxim™ MAX845 monolithic oscillator/power drivers with 3.3V or 5V power source.
- DIL and SMD packages are also available with isolation voltages up to 4.5KVrms.
- Operating Temp: -40 to +85°C

Part Number	Circuit	Turns Ratio ( $\pm 3\%$ ) PRI : SEC	Cw/w (pF Max.)	PRI LL ( $\mu\text{H Typ.}$ )	Isolation Vrms
TGM-010P3RL	A	1:1:1	12	0.40	500
TGM-020P3RL	A	1:1:0.75	12	0.40	500
TGM-030P3RL	A	1:1:1.5	12	0.40	500
TGM-040P3RL	B	1:1:1.3:1.3	12	0.40	500
TGM-050P3RL	B	1:1:1:1	12	0.40	500

### Notes:

1. PRI Pins: 1-2 & 3-4
2. PRI DCR:  $0.6\Omega$  Max.
3. PRI OCL:  $240\mu\text{H Typ.}$
4. ET Constant:  $5.5 \text{ V}\cdot\mu\text{s Min.}$
5. For more information, pertaining to the MAX845 please contact Maxim at (408) 737-7600. Maxim is a registered trademark of Maxim Integrated Products.

Schematic A

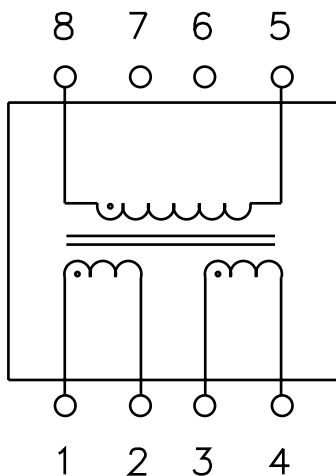


Schematic B



# PCMCIA DC/DC Converter Isolation Modules

## Package P3

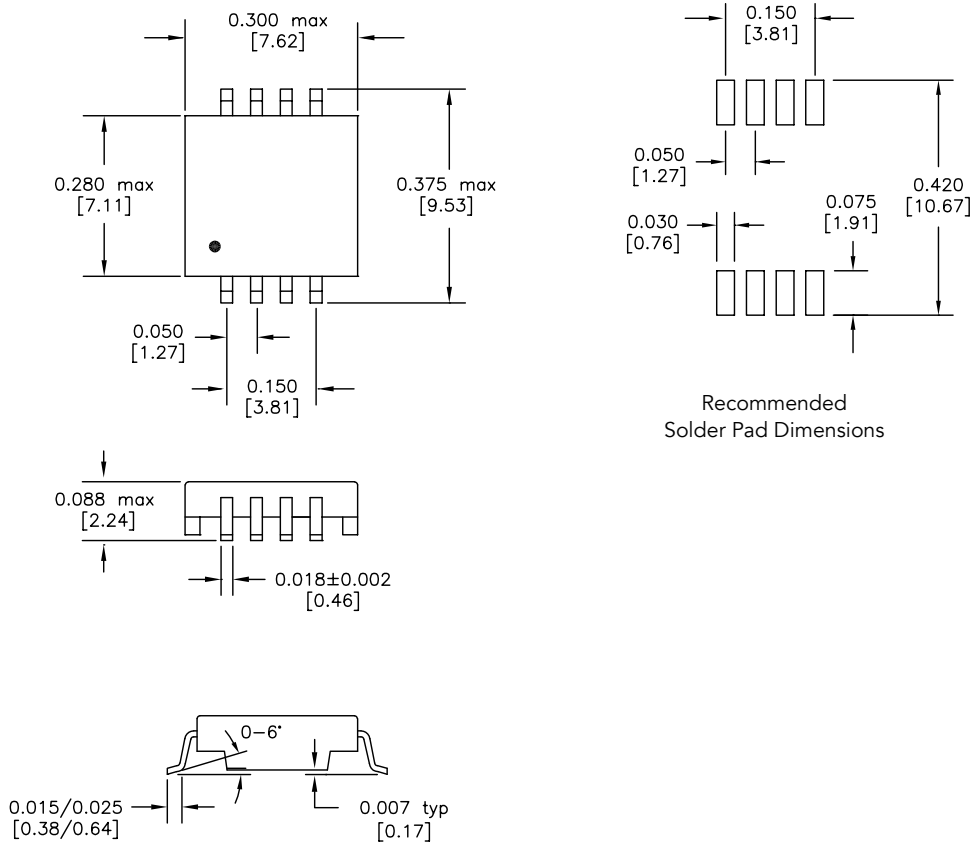

Dimensions: inches [mm]  
Co-Planarity: 0.004 [0.10]

US Patent Numbers for SMD Devices  
 5,656,985      6,297,721 B1  
 6,297,720 B1      6,320,489 B1  
 6,344,785 B1      6,662,431 B1



2880 Lakeside Drive #116  
 Santa Clara, CA 95054  
 (650) 903-3800  
[www.haloelectronics.com](http://www.haloelectronics.com)

HALO® Electronics is a leading supplier of high quality communication magnetics including signal transformers, filters, CMR chokes, PoE power transformers, DC/DC converters, and integrated Ethernet connectors. HALO's leading edge technology solutions are manufactured in ISO9001 and ISO14001 factories offering high quality products at a competitive price.

© Copyright 2014 HALO Electronics, Inc. All rights reserved.

Revised 6/2014 Download the latest version at [www.haloelectronics.com/pdf/discrete-max845dc2dc-pcmcia.pdf](http://www.haloelectronics.com/pdf/discrete-max845dc2dc-pcmcia.pdf)

# Maxim™ MAX845 DC/DC Converter Application Note

The TGM series of transformers have been designed specifically for use with the Maxim™ MAX845 monolithic oscillator/power driver with 3.3V or 5V power source. Multiple output voltages can be achieved depending on the diode circuit and transformer selected. For more information, pertaining to the MAX845 please contact Maxim at (408) 737-7600. Maxim is a registered trademark of Maxim Integrated Products.

## Bridge Rectifier Circuit



## Output Voltages



## Doubler Circuit




## Output Voltages



## Full Wave Rectifier Circuit



## Output Voltages

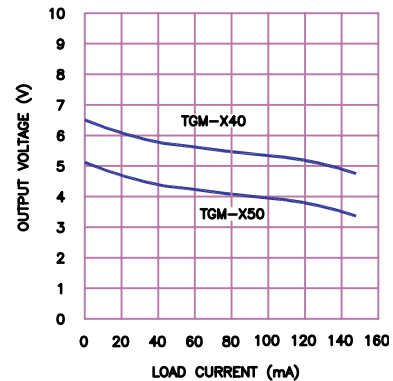

**HALO**  
ELECTRONICS, INC.

2880 Lakeside Drive #116  
Santa Clara, CA 95054  
(650) 903-3800  
[www.haloelectronics.com](http://www.haloelectronics.com)

HALO® Electronics is a leading supplier of high quality communication magnetics including signal transformers, filters, CMR chokes, PoE power transformers, DC/DC converters, and integrated Ethernet connectors. HALO's leading edge technology solutions are manufactured in ISO9001 and ISO14001 factories offering high quality products at a competitive price.

© Copyright 2014 HALO Electronics, Inc. All rights reserved.

Revised 6/2014 Download the latest version at [www.haloelectronics.com/pdf/discrete-max845dc2dc-pcmcia.pdf](http://www.haloelectronics.com/pdf/discrete-max845dc2dc-pcmcia.pdf)

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9