

## DESCRIPTION

Demonstration board DC053A is a complete DC/DC step-up switching regulator using the LT<sup>®</sup>1372 or the LT1377 constant frequency, high efficiency converter in an 8-pin SOIC package. High frequency switching allows the use of

very small inductors, making this all surface mount solution ideal for space conscious systems.

LT, LTC and LT are registered trademarks of Linear Technology Corporation.

## PERFORMANCE SUMMARY $T_A = 25^\circ\text{C}$ , $V_{IN} = 5\text{V}$ , S/S pin open, unless otherwise specified.

| PARAMETER               | CONDITIONS                                                                                                | MIN   | TYP            | MAX   | UNITS                                                       |
|-------------------------|-----------------------------------------------------------------------------------------------------------|-------|----------------|-------|-------------------------------------------------------------|
| Output Voltage          | $R2 = R3 = 1\%$ (Note 1)                                                                                  | 11.60 | 12.04          | 12.50 | V                                                           |
| Output Current          | $V_{IN} = 5\text{V}$                                                                                      | 250   |                |       | mA                                                          |
| Input Voltage Range     | (Note 2)                                                                                                  | 2.7   |                | 11    | V                                                           |
| Switching Frequency     | LT1372<br>LT1377                                                                                          |       | 500<br>1       |       | kHz<br>MHz                                                  |
| Output Ripple Voltage   | $I_{LOAD} = 250\text{mA}$<br>$I_{LOAD} = 250\text{mA}$ (Note 3)<br>$V_{OUT2}$ , $I_{LOAD} = 250\text{mA}$ |       | 150<br>80<br>3 |       | mV <sub>P-P</sub><br>mV <sub>P-P</sub><br>mV <sub>P-P</sub> |
| Supply Current          | $I_{LOAD} = 0\text{A}$                                                                                    |       | 4.5            |       | mA                                                          |
| Shutdown Supply Current | $I_{LOAD} = 0\text{A}$ , $V_{S/S} = 0\text{V}$ (Note 4)                                                   |       | 100            |       | $\mu\text{A}$                                               |



**Note 1:** The reference voltage tolerance of the LT1372/LT1377 is  $\pm 1.6\%$  over temperature. Output voltage is a worst-case summation of R2, R3 and reference tolerances, plus feedback input current times R3. For a tighter output voltage range, use lower tolerance feedback resistors, or a fixed voltage version of the LT1372/LT1377 (consult Linear Technology Marketing).

**Note 2:** Increase L1 to  $10\mu\text{H}$  for  $V_{IN} < 4.75\text{V}$  or to  $15\mu\text{H}$  for  $V_{IN} < 3.3\text{V}$ .


**Note 3:** To reduce output ripple voltage, change C7 to a  $2.2\mu\text{F}$  ceramic chip capacitor (Tokin 1E225ZY5U-C203).

**Note 4:** Single inductor step-up converters have a direct path from the input supply to the output, and therefore draw some supply current even when the LT1372/LT1377 is in shutdown. Shutdown supply current will also increase with the addition of an output load. Applications are available which remove this direct path and reduce shutdown supply current to  $30\mu\text{A}$  maximum, independent of loading.

## TYPICAL PERFORMANCE CHARACTERISTICS AND BOARD PHOTO

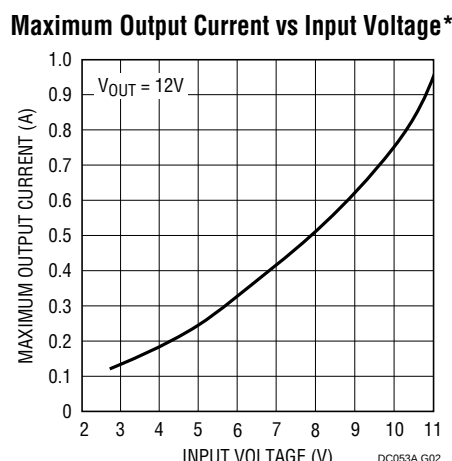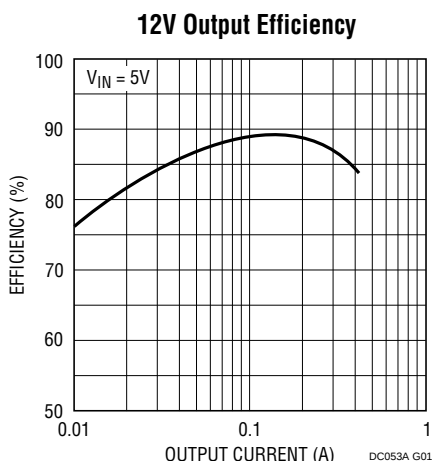

\*INCREASE L1 TO  $10\mu\text{H}$  FOR  $V_{IN} < 4.75\text{V}$   
OR TO  $15\mu\text{H}$  FOR  $V_{IN} < 3.3\text{V}$

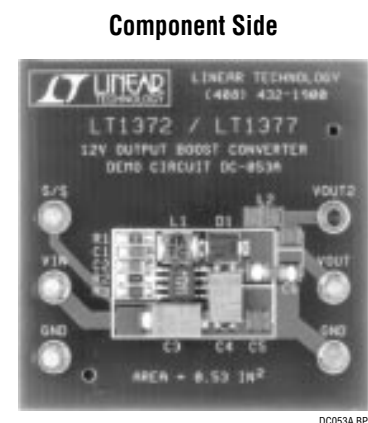

# DEMO MANUAL DC053A

## PACKAGE A AND SCHEMATIC DIAGRAMS

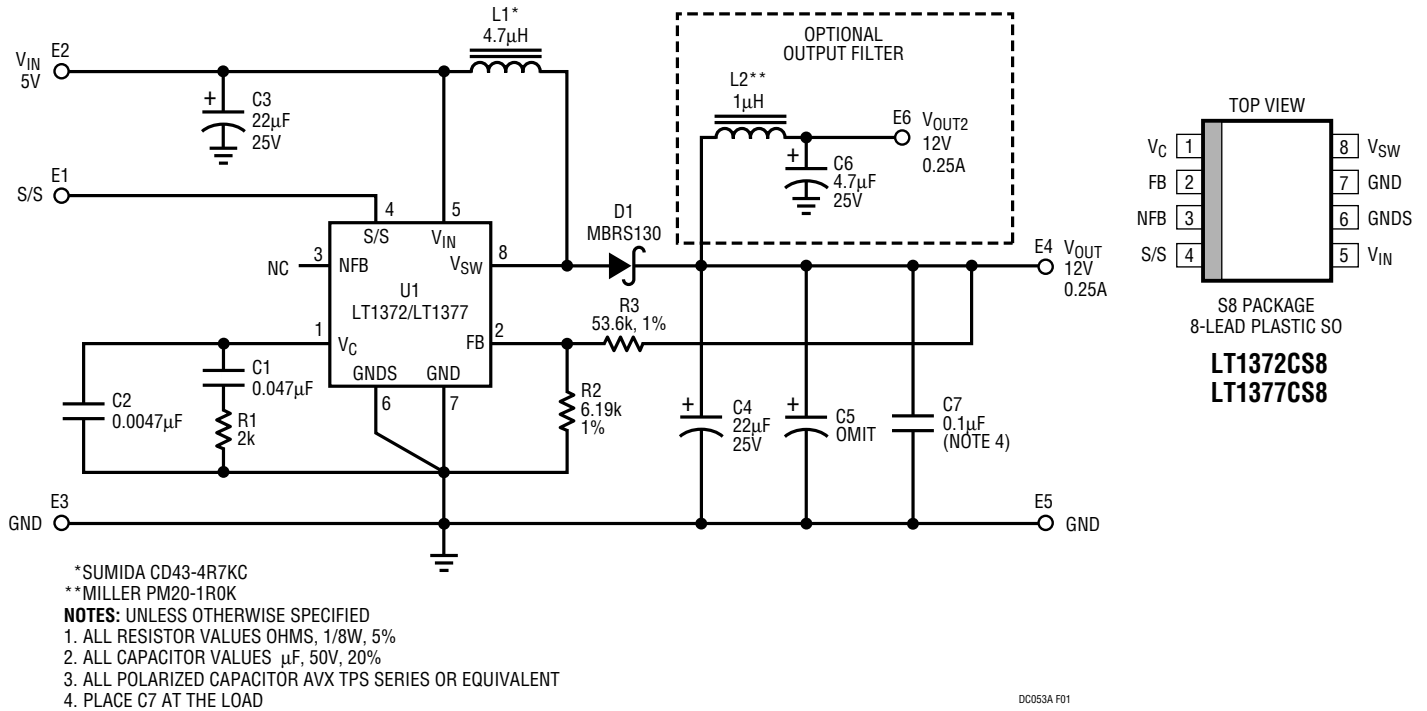


Figure 1. Switching Regulator 5V to 12V, 0.25A; 500kHz for the LT1372 and 1MHz for the LT1377

## PARTS LIST

| REFERENCE DESIGNATOR | QUANTITY | PART NUMBER          | DESCRIPTION                              | VENDOR   | TELEPHONE      |
|----------------------|----------|----------------------|------------------------------------------|----------|----------------|
| C1                   | 1        | AVX 12065C473MAT2A   | 0.047 $\mu$ F, 50V, 20%, X7R Capacitor   | AVX      | (803) 946-0362 |
| C2                   | 1        | AVX 12065C472MAT2A   | 0.0047 $\mu$ F, 50V, 20%, X7R Capacitor  | AVX      | (803) 946-0362 |
| C3, C4               | 2        | AVX TPSD226M025R0200 | 22 $\mu$ F, 25V, 20%, Tantalum Capacitor | AVX      | (207) 282-5111 |
| C5, C6               | 0        |                      | Capacitor, Optional (See Text)           |          |                |
| C7                   | 1        | AVX 12065C104MAT2A   | 0.1 $\mu$ F, 50V, 20%, X7R Capacitor     | AVX      | (803) 946-0362 |
| D1                   | 1        | MBRS130LT3           | 30V, 1A, Schottky Diode                  | Motorola | (602) 244-5768 |
| E1 to E5             | 5        | 1502-2               | 2-Turret, 0.092 Terminal                 | Keystone | (718) 956-8900 |
| E6                   | 0        |                      | Terminal, Optional (See Text)            |          |                |
| L1                   | 1        | CD43-4R7KC           | 4.7 $\mu$ H, SMT Inductor                | Sumida   | (708) 956-0666 |
| L2                   | 0        |                      | Inductor, Optional (See Text)            |          |                |
| R1                   | 1        | AVX CR32-202J-T      | 2k, 5%, SMT1206 Resistor                 | AVX      | (803) 946-0524 |
| R2                   | 1        | AVX CR32-6191F-T     | 6.19k, 1%, SMT 1206 Resistor             | AVX      | (803) 946-0524 |
| R3                   | 1        | AVX CR32-5362F-T     | 53.6k, 1%, SMT-1206 Resistor             | AVX      | (803) 946-0524 |
| U1*                  | 1        | LT1372CS8            | SO-8, LT1372, Switching Regulator IC     | LTC®     | (408) 432-1900 |
| U1*                  | 1        | LT1377CS8            | SO-8, LT1377, Switching Regulator IC     | LTC      | (408) 432-1900 |

\*The two demo board versions are:

DC53A-A: U1 = LT1372CS8

DC53A-B: U1 = LT1377CS8

## OPERATION

### DC053A Operation

This DC053A demonstration board is intended for evaluating the LT1372/LT1377 switching regulator in a typical step-up application. Solid turret terminals are provided for easy connection to test equipment. A device pinout and board schematic are shown in Figure 1. Please refer to the LT1372/LT1377 data sheet for additional specifications and applications information. Also useful is Linear Technology's SwitcherCAD software when creating your own designs.

### Hook-Up

Connect the input supply and measurement instruments to the  $V_{IN}$  and GND terminals on the left side of the board. The S/S pin (synchronization/shutdown) can be connected to  $V_{IN}$  or left open. Connect the output load and measurement instruments to the  $V_{OUT}$  and GND terminals on the right side of the board.  $V_{OUT2}$  is for evaluating an optional output filter and can be left open.

### LT1372/LT1377 Operation

The LT1372/LT1377 are monolithic high frequency current mode switchers. Each device can operate from an input supply range of 2.7V to 25V (DC053A maximum  $V_{IN}=11V$ ), and draws only 4mA quiescent current. The on-chip current limited power switch is guaranteed to 1.5A minimum switch current with a  $0.5\Omega$  typical "on" resistance and a 35V minimum breakdown voltage. Running at a fixed frequency of 500kHz (LT1372) or 1MHz (LT1377), switching can also be easily synchronized to a higher frequency by driving the S/S pin with a logic level source. Shutdown is activated by pulling the S/S pin below 0.6V, which reduces device supply current to 30 $\mu$ A maximum.

Under normal operating conditions, a 1.245V reference voltage is developed at the Feedback pin. The output voltage is set by R2 and R3, where  $V_{OUT}=V_{REF}(1+R3/R2)$ . Although not used in this application, the part also has a Negative Feedback pin (NFB) which can be used to set the output voltage of positive-to-negative converters. When in use, a -2.49V reference voltage is developed at the NFB pin.

The  $V_C$  pin is the output of the error amplifier. During normal regulator operation this pin sits at a voltage be-

tween 1V (low output current) and 1.9V (high output current). The  $V_C$  pin is also where loop frequency compensation is performed with an RC network to ground.

## COMPONENTS

### Inductors

The inductor is a Sumida CD43-4R7KC, which is a 4.7 $\mu$ H unshielded ferrite unit. It was selected for low cost and small physical size. Similar units are available from other manufacturers. There are benefits to higher frequency switching (1MHz LT1377 versus 500kHz LT1372) and higher value inductors. Both higher frequency switching and higher value inductors allow more output current because they reduce peak current in the switch. Both also reduce input ripple voltage and output ripple voltage. An inductor with a closed magnetic path (i.e., E-core or toroid) may also be chosen to reduce the RFI/EMI of the circuit.

### Capacitors (and Input/Output Ripple Voltage)

The capacitors on this board are low ESR (Effective Series Resistance) tantalum units specifically designed for switch-mode power supply applications. At these high frequencies, input and output ripple voltages are more a function of the ESR of the capacitor than the capacitance value. For example, at 500kHz a 22 $\mu$ F capacitor has a capacitive reactance of only  $0.014\Omega$ , which is much lower than the limiting  $0.2\Omega$  maximum ESR of the capacitors used. Therefore, if a reduction in input or output ripple voltage is required, use two or more capacitors in parallel instead of a larger value capacitor. If very low output ripple voltage is needed, adding an output LC filter may be a cheaper solution. The output contains very narrow voltage spikes because of the parasitic inductance of the output capacitor. Due to their high frequency nature, the amplitude of the spikes is determined by the ESL (Effective Series Inductance) of the output capacitor. But this also makes them easy to filter. Small 0.1 $\mu$ F ceramic chip capacitors work well in reducing the spikes, and if the traces connecting to the load are a few inches or more, the parasitic inductance of the traces combined with any local load bypass capacitor will virtually eliminate the spikes at the load.

# DEMO MANUAL DC053A

## OPERATION

### Diodes

Use diodes designed for switching applications with adequate current rating and fast turn on times, such as Schottky or ultra-fast diodes. In selecting a diode, the basic parameters of interest are forward voltage, maximum reverse voltage, average operating current and peak current. Lower forward voltage yields higher circuit efficiency and lower power dissipation in the diode. The worst-case reverse voltage is equal to the output voltage. The average diode current will be equal to the output current, but the peak diode current can be many times higher than the output current. Except for output short conditions, peak diode current is limited to the switch current limit of 2.4A maximum.

### Thermal Considerations


Care should be taken to ensure that the worst-case input voltage and load current conditions do not cause exces-

sive die temperatures. Please consult the LT1372/LT1377 data sheet or Linear Technology's SwitcherCAD software for more information.


### PCB Layout

In many cases, the circuit area traces of the demonstration board may be dropped directly into your PCB layout. If not, there are a few things to be aware of with high frequency converter layouts. Keep the traces connecting the Switch (Pin 8), output diode, output capacitor and Ground pin (Pin 7) as short as possible. This will reduce RFI and limit the voltage spikes caused by parasitic inductance. Keep the more sensitive components, mainly the feedback resistors and  $V_C$  pin network, away from the high current switching components.


## PCB LAYOUT AND FILM




Component Side Silkscreen



Component Side




Component Mask




Solder Side

## PC FAB DRAWING



Solder Mask

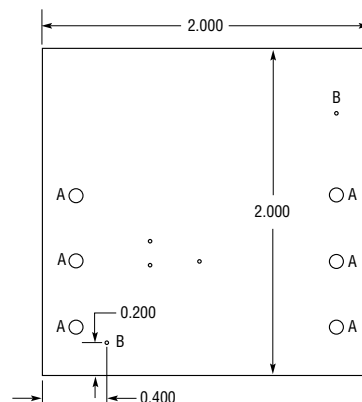

### NOTES:

1. FINISHED MATERIAL IS FR4, 0.062 THICK, 2-OZ COPPER
2. PCB WILL BE DOUBLE-SIDED WITH PLATED THROUGH-HOLES
3. PTH SIZES AFTER PLATING, 0.001 MIN WALL THICKNESS
4. SOLDER MASK BOTH SIDES USING PC401 OR EQUIVALENT
5. SILKSCREEN COMPONENT SIDE USING WHITE NONCONDUCTIVE INK
6. ALL DIMENSIONS IN INCHES,  $\pm 0.005$
7. ALL HOLE SIZES AFTER PLATING,  $-0$  TO 0.003 MAX

### HOLE CHART

| SYMBOL         | DIAMETER | QTY | PLT |
|----------------|----------|-----|-----|
| NONE           | 0.020    | 3   | YES |
| A              | 0.094    | 6   | YES |
| B              | 0.062    | 2   | NO  |
| TOTAL HOLES 11 |          |     |     |

DC053A FAB

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9