

DESCRIPTION

Demonstration circuit 842 features the LT[®]3474 constant frequency step-down converter in a compact 16-lead TSSOP thermally enhanced package. The demonstration circuit is designed to drive a single Lumileds Luxeon III star LED from a wide input voltage range. The high switching frequency scheme permits the use of small inductors and ceramic capacitors to save space and cost. The current mode PWM scheme provides fast transient response and cycle-by-cycle current limiting. Frequency foldback and thermal shutdown provide additional protection. The DC842 is specifically designed for white LED applications such as automotive and avionic lighting,

architectural detail lighting and display backlighting. The LT3474 offers numerous LED-dimming circuit options. See the datasheet for more detailed information on LED brightness and dimming control. The PWM terminal can be used to dim the LED only if a trace between the drain and source of the unstuffed MOSFET (SO8 or SOT23) is cut and a proper MOSFET is soldered onto the demonstration circuit.


Design files for this circuit board are available. Call the LTC factory.

LT is a registered trademark of Linear Technology Corporation

QUICK START PROCEDURE

DC842 is easily set up for evaluating the LT3474 constant-current step-down LED driver circuit. Follow the test procedure outlined below and see Figure1.

1. Connect a bench supply to the Vin and Gnd terminals.
2. Turn on the input power supply and set the voltage above 6V and below 36V.
3. Turn on the LT3474 LED driver circuit by pressing the LED ON button. See the datasheet for detailed information on LED current and minimum input voltage.

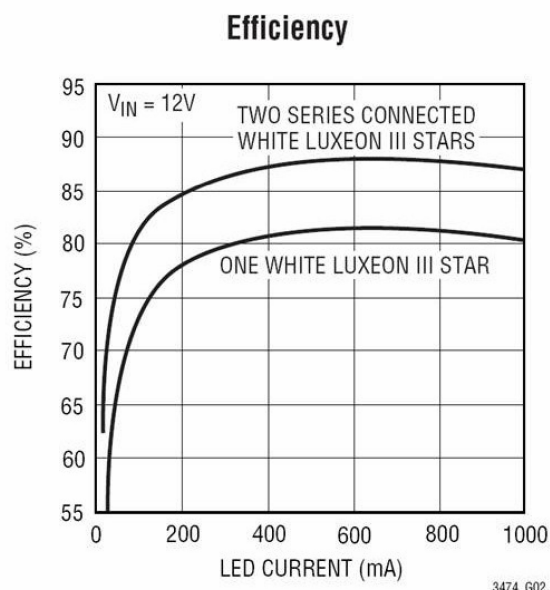

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 842

36V STEP-DOWN 1A LED DRIVER


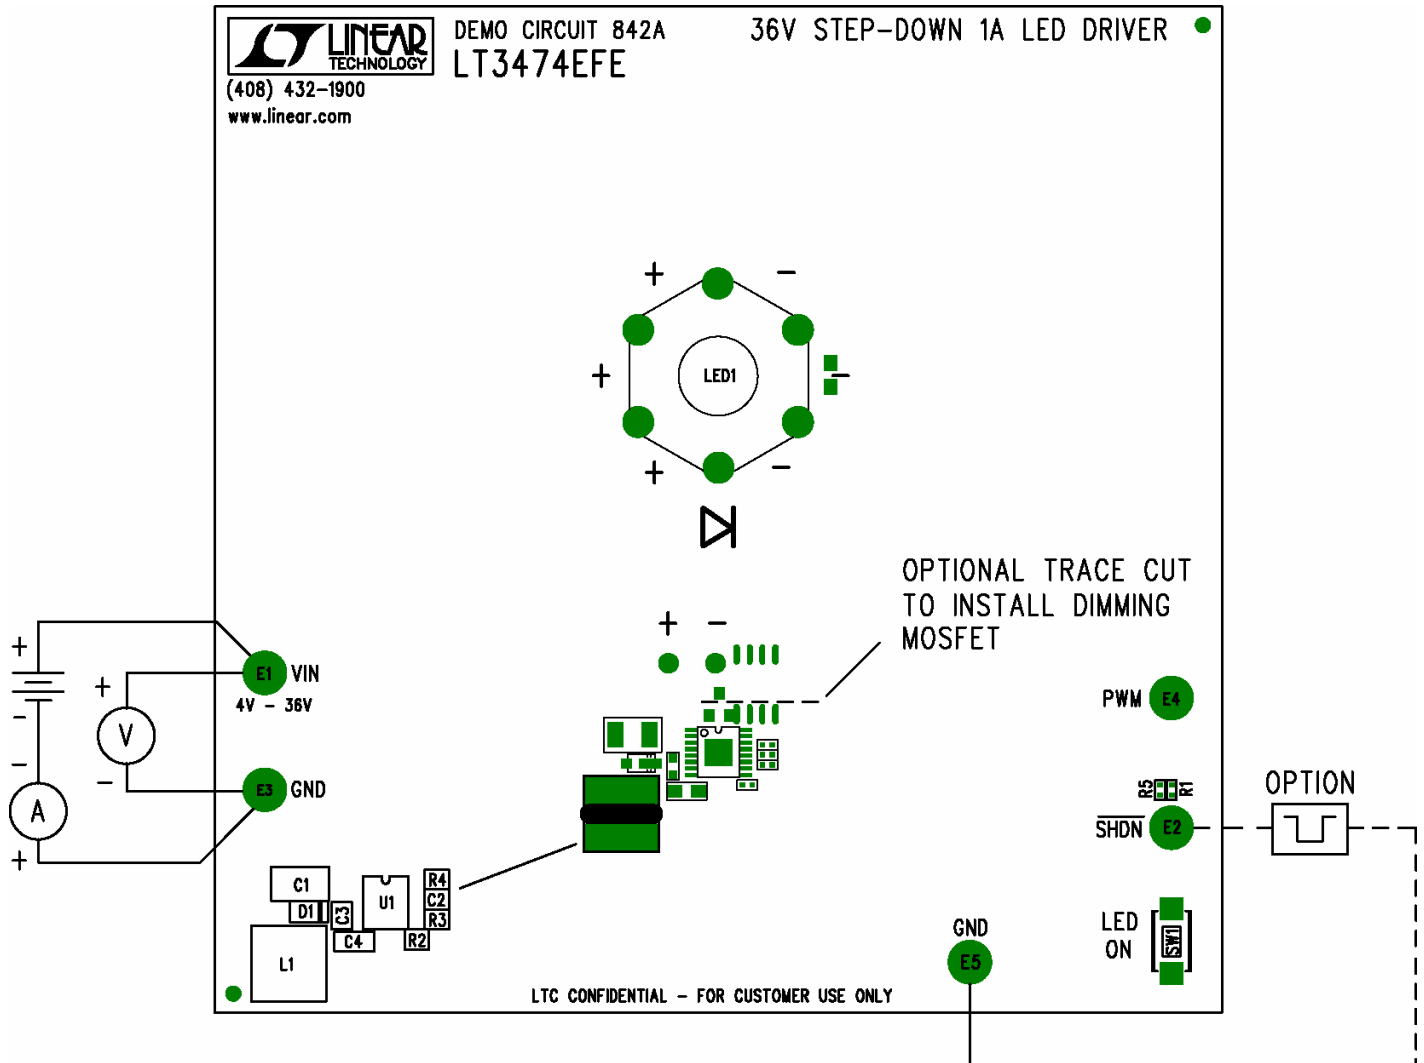


Figure 1. Proper Measurement Equipment Setup

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 842

36V STEP-DOWN 1A LED DRIVER

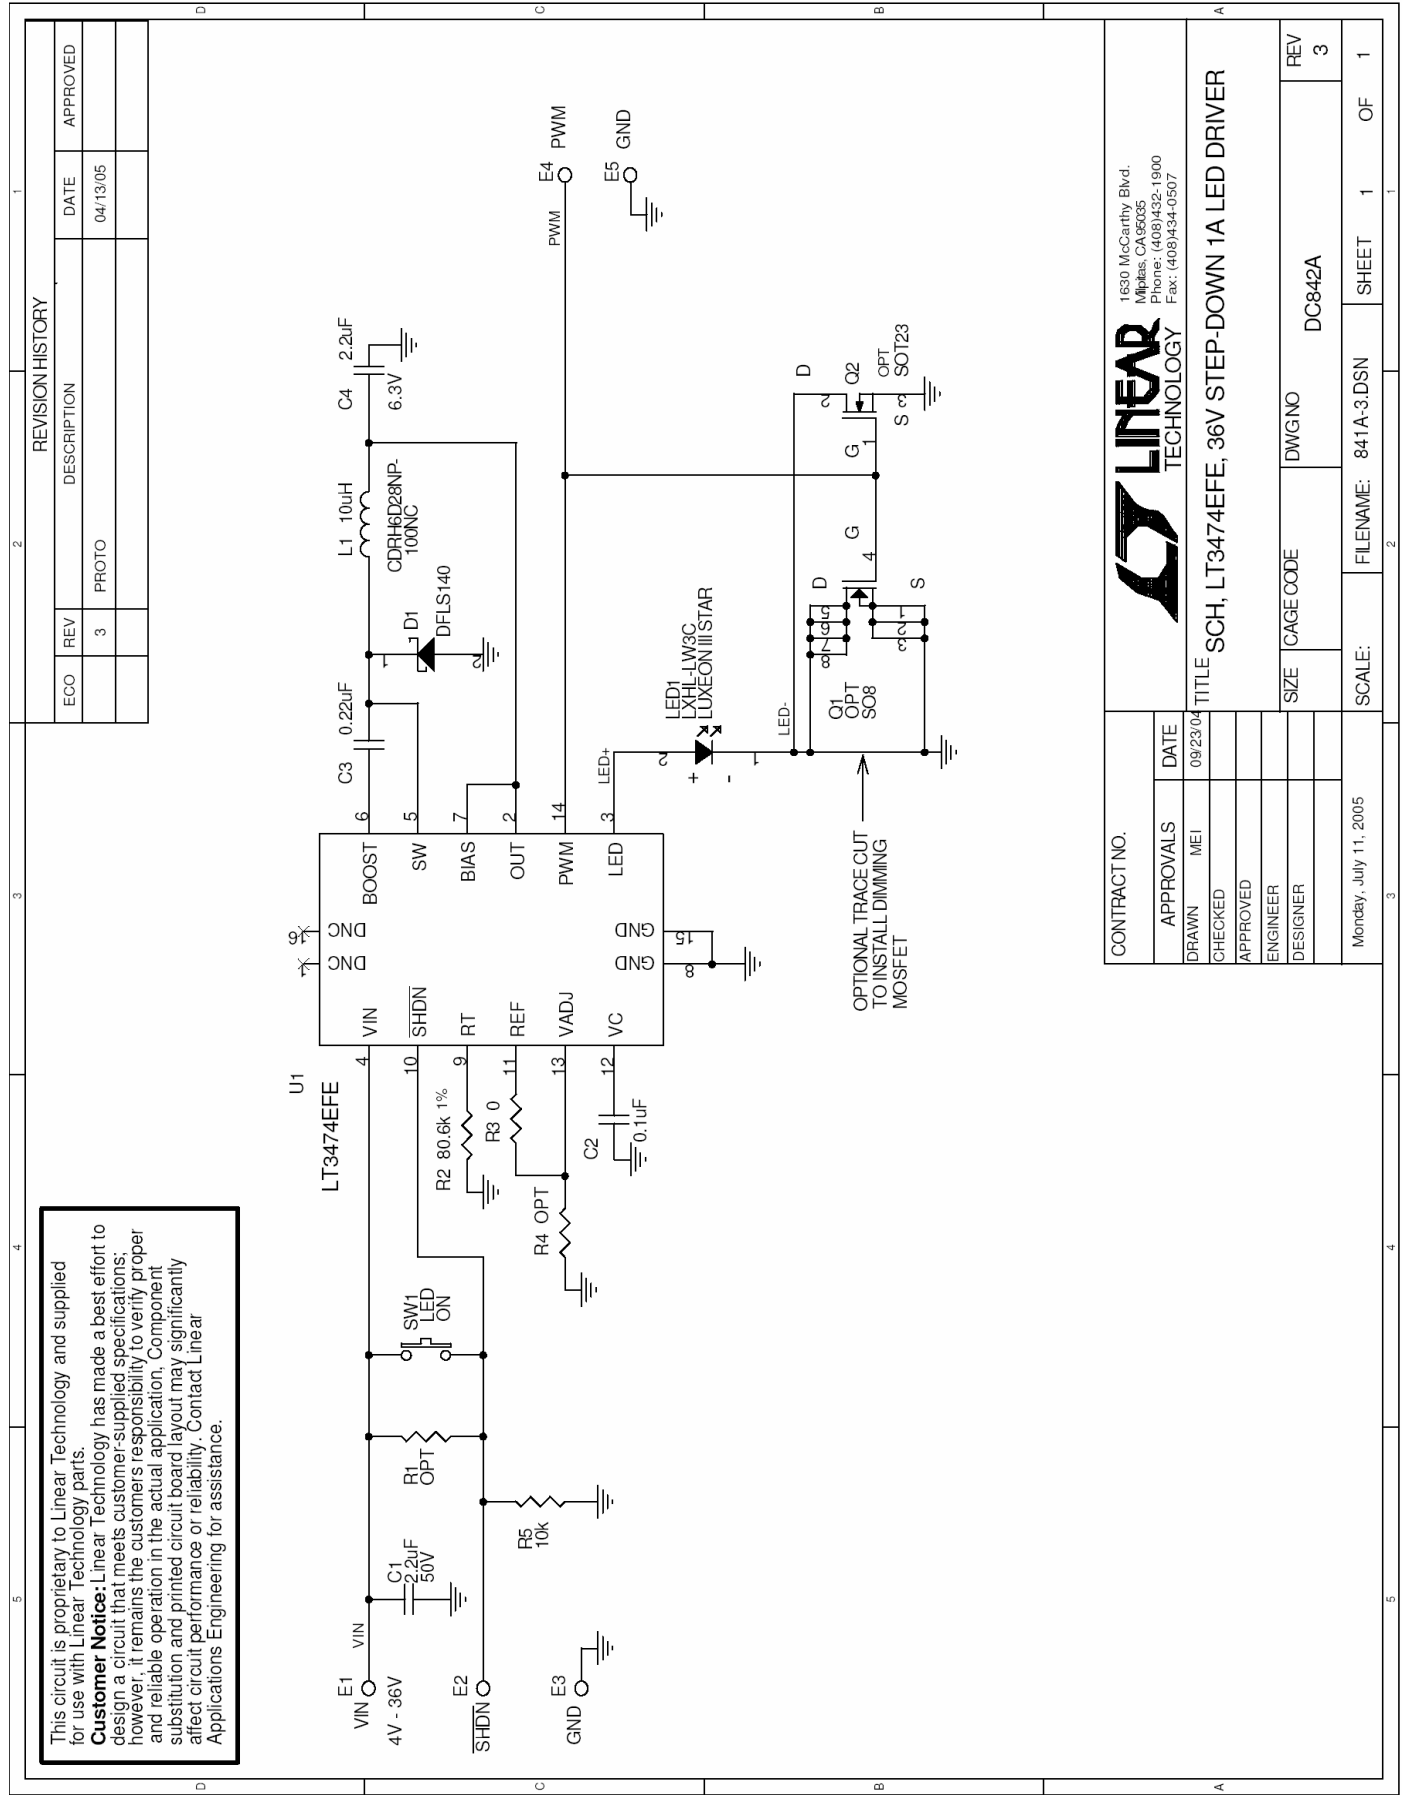

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9