



## SERIES 57 – MINIATURE VANDAL RESISTANT PUSHBUTTON

### FEATURES

- Vandal Resistant
- Wide temperature range  
– up to 125°C
- Panel sealed to IP67
- High environmental specifications
- Gold contacts
- Status illumination
- Solder terminals
- Mounts virtually flush to panel



## Technical Information

### Description

The Series 57 is a range of miniature, momentary action, rugged panel sealed push-button switches with a round button and bezel.

The Series is available with or without LED status illumination. A locknut is supplied with each switch.

The body and button are manufactured from a non-spark zinc alloy and are velour chrome plated. It is panel sealed to IP67 and is designed to be impact resistant. The small size, robustness and panel sealing make this switch ideal in harsh environments.

**Status Illuminated Version**

The illuminated version is available with a choice of 2 high brightness LED colours.

### Mechanical

|                       |                  |
|-----------------------|------------------|
| Travel (nom)          | 2.3 mm           |
| Life (nom)            | 1,000,000 cycles |
| Operating force (nom) | 3N               |
| Contact bounce (nom)  | 1ms              |
| Panel thickness (max) | 3 mm             |

### Electrical

#### Switch & LED

|                                         |                                                                                            |
|-----------------------------------------|--------------------------------------------------------------------------------------------|
| <b>SWITCH</b>                           |                                                                                            |
| Dielectric strength                     | 1000V a.c.                                                                                 |
| Insulation resistance                   | 1GΩ                                                                                        |
| Contact resistance (initial)            | 50mΩ                                                                                       |
| Current rating (typical)                | 400mA at 32V a.c. resistive<br>100mA at 50V d.c. resistive<br>125mA at 125V a.c. resistive |
| Life (min)                              | 500,000 cycles                                                                             |
| Switching power (max)                   | 16VA a.c.                                                                                  |
| <b>LED</b>                              |                                                                                            |
| Typical fwd voltage (Vf at I operating) | 2,2V                                                                                       |
| Max fwd voltage (Vf at I operating)     | 3,0V                                                                                       |
| Forward current (I operating)           | 20mA                                                                                       |
| Meantime between failures               | 100,000 hours                                                                              |
| Luminous intensity (Iv at Iopr)         | Red LED – 100mcd                                                                           |
| Luminous intensity (Iv at Iopr)         | Green LED – 160mcd                                                                         |

### Environmental & Physical

|                             |                     |
|-----------------------------|---------------------|
| Ingress protection          | IP67 (panel sealed) |
| Shock                       | 100g                |
| Vibration                   | DEF STD 07-55       |
| Non-Illuminated             |                     |
| Operating temperature range | -40°C to +125°C     |



## Technical Information

## Ordering Information

### Environmental & Physical (continued)

|                             |                                 |
|-----------------------------|---------------------------------|
| Illuminated                 |                                 |
| Operating temperature range | -35°C to +85°C                  |
| Body and Button material    | Velour chrome plated zinc alloy |
| Contacts                    | Gold plated palladium nickel    |
| Terminals                   | Gold plated brass               |
| Salt mist                   | BS2011 Part 2:1                 |
| Soldering information       | 320°C max for 3s                |

### Body Style

### Termination

### Button Colour

### LED Colour

|                                                            |   |
|------------------------------------------------------------|---|
| Standard round bezel                                       | 1 |
| Solder terminals                                           | 1 |
| Non-illuminated                                            | 1 |
| Illuminated                                                | 2 |
| Red                                                        | R |
| Green                                                      | G |
| (This digit is only required for illuminated part numbers) |   |


57 –

### Panel mounting & construction information

The Series 57 mounts easily into panels of maximum 3mm thickness. Front panel sealing to IP67 is achieved by the use of a sealing washer which is fitted behind the bezel of the body of the switch before it is inserted into the panel hole cut-out. It is held onto the panel by means of a brass locknut, tightened down by a 20mm spanner, to a torque of maximum 1,5Nm to achieve the correct sealing pressure.

A 'D' flat is provided to prevent rotation.

### Ingress Protection Impact Key

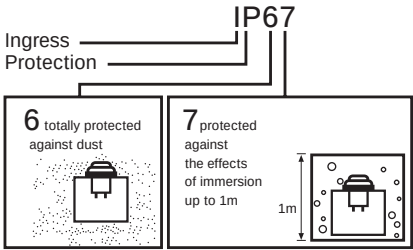


# SERIES 57

## Miniature Vandal Resistant Pushbutton


### Technical Information

#### Product Dimensions


**Non-illuminated Round Bezel**

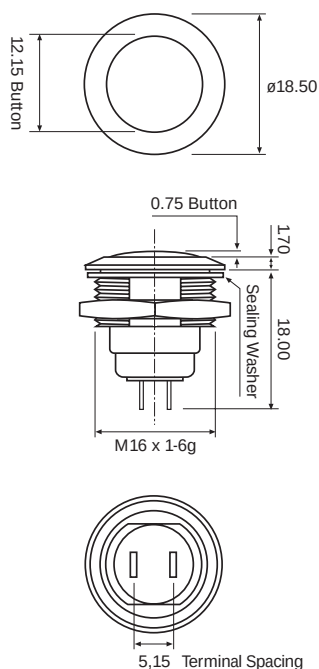

**Illuminated Round Bezel**

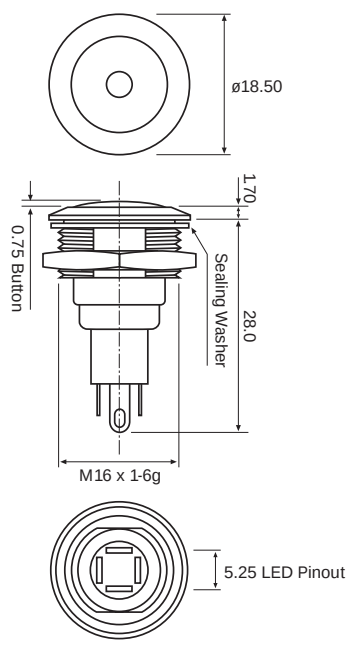

**Suggested Panel Cutout**



All dimensions in Millimetres

#### Circuit Form



#### Application References

- Vandal resistant requirements
- Military environments
- Robust industrial requirements
- Flush-with-panel requirements
- Process control
- Railway carriage equipment
- External security door controls
- Elevators
- Fishing vessels
- Crane gantry equipment
- Earth moving equipment
- Upper deck yachting equipment
- Medical instrumentation

#### Further Information

For further information on our complete range of switch products, visit our website – [www.itwswitchcon.com](http://www.itwswitchcon.com) or contact our Sales Office.

**ITW Switches**

ITW Switches, Division of ITW Limited, Norway Road, Hilsea, Portsmouth PO3 5HT, UK  
Tel: +44 (0) 1705 694971 Fax: +44 (0) 1705 666352 Website: [www.itwswitchcon.com](http://www.itwswitchcon.com)

Due to our policy of continuous product development, ITW Switches retain the right to change the specification at any time without prior notice.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9