QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 563 SINGLE AND DUAL MARGINING CONTROLLER

LTC2920-1CS5 LTC2920-2CMS8

DESCRIPTION

Demonstration circuit 563 contains two separate circuits: a (single channel) LTC2920-1 and a (dual channel) LTC2920-2 Power Supply Margining Controllers. This board is meant to be connected to up to three power supplies and demonstrates the voltage margining capabilities of the LTC2920. The board is scribed for easy separation of the two circuits if desired. Each circuit contains a Margining Controller, bypass

capacitor, and pads for external connections. There are also component locations for adding 0805 resistors. These resistors are specific to each application and must be installed to demonstrate Voltage Margining.

Design files for this circuit board are available. Call the LTC factory.

QUICK START PROCEDURE

Referring to Figure 1, the Vcc1 and Gnd1 pins provide the power and ground connections for the LTC2920-1 (single). The Vcc2 and Gnd2 pins provide the power and ground connections for the LTC2920-2 (dual). The Vcc voltage can generally be varied between 2.2V and 6.0V. Vcc must be at least 0.6 volts higher than the voltage at the Im pin. See the LTC2920 Data Sheet for other design considerations on minimum Vcc voltage and Vcc filtering. Be sure to connect the ground pin(s) to the same ground as the power supply(s) being margined.

For margining power supplies with external feedback resistors, the Im pins should be connected to the power supply feedback node. For margining power supplies using trim pins, the Im pin should be connected to the power supply trim pin.

The Imargin current sourced or sunk from each Im pin is individually programmed by its respective on board Rset resistor. For the LTC2920-1 circuit, there are two possible locations for the Rset resistor. Placing the Rset resistor in the 'RLOW' position will program the Imargin current at 1V / Rset. Placing the Rset resistor in the 'RHI' position will program the Imargin current at 30 * 1V / Rset. See the LTC2920 Data Sheet for the specification limits of the high and low current ranges. On the LTC2920-2 circuit, there

are two positions for each of the two Rset resistors. The 'R1L' and 'R2L' positions are similar to the 'RLOW' position described above. The 'R1H' and 'R2H' positions are similar to the 'RHI' position described above.

The In pins can be connected to a system controller that has a 3-state output, or manually connected as shown. When using a 3-state output to control the In pin, placing the (3-state) output in the high-Z state will 'float' the In pin, and cause the controlled Im pin to be in a high impedance state. Raising an In pin above 2.0 Volts will cause its respective Im pin to sink current. Lowering an In pin below 0.6 Volts will cause its respective Im pin to source current. See the LTC2920 Data Sheet for details. The In pins may also be controlled manually by connecting them to Vcc, ground, or left floating.

After calculating and inserting the Rset resistor(s) as described above, place the DC563 board as close as possible to the power supplie(s) being margined. The ground, Vcc, and Im pins should be connected with the shortest practical wires.

With power applied, the power supply output(s) should be at their nominal values with the In pin(s)



floating. Raising the In pin(s) above 2.0 V will cause the power supply output voltage to increase by the desired margin voltage. Lowering the In pin(s) below 0.6 V will cause the power supply output voltage to decrease by the desired margin voltage. When connected to 'trim' pins on DC to DC modules, the polarity of the voltage margining may be inverted.

If the LTC2920 Vcc pin is connected to power supplies that are compensated to be only 'marginally stable,' oscillations may be observed. If oscillations are observed while margining a power supply, connect the Vcc pin to the power supply using an axial lead resistor instead of a wire. See the LTC2920 Data Sheet for calculating the value of this resistor.


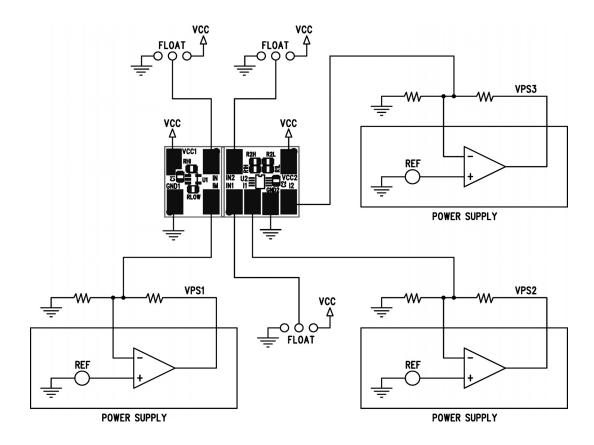


Figure 1. Proper Measurement Equipment Setup



QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 563 SINGLE AND DUAL MARGINING CONTROLLER



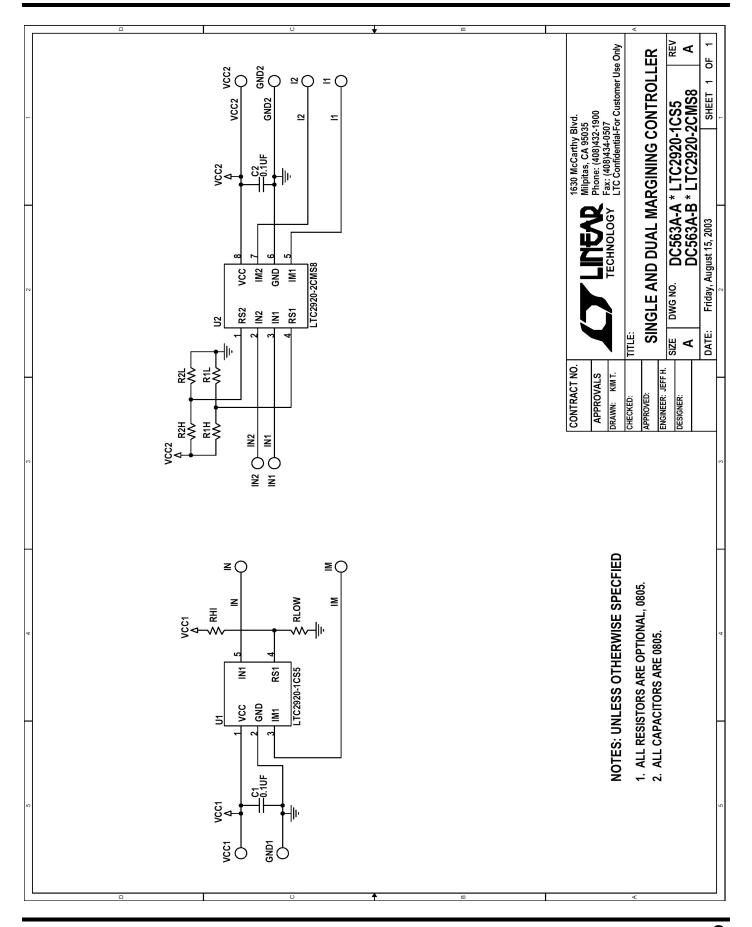

ПОСТАВКА ЭЛЕКТРОННЫХ КОМПОНЕНТОВ

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001 Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г. Москва, ул. Щербаковская д. 3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru moschip.ru_6 moschip.ru_4 moschip.ru_9