

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:


5009130302

Status:

Active

Description:

0.40mm (.016") Pitch SlimStack™ Board-to-Board Receptacle, Surface Mount, Dual Row, Vertical Stacking, Mated Height of 1.80mm (071"), with Solder Tabs, 30 Circuits, Lead-free

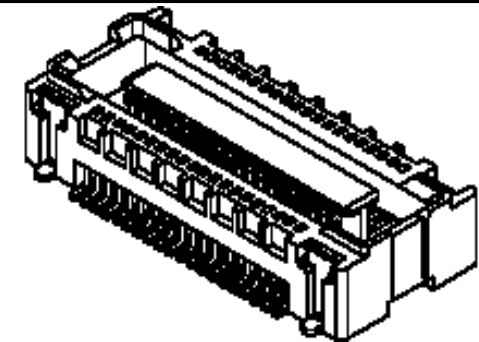

Series

image - Reference only

Documents:

- [3D Model](#)
- [Drawing \(PDF\)](#)
- [Product Specification PS-500913-001 \(PDF\)](#)
- [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	PCB Receptacles
Series	500913
Application	Board-to-Board
Comments	Solder Tab Plating: Lead-Fr...
Product Name	SlimStack™

Physical

Circuits (Loaded)	30
Circuits (maximum)	30
Color - Resin	Black
Durability (mating cycles max)	30
Glow-Wire Compliant	No
Lock to Mating Part	Yes
Mated Height (in)	0.071 In
Mated Height (mm)	1.80 mm
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Gold
Material - Resin	High Temperature Thermoplastic
Number of Rows	2
Orientation	Vertical
PC Tail Length (in)	0.000 In
PC Tail Length (mm)	0.00 mm
PCB Locator	No
PCB Retention	None
PCB Thickness Recommended (in)	0.000 In
PCB Thickness Recommended (mm)	0.00 mm
Packaging Type	Embossed Tape on Reel
Pitch - Mating Interface (in)	0.016 In
Pitch - Mating Interface (mm)	0.40 mm
Pitch - Term. Interface (in)	0.016 In
Pitch - Term. Interface (mm)	0.40 mm
Plating min: Mating (µin)	10
Plating min: Mating (µm)	0.25
Plating min: Termination (µin)	2
Plating min: Termination (µm)	0.05
Polarized to Mating Part	No
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	Yes
Temperature Range - Operating	-25°C to +85°C
Termination Interface: Style	Surface Mount

Electrical

Current - Maximum per Contact	0.3A
-------------------------------	------

EU RoHS

ELV and RoHS
Compliant

REACH SVHC

Not Reviewed

Halogen-Free

Status

Not Reviewed

China RoHS



Need more information on product
environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of
Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
non-product compliance questions.

Search Parts in this Series

500913Series

Mates With

55909 PCB Header

Voltage - Maximum

50V AC (RMS)/DC

Material Info

Reference - Drawing Numbers

Product Specification

PS-500913-001, RPS-500913-003, RPS-500913-005

Sales Drawing

SD-500913-001, SD-500913-002

This document was generated on 04/19/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

注記 NOTES:

1. 使用材料 MATERIAL
ハウジング：液晶ポリマー（LCP） ガラス充填 UL94V-0（黒）
HOUSING: LIQUID CRYSTAL POLYMER(GLASS FILLED)
UL94V-0 (COLOR:BLACK)
ターミナル：リン青銅（t=0.15）
TERMINAL: PHOSPHOR BRONZE (t=0.15)
金具：リン青銅（t=0.15）
FITTING NAIL: PHOSPHOR BRONZE (t=0.15)

2. メッキ仕様 PLATING
ターミナル TERMINAL
金メッキ 0.2マイクロメートル以上（コンタクト部）
GOLD 0.2MICROMETER MINIMUM (CONTACT AREA)
金メッキ 0.4マイクロメートル以下（テール部）
GOLD 0.4MICROMETER MAXIMUM (TAIL AREA)
下地メッキ：ニッケルメッキ 1.5マイクロメートル以上
UNDER PLATING : NICKEL 1.5MICROMETER MINIMUM
*コンタクト部とテール部はニッケルメッキによって分断されている金メッキです。
DIVIDE INTO PARTS THE GOLD PLATING OF THE CONTACT AND THE TAIL PART BY THE NICKEL PLATING.


金具 FITTING NAIL
錫メッキ 1.0マイクロメートル以上
TIN PLATING 1.0MICROMETER MINIMUM
下地メッキ：ニッケルメッキ 1.0マイクロメートル以上
UNDER PLATING : NICKEL 1.0MICROMETER MINIMUM


△3 (全極数/2) = 偶数の場合に適用。
APPLY FOR (CIRCUIT/2)=EVEN.


4. 嵌合相手：55909シリーズ
MATE WITH : 55909 SERIES.

5. テール及び金具の平坦度は、0.1以下
TAIL AND FITTING NAIL COPLANARITY TO BE 0.1MAXIMUM

21.5	19.6	23.1	500913-1008	100
19.5	17.6	21.1	500913-0908	90
15.5	13.6	17.1	500913-0708	70
13.5	11.6	15.1	500913-0608	60
11.5	9.6	13.1	500913-0508	50
9.5	7.6	11.1	500913-0408	40
7.5	5.6	9.1	500913-0308	30
6.3	4.4	7.9	500913-0248	24
C	B	A	MATERIAL NO.	CIRCUIT

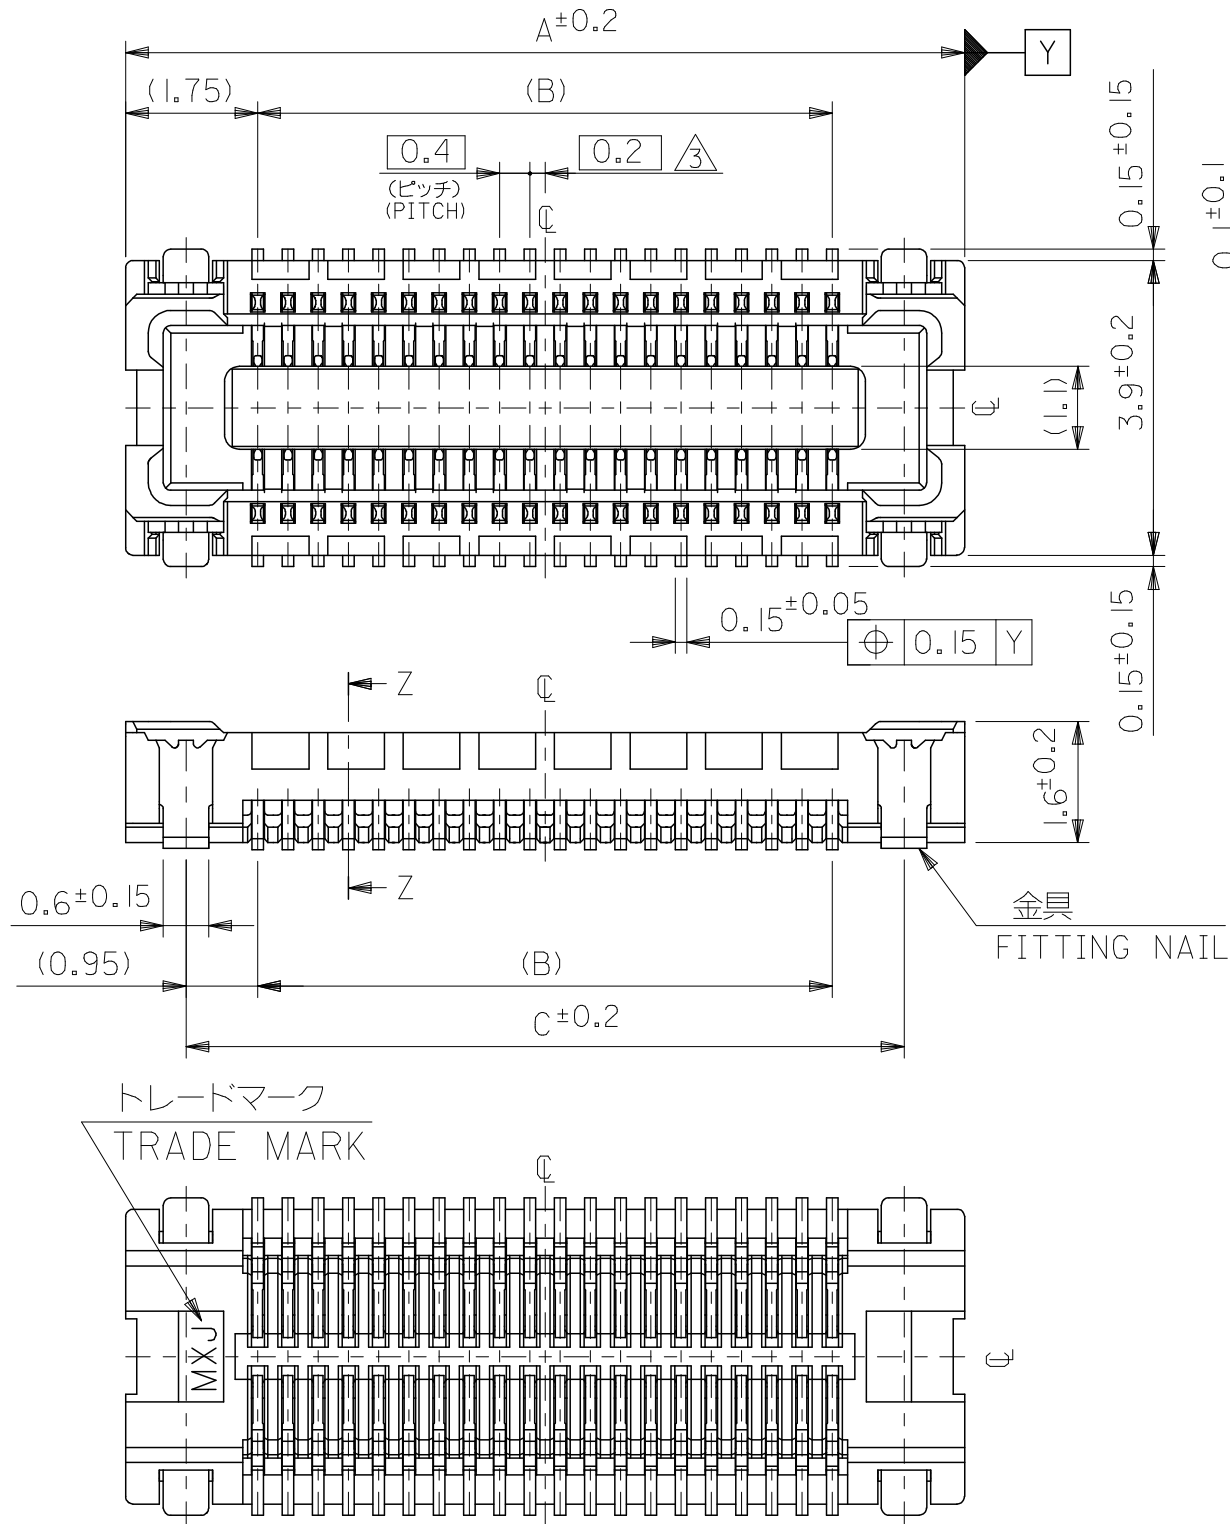


REVISED EC NO: J2007-1419 DRWN: MWABEI CHKD: KTOYODA APPR: NUKITA	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	 THIRD ANGLE PROJECTION		
				MM ONLY		10:1	METRIC			
		10 UNDER ± ---		DRAWN BY R. SUMIYA	DATE 2004/04/19	TITLE 0.4 B-TO-B CONN REC HSG ASSY (HGT=1.8MM) -LEAD FREE-				
		10 OVER 30 UNDER ± ---		CHECKED BY M. SASAO	DATE 2004/04/19					
		30 OVER ± ---		APPROVED BY M. SASAO	DATE 2004/04/19	 MOLEX INCORPORATED				
		ANGULAR ± --- °		MATERIAL NO. SEE CHART						
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

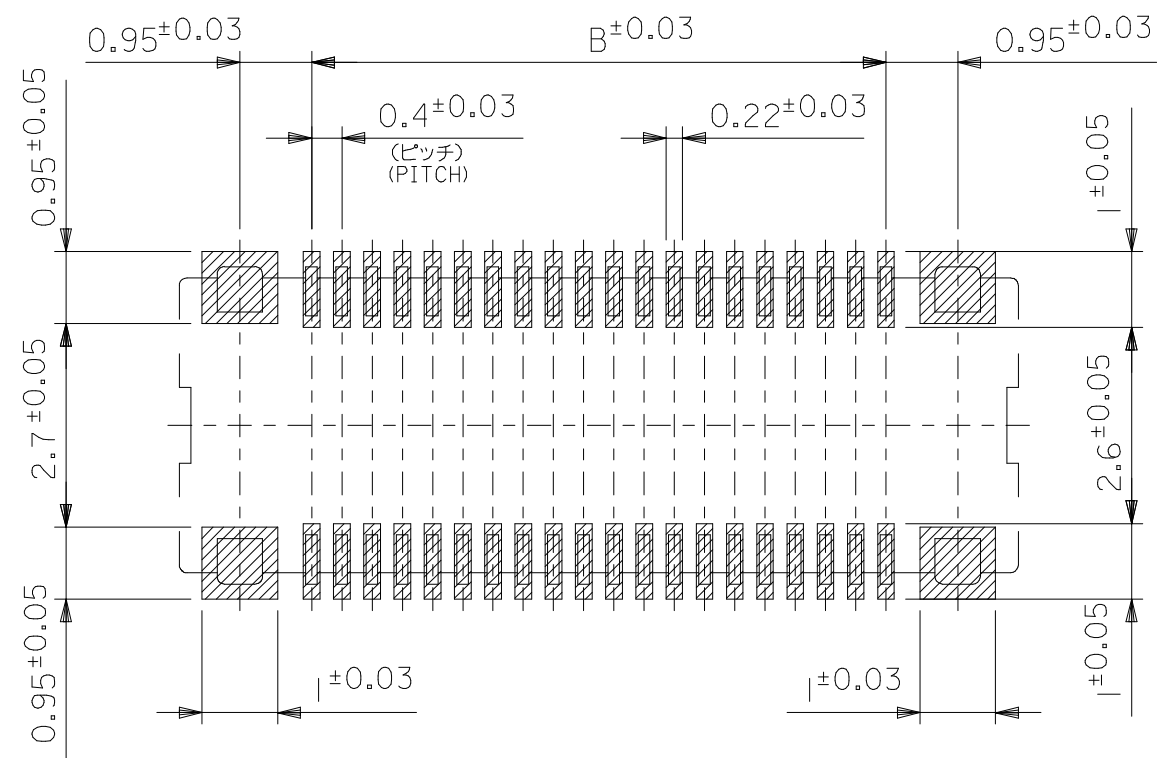

参考基板レイアウト（マウント面）



P.C.BOARD PATTERN DIMENSION. (REFERENCE)
(MOUNTING AREA)

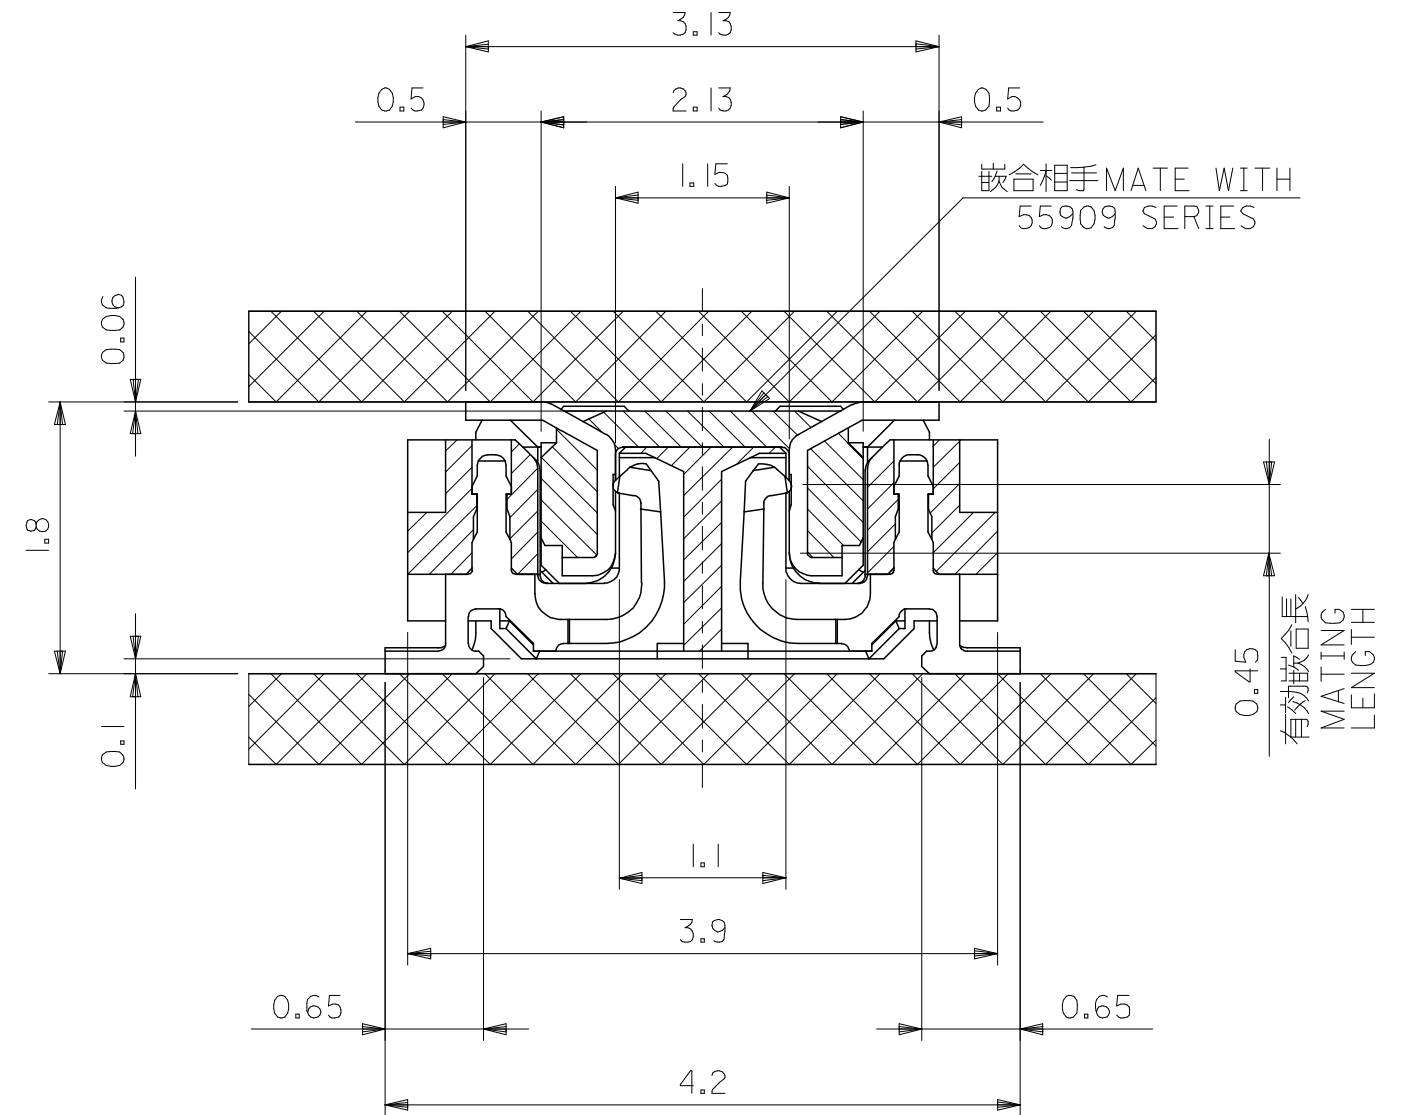


嵌合断面図 (参考)

MATED DRAWING (REFERENCE)

REVISED		EC NO: J2007-1419		DRWN: MWABEI 2006/11/16		CH'KD: KTOYODA 2006/11/20		APPR: NUKITA 2006/11/21		DESCRIPTION			
REV		GENERAL TOLERANCES (UNLESS SPECIFIED)				DIMENSION STYLE MM ONLY				500913-***8		MODEL NO.	
		10 UNDER		± ---		DRAWN BY DATE R. SUMIYA 2004/04/19		SCALE ---		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION	
		10 OVER 30 UNDER		± ---		CHECKED BY DATE M. SASAO 2004/04/19		TITLE 0.4 B-TO-B CONN REC HSG ASSY (HGT=1.8MM) -LEAD FREE- MOLEX INCORPORATED					
		30 OVER		± ---		APPROVED BY DATE M. SASAO 2004/04/19							
		ANGULAR ± --- °		MATERIAL NO.		DOCUMENT NO.							
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS				SEE CHART				SD-500913-001				2 OF 2	
		SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									

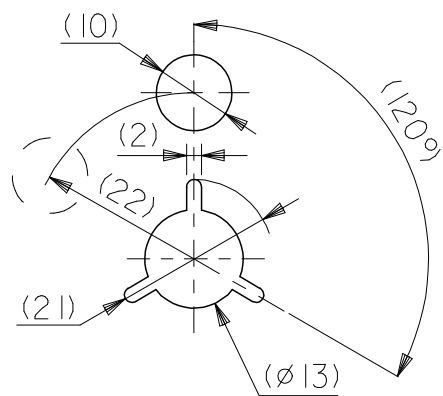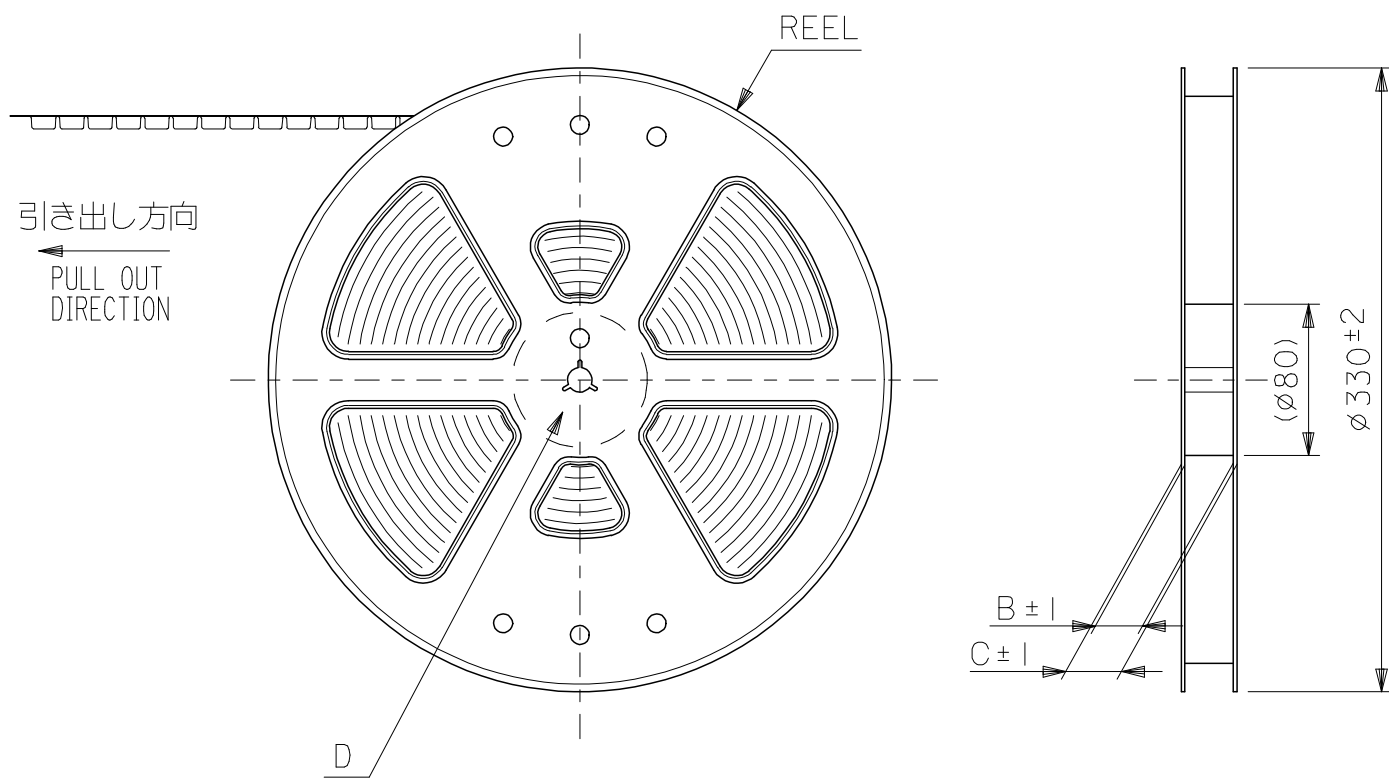DETAIL DNOTES

- 製品詳細寸法については製品単体図面SD-500913-001を参照下さい。
RE DETAILED DIMENSION, SEE PRODUCT DRAWING NO. SD-500913-001.
- 梱包数量：1500個／リール
NUMBER OF CONNECTORS：1500PCS/REEL
- リードテープ長さ LEAD TAPE LENGTH

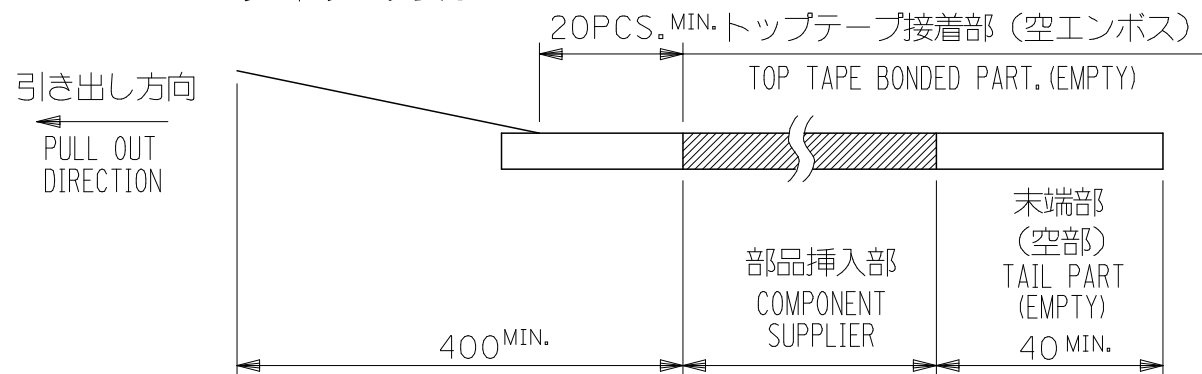

- 材料 MATERIAL
キャリアテープ (CARRIER TAPE)：ポリプロピレン (POLYPROPYLENE)
トップテープ (TOPTAPE)：PET , PE , PEF
リール (REEL)：ポリスチレン (PS) <リサイクル材を含む>
POLYSTYRENE (PS) <RECYCLE MATERIAL CONTAINED>

REVISED EC NO: J2007-1419 DRWN:MNABEI 2006/11/16 CHKD:KTOYODA 2006/11/20 APPR:NUKITA 2006/11/21	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
				MM ONLY		---	METRIC		
		10 UNDER		± ---	DRAWN BY	DATE	TITLE 0.4 B-TO-B REC HSG ASSY (HGT=1.8) EMBSTP PKG -LEAD FREE-		
		10 OVER 30 UNDER		± ---	CHECKED BY	DATE			
		30 OVER		± ---	APPROVED BY	DATE			
		ANGULAR ± --- °		M. SASAO 2004/04/19		molex MOLEX INCORPORATED		DOCUMENT NO.	
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-500913-002		1 OF 4		
REV		SIZE A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						

F

E

D

C

B

A

F


E

D

C

B

A

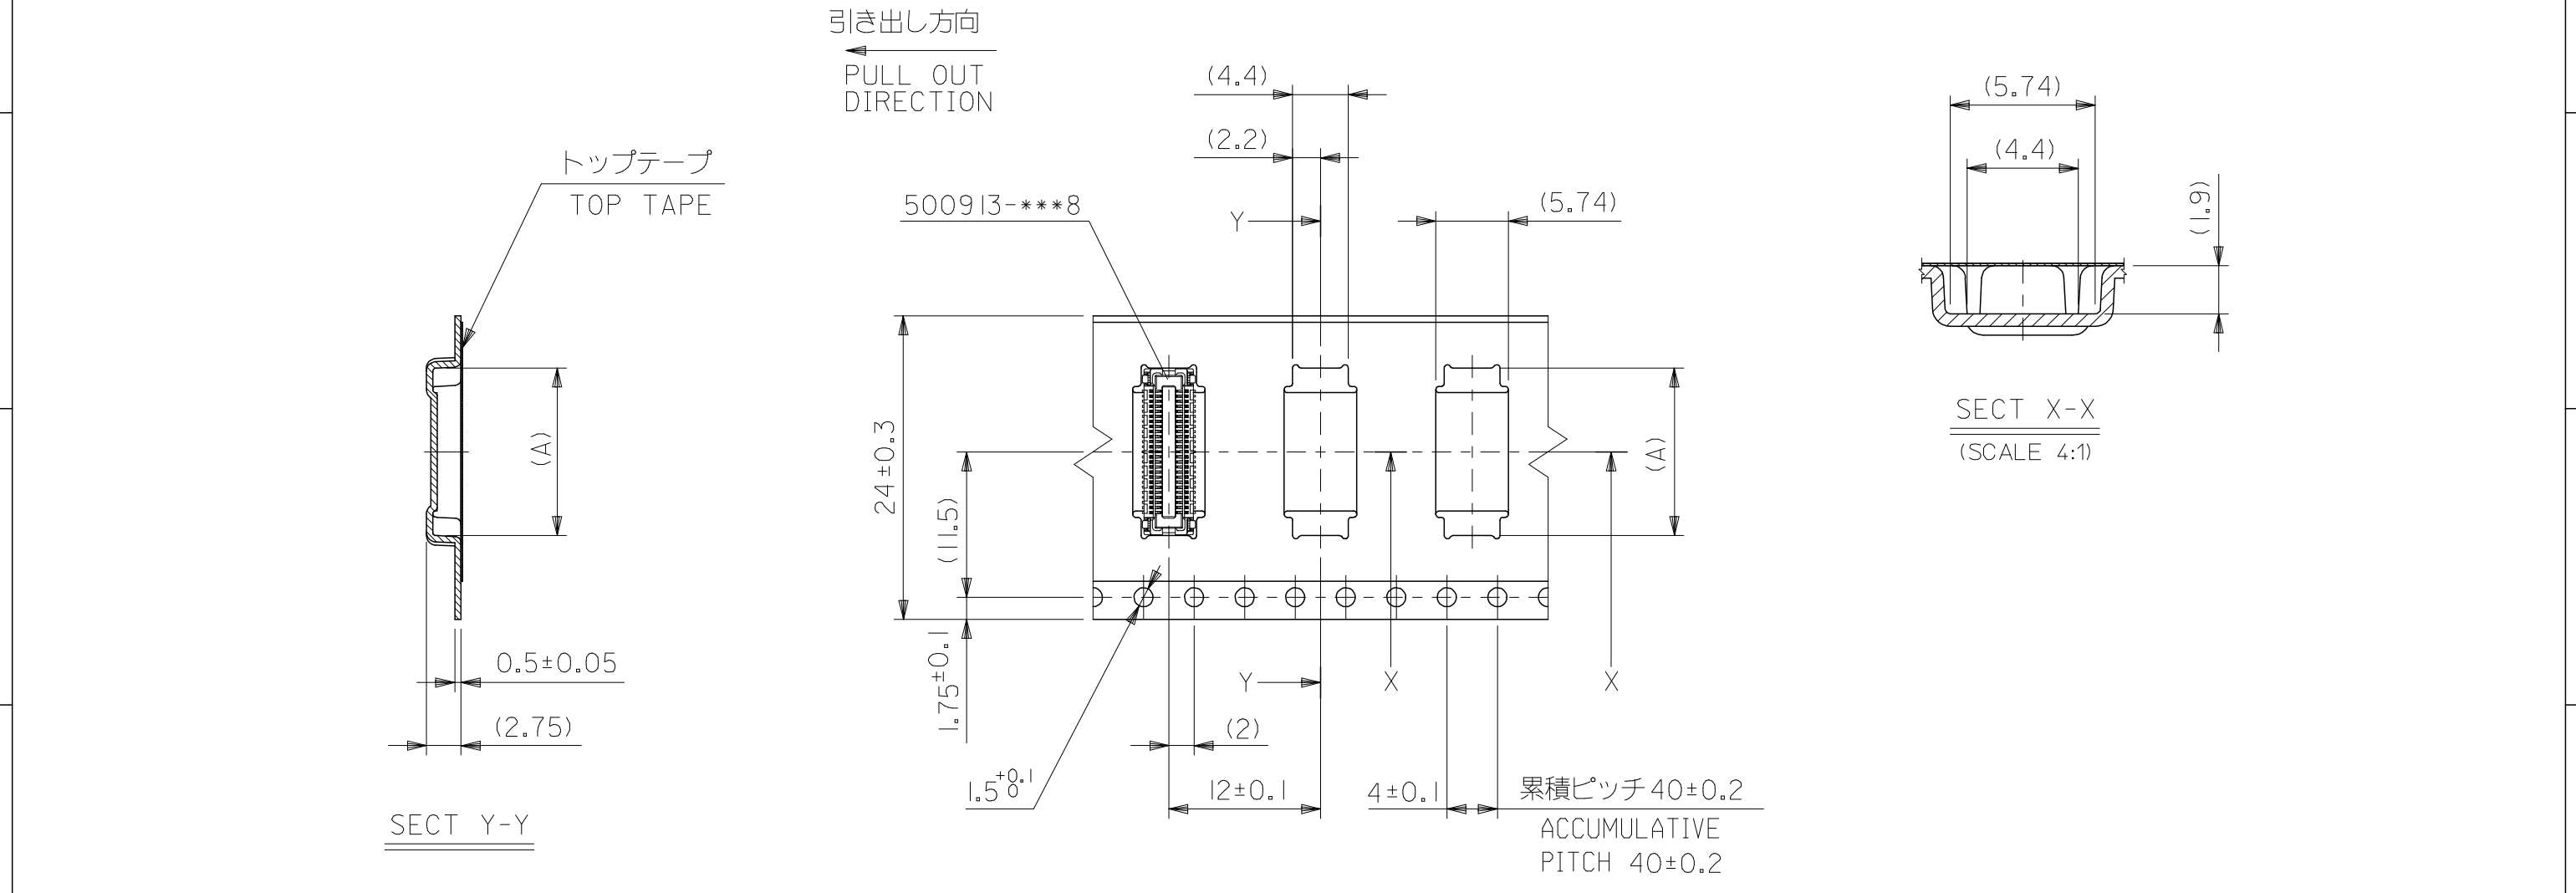

24mm幅キャリアテープ
24mm WIDTH CARRIER TAPE

24	29.4	25.4	15.26	500913-0602	60
			13.26	500913-0502	50
			11.26	500913-0402	40
			9.26	500913-0302	30
			8.06	500913-0242	24
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	MATERIAL NO.	CIRCUIT

REVISED		EC NO: J2007-1419		DRWN: MNABEI		2006/11/16		2006/11/20		2006/11/21			
				CHKD: KTOYODA						APPR: NUKITA			

F

E

D

C

B

A

F


E

D

C

B

A

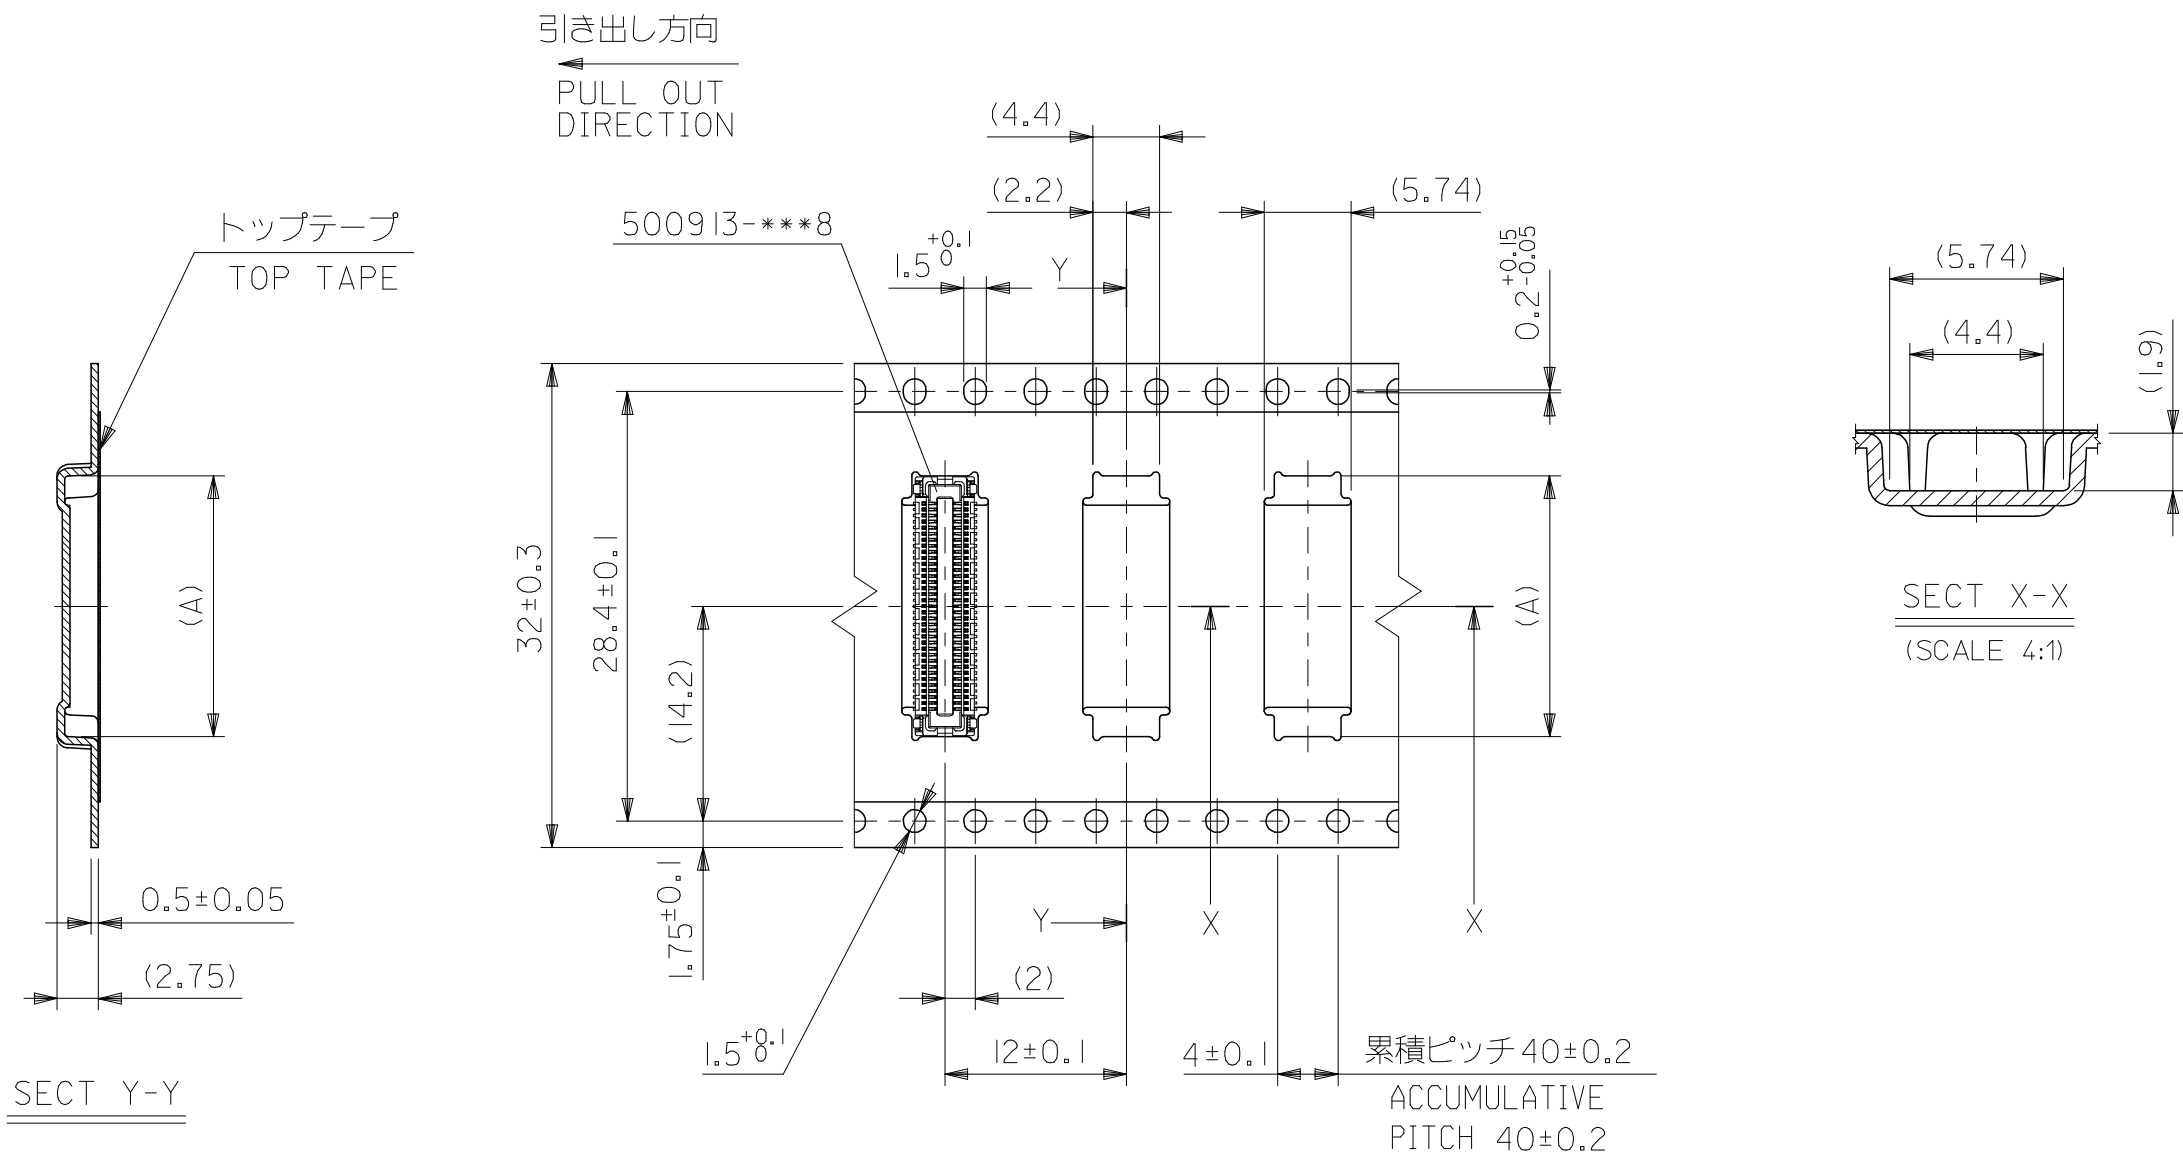

32mm幅キャリアテープ
32mm WIDTH CARRIER TAPE

32	41.4	37.4	21.26	500913-0902	90
	37.4	33.4	17.26	500913-0702	70
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	MATERIAL NO.	CIRCUIT

REVISED		EC NO: J2007-1419		2006/11/16		2006/11/20		2006/11/21			
DRWN:MNABEI		CHKD:KTOYODA		APPR:NUKITA							
		DESCRIPTION									
		GENERAL TOLERANCES (UNLESS SPECIFIED)				DIMENSION STYLE MM ONLY		SCALE 2:1		DESIGN UNITS METRIC	
						DRAWN BY R. SUMIYA		DATE 2004/04/19		TITLE 0.4 B-TO-B REC HSG ASSY (HGT=1.8) EMBSTP PKG -LEAD FREE-	
		10 UNDER		± ---		CHECKED BY M. SASAO		DATE 2004/04/19			
		10 OVER 30 UNDER		± ---		APPROVED BY M. SASAO		DATE 2004/04/19		MOLEX MOLEX INCORPORATED	
		30 OVER		± ---		MATERIAL NO. SEE CHART		DOCUMENT NO. SD-500913-002		SHEET NO. 3 OF 4	
		ANGULAR ± --- °									
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS									
REV						SIZE A3				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	

F

F

E

E

D

D

C


C

B

B

A

A

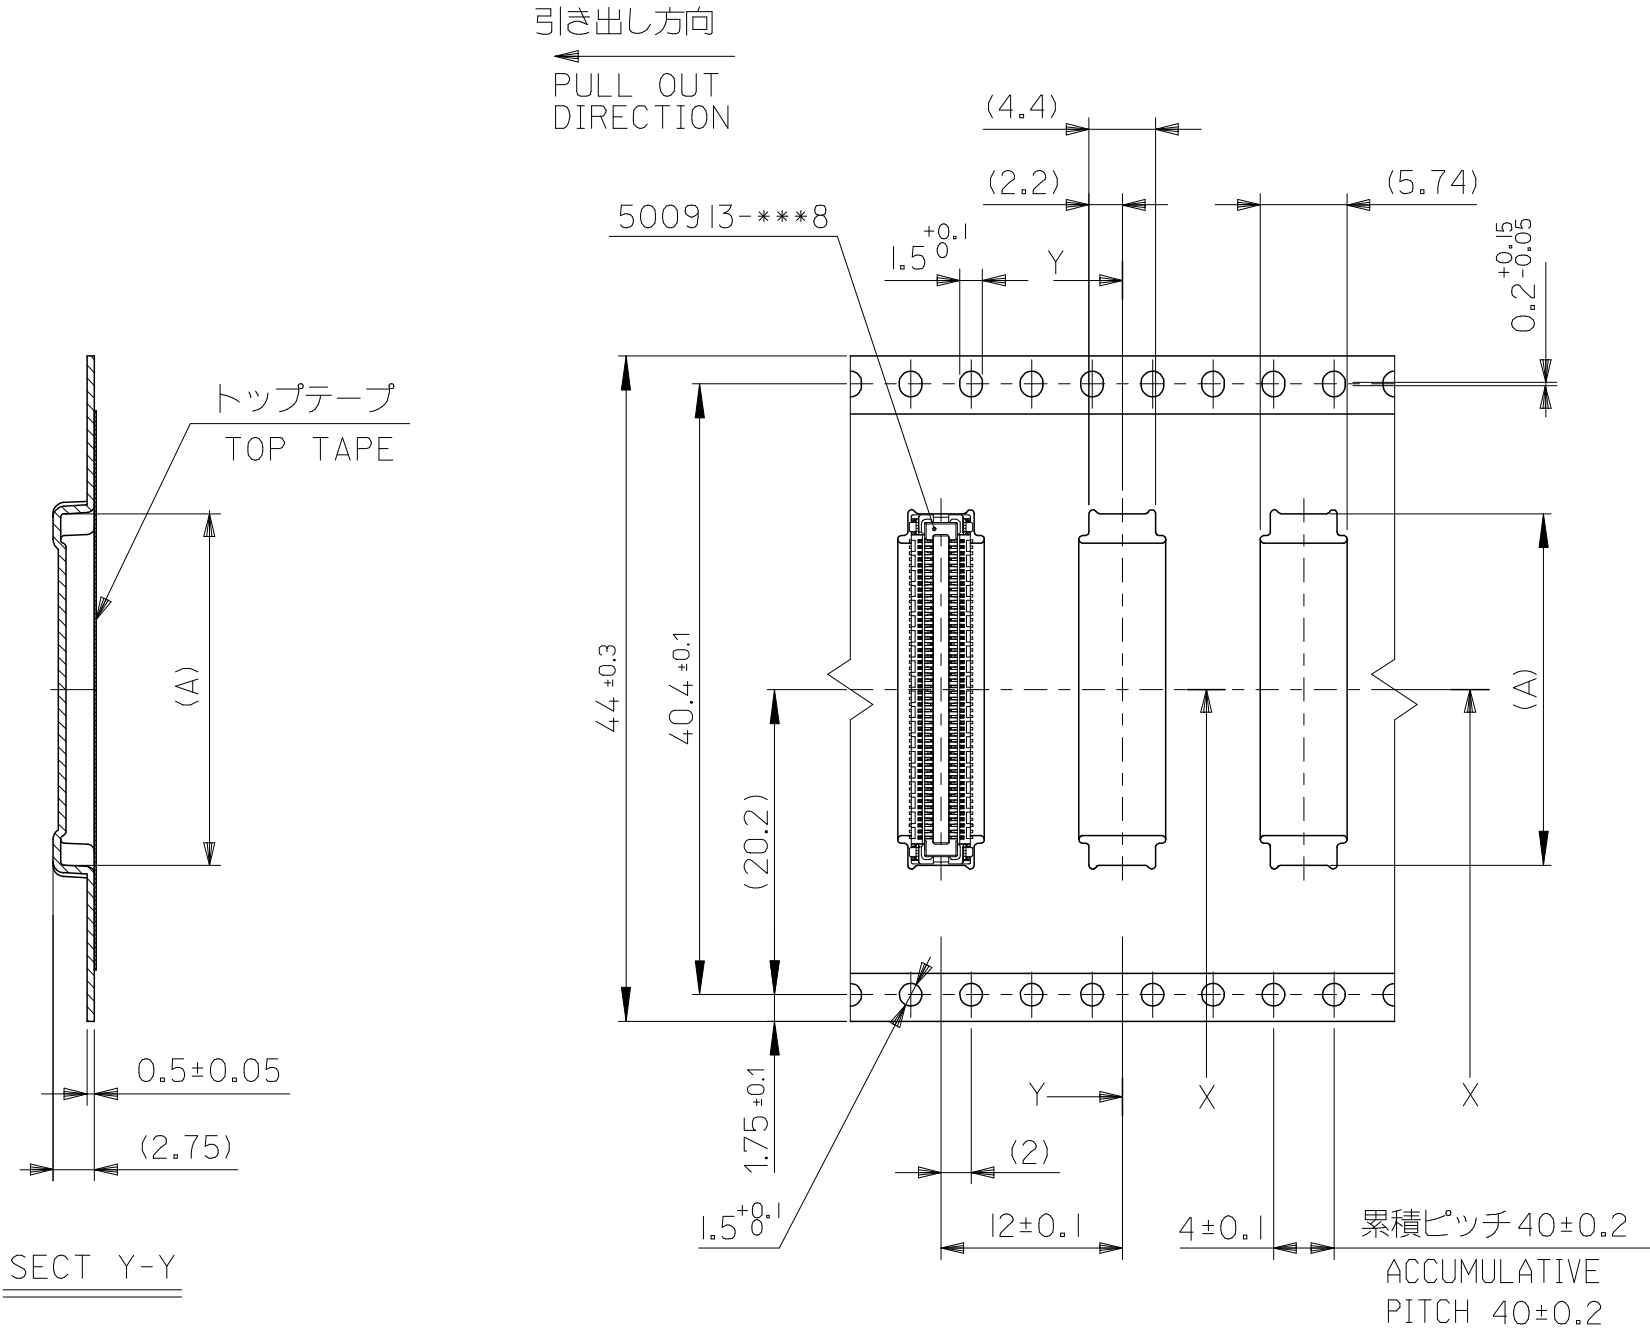

44 mm幅キャリアテープ
44 mm WIDTH CARRIER TAPE

44	49.4	45.4	23.26	500913-1002	100
キャリアテープ幅 CARRIER TAPE WIDTH	C	B	(A)	MATERIAL NO.	CIRCUIT

REVISED		EC NO: J2007-1419		2006/11/16 DRWN:MWABEI		2006/11/20 CHKD:KTOYDOA		2006/11/21 APPR:NUKITA		DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 2:1		DESIGN UNITS METRIC		THIRD ANGLE PROJECTION		
											10 UNDER ± ---		DRAWN BY Y. SAKIYA		DATE 2004/07/30		TITLE 0.4 B-TO-B REC HSG ASSY (HGT=1.8) EMBSTP PKG -LEAD FREE-				
											10 OVER 30 UNDER ± ---		CHECKED BY M. SASAO		DATE 2004/07/30						
											30 OVER ± ---		APPROVED BY M. SASAO		DATE 2004/07/30		MOLEX MOLEX INCORPORATED				
											ANGULAR ± --- °		MATERIAL NO.		DOCUMENT NO.						SHEET NO.
													DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-500913-002				4 OF 4
REV														SIZE A3		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION					

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9