

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 834

HIGH VOLTAGE LDO LINEAR REGULATOR

LT3014

DESCRIPTION

Demonstration circuit DC834 is a high voltage micro-power voltage regulator using the LT3014 low dropout linear regulator, which comes in a tiny SOT-23 package. The DC834 has an input voltage range from 3V to 80V, and an output voltage range between 1.22V and 60V. The DC834 is capable of delivering 20mA max. The DC supply current is typically only 6uA in operation, and

less than 1uA in shutdown. The DC834 is assembled with ceramic capacitors, to demonstrate the LT3014 maintaining stability with ceramic output capacitors. Due to its high input voltage range, the DC834 voltage regulator is ideally suited for automotive and industrial applications. **Gerber files for this circuit are available.** **Call the LTC Factory.**

QUICK START PROCEDURE

The DC834 is easy to set up to evaluate the performance of the LT3014. For proper measurement equipment configuration, set up the circuit according to the diagram in **Figure 1**.

Please follow the procedure outlined below for proper operation.

1. Before proceeding to test, insert a shunt into the OFF position of jumper JP4, and insert a shunt into jumper JP1, the 3.3V option.
2. Apply 5V across Vin and Gnd. Insert the jumper JP4 shunt into the ON position. Draw 1mA of load current. Measure Vout; it should be 3.3V +/- 5% (3.135V to 3.465V).
3. Vary the input voltage from 5V to 80V and the load current from no load to 20 mA. Vout should measure 3.3V +/-10% (2.97V to 3.63V).
4. Insert the jumper JP4 shunt into the OFF position and move the shunt in jumper JP1 into jumper JP2, the 5V output voltage option, and repeat the test. Re-insert jumper JP4 into the ON position. Just as in the 3.3 Vout test, the 5V output voltage should read Vout +/- 5% tolerance under static line and load conditions, and +/- 10% tolerance under dynamic line and load conditions.
5. When finished evaluating, insert jumper JP4 shunt into the OFF position.

Warning - if long leads are used to power the demo circuit, the input voltage at the part could “ring”. This ringing could affect the operation of the circuit or even exceed the maximum voltage rating of the IC. To eliminate this, insert a small aluminum electrolytic capacitor (for instance, a Sanyo cap., part # 100CV10BS) on the pads between the input power and return terminals on the bottom of the demo board. The (greater) ESR of the aluminum electrolytic capacitor will dampen the (possible) ringing voltage due to the use of long input leads. On a normal, typical PCB, with short traces, the capacitor is not needed.

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 834

HIGH VOLTAGE LDO LINEAR REGULATOR

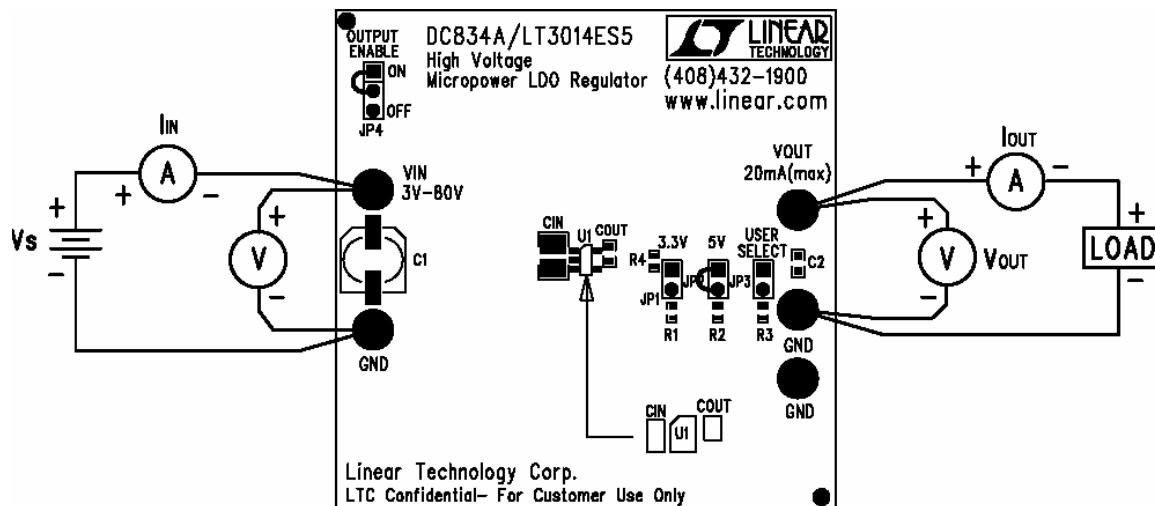


Figure1. Proper Measurement Equipment Setup


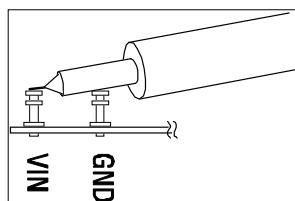


Figure 2. Measuring Input or Output Voltage Ripple

QUICK START GUIDE FOR DEMONSTRATION CIRCUIT 834

HIGH VOLTAGE LDO LINEAR REGULATOR

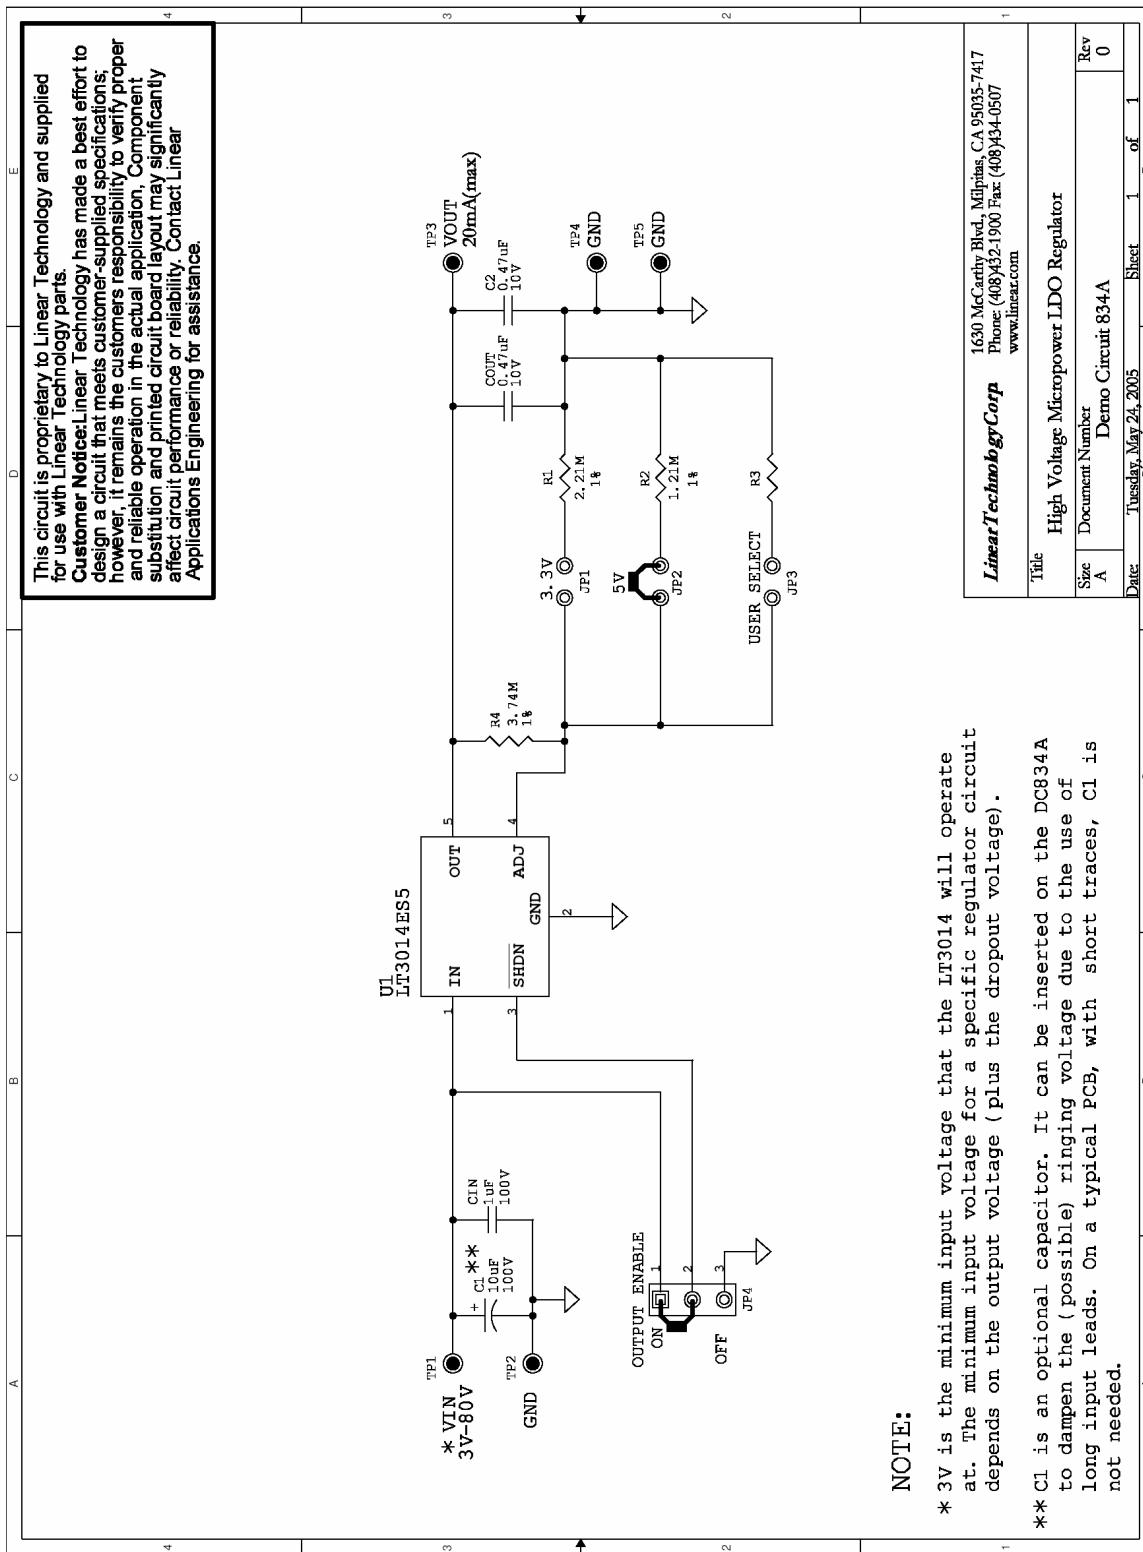

NOTE:

* 3V is the minimum input voltage that the LT3014 will operate at. The minimum input voltage for a specific regulator circuit depends on the output voltage (plus the dropout voltage).

** C1 is an optional capacitor. It can be inserted on the DC834A to dampen the (possible) ringing voltage due to the use of long input leads. On a typical PCB, with short traces, C1 is not needed.

Linear Technology Corp.		1630 McCarthy Blvd. Milpitas CA 95035-7417
Phone: (408) 421-1900 Fax: (408) 424-0507		www.linear.com
Title	High Voltage Micropower LDO Regulator	1
Size	Document Number	
A	Demo Circuit 834A	Rev 0
Date	Tuesday, May 24, 2005	Sheet 1 of 1

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9