

DA9052

Flexible system PMIC with high-efficiency USB power manager

DA9052 is a quad buck PMIC with supply domain flexibility to support a wide range of application processors, associated peripherals, and user interface functions.

Combining a dual input switched-mode USB compatible charger, full power-path management, four bucks, ten linear regulators, and support for multiple sleep modes: the DA9052 offers an energy-optimised solution suitable for portable handheld, wireless, industrial, and infotainment applications.

The high-efficiency Li-Ion/Polymer switching charger supports precise current/voltage charging as well as pre-charge and USB modes without processor interaction. During charging, the die temperature is thermally regulated enabling high-capacity batteries to be rapidly charged at currents up to 1.26 A with minimum thermal impact. USB suspend mode operation is supported and, for robustness, the power inputs are protected against over-voltage conditions.

The autonomous power-path controller seamlessly detects and manages energy flow between an AC adaptor, USB cable, and battery while maintaining USB power specification compliance. The internally-generated system power rail supports power scenarios such as instant-on with a fully discharged battery. A reverse-protected backup battery charger is also integrated into the power-path function.

Controlled by a programmable digital power manager, the 14 user-programmable switched/linear regulators can be configured to meet the start-up sequence, voltage, and timing requirements for most applications. The power manager includes supply-rail qualification and system reset management. For optimal processor energy-per-task performance, Dynamic Voltage Scaling (DVS), is available on up to five supply domains. Dialog's patented SmartMirror™ dynamic biasing is implemented on all linear regulators.

An integrated 10-channel general purpose ADC includes support for a touch screen controller with pen down detect, programmable high/low thresholds, an integrated current source for resistive measurements, and system voltage monitoring with a programmable low voltage warning. The ADC has 8-bit resolution in auto mode and 10-bit resolution in manual conversion mode.



VFBGA 7 mm x 7 mm, 0.5 mm pitch package


Features

- Switched DC/USB charger with power-path management
- Four buck converters, 0.5 V to 3.6 V up to 800 mA
- DVS support
- Ten programmable LDOs, LDO9 is accurate to 1 %, all other LDOs to 3 %
- Low-power backup battery charger 1.1 V to 3.1 V, up to 6 mA
- 32 kHz Real Time Clock (RTC) oscillator
- 10-channel general purpose ADC with touch screen interface with pen down detect
- High-voltage white LED driver >24 V / 78 mA boost, three strings
- Sixteen flexible GPIO pins for enhanced wakeup and peripheral control
- 2-wire and 4-wire control interfaces
- System watchdog function
- -40 °C to +125 °C junction temperature operation

Typical applications

- Personal media players
- Smartphones
- Personal navigation devices
- Consumer and in-vehicle infotainment devices
- IoT devices

Block diagram

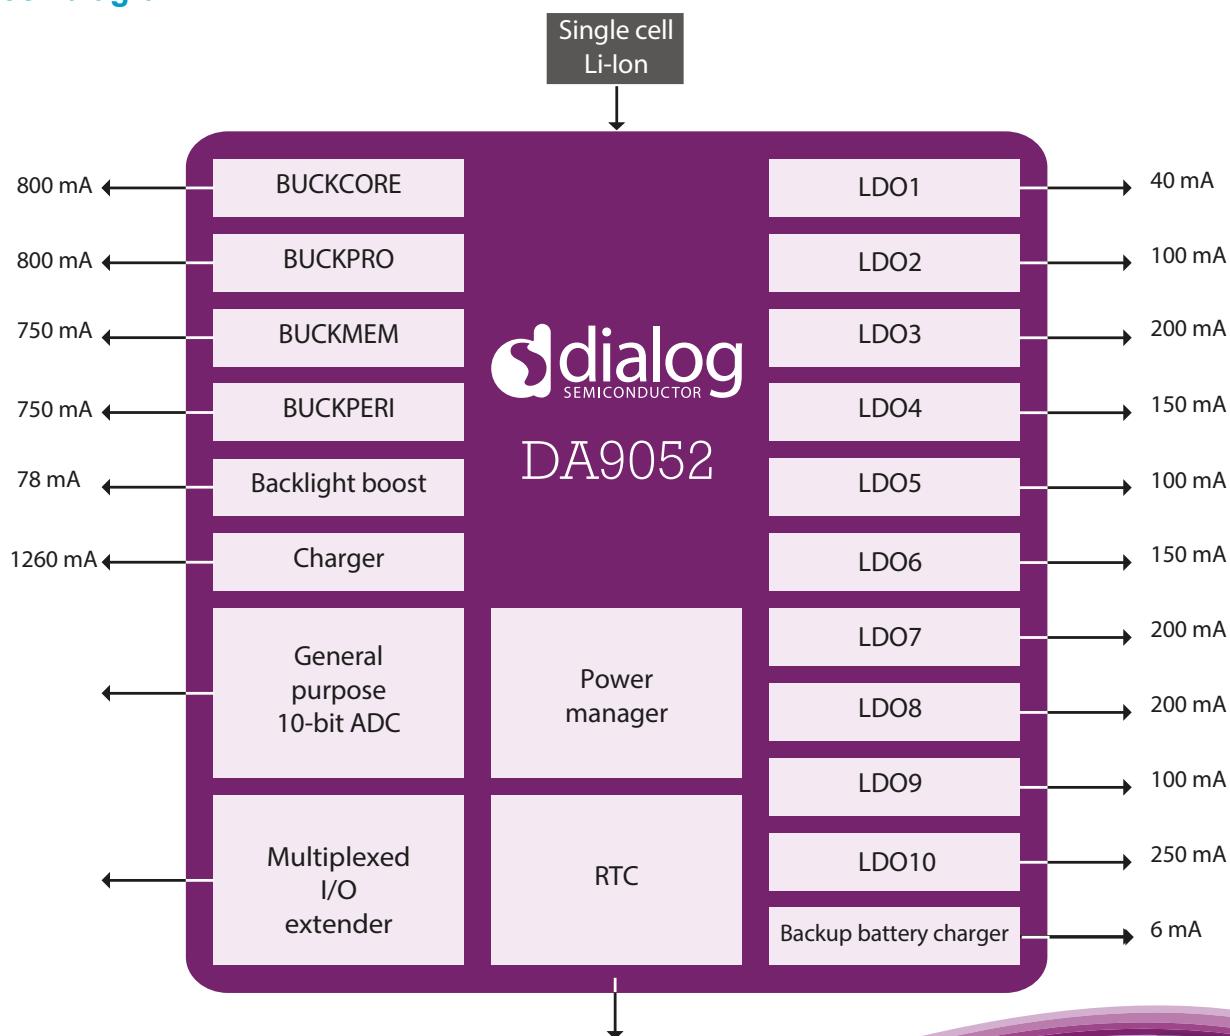

Generated supply domains

Regulator	Supplied voltage	Supplied max. current	External component	Notes
BUCKCORE	0.5 V to 2.075 V ±3 % accuracy	800 mA	2.2 µH to 4.7 µH	DVS, 2 MHz, 25 mV steps, DVS ramp with controlled slew rate, pull-down resistor
BUCKPRO	0.5 V to 2.075 V ±3 % accuracy	800 mA	2.2 µH to 4.7 µH	DVS, 2 MHz, 25 mV steps, DVS ramp with controlled slew rate, pull-down resistor
BUCKPERI	1.8 V to 3.6 V ±3 % accuracy	750 mA	2.2 µH to 4.7 µH	2 MHz, 50/100 mV steps
BUCKMEM	0.925 V to 2.5 V ±3 % accuracy	750 mA	2.2 µH to 4.7 µH	DVS, 2 MHz, 25 mV steps, DVS ramp with controlled slew rate, pull-down resistor
LDO1	0.6 V to 1.8 V ±3 % accuracy	40 mA	1.0 µF	High PSRR, low noise LDO, 50 mV steps
LDO2	0.6 V to 1.8 V ±3 % accuracy	100 mA	1.0 µF	DVS, digital LDO, 25 mV steps, DVS with controlled slew rate
LDO3	1.725 V to 3.3 V ±3 % accuracy	200 mA	2.2 µF	DVS, digital LDO, 25 mV steps, DVS with controlled slew rate
LDO4	1.725 V to 3.3 V ±3 % accuracy	150 mA	2.2 µF	Digital LDO, 25 mV steps, optional hardware control via GPI
LDO5	1.2 V to 3.6 V ±3 % accuracy	100 mA	1.0 µF	Digital LDO, 50 mV steps, optional hardware control via GPI
LDO6	1.2 V to 3.6 V ±3 % accuracy	150 mA	2.2 µF	High PSRR, low noise, 50 mV steps
LDO7	1.2 V to 3.6 V ±3 % accuracy	200 mA	2.2 µF	High PSRR, low noise, 50 mV steps
LDO8	1.2 V to 3.6 V ±3 % accuracy	200 mA	2.2 µF	High PSRR, low noise, 50 mV steps
LDO9	1.25 V to 3.6 V ±1 % accuracy	100 mA	1.0 µF	High PSRR, low noise, 50 mV steps, optional hardware control via GPI
LDO10	1.2 V to 3.6 V ±3 % accuracy	250 mA	2.2 µF	High PSRR, low noise, 50 mV steps

Dialog Semiconductor Worldwide Sales Offices - www.dialog-semiconductor.com

email: info@diasemi.com

United Kingdom
Phone: +44 1793 757700

The Netherlands
Phone: +31 73 640 88 22

Japan
Phone: +81 3 5425 4567

Singapore
Phone: +65 648 499 29

Korea
Phone: +82 2 3469 8200

Germany
Phone: +49 7021 805-0

North America
Phone: +1 408 845 8500

Taiwan
Phone: +886 281 786 222

Hong Kong
Phone: +852 3769 5200

China (Shenzhen)
Phone: +86 755 2981 3669
China (Shanghai)
Phone: +86 21 5424 9058

This publication provides outline information only, which unless agreed by Dialog Semiconductor may not be used, applied or reproduced for any purpose, or be regarded as a representation relating to products. Please refer to Dialog standard supply terms on the company website (www.dialog-semiconductor.com).

© Dialog Semiconductor 2015. All rights reserved. DA9052 PB 2v0

Данный компонент на территории Российской Федерации**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибуторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ Р В 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru
moschip.ru_4

moschip.ru_6
moschip.ru_9