

841AR Aerosol



Super Shield™ Nickel Conductive Paint

841AR is a conductive paint that consists of a 1-part, solvent-based acrylic lacquer, pigmented with a highly conductive nickel flake. It is smooth, hard, and abrasion resistant. It has a quick dry time, with no heat cure necessary. It adheres strongly to most injection-molded plastics, such as ABS, PBT and PVA. It also provides strong corrosion resistance and is suitable for use in marine environments.

841AR provides a conductive coating for the interior of plastic electronic enclosures that suppresses EMI/RFI emissions. It excels when corrosion resistance is a concern.



Features and Benefits

- UL Recognized (File # E202609)
- Provides effective EMI/RFI shielding over a broad frequency range
- Mild solvent system, safe on polystyrenes
- HAP free—does not contain toluene, xylene or MEK
- Available in liquid format (see separate TDS)

Available Packaging

Cat. No.	Packaging	Net Vol.	Net Wt.
841AR-340G	Aerosol	232 mL	340 g

Contact Information

MG Chemicals, 1210 Corporate Drive
Burlington, Ontario, Canada L7L 5R6

Email: support@mgchemicals.com

Phone: North America: +(1)800-340-0772

International: +(1) 905-331-1396

Europe: +(44)1663 362888

Cured Properties

Resistivity	$7.6 \times 10^{-3} \Omega \cdot \text{cm}$
Surface Resistance @ 50 μm	0.60 Ω/sq
Service Temperature Range	-40–120 °C

Usage Parameters

Dry To Touch	3 min
Cure Times	24 h @ 22 °C
	30 min @ 65 °C
Recommended Film Thickness	50 μm
Theoretical Coverage @ 50 μm	$\leq 2570 \text{ cm}^2$

Uncured Properties

Viscosity @ 25 °C	61 cP
Density	1.38 g/mL
Percent Solids	38 %
Shelf Life	2 y
Calculated VOC	470 g/mL

841AR Aerosol



Safety Data Sheet

Read the product SDS before using this product (downloadable at www.mgchemicals.com).


Recommended Preparation

Clean the substrate with Isopropyl Alcohol, MG #824, so the surface is free of oils, dust, and other residues.

Application Instructions

1. Shake the can vigorously.
2. Spray a test pattern to ensure good flow quality.
3. Tilt the board at 45° and spray a thin, even coat from a distance of 20–25 cm (8–10 in). Use spray-and-release strokes with an even motion to avoid paint buildup in one spot. Start and end each stroke off the surface.
4. Wait 3 min before applying another coat, to avoid trapping solvent.
5. Rotate the board 90° and spray again to ensure good coverage.
6. Apply additional coats until desired thickness is achieved (go to step 3).
7. Let dry 3 min at room temperature before applying heat cure.
8. After use, clear the nozzle by inverting the can and briefly spraying until clear propellant comes out.

Surface Resistance by Coating Thickness

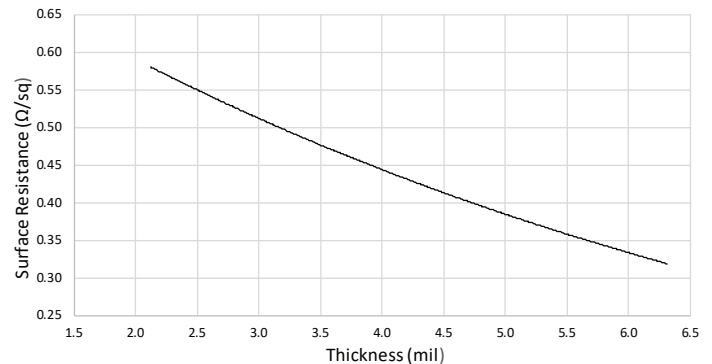


Cure Instructions

Allow to dry at room temperature for 24 hours, or after letting sit for 3 minutes, cure the paint in an oven for 30 minutes @ 65 °C.

Storage and Handling

Store between -5 and 40 °C in a dry area, away from sunlight (see SDS).

Shielding Attenuation

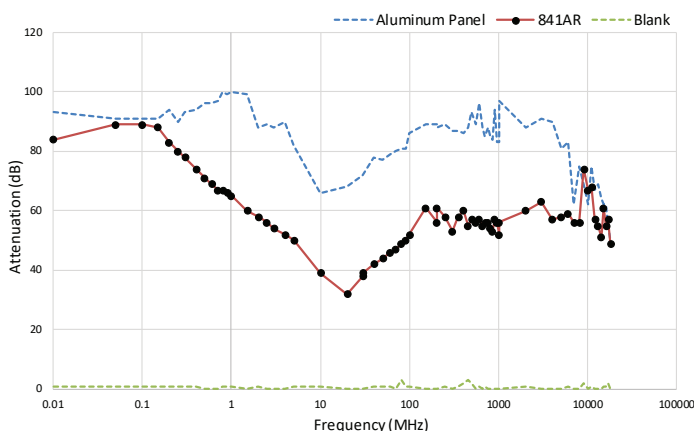

Test performed with a 2 coat thickness.

Disclaimer

This information is believed to be accurate. It is intended for professional end-users who have the skills required to evaluate and use the data properly. M.G. Chemicals Ltd. does not guarantee the accuracy of the data and assumes no liability in connection with damages incurred while using it.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9