

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0010845060

Status:

Active

Overview:

mlx

Description:

6.35mm (.250) Pitch MLX™ Power Connector Header, Vertical, 6 Circuits, Polyester 94V-0, Tin (Sn) Plating, White

Documents:

3D Model

Drawing (PDF)

Product Specification PS-42022-0001 (PDF)

RoHS Certificate of Compliance (PDF)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

PCB Headers

Series

42002

Application

Wire-to-Board

Comments

Solder Type

Overview

mlx

Product Name

MLX™

Physical

Breakaway

No

Circuits (Loaded)

6

Circuits (maximum)

6

Color - Resin

Natural

Durability (mating cycles max)

50

First Mate / Last Break

No

Flammability

94V-0

Glow-Wire Compliant

No

Guide to Mating Part

Yes

Keying to Mating Part

Yes

Lock to Mating Part

Yes

Material - Metal

Phosphor Bronze

Material - Plating Mating

Tin

Material - Resin

Polyester

Number of Rows

3

Orientation

Vertical

PC Tail Length (in)

0.168 In

PC Tail Length (mm)

4.27 mm

PCB Retention

Yes

PCB Thickness Recommended (in)

0.062 In

PCB Thickness Recommended (mm)

1.60 mm

Packaging Type

Bag

Pitch - Mating Interface (in)

0.250 In

Pitch - Mating Interface (mm)

6.35 mm

Pitch - Term. Interface (in)

0.250 In

Pitch - Term. Interface (mm)

6.35 mm

Polarized to Mating Part

Yes

Polarized to PCB

Yes

Shrouded

Fully

Stackable

No

Surface Mount Compatible (SMC)


No

Temperature Range - Operating

-55°C to +105°C

Termination Interface: Style

Through Hole

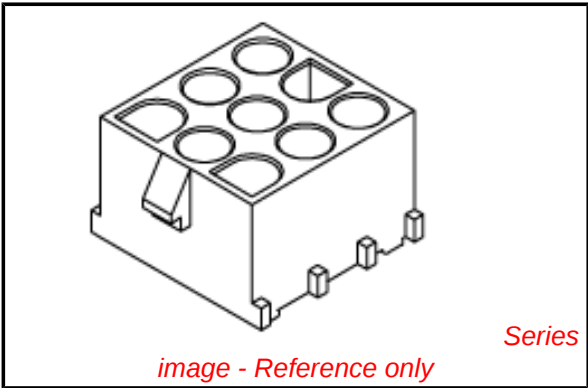

EU RoHS

ELV and RoHS

Compliant

REACH SVHC

Contains SVHC: No

Halogen-Free

Status

Not Halogen-Free

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com

For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

42002Series

Mates With

42021 Plug

Electrical

Current - Maximum per Contact	13.5A
Voltage - Maximum	600V

Solder Process Data

Duration at Max. Process Temperature (seconds)	10
Lead-free Process Capability	Wave Capable (TH only)
Process Temperature max. C	260

Material Info


Old Part Number	42002-06C1A1
-----------------	--------------

Reference - Drawing Numbers

Packaging Specification	PK-43255-002
Product Specification	PS-42022-0001
Sales Drawing	SDA-42002-*****

This document was generated on 05/24/2010


PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

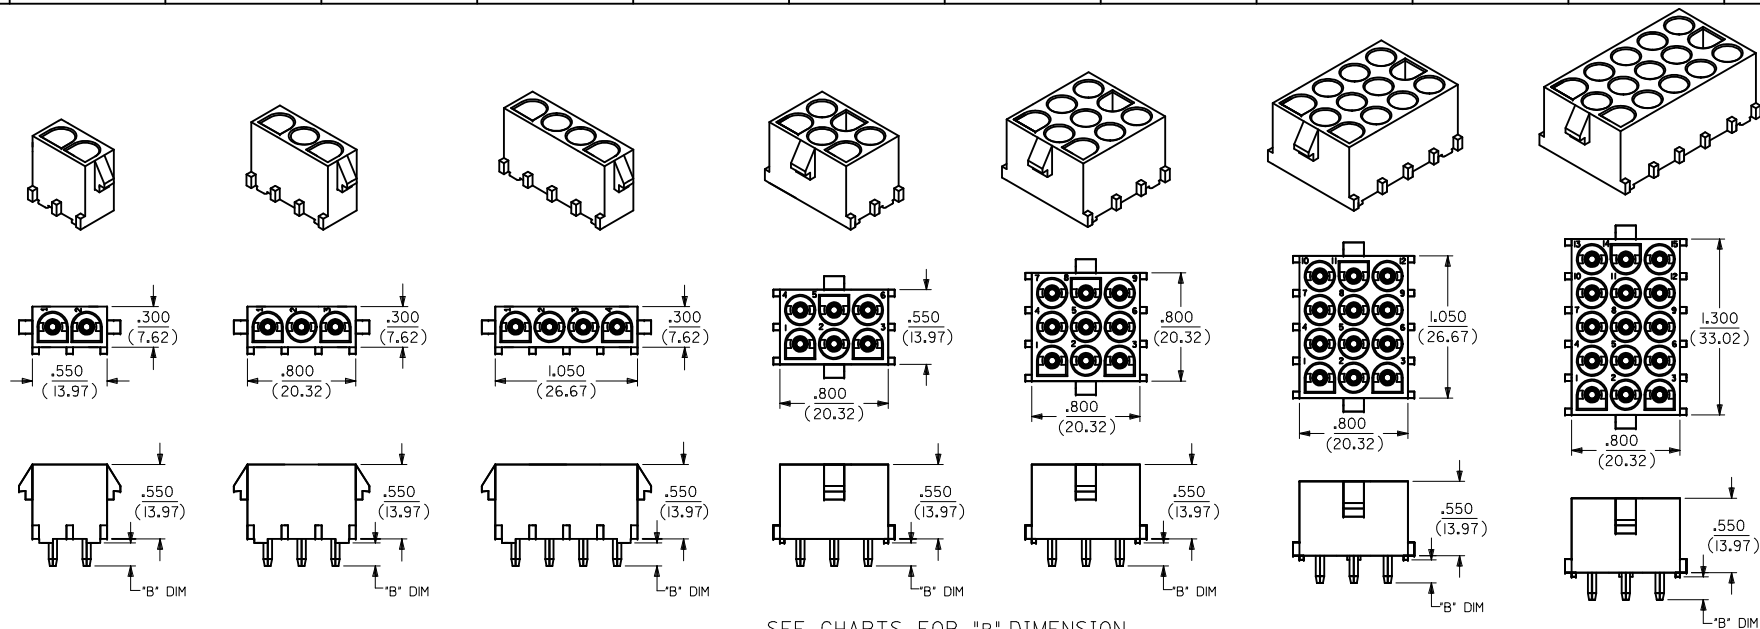


SEE CHARTS FOR "B" DIMENSION

P.C. BOARD MOUNTING DIMENSIONS

2, 3, & 4 POSITION HEADER ASSEMBLIES



6, 9, 12 & 15 POSITION HEADER ASSEMBLIES

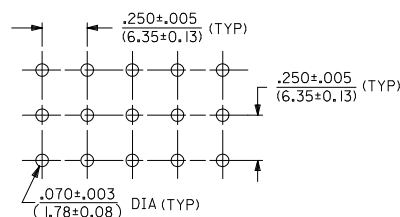

NOTES:

1) MATERIAL CODES:

A= NYLON 6/6, 94V-2, NATURAL

C= PLOYESTER, 94V-0, WHITE/NATURAL

D= NYLON V-2

COLOUR:BLACK(ZYTEL 101F)

E= NYLON V-2

COLOUR:NATURAL

GLOWWIRE COMPATIBLE WITH CTI OF 325V

2) PLATING CODES:

A = ES-88-P921

3) TERMINAL LENGTH CODES:

I= TERMINAL FOR .062/(1.57) THICK PC BOARD

4) DIMENSIONS ARE FOR REFERENCE ONLY UNLESS INDICATED OTHERWISE.

5) HEADER ASSEMBLY HOUSINGS MATE WITH : PLUG HOUSINGS, .084/(2.13) DIA. SERIES: (42021-***)

6) CONTACTS ARE ON .250/(6.35) GRID CENTERLINE SPACING.

LEGEND:

A-42002-***
BASE NUMBER
CIRCUIT SIZE
MATERIAL CODE (SEE NOTE 1)
PIN (1) OR SOCKET (2) TERMINALS
TERMINAL PLATING CODE (SEE NOTE 2)
TERMINAL LENGTH CODE (SEE NOTE 3)

ENTER DESCRIPTION		QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION					
						IN/MM		NTS	INCH						
EC NO: 12010-0067 DRWNS01 CHKD:GJLOWE APPR:KPRASAD 2009/11/02 2010/01/27 2010/01/27		D1		DESCRIPTION		DRAWN BY		DATE	TITLE HEADER HOUSING ASSEMBLY .084/(12.13)DIA.SERIES						
						mm		INCH							
						4 PLACES ±---		±---				SSUDHIR	2004/06/08		
						3 PLACES ±---		±.005				CHECKED BY	DATE		
						2 PLACES ±0.13		±.010				GJLOWE	2004/06/08		
REV				ANGULAR ±---°		APPROVED BY		DATE	MOLEX MOLEX INCORPORATED						
						GJLOWE		2004/06/08							
						MATERIAL NO.		DOCUMENT NO.				SHEET NO.			
						DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART				SDA-42002-*****		1 OF 2	
						SIZE A2		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

PART NO.	ENG. NO.	CIRCUIT SIZE	MATERIAL (SEE NOTE 1)	INSULATOR PART NO.	PLATING (SEE NOTE 2)	TERMINAL PART NO.	*B* DIM ±.015
10-84-4020	A-42002-2A1A1	2	A	42002-2A	A	42005-P921A	.17/(4,3)
10-84-5020	A-42002-2C1A1		C	42002-2C	A	42005-P921A	
10-84-4022	A-42002-2A2A1		A	42002-2A	A	42006-P921A	
10-84-5021	A-42002-2C2A1		C	42002-2C	A	42006-P921A	
367590101	36759-0101		D	366480042	A	42005-P921A	
367590141	36759-0141		D	366480042	A	42006-P921A	
367570101	36757-0101	3	E	367570001	A	42005-P921A	
367570141	36757-0141		E	367570001	A	42006-P921A	
10-84-4030	A-42002-3A1A1		A	42002-3A	A	42005-P921A	.17/(4,3)
10-84-5030	A-42002-3C1A1		C	42002-3C	A	42005-P921A	
10-84-4032	A-42002-3A2A1		A	42002-3A	A	42006-P921A	
10-84-5031	A-42002-3C2A1		C	42002-3C	A	42006-P921A	
367590102	36759-0102	4	D	366480043	A	42005-P921A	
367590142	36759-0142		D	366480043	A	42006-P921A	
367570102	36757-0102		E	367570002	A	42005-P921A	
367570142	36757-0142		E	367570002	A	42006-P921A	
10-84-4040	A-42002-4A1A1		A	42002-4A	A	42005-P921A	.17/(4,3)
10-84-5040	A-42002-4C1A1		C	42002-4C	A	42005-P921A	
10-84-4042	A-42002-4A2A1	5	A	42002-4A	A	42006-P921A	
10-84-5041	A-42002-4C2A1		C	42002-4C	A	42006-P921A	
367590103	36759-0103		D	366480044	A	42005-P921A	
367590143	36759-0143		D	366480044	A	42006-P921A	
367570103	36757-0103		E	367570003	A	42005-P921A	
367570143	36757-0143		E	367570003	A	42006-P921A	
10-84-4060	A-42002-6A1A1	6	A	42002-6A	A	42005-P921A	.17/(4,3)
10-84-5060	A-42002-6C1A1		C	42002-6C	A	42005-P921A	
10-84-4062	A-42002-6A2A1		A	42002-6A	A	42006-P921A	
10-84-5061	A-42002-6C2A1		C	42002-6C	A	42006-P921A	
367590104	36759-0104		D	366480045	A	42005-P921A	
367590144	36759-0144		D	366480045	A	42006-P921A	
367570104	36757-0104	9	E	367570004	A	42005-P921A	
367570144	36757-0144		E	367570004	A	42006-P921A	
10-84-4090	A-42002-9A1A1		A	42002-9A	A	42005-P921A	.17/(4,3)
10-84-5090	A-42002-9C1A1		C	42002-9C	A	42005-P921A	
10-84-4092	A-42002-9A2A1		A	42002-9A	A	42006-P921A	
10-84-5091	A-42002-9C2A1		C	42002-9C	A	42006-P921A	
367590105	36759-0105	12	D	366480046	A	42005-P921A	
367590145	36759-0145		D	366480046	A	42006-P921A	
367570105	36757-0105		E	367570005	A	42005-P921A	
367570145	36757-0145		E	367570005	A	42006-P921A	
10-84-4120	A-42002-12A1A1		A	42002-12A	A	42005-P921A	.17/(4,3)
10-84-5120	A-42002-12C1A1		C	42002-12C	A	42005-P921A	
10-84-4122	A-42002-12A2A1	15	A	42002-12A	A	42006-P921A	
10-84-5121	A-42002-12C2A1		C	42002-12C	A	42006-P921A	
367590106	36759-0106		D	366480047	A	42005-P921A	
367590146	36759-0146		D	366480047	A	42006-P921A	
367570106	36757-0106		E	367570006	A	42005-P921A	
367570146	36757-0146		E	367570006	A	42006-P921A	
10-84-4150	A-42002-15A1A1	15	A	42002-15A	A	42005-P921A	.17/(4,3)
10-84-5150	A-42002-15C1A1		C	42002-15C	A	42005-P921A	
10-84-4152	A-42002-15A2A1		A	42002-15A	A	42006-P921A	
10-84-5151	A-42002-15C2A1		C	42002-15C	A	42006-P921A	
367590107	36759-0107		D	366480057	A	42005-P921A	
367590147	36759-0147		D	366480057	A	42006-P921A	
367570107	36757-0107	15	E	367570007	A	42005-P921A	
367570147	36757-0147		E	367570007	A	42006-P921A	

ENTER DESCRIPTION DEC NO: 2010-0067 2009/11/02 DRAWNS:SS01 CHKD:GJLOWE APPR:KFRASAD 2010/01/27	QUALITY SYMBOLS ▽=0 ▽=0 ▽=0	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE IN/MM		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION	
						DRAWN BY SSUDHIR		DATE 2004/06/08	
						CHECKED BY GJLOWE		DATE 2004/06/08	
						APPROVED BY GJLOWE		DATE 2004/06/08	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		MATERIAL NO.		SEE CHART		DOCUMENT NO.		SHEET NO.	
				SIZE A 1		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		2 OF 2	

HEADER HOUSING ASSEMBLY .084/(2.13)DIA.SERIES

MOLEX MOLEX INCORPORATED

SDA-42002-*****

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9