

## General Description

The MAX17502F evaluation kit (EV kit) provides a proven design to evaluate the MAX17502F high-efficiency, high-voltage, synchronous step-down DC-DC converter. The EV kit uses the device to generate a fixed 5V at load currents up to 1A from a 7V to 60V input supply. The device features a forced-PWM control scheme that provides constant switching-frequency operation at all load and line conditions.

Ordering Information appears at end of data sheet.

## Features

- Operates from a 7V to 60V Input Supply
- 5V Fixed Output Voltage
- 1A Output Current
- 600kHz Switching Frequency
- Enable/UVLO Input
- Resistor-Programmable UVLO Threshold
- Open-Drain  $\overline{\text{RESET}}$  Output
- Overcurrent and Overtemperature Protection
- Proven PCB Layout
- Fully Assembled and Tested

## Component List

| DESIGNATION | QTY | DESCRIPTION                                                                       |
|-------------|-----|-----------------------------------------------------------------------------------|
| C1          | 1   | 2.2 $\mu$ F $\pm$ 10%, 100V X7R ceramic capacitor (1210)<br>Murata GRM32ER72A225K |
| C2          | 1   | 1 $\mu$ F $\pm$ 10%, 6.3V X7R ceramic capacitor (0603)<br>Murata GRM188R70J105K   |
| C3          | 1   | 3300pF $\pm$ 10%, 50V X7R ceramic capacitor (0402)<br>Murata GRM155R71H332K       |
| C4          | 1   | 10 $\mu$ F $\pm$ 10%, 10V X7R ceramic capacitor (1210)<br>Murata GRM32DR71A106K   |
| C7          | 1   | 33 $\mu$ F, 80V aluminum electrolytic (D = 8mm)<br>Panasonic EEEFK1K330P          |

| DESIGNATION | QTY | DESCRIPTION                                                              |
|-------------|-----|--------------------------------------------------------------------------|
| JU1         | 1   | 3-pin header                                                             |
| L1          | 1   | 22 $\mu$ H, 1.7A inductor (6mm x 6mm x 3.5mm)<br>Coilcraft LPS6235-223ML |
| R1          | 1   | 3.32M $\Omega$ $\pm$ 1% resistor (0402)                                  |
| R2          | 1   | 866k $\Omega$ $\pm$ 1% resistor (0402)                                   |
| R4          | 1   | 100 $\Omega$ resistor (0402)                                             |
| R6          | 1   | 10k $\Omega$ $\pm$ 1% resistor (0402)                                    |
| TP1, TP2    | 0   | Not installed, test points                                               |
| U1          | 1   | Buck converter (10 TDFN-EP*)<br>Maxim MAX17502FATB+                      |
| —           | 1   | Shunt                                                                    |
| —           | 1   | PCB: MAX17502FT EVALUATION KIT                                           |

\*EP = Exposed pad.

## Component Suppliers

| SUPPLIER                               | PHONE        | WEBSITE                     |
|----------------------------------------|--------------|-----------------------------|
| Coilcraft, Inc.                        | 847-639-6400 | www.coilcraft.com           |
| Murata Electronics North America, Inc. | 770-436-1300 | www.murata-northamerica.com |
| Panasonic Corp.                        | 800-344-2112 | www.panasonic.com           |

**Note:** Indicate that you are using the MAX17502 when contacting these component suppliers.

## Quick Start

### Recommended Equipment

- MAX17502F EV kit
- 7V to 60V, 2A DC input power supply
- Load capable of sinking 1A
- Digital voltmeter (DVM)
- Function generator

### Procedure

The EV kit is fully assembled and tested. Follow the steps below to verify the board operation. **Caution: Do not turn on power supply until all connections are completed.**

- 1) Set the power supply at a voltage between 7V and 60V. Disable the power supply.
  - 2) Connect the positive terminal of the power supply to the VIN PCB pad and the negative terminal to the nearest PGND PCB pad. Connect the positive terminal of the 1A load to the VOUT PCB pad and the negative terminal to the nearest PGND PCB pad.
  - 3) Connect the DVM across the VOUT PCB pad and the nearest PGND PCB pad.
  - 4) Verify that a shunt is installed across pins 1-2 on jumper JU1.
  - 5) Turn on the DC power supply.
  - 6) Enable the load.
  - 7) Verify that the DVM displays the expected voltage.
- To turn-on/off the part from EN/UVLO, follow the steps below:
- 1) Remove resistors R1 and R2 and the jumper installed across pins 1-2 on jumper JU1.
  - 2) Connect the power supply to the EV kit and turn on the power supply. Set the power supply at a voltage between 7V and 60V.
  - 3) Connect the function generator output to the EN/UVLO test loop.
  - 4) EN/UVLO rising threshold is 1.24V and falling threshold is 1.24V. Make sure that the voltage-high and

voltage-low levels of the function generator output are greater than 1.24V and less than 1.11V, respectively.

- 5) While powering down the EV kit, first disconnect the function generator output from the EN/UVLO test loop and then turn off the DC power supply.

Care should be taken in board layout and systems wiring to prevent violation of the absolute maximum rating of the FB/VO pin under short-circuit conditions. Under such conditions, it is possible for the ceramic output capacitor to oscillate with the board or wiring inductance between the capacitor and short-circuited load, and thereby cause the absolute maximum rating of FB/VO (-0.3V) to be exceeded. This parasitic board or wiring inductance should be minimized and the output voltage waveform under short-circuit operation should be verified to ensure that the absolute maximum rating of FB/VO is not exceeded.

## Detailed Description of Hardware

The MAX17502F EV kit provides a proven design to evaluate the MAX17502F high-efficiency, high-voltage, synchronous step-down DC-DC converter. The EV kit generates a fixed 5V, at load currents up to 1A, from a 7V to 60V input supply. The EV kit features a 600kHz fixed switching frequency for optimum efficiency and component size. The EV kit features a forced-PWM control scheme that provides constant switching-frequency operation at all load and line conditions.

The EV kit includes an EN/UVLO PCB pad and jumper JU1 to enable control of the converter output. An additional RESET PCB pad is available for monitoring the converter output. The VCC PCB pad helps measure the internal LDO voltage.

### Soft-Start Input (SS)

The device utilizes an adjustable soft-start function to limit inrush current during startup. The soft-start time is adjusted by the value of C3, the external capacitor from SS to GND. To adjust the soft-start time, determine C3 using the following formula:

$$C3 = 5.55 \times t_{SS}$$

where  $t_{SS}$  is the required soft-start time in milliseconds and C3 is in nanofarads.

**Table 1. Regulator Enable (EN/UVLO) Jumper JU1 Settings**

| SHUNT POSITION | EN/UVLO PIN                                                | MAX17501_ OUTPUT                                               |
|----------------|------------------------------------------------------------|----------------------------------------------------------------|
| 1-2*           | Connected to IN                                            | Enabled                                                        |
| Not installed  | Connected to the center node of resistor-divider R1 and R2 | Enabled, UVLO level set through the R1 and R2 resistor-divider |
| 2-3            | Connected to GND                                           | Disabled                                                       |

\*EP = Exposed pad.

### Regulator Enable/Undervoltage-Lockout Level (EN/UVLO)

The device features an EN/UVLO input. For normal operation, a shunt should be installed across pins 1-2 on jumper JU1. To disable the output, install a shunt across pins 2-3 on JU1 and the EN/UVLO pin is pulled to GND. See Table 1 for JU1 settings.

### Setting the Undervoltage-Lockout Level

The device offers an adjustable input undervoltage-lockout level. Set the voltage at which the device turns on with a resistive voltage-divider connected from VIN to GND. Connect the center node of the divider to EN/UVLO.

Choose R1 to be 3.3MΩ and then calculate R2 as follows:

$$R2 = \frac{R1 \times 1.218}{(V_{INU} - 1.218)}$$

where  $V_{INU}$  is the voltage at which the IC is required to turn on.

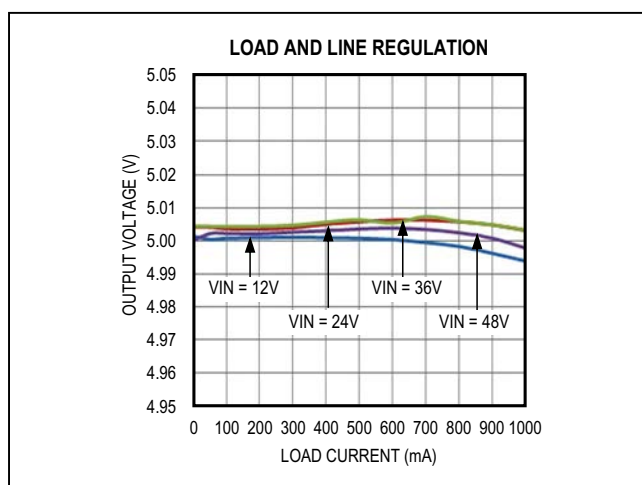


Figure 1. MAX17502F Load and Line Regulation

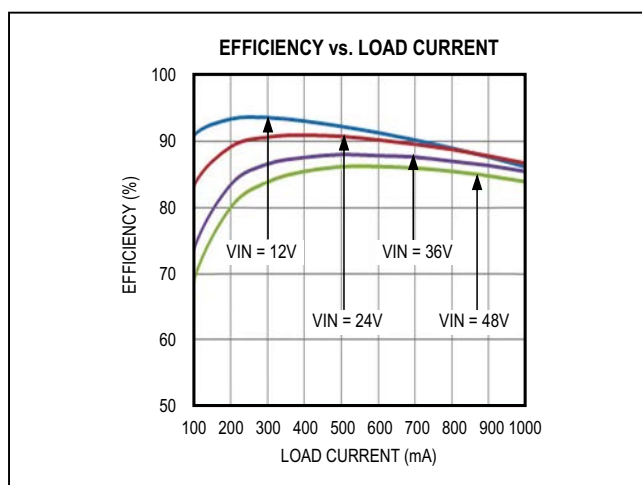


Figure 2. MAX17502F Efficiency

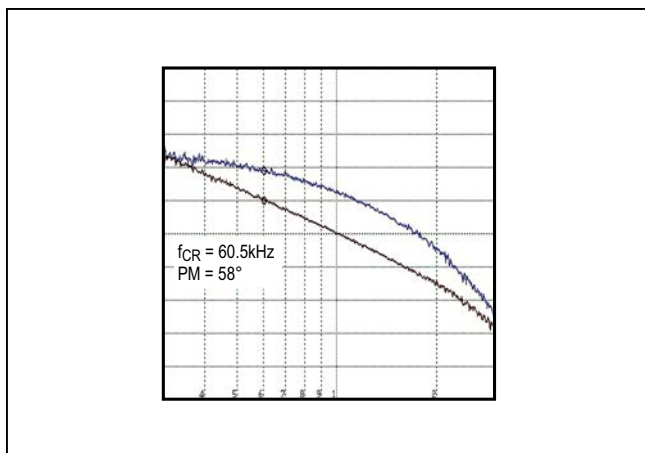
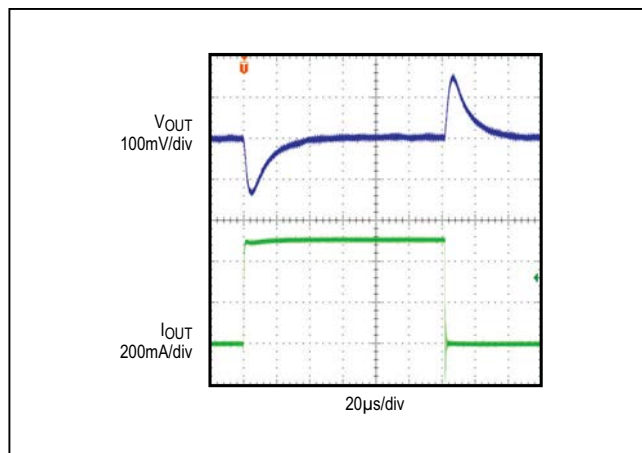
Figure 3. MAX17502F Full Load Bode Plot ( $V_{IN} = 24\text{V}$ )

Figure 4. MAX17502F No Load to 500mA Load Transient

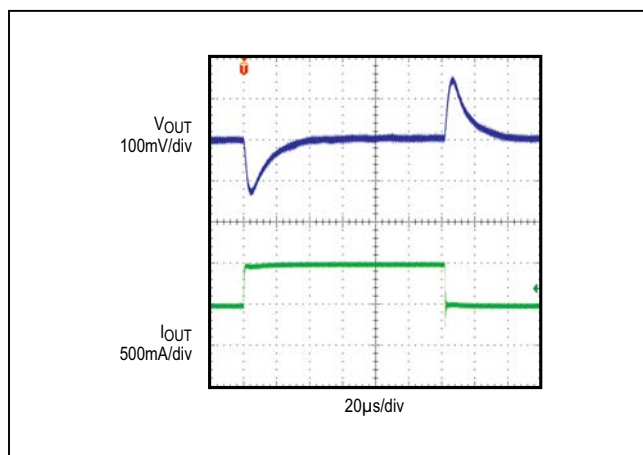


Figure 5. MAX17502F 500mA to 1A Load Transient

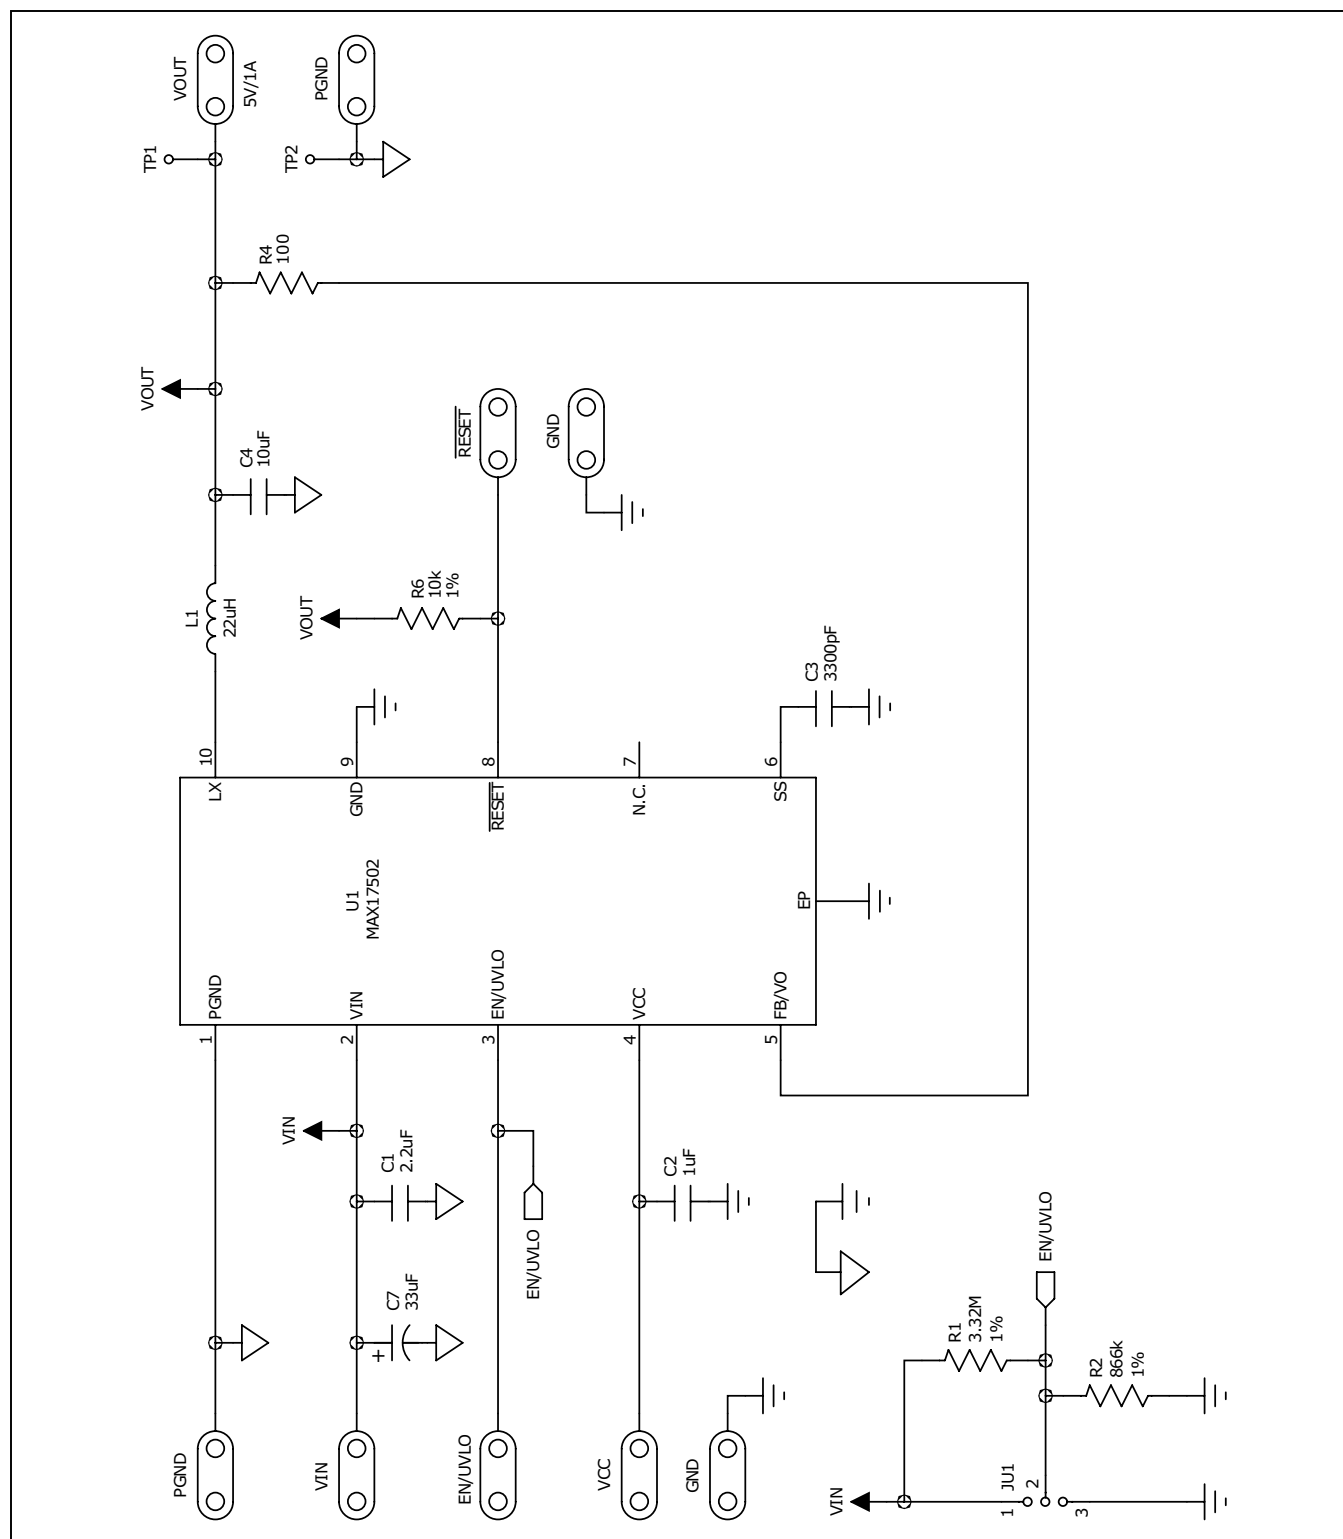


Figure 6. MAX17502F EV Kit Schematic

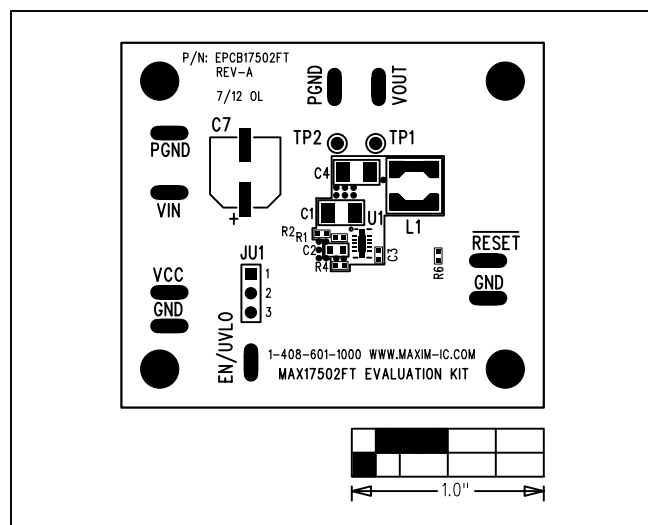


Figure 7. MAX17502F EV Kit Component Placement Guide—Component Side

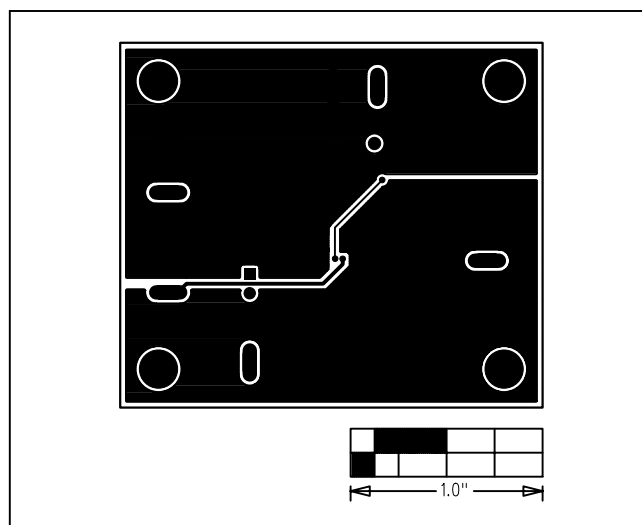


Figure 9. MAX17502F EV Kit PCB Layout—Solder Side

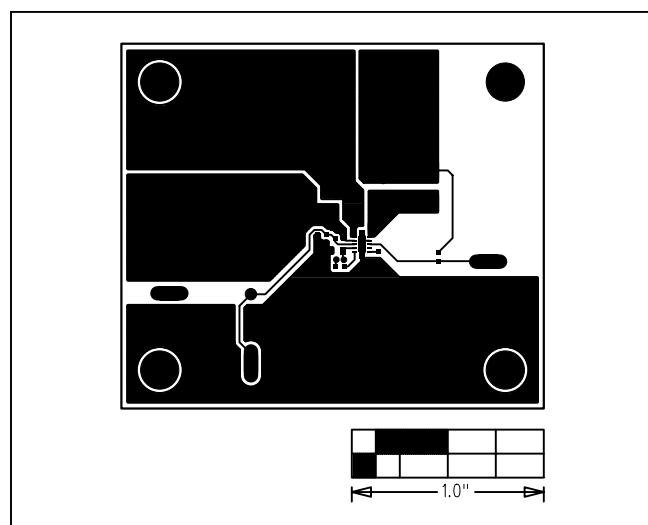


Figure 8. MAX17502F EV PCB Layout—Component Side

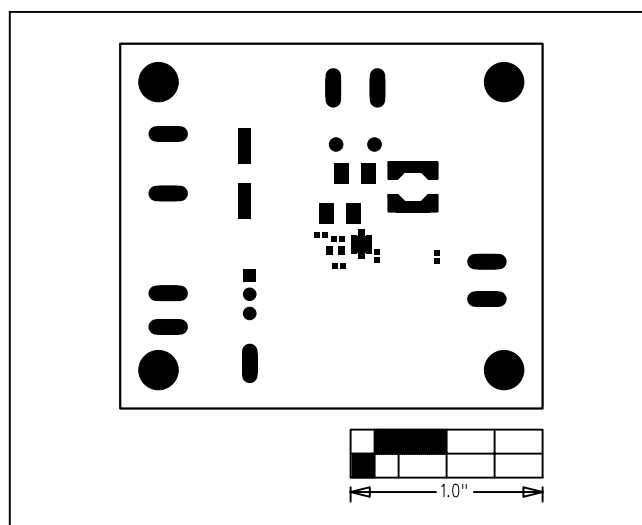


Figure 10. MAX17502F EV Kit PCB Layout—Top Solder Mask

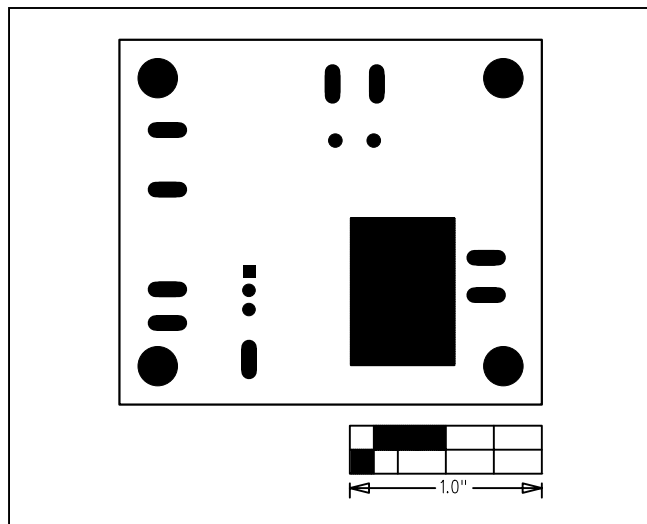


Figure 11. MAX17502F EV Kit PCB Layout—Bottom Solder Mask

### Ordering Information

| PART             | TYPE   |
|------------------|--------|
| MAX17502FTEVKIT# | EV Kit |

#Denotes RoHS compliant.

## Revision History

| REVISION<br>NUMBER | REVISION<br>DATE | DESCRIPTION                                                                                                                                                                                                        | PAGES<br>CHANGED |
|--------------------|------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------|
| 0                  | 11/12            | Initial release                                                                                                                                                                                                    | —                |
| 1                  | 10/13            | Replaced the R4 resistor value from 0Ω to 100Ω in the <i>Component List</i> and Figure 6 schematic; added new paragraph to the <i>Procedure</i> section about preventing violation of the abs max rating for FB/VO | 1, 2, 5          |

For pricing, delivery, and ordering information, please contact Maxim Direct at 1-888-629-4642, or visit Maxim Integrated's website at [www.maximintegrated.com](http://www.maximintegrated.com).

*Maxim Integrated cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim Integrated product. No circuit patent licenses are implied. Maxim Integrated reserves the right to change the circuitry and specifications without notice at any time.*



## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9