

3 Watts WA Series



- 2:1 Input Range
- Optional 4:1 Input Range
- Efficiency to 74%
- Input Pi Filter
- Fully Regulated Outputs
- Optional 3 kVDC Isolation
- UL Approved Versions

Specification

Input

Input Voltage Range	• 5 V (4.5-6.0 VDC) • 12 V (9-18 or 9-36 VDC - A version) • 24 V (18-36 or 18-72 VDC - A version) • 48 V (36-72 VDC)
Input Current	• See table
Input Filter	• Pi network
Undervoltage Lockout	• Turn On > 65% nominal input • Turn Off < 62% nominal input

Output

Output Voltage	• See table
Output Voltage Balance	• $\pm 1\%$ max, dual output models
Initial Set Accuracy	• $\pm 2\%$ max
Start Up Delay	• 30 ms max
Start Up Rise Time	• 35 ms typical
Line Regulation	• $\pm 0.5\%$ max (high line to low line)
Load Regulation	• $\pm 0.5\%$ max for 10-100% load change • single output models, $\pm 1.0\%$ max for 25-100% load change dual output models
Cross Regulation	• 2.2% on dual output models
Transient Response	• <1.5% max deviation, recovering within 200 μs for a 50% load change
Ripple & Noise	• 100 mV or 1% pk-pk, whichever is greater, 20MHz BW
Overcurrent Protection	• 110-130% trip and restart (Hiccup mode)
Short Circuit Protection	• Continuous with auto recovery
Maximum Capacitive Load	• 30,000 μF
Temperature Coefficient	• ± 0.05 /°C max

General

Efficiency	• See table
Isolation	• 500 VDC Input to Output (1000 M /80 pF) • Optional high isolation version, 3000 VDC Input to Output, add suffix 'X' to model number
Switching Frequency	• 100 kHz typical
MTBF	• 1,000 kHrs to MIL-HDBK-217F

Environmental

Operating Temperature	• -25 $^{\circ}$C to +70 $^{\circ}$C
Case Temperature	• +95 $^{\circ}$C max
Storage Temperature	• -40 $^{\circ}$C to +100 $^{\circ}$C

EMC & Safety

Emissions	• EN55022, level A conducted • EN55022, level A radiated
ESD Immunity	• EN61000-4-2, level 2 • Performance Criteria A
Radiated Immunity	• EN61000-4-3 3 V/m • Performance Criteria A
Conducted Immunity	• EN61000-4-6 3 V rms • Performance Criteria A
Safety Approvals	• UL1950 for XU versions only

Models and Ratings

WA Series **XP**

Input Voltage ^(1,2,5)	Output Voltage	Output Current	Input Current ⁽⁶⁾		Efficiency	Model Number ^(3,4)
			No Load	Full Load		
4.5-6.0 VDC	3.3 VDC	600 mA	15.0 mA	619 mA	64%	WA100
	5.0 VDC	600 mA	15.0 mA	850 mA	70%	WA101
	12.0 VDC	250 mA	15.0 mA	800 mA	75%	WA102
	15.0 VDC	200 mA	15.0 mA	800 mA	75%	WA103
	±5.0 VDC	±250 mA	25.0 mA	850 mA	70%	WA104
	±12.0 VDC	±125 mA	25.0 mA	800 mA	75%	WA105
	±15.0 VDC	±100 mA	25.0 mA	800 mA	75%	WA106
9-18 VDC	3.3 VDC	600 mA	7.5 mA	236 mA	70%	WA200
	5.0 VDC	600 mA	7.5 mA	340 mA	73%	WA201
	12.0 VDC	250 mA	7.5 mA	320 mA	78%	WA202
	15.0 VDC	200 mA	7.5 mA	320 mA	78%	WA203
	±5.0 VDC	±250 mA	12.0 mA	340 mA	73%	WA204
	±12.0 VDC	±125 mA	12.0 mA	320 mA	78%	WA205
	±15.0 VDC	±100 mA	12.0 mA	320 mA	78%	WA206
18-36 VDC	3.3 VDC	600 mA	5.0 mA	113 mA	73%	WA300
	5.0 VDC	600 mA	5.0 mA	168 mA	74%	WA301
	12.0 VDC	250 mA	5.0 mA	156 mA	80%	WA302
	15.0 VDC	200 mA	5.0 mA	156 mA	80%	WA303
	±5.0 VDC	±250 mA	7.5 mA	168 mA	74%	WA304
	±12.0 VDC	±125 mA	7.5 mA	156 mA	80%	WA305
	±15.0 VDC	±100 mA	7.5 mA	156 mA	80%	WA306
36-72 VDC	3.3 VDC	600 mA	3.0 mA	58 mA	71%	WA400
	5.0 VDC	600 mA	2.0 mA	82 mA	76%	WA401
	12.0 VDC	250 mA	2.0 mA	78 mA	80%	WA402
	15.0 VDC	200 mA	2.0 mA	78 mA	80%	WA403
	±5.0 VDC	±250 mA	3.0 mA	82 mA	76%	WA404
	±12.0 VDC	±125 mA	3.0 mA	80 mA	78%	WA405
	±15.0 VDC	±100 mA	3.0 mA	80 mA	78%	WA406


Notes

1. Nominal input voltage 5, 12, 24 or 48 VDC.
2. For optional 4:1 input range: 9-36 VDC: Add suffix 'A' to WA2xx model number, 18-72 VDC: Add suffix 'A' to WA3xx model number.
3. For 3000 VDC isolation add suffix 'X' to model number.
4. For UL1950 approval, add suffix 'XU' to model number. UL approved product is only available with 3000 VDC isolation and option 'X' pinout.
5. 'X' or 'XU' versions are not available with optional 4:1 input range.
6. Input current is at nominal input voltage.

Mechanical Details

All dimensions are in inches (mm)

Weight: 0.04 lbs (20 g) approx.

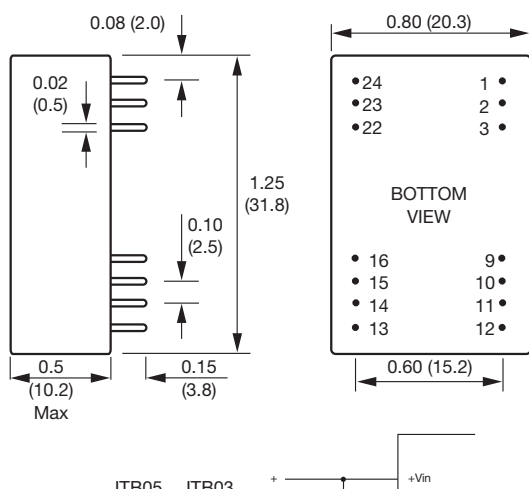

PIN CONNECTIONS		
Pin	Single Output	Dual Output
1	+V input	+V input
2	N/C	-V output
3	N/C	Common
9	No pin	No pin
10	-V output	Common
11	+V output	+V output
12	-V input	-V input
13	-V input	-V input
14	+V output	+V output
15	-V output	Common
16	No pin	No pin
22	N/C	Common
23	N/C	-V output
24	+V input	+V input

OPTION 'X' PIN CONNECTIONS		
Pin	Single Output	Dual Output
1	No pin	No pin
2	-V input	-V input
3	-V input	-V input
9	N/C	Common
10	N/C	N/C
11	N/C	-V output
12	No pin	No pin
13	No pin	No pin
14	+V output	+V output
15	N/C	N/C
16	-V output	Common
22	+V input	+V input
23	+V input	+V input
24	No pin	No pin

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9