


Unpublished copy not to be
without written permission of AMP

REVISIONS				DATE	APPROVED
ZONE	LTR	DESCRIPTION			
	Y	REV PER OG3C-0166-02		25JUN02	MM
	Y1	REVISED PER -ECO-09-026444		27NOV09	KK AEG

PART NO	NO. OF POS	A	B	F	G	
583660-1	36	.156	5.460	5.772	6.248	
-2	15		2.184	2.496	2.942	
-3	3		.312	.624	1.070	OBSOLETE 4
-4	4		.468	.780	1.226	
-5	5		.624	.936	1.382	
-6	6		.780	1.092	1.538	OBSOLETE 4
-7	7		.936	1.248	1.694	
-8	8		1.092	1.404	1.850	
-9	9		1.248	1.560	2.006	
1-583660-0	10		1.404	1.716	2.162	
1-1	11		1.560	1.872	2.318	
1-2	12		1.716	2.028	2.474	OBSOLETE 4
1-3	13		1.872	2.184	2.630	
1-4	14		2.028	2.340	2.786	OBSOLETE 4
1-5	15		2.340	2.652	3.098	
1-6	17		2.496	2.808	3.254	
1-7	18		2.652	2.964	3.410	
1-8	19		2.808	3.120	3.566	
1-9	20		2.964	3.276	3.722	
2-583660-0	21		3.120	3.432	3.878	
2-1	22		3.276	3.588	4.034	
2-2	23		3.432	3.744	4.190	
2-3	24		3.588	3.900	4.346	OBSOLETE 4
2-4	25		3.744	4.056	4.502	
2-5	26		3.900	4.212	4.658	
2-6	27		4.056	4.368	4.814	OBSOLETE 4
2-7	28		4.212	4.524	4.970	
2-8	29		4.368	4.680	5.126	OBSOLETE 4
2-9	30		4.524	4.836	5.282	OBSOLETE 4
3-583660-0	31		4.680	4.992	5.438	OBSOLETE 4
3-1	32		4.836	5.148	5.594	
3-2	33		4.992	5.304	5.750	
3-3	34		5.148	5.460	5.906	OBSOLETE 4
3-4	35		5.304	5.616	6.062	
3-5	37		5.616	5.928	6.374	
3-6	38		5.772	6.084	6.530	OBSOLETE
3-7	39		5.928	6.240	6.686	
3-8	40		6.084	6.396	6.842	
3-9	41		6.240	6.552	6.998	
4-583660-0	42		6.396	6.708	7.154	
4-1	43		6.552	6.864	7.310	OBSOLETE 4
4-2	44		6.708	7.020	7.466	
4-3	45		6.864	7.176	7.622	
4-4	46		7.020	7.332	7.778	
4-5	47		7.176	7.488	7.934	
4-6	48		7.332	7.644	8.090	
4-7	49		7.488	7.800	8.246	
4-583660-8	50	.156	7.644	7.956	8.402	OBSOLETE 4

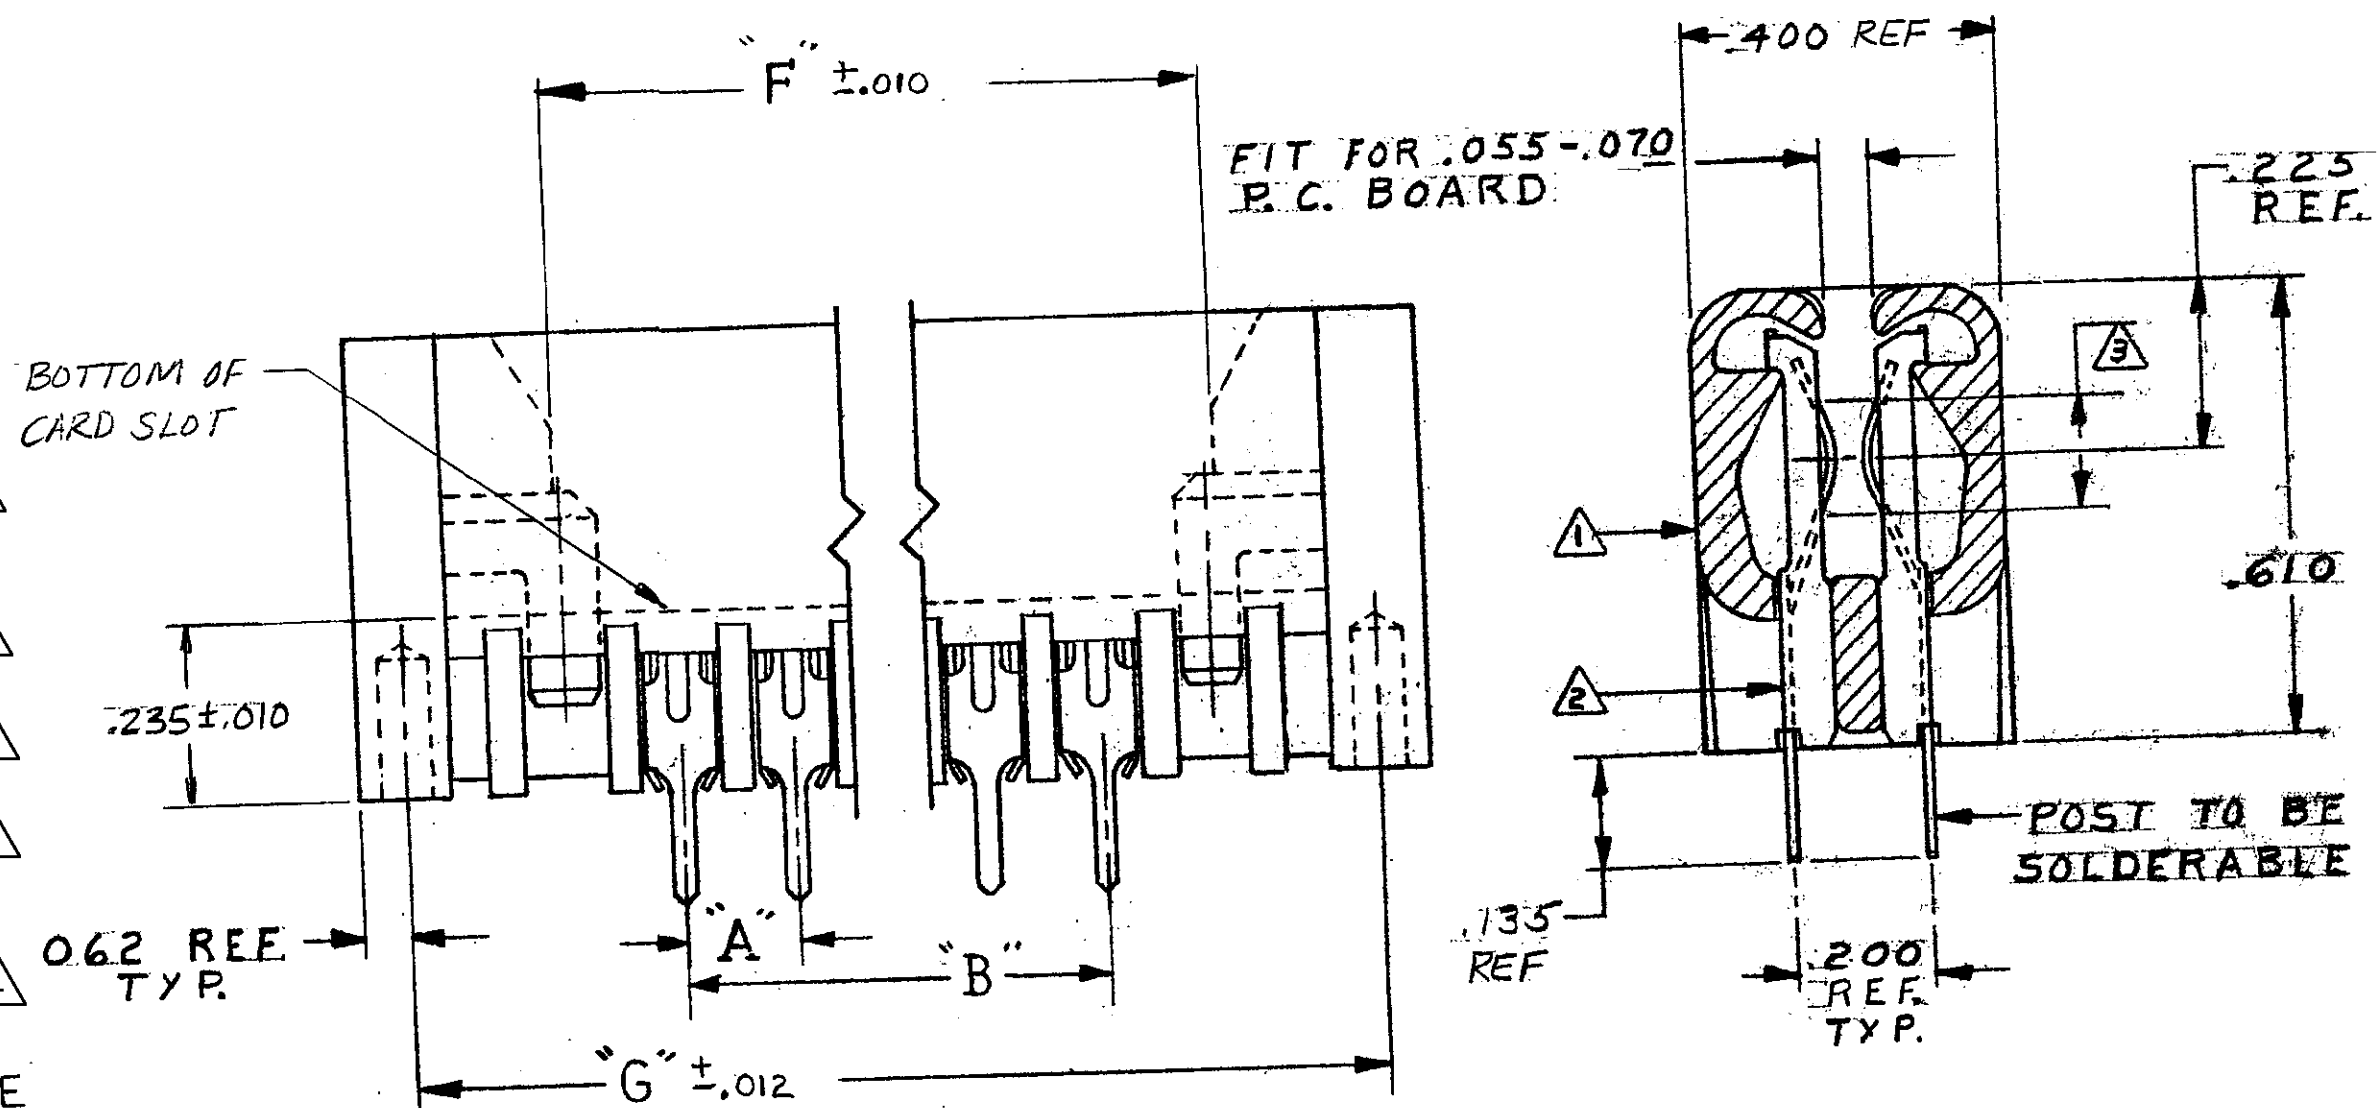


- ① GLASS FILLED POLYESTER, COLOR-BLACK
 ② PHOSPHOR BRONZE
 ③ .000015 GOLD, SELECTIVE
 ④ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI



UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES TOLERANCES ON: DECIMALS ±.005 ANGLES ±		CONTRACT NO.		AMP INCORPORATED HARRISBURG, PENNSYLVANIA	
MATERIAL SEE CALLOUT		DR	1-30-73		NAME HOUSING ASSEMBLY, TWIN LEAF, .156 Q. .010X.024, SOLDER TYPE POST, END CAP VERSION
		CHK	M. J. G. 2-5-73		
		APPD	Larry M. Brown 2-5-73		
		REL	R. G. D. 3/13/73		
		DSGN APPD			SIZE C
		OTHER APPD			CODE IDENT NO. 00779
				NUMBER 583660	
				SCALE 1/8"	
				SHEET 1 OF 2 SHTS.	

CUSTOMER DRAWING

REVISIONS				
ZONE	LTR	DESCRIPTION	DATE	APPROVED
SEE SHEET 1				

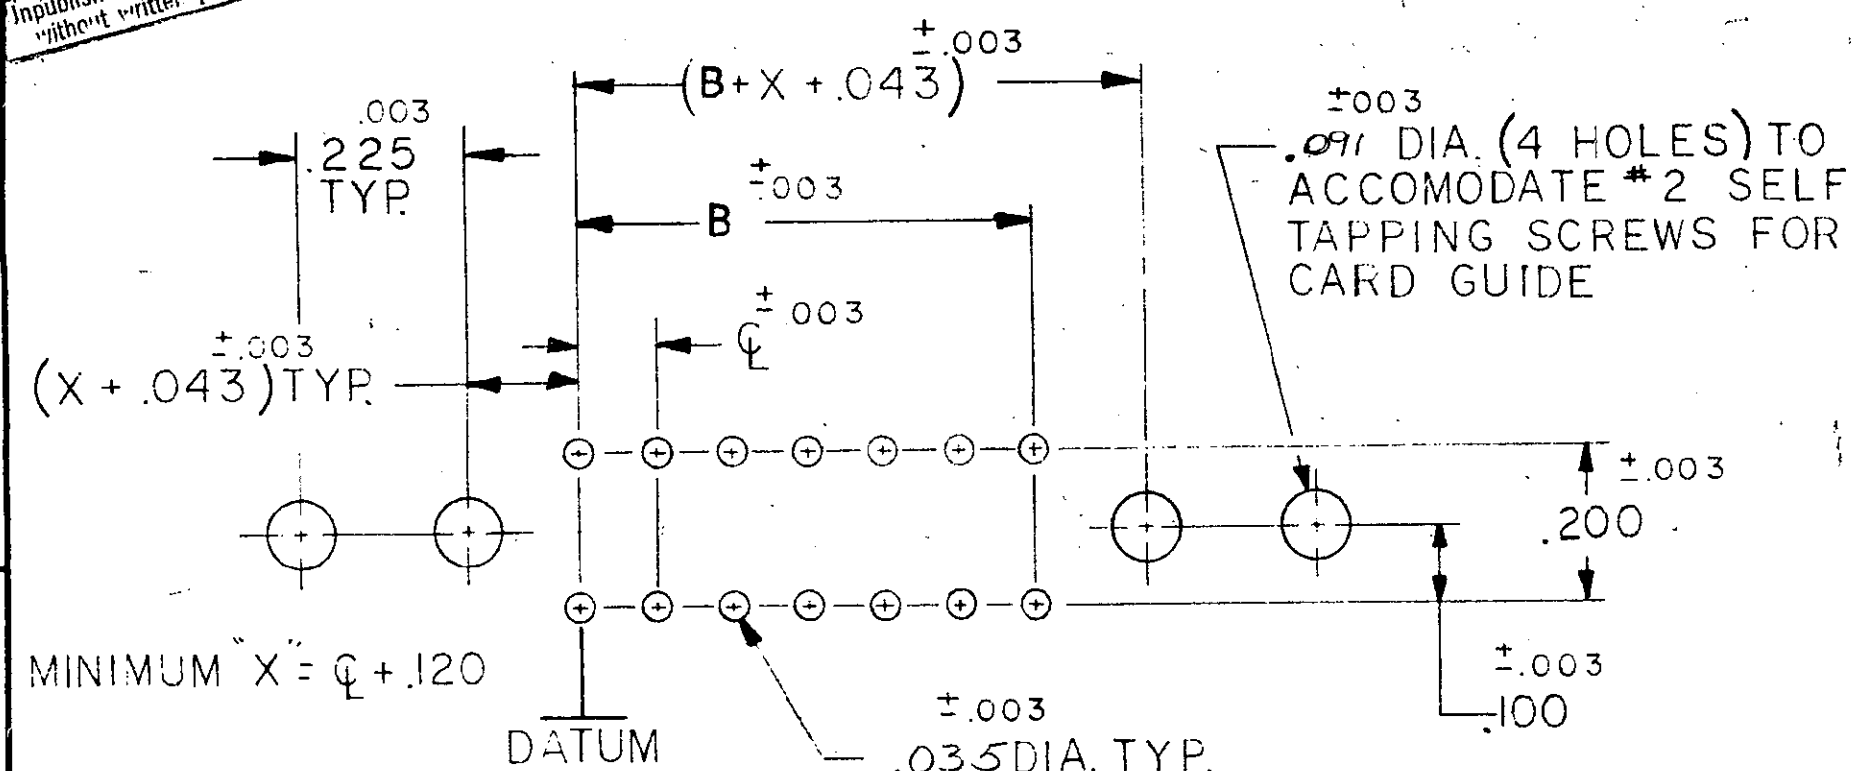

BOARD LAYOUT FOR USE WITH AMP CARD GUIDE PART NO. 583671

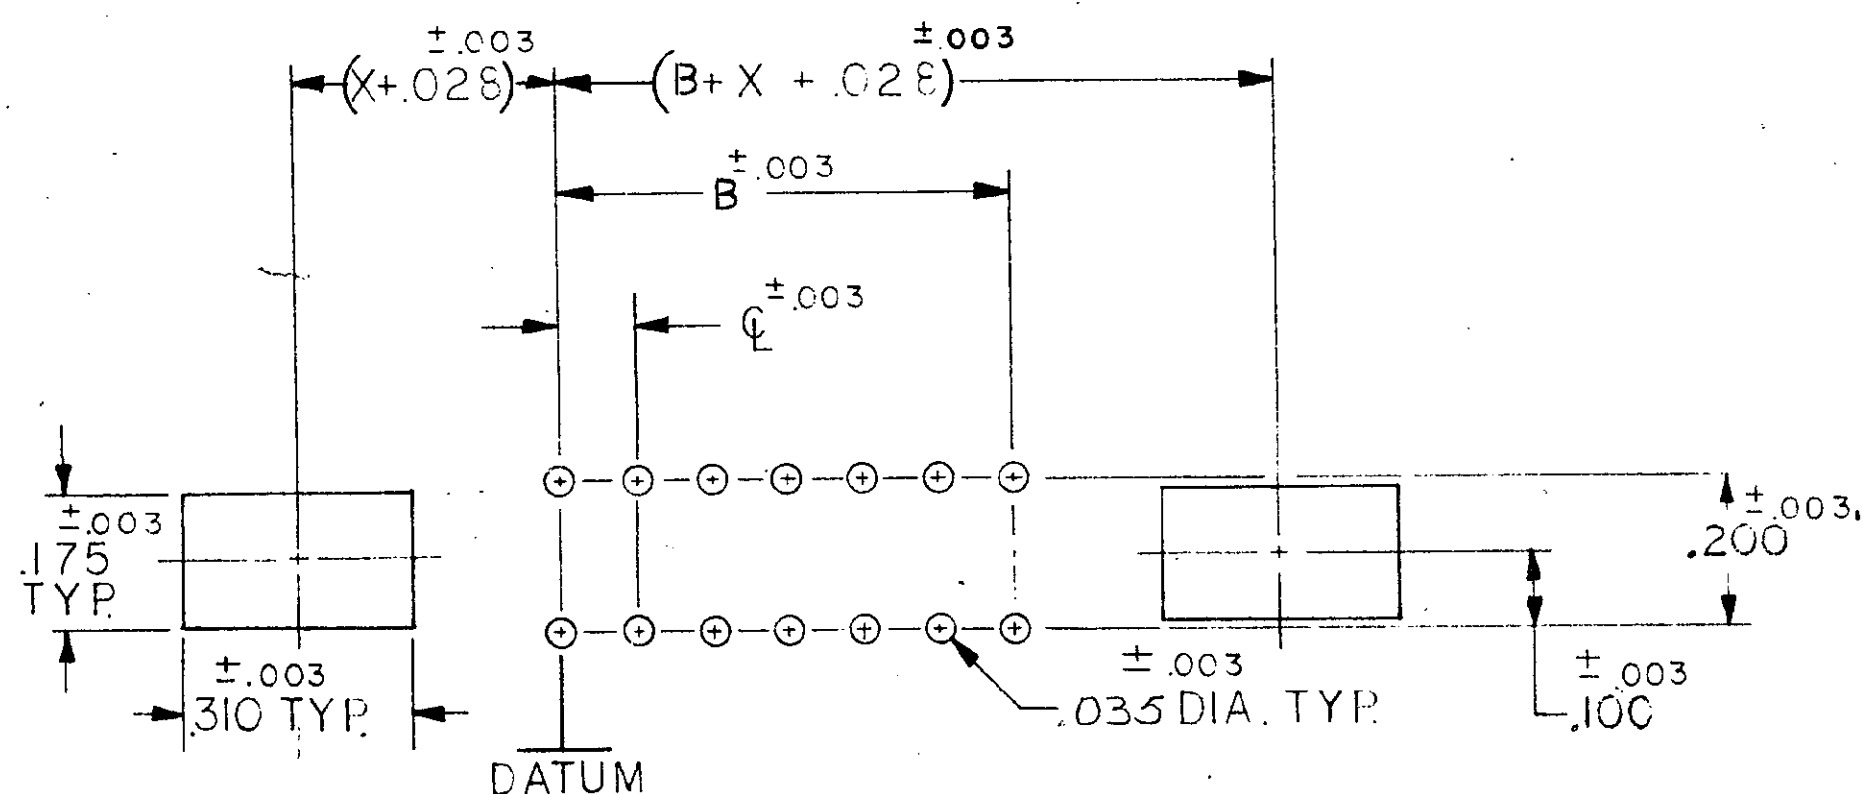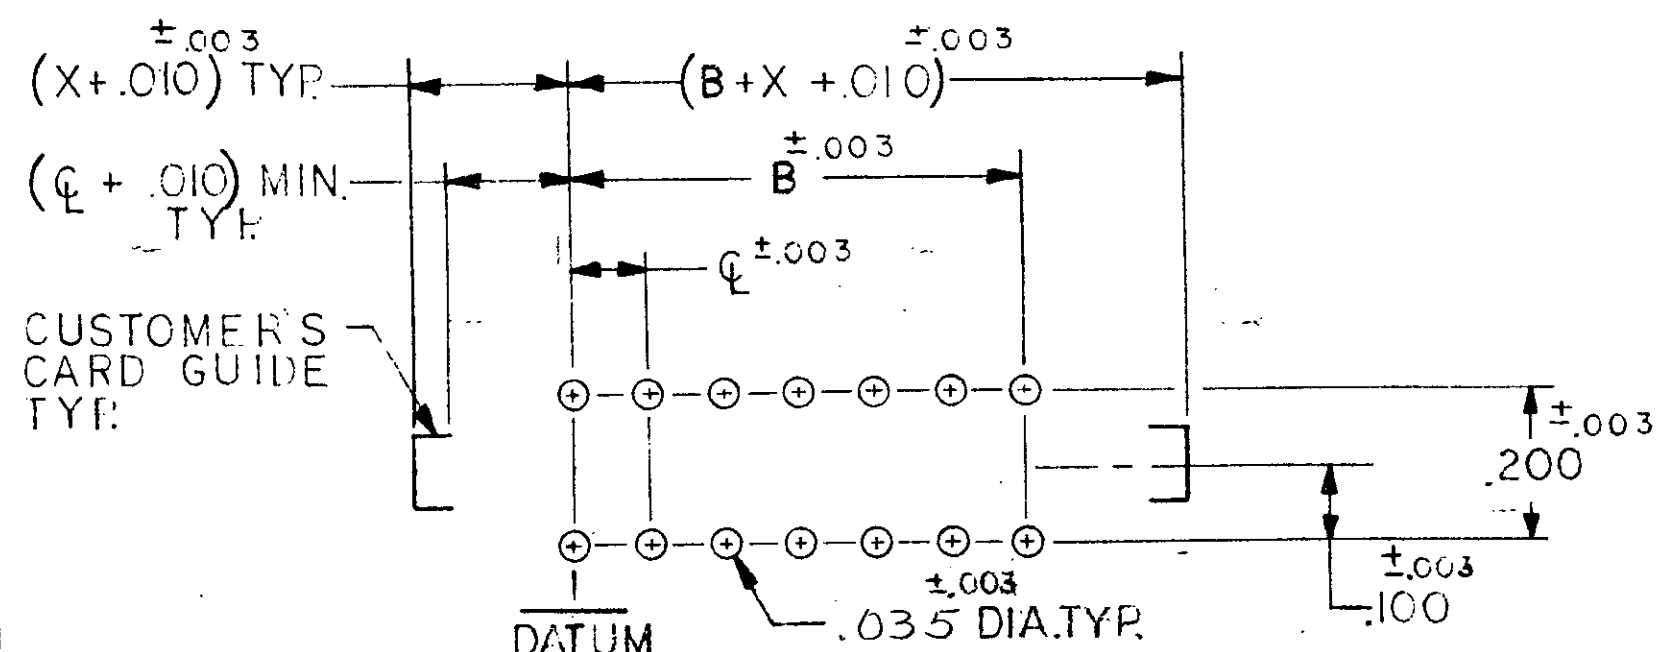
MINIMUM $X = \phi + .200$ BOARD LAYOUT FOR USE WITH AMP CARD GUIDE PART NO. 583408
CR 583425

BOARD LAYOUT FOR USE WITH CUSTOMER SUPPLIED CARD GUIDE


THE SLOT FOR INTER-CONTACT KEYING PLUGS MUST BE CENTERED BETWEEN THE PRINTED CIRCUIT PADS, WHILE THE SLOT FOR ON-CONTACT KEYING PLUGS MUST BE CENTERED ON THE AREA OF A PRINTED CIRCUIT PAD.

INTER-CONTACT KEYING PLUG	"R"	FOR CENTER LINE SPACING
530030-1	.050	.125-.150-.156
530030-2	.040	.100

ON CONTACT KEYING PLUG	"S"	FOR CENTER LINE SPACING
583714-1	.129	.100-.125
583714-2	.160	.150-.156

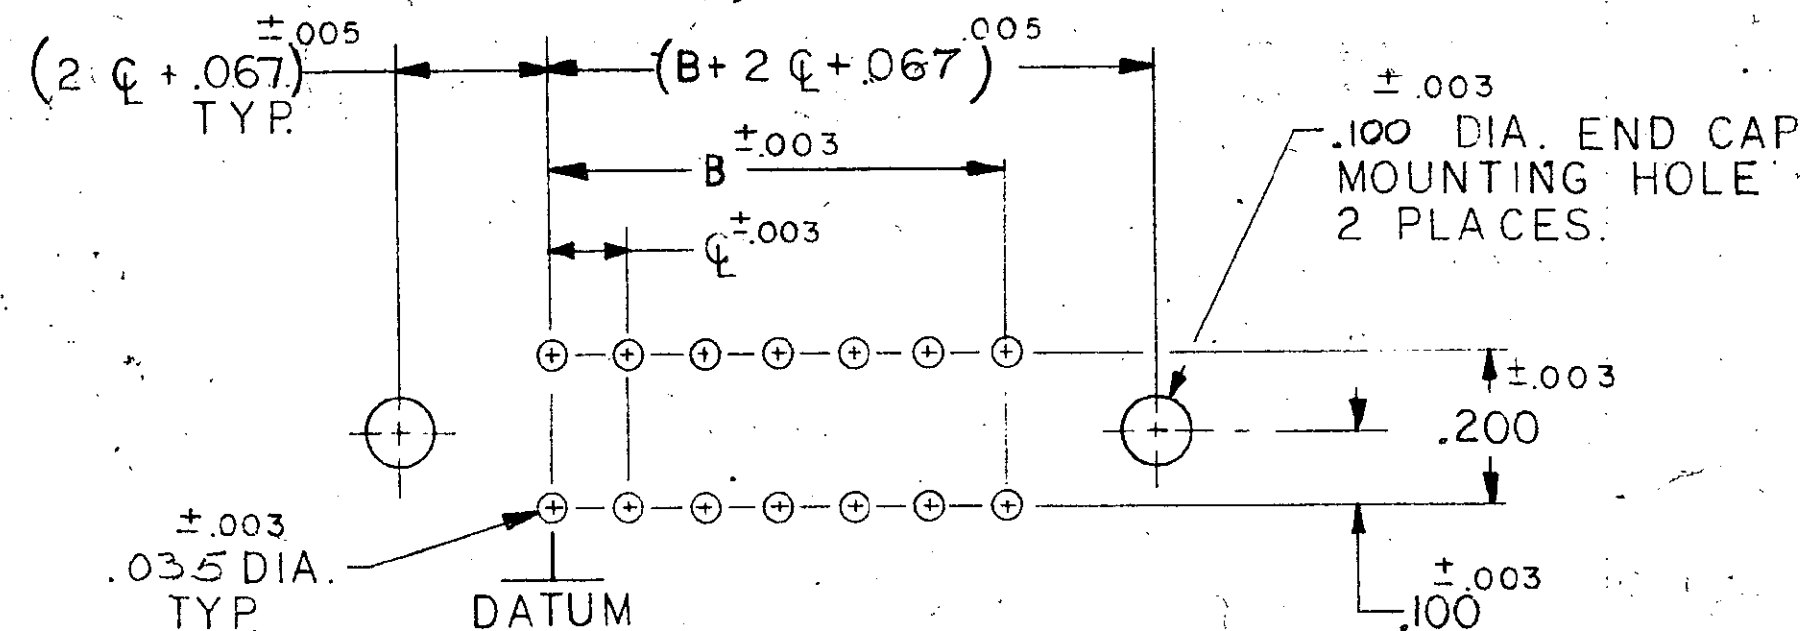

BOARD LAYOUT FOR USE WITH END CAP

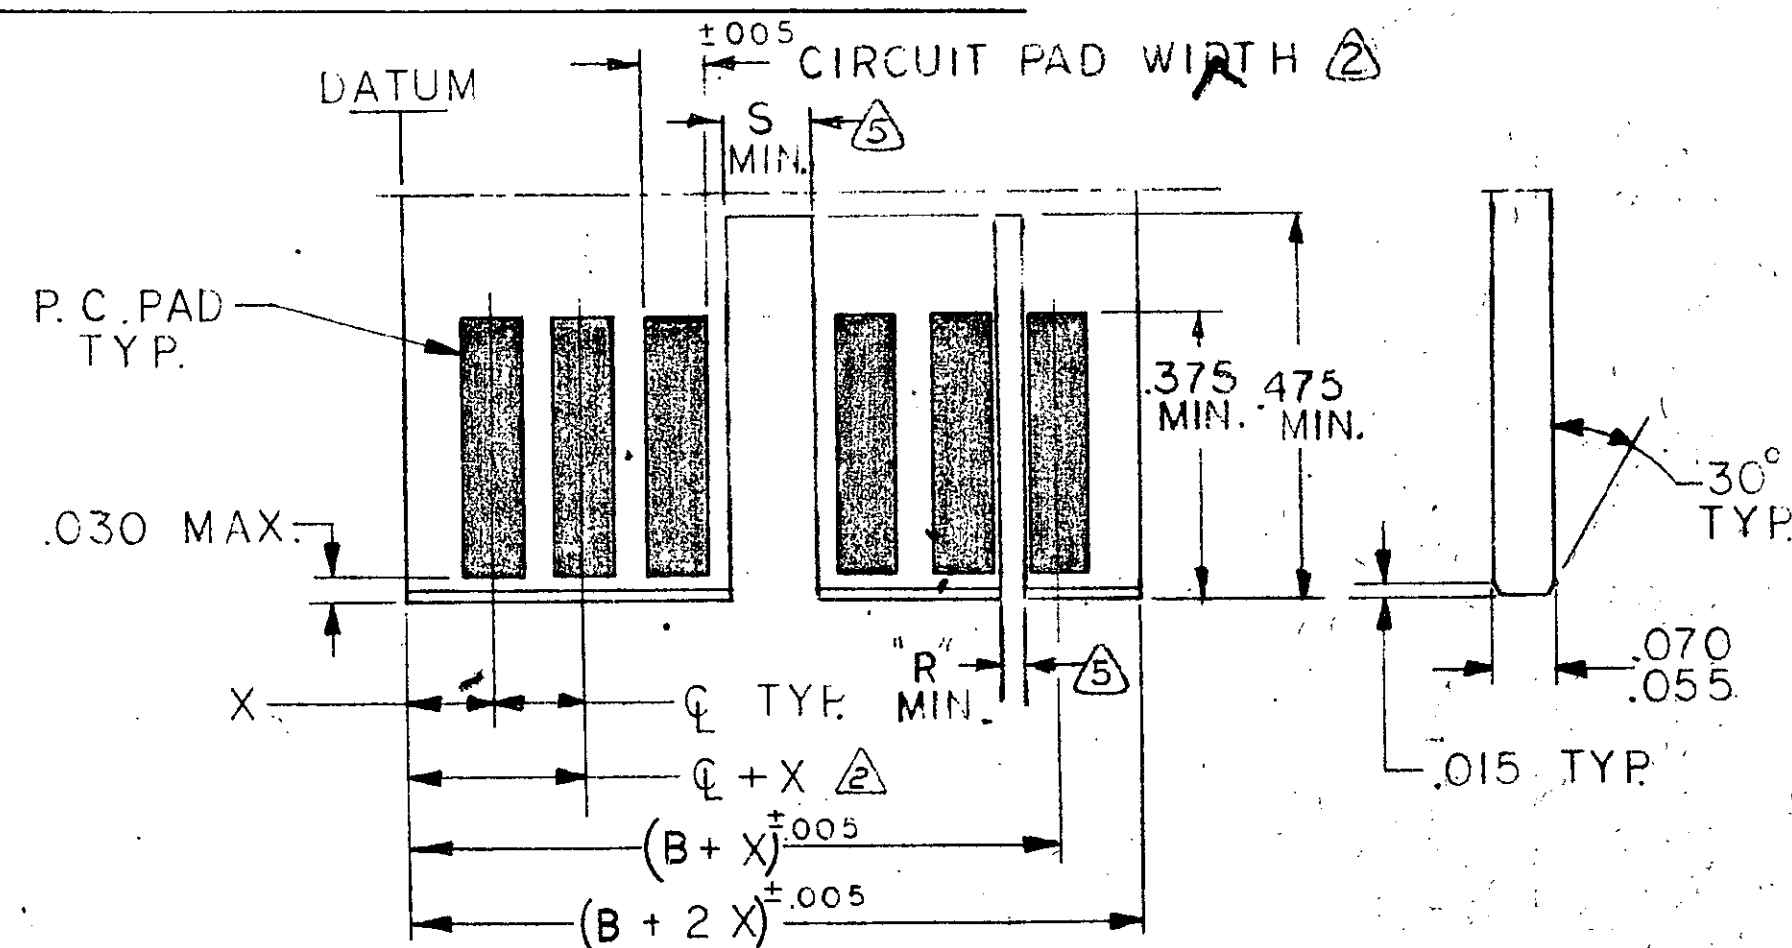

DAUGHTER BOARD LAYOUT

1. MAX. ALLOWABLE WARPAGE OF MOTHER BOARD NOT TO EXCEED .005/IN.
2. MAX. ALLOWABLE BOW OF DAUGHTER BOARD NOT TO EXCEED .010/IN.
3. THICKNESS OF MOTHER BOARD IS .062 FOR DOUBLE SLOTTED CARD GUIDES AND .104 MAX. FOR ALL OTHER MOUNTING CONDITIONS.
4. EACH PAD LOCATION INCREASES BY $\phi \pm .005$ WITH A NON-CUMULATIVE TOLERANCE OF $\pm .005$.
5. CIRCUIT PAD WIDTH - .045 FOR .100 ϕ
.072 FOR .125 ϕ
.072 FOR .150 ϕ
.080 FOR .156 ϕ
6. DIMENSIONS APPLY TO BOTH SIDES OF DAUGHTER BOARD.
7. 3 ϕ INCREMENTS ON MOTHER BOARD HAVE $\pm .003$ NON-CUMULATIVE TOLERANCE.
8. "X" IS A CUSTOMER CONTROLLED DIMENSION EXCEPT FOR END CAP ASSEMBLIES WHERE "X" = $\phi - .008$

UNLESS OTHERWISE SPECIFIED,
DIMENSIONS ARE IN INCHES
TOLERANCES ON:
DECIMALS $\pm .005$ ANGLES $\pm$

MATERIAL

CONTRACT NO.

DR

CHK

APPD

REL

DSGN APPD

OTHER APPD

AMP

AMP INCORPORATED
HARRISBURG, PENNSYLVANIA

NAME

HOUSING ASSEMBLY
TWIN LEAF CONNECTOR
.156 CENTERS

SIZE

CODE IDENT NO.

NUMBER

C

00779

583660

SCALE #

SHEET 2 OF 2 SHES.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9