



Copyright FCI.

FCIconnect.com

form: A4

## Configuration of Documents

| P/N              | Documents                    | No.         | Title                                                          | CAT.No.        |
|------------------|------------------------------|-------------|----------------------------------------------------------------|----------------|
| SFW_S-25T(M)E1   | Specification Connector dwg. | SC-SFWS01   | CAT.NO.TABLE FOR 1mm SPACING SMT CONNECTOR                     | SFW_S-25T__    |
|                  |                              | JSAG3342    | 1mm SPACING SURFACE MOUNT FPC/FFC CONNECTOR                    | SFW_S-25T__    |
|                  |                              | JSAG3579    | 1mm SPACING SURFACE MOUNT FPC/FFC CONNECTOR                    | SFW_S-25T__    |
|                  |                              | JSAG3836    | CAT. NO. TABLE FOR PLASTIC TAPE PACKAGED 1mm SPACING SMT CONN. | SFW_S-25T_E1   |
|                  |                              | JSAG3343    | PLASTIC TAPE PACKAGED 1mm SPACING SMT CONNECTOR                | SFW_S-25T_E1   |
|                  |                              | JSAG3338    | RECOMMENDED CABLE                                              | SFW_S-25T__    |
| SFW_S-65T(M)E1   | Cable dwg.                   | JSAG3340    | RECOMMENDED CABLE                                              | SFW_S-25T__    |
|                  | Manual                       | JSAG3341    |                                                                | SFW_S-25T__    |
|                  |                              | BJM-SFWS101 |                                                                |                |
|                  | Specification Connector dwg. | SC-SFWS02   | CAT.NO.TABLE FOR 1mm SPACING SMT CONNECTOR                     | SFW_S-65T__    |
|                  |                              | JSAG3900    | 1mm SPACING SURFACE MOUNT CFC CONNECTOR                        | SFW_S-65T__    |
|                  |                              | JSAG3905    | 1mm SPACING SURFACE MOUNT CFC CONNECTOR                        | SFW_S-65T__    |
| SFW_S-25T(M)E1LF | Cable dwg.                   | JSAG3901    | CAT. NO. TABLE FOR PLASTIC TAPE PACKAGED 1mm SPACING SMT CONN. | SFW_S-65T_E1   |
|                  | Manual                       | JSAG3902    | PLASTIC TAPE PACKAGED 1mm SPACING SMT CONNECTOR                | SFW_S-65T_E1   |
|                  |                              | JSAG3903    | RECOMMENDED CABLE                                              | SFW_S-65T__    |
|                  |                              | JSAG3904    |                                                                |                |
|                  |                              | BJM-SFWS102 |                                                                |                |
|                  | Specification Connector dwg. | SC-SFWS03   | CAT.NO.TABLE FOR 1mm SPACING SMT CONNECTOR                     | SFW_S-25T__LF  |
| SFW_S-65T(M)E1LF | Cable dwg.                   | JSAG6516    | 1mm SPACING SURFACE MOUNT FPC/FFC CONNECTOR                    | SFW_S-25T__LF  |
|                  | Manual                       | JSAG6517    | 1mm SPACING SURFACE MOUNT FPC/FFC CONNECTOR                    | SFW_S-25T__LF  |
|                  |                              | JSAG6518    | CAT. NO. TABLE FOR PLASTIC TAPE PACKAGED 1mm SPACING SMT CONN. | SFW_S-25T_E1LF |
|                  |                              | JSAG6519    | PLASTIC TAPE PACKAGED 1mm SPACING SMT CONNECTOR                | SFW_S-25T_E1LF |
|                  |                              | JSAG6520    | RECOMMENDED CABLE                                              | SFW_S-25T__LF  |
|                  |                              | JSAG3340    | RECOMMENDED CABLE                                              | SFW_S-25T__LF  |
| SFW_S-65T(M)E1LF | Cable dwg.                   | JSAG3341    |                                                                | SFW_S-25T__LF  |
|                  | Manual                       | BJM-SFWS101 |                                                                |                |
|                  |                              | SC-SFWS04   | CAT. NO. TABLE FOR 1mm SPACING SMT CONNECTOR                   | SFW_S-65T__LF  |
|                  |                              | JSAG6521    | 1mm SPACING SURFACE MOUNT CFC CONNECTOR                        | SFW_S-65T__LF  |
|                  |                              | JSAG6522    | 1mm SPACING SURFACE MOUNT CFC CONNECTOR                        | SFW_S-65T__LF  |
|                  |                              | JSAG6523    | CAT. NO. TABLE FOR PLASTIC TAPE PACKAGED 1mm SPACING SMT CONN. | SFW_S-65T_E1LF |

|                          |  |                |  |                                                      |  |            |  |                                                                   |  |         |  |
|--------------------------|--|----------------|--|------------------------------------------------------|--|------------|--|-------------------------------------------------------------------|--|---------|--|
| mat'l. code              |  |                |  | surface 58 / tolerance ISO 1302 / ISO 406 / ISO 1101 |  | projection |  | product family 58SF                                               |  | CODE JP |  |
| ltr                      |  |                |  | tolerances unless otherwise specified                |  |            |  | title<br>SFW_S Documents Configuration<br>(1mm Spacing connector) |  |         |  |
| A J05-0334 H.T 6/3/'05   |  |                |  | angles                                               |  | mm         |  |                                                                   |  |         |  |
| B J05-0377 H.T 6/22/'05  |  |                |  | linear                                               |  | scale      |  |                                                                   |  |         |  |
| C J06-0430 H.T 10/19/'06 |  |                |  |                                                      |  |            |  |                                                                   |  |         |  |
|                          |  |                |  | dr                                                   |  |            |  | dwg no sheet 1 of 1 size                                          |  |         |  |
|                          |  |                |  | enr                                                  |  |            |  | JSA96060 A4                                                       |  |         |  |
|                          |  |                |  | chr                                                  |  |            |  | type Product Customer Drawing                                     |  |         |  |
|                          |  |                |  | appd                                                 |  |            |  |                                                                   |  |         |  |
| sheet index              |  | revision sheet |  | C 1                                                  |  |            |  |                                                                   |  | Rev. C  |  |

## CAT. NO. &amp; DIMENSIONS

| NOTE3 | NO. OF CONTACTS (n) | CAT. NO.         | DIMENSIONS (NOTE2) |        |        |
|-------|---------------------|------------------|--------------------|--------|--------|
|       |                     |                  | A ±0.2             | B ±0.2 | C ±0.2 |
|       | 4                   | SFW4S-6ST____LF  | 10.4               | 5.24   | 3      |
|       | 5                   | SFW5S-6ST____LF  | 11.4               | 6.24   | 4      |
|       | 6                   | SFW6S-6ST____LF  | 12.4               | 7.24   | 5      |
| *     | 7                   | SFW7S-6ST____LF  | 13.4               | 8.24   | 6      |
|       | 8                   | SFW8S-6ST____LF  | 14.4               | 9.24   | 7      |
| *     | 9                   | SFW9S-6ST____LF  | 15.4               | 10.24  | 8      |
|       | 10                  | SFW10S-6ST____LF | 16.4               | 11.24  | 9      |
|       | 11                  | SFW11S-6ST____LF | 17.4               | 12.24  | 10     |
| *     | 12                  | SFW12S-6ST____LF | 18.4               | 13.24  | 11     |
|       | 13                  | SFW13S-6ST____LF | 19.4               | 14.24  | 12     |
|       | 14                  | SFW14S-6ST____LF | 20.4               | 15.24  | 13     |
|       | 15                  | SFW15S-6ST____LF | 21.4               | 16.24  | 14     |
|       | 16                  | SFW16S-6ST____LF | 22.4               | 17.24  | 15     |
|       | 17                  | SFW17S-6ST____LF | 23.4               | 18.24  | 16     |
| *     | 18                  | SFW18S-6ST____LF | 24.4               | 19.24  | 17     |
| *     | 19                  | SFW19S-6ST____LF | 25.4               | 20.24  | 18     |
|       | 20                  | SFW20S-6ST____LF | 26.4               | 21.24  | 19     |
| *     | 21                  | SFW21S-6ST____LF | 27.4               | 22.24  | 20     |
|       | 22                  | SFW22S-6ST____LF | 28.4               | 23.24  | 21     |
|       | 23                  | SFW23S-6ST____LF | 29.4               | 24.24  | 22     |
|       | 24                  | SFW24S-6ST____LF | 30.4               | 25.24  | 23     |
| *     | 25                  | SFW25S-6ST____LF | 31.4               | 26.24  | 24     |
|       | 26                  | SFW26S-6ST____LF | 32.4               | 27.24  | 25     |
| *     | 27                  | SFW27S-6ST____LF | 33.4               | 28.24  | 26     |
|       | 28                  | SFW28S-6ST____LF | 34.4               | 29.24  | 27     |
|       | 29                  | SFW29S-6ST____LF | 35.4               | 30.24  | 28     |
|       | 30                  | SFW30S-6ST____LF | 36.4               | 31.24  | 29     |
| *     | 31                  | SFW31S-6ST____LF | 37.4               | 32.24  | 30     |
| *     | 32                  | SFW32S-6ST____LF | 38.4               | 33.24  | 31     |

CAT. NO. SFW (n) S - 6 ST \_\_\_\_ LF

SERIES \_\_\_\_\_

NO. OF CONTACTS \_\_\_\_\_

STRAIGHT TYPE \_\_\_\_\_

FOR CIC \_\_\_\_\_

VARIATION \_\_\_\_\_

STM : FOR AUTOMATIC MOUNTING (SMT)  
WITH MOUNTING PLATE

ST : FOR AUTOMATIC MOUNTING (SMT)  
WITHOUT MOUNTING PLATE

PACKAGE STYLE \_\_\_\_\_

LEAD FREE \_\_\_\_\_

## NOTES

1. THIS PRODUCT IS THE CONNECTOR, DESIGNED TO TERMINATE CIC AND COPE WITH AUTOMATIC MOUNTING (SMT).
2. SEE PART DRAWINGS FOR DIMENSIONS A.B.C.
3. PLEASE CONSULT US IN CASE OF USING PARTS WITH \* MARK

|             |                  |     |            |                                                    |        |            |  |                                                                                       |  |         |        |
|-------------|------------------|-----|------------|----------------------------------------------------|--------|------------|--|---------------------------------------------------------------------------------------|--|---------|--------|
| mat'l. code |                  |     |            | surface 58 / tolerance ISO 1302 ✓ ISO 406 ISO 1101 |        | projection |  | product family 58SF                                                                   |  | CODE JP |        |
| ltr         | ecn no           | dr  | date       | tolerances unless otherwise specified              |        | mm         |  | title<br>CAT. NO. TABLE FOR<br>1mm SPACING SMT CONNECTOR<br>(CAT.No.SFW__S-6ST____LF) |  |         |        |
| A           | J05-0377         | H.T | 2005-6-22  | angles                                             | linear |            |  |                                                                                       |  |         |        |
| B           | J05-0547         | H.T | 2005-8-30  |                                                    |        | scale X    |  | dwg no sheet 1 of 1 size<br>JSA 96521 A4                                              |  |         |        |
| C           | J06-0430         | H.T | 2006-10-19 |                                                    |        |            |  |                                                                                       |  |         |        |
| D           | J07-0407         | H.T | 2007-8-9   | dr                                                 | engr   | FCJ        |  | type Product Customer Drawing                                                         |  |         |        |
|             |                  |     |            | chr                                                | appd   |            |  |                                                                                       |  |         |        |
| sheet index | revision sheet 1 | D   |            |                                                    |        |            |  |                                                                                       |  |         | Rev. D |


B

B

## C

## C

D

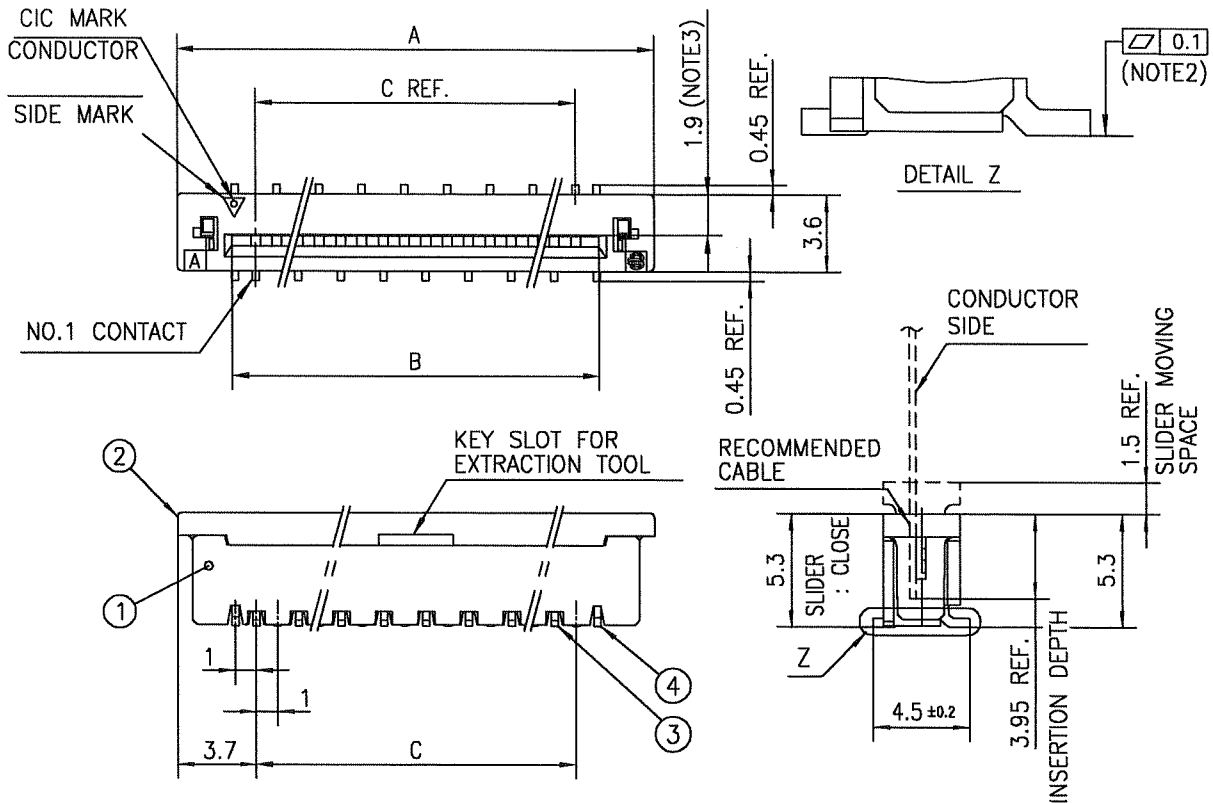


| PT. NO. | PARTS NAME     | MATERIAL                                    | Q'TY | NOTE                                      |
|---------|----------------|---------------------------------------------|------|-------------------------------------------|
| 1       | HOUSING        | GLASS FILLED THERMOPLASTIC RATED. (UL94V-0) | 1    | COLOR : BROWN                             |
| 2       | SLIDER         |                                             | 1    | COLOR : BLACK                             |
| 3       | CONTACT        | PHOSPHOR BRONZE                             | n    | PLATING : TIN Ni UNDER PLATED (LEAD FREE) |
| 4       | MOUNTING PLATE | BRASS                                       | 2    |                                           |

n : NO. OF CONTACTS

#### NOTES

1. THIS PRODUCT IS THE CONNECTOR DESIGNED TO TERMINATE CIC AND COPS WITH AUTOMATIC MOUNTING (SMT).
2. FLATNESS OF CONTACT TERMINAL AND MOUNTING PLATE MUST BE WITHIN TOLERANCE IN Z PORTION DETAILED DRAWING.
3. THIS DIMENSION IS SPACE FOR THE NOZZLE OF MOUNTER.
4. THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
5. THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A REFLOW SOLDERING OVEN.

#### RECOMMENDED PC BOARD LAYOUT (COMPONENT SIDE)

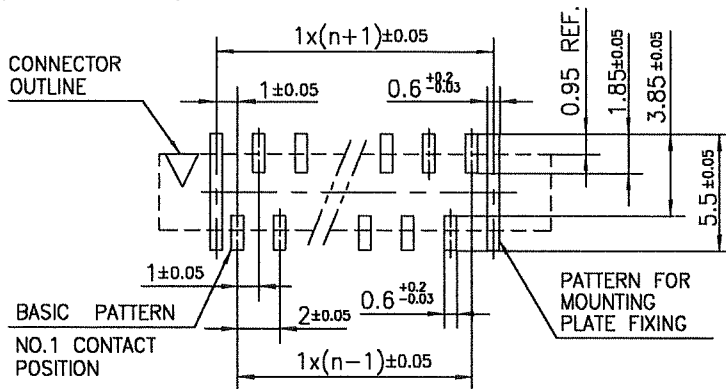

|             |          |     |          |                                       |           |            |                           |      |                          |
|-------------|----------|-----|----------|---------------------------------------|-----------|------------|---------------------------|------|--------------------------|
| mat'l. code |          |     |          | surface 58                            | tolerance | projection | product family            | 58SF | CODE                     |
|             |          |     |          | ISO 1302                              | ISO 406   |            |                           |      | JP                       |
|             |          |     |          | tolerances unless otherwise specified |           |            |                           |      |                          |
| ltr         | ecn no   | dr  | date     | angles                                | linear    | mm         | title                     |      |                          |
| A           | J05-0377 | H.T | 6/22/05  |                                       |           |            | 1mm SPACING SURFACE MOUNT |      |                          |
| B           | J05-0731 | H.T | 10/28/05 |                                       |           |            | CIC CONNECTOR             |      |                          |
| C           | J06-0430 | H.T | 10/19/06 |                                       |           |            | (CAT.No.SFW__S-6STM__LF)  |      |                          |
|             |          |     |          | dr                                    | 10/19/06  | FCI        | dwg no                    |      | sheet 1 of 1             |
|             |          |     |          | enr                                   | 10/19/06  |            | JSA 96523                 |      | size                     |
|             |          |     |          | chr                                   | 10/19/06  |            |                           |      | A4                       |
|             |          |     |          | appd                                  | 10/20/06  |            | type                      |      | Product Customer Drawing |
| sheet       | revision | C   |          |                                       |           |            |                           |      | Rev.                     |
| index       | sheet    | 1   |          |                                       |           |            |                           |      | c                        |

## CAT. NO. &amp; DIMENSIONS

| (NOTE4) | NO. OF CONTACTS (n) | CAT. NO. (NOTE2) | DIMENSIONS (NOTE3) |         |         |
|---------|---------------------|------------------|--------------------|---------|---------|
|         |                     |                  | D ± 5              | E ± 0.3 | F ± 0.1 |
|         | 4                   | SFW4S-6ST_E1LF   | 28.4               | 24      | —       |
|         | 5                   | SFW5S-6ST_E1LF   | 28.4               | 24      | —       |
|         | 6                   | SFW6S-6ST_E1LF   | 28.4               | 24      | —       |
| *       | 7                   | SFW7S-6ST_E1LF   | 28.4               | 24      | —       |
|         | 8                   | SFW8S-6ST_E1LF   | 28.4               | 24      | —       |
| *       | 9                   | SFW9S-6ST_E1LF   | 28.4               | 24      | —       |
|         | 10                  | SFW10S-6ST_E1LF  | 28.4               | 24      | —       |
|         | 11                  | SFW11S-6ST_E1LF  | 28.4               | 24      | —       |
| *       | 12                  | SFW12S-6ST_E1LF  | 36.4               | 32      | 28.4    |
|         | 13                  | SFW13S-6ST_E1LF  | 36.4               | 32      | 28.4    |
|         | 14                  | SFW14S-6ST_E1LF  | 36.4               | 32      | 28.4    |
|         | 15                  | SFW15S-6ST_E1LF  | 36.4               | 32      | 28.4    |
|         | 16                  | SFW16S-6ST_E1LF  | 48.4               | 44      | 40.4    |
|         | 17                  | SFW17S-6ST_E1LF  | 48.4               | 44      | 40.4    |
| *       | 18                  | SFW18S-6ST_E1LF  | 48.4               | 44      | 40.4    |
| *       | 19                  | SFW19S-6ST_E1LF  | 48.4               | 44      | 40.4    |
|         | 20                  | SFW20S-6ST_E1LF  | 48.4               | 44      | 40.4    |
| *       | 21                  | SFW21S-6ST_E1LF  | 48.4               | 44      | 40.4    |
|         | 22                  | SFW22S-6ST_E1LF  | 48.4               | 44      | 40.4    |
|         | 23                  | SFW23S-6ST_E1LF  | 48.4               | 44      | 40.4    |
|         | 24                  | SFW24S-6ST_E1LF  | 48.4               | 44      | 40.4    |
| *       | 25                  | SFW25S-6ST_E1LF  | 48.4               | 44      | 40.4    |
|         | 26                  | SFW26S-6ST_E1LF  | 48.4               | 44      | 40.4    |
| *       | 27                  | SFW27S-6ST_E1LF  | 60.4               | 56      | 52.4    |
|         | 28                  | SFW28S-6ST_E1LF  | 60.4               | 56      | 52.4    |
|         | 29                  | SFW29S-6ST_E1LF  | 60.4               | 56      | 52.4    |
|         | 30                  | SFW30S-6ST_E1LF  | 60.4               | 56      | 52.4    |
| *       | 31                  | SFW31S-6ST_E1LF  | 60.4               | 56      | 52.4    |
| *       | 32                  | SFW32S-6ST_E1LF  | 60.4               | 56      | 52.4    |

CAT. NO. SFW (n) S - 6 ST - - - LF

SERIES SFW

NO. OF CONTACTS (n)

STRAIGHT TYPE S

FOR CIC - 6

VARIATION ST

STM : FOR AUTOMATIC MOUNTING (SMT) WITH MOUNTING PLATE

ST : FOR AUTOMATIC MOUNTING (SMT) WITHOUT MOUNTING PLATE


PACKAGE STYLE LF

LEAD FREE

## NOTES

- THIS PRODUCT IS THE CONNECTOR DESIGNED TO TERMINATE CIC AND COPE WITH AUTOMATIC MOUNTING (SMT).
- THIS CATALOG NO. INDICATES PLASTIC TAPE PACKAGED CONNECTOR.
- SEE PART DRAWINGS FOR DIMENSIONS D~F.
- PLEASE CONSULT US IN CASE OF USING PARTS WITH \* MARK.

|             |          |     |            |                                                    |  |            |  |                                                                                         |  |         |  |
|-------------|----------|-----|------------|----------------------------------------------------|--|------------|--|-----------------------------------------------------------------------------------------|--|---------|--|
| mat'l. code |          |     |            | surface 58 / tolerance ISO 1302 ✓ ISO 406 ISO 1101 |  | projection |  | product family 58SF                                                                     |  | CODE JP |  |
| ltr         | ecn no   | dr  | date       | tolerances unless otherwise specified              |  | mm         |  | title                                                                                   |  |         |  |
| A           | J05-0377 | H.T | 2005-6-22  | angles                                             |  | linear     |  | CAT. NO. TABLE FOR PLASTIC TAPE PACKAGED 1mm SPACING SMT CONN. (CAT.No.SFW__S-6ST_E1LF) |  |         |  |
| B           | J05-0547 | H.T | 2005-8-30  |                                                    |  |            |  |                                                                                         |  |         |  |
| C           | J06-0430 | H.T | 2006-10-19 |                                                    |  |            |  |                                                                                         |  |         |  |
| D           | J07-0407 | H.T | 2007-8-9   | dr                                                 |  | scale X    |  | dwg no sheet 1 of 1 size                                                                |  |         |  |
|             |          |     |            | engr                                               |  | FCI        |  | JSA 96524 A4                                                                            |  |         |  |
|             |          |     |            | chr                                                |  |            |  | type Product Customer Drawing                                                           |  |         |  |
|             |          |     |            | appd                                               |  |            |  |                                                                                         |  |         |  |
| sheet index | revision | D   | 1          |                                                    |  |            |  |                                                                                         |  | Rev. D  |  |

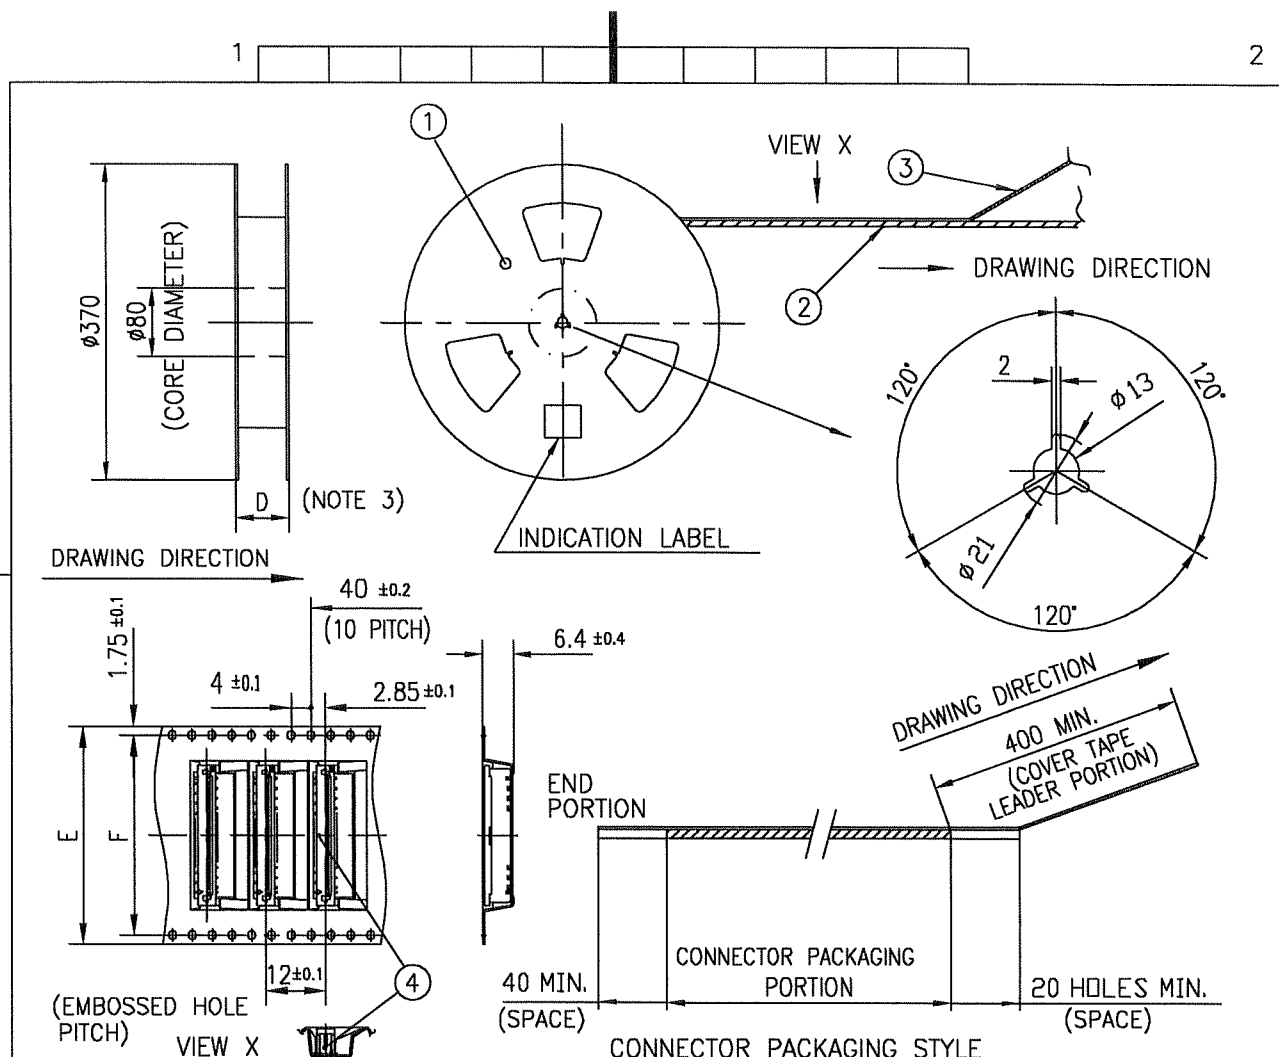


| PT. NO. | PARTS NAME             | CAT. NO.       | MATERIAL          | Q'TY  | NOTE               |
|---------|------------------------|----------------|-------------------|-------|--------------------|
| 1       | REEL                   | _____          | CARDBOARD         | 1     | COLOR:GRAY         |
| 2       | PLASTIC (EMBOSSD) TAPE | _____          | PET               | _____ | COLOR:TRANSPARENCY |
| 3       | COVER                  | _____          | POLYESTER         | _____ | COLOR:TRANSPARENCY |
| 4       | CONNECTOR              | SFW__S-6ST__LF | SEE ATTACHED DWG. | 1000  | _____              |

- NOTES
1. THIS IS PLASTIC TAPE PACKAGED CONNECTOR USED FOR CIC AND CYPES WITH AUTOMATIC MOUNTING (SMT).
  2. SEE JIS C 0806 (PACKING OF ELECTRONIC COMPONENTS ON CONTINUOUS TAPES (SURFACE MOUNTING DEVICES)) FOR SHAPE AND DIMENSIONS OF PLASTIC (EMBOSSD) TAPE AND REEL.
  3. D DIMENSION IS PORTION OF THE CORE.

|             |          |     |          |                                       |  |                                  |  |                  |  |                                                                                         |  |                     |  |
|-------------|----------|-----|----------|---------------------------------------|--|----------------------------------|--|------------------|--|-----------------------------------------------------------------------------------------|--|---------------------|--|
| mat'l. code |          |     |          | surface 58<br>ISO 1302                |  | tolerance<br>ISO 406<br>ISO 1101 |  | projection<br>mm |  | product family<br>58SF                                                                  |  | CODE<br>JP          |  |
| ltr         | ecn no   | dr  | date     | tolerances unless otherwise specified |  | angles                           |  | linear           |  | title<br>PLASTIC TAPE PACKAGED<br>1mm SPACING SMT CONNECTOR<br>(CAT.No.SFW__S-6ST_E1LF) |  | dwg no<br>JSA 96525 |  |
| A           | J05-0377 | H.T | 6/22/05  | ±5                                    |  | ±5'                              |  | scale X          |  | sheet 1 of 1                                                                            |  | size<br>A4          |  |
| B           | J06-0430 | H.T | 10/19/06 |                                       |  |                                  |  |                  |  | type<br>Product Customer Drawing                                                        |  | Rev.<br>B           |  |
| sheet index |          |     |          | revision<br>sheet 1                   |  | dr<br>H. Shoun                   |  | engr<br>R. Shoun |  | chr<br>S. Shoun                                                                         |  | appd<br>S. Shoun    |  |
|             |          |     |          |                                       |  | 10/19/06                         |  | 10/19/06         |  | 10/19/06                                                                                |  | 10/20/06            |  |

## RECOMMENDED CABLE (CIC)

n : NO. OF CONDUCTOR

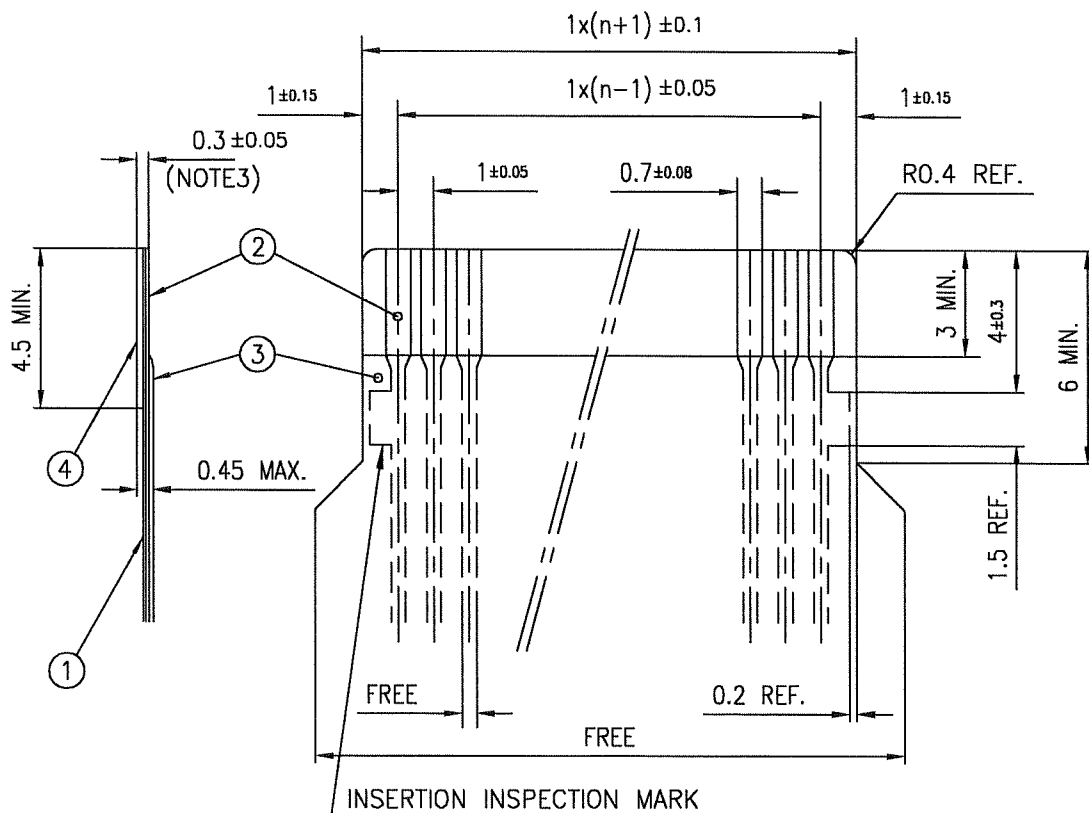

| PT. NO. | PARTS NAME      | MATERIAL                        | THICKNESS (μm) |     |
|---------|-----------------|---------------------------------|----------------|-----|
| 1       | BASE FILM       | POLYESTER OR EQUAL              | 75             | 25  |
| 2       | CONDUCTOR       | CARBON PASTE OVER SILVER PASTE  | 10 MIN.        |     |
| 3       | OVERLAY         | POLYIMIDE OR POLYESTER OR EQUAL |                |     |
| 4       | SUPPORTING TAPE | POLYESTER OR POLYIMIDE OR EQUAL | 188            | 250 |

## NOTES

1. NO BURR AT EACH PORTION.
2. NO PEELING IN COMMON USE.
3. TOTAL THICKNESS LIMIT OF EACH MATERIAL (INCLUDING ADHESIVE AGENT) IS SPECIFIED.

|             |  |  |  |                          |  |                                  |  |                  |  |                                                     |  |                          |  |
|-------------|--|--|--|--------------------------|--|----------------------------------|--|------------------|--|-----------------------------------------------------|--|--------------------------|--|
| mat'l. code |  |  |  | surface 58<br>ISO 1302 ✓ |  | tolerance<br>ISO 406<br>ISO 1101 |  | projection<br>mm |  | product family<br>58SF                              |  | CODE<br>JP               |  |
| ltr         |  |  |  | ecn no                   |  | dr                               |  | date             |  | title<br>RECOMMENDED CABLE<br>(CAT.No.SFW__S-6ST__) |  |                          |  |
| AA          |  |  |  | J04-0333                 |  | H.T                              |  | Oct.13/04        |  |                                                     |  |                          |  |
| AB          |  |  |  | J06-0430                 |  | H.T                              |  | 10/19/06         |  |                                                     |  |                          |  |
|             |  |  |  |                          |  |                                  |  |                  |  | scale X                                             |  |                          |  |
|             |  |  |  |                          |  |                                  |  |                  |  | dwg no                                              |  | sheet 1 of 1             |  |
|             |  |  |  |                          |  |                                  |  |                  |  | JSA 93904                                           |  | size<br>A4               |  |
|             |  |  |  |                          |  |                                  |  |                  |  | type                                                |  | Product Customer Drawing |  |
| sheet index |  |  |  | revision                 |  | AB                               |  |                  |  |                                                     |  | Rev.<br>AB               |  |
| 1           |  |  |  | 1                        |  |                                  |  |                  |  |                                                     |  |                          |  |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9