

Type LT73 Series



This tiny thin film chip is manufactured by sputtering pure metals onto a high purity alumina base. This process ensures the element remains stable in performance over a long life. The LT73 is equally suited to temperature compensation or thermal protection when incorporated within the appropriate electronics. This range of sensors are finished in a tough epoxy seal and are available on tape for high speed auto placement.

Key Features

- Stable Alumina Substrate
- Solvent Resistant Coating
- Wide Value Range
- Excellent Linearity
- 08 05 Small Size
- Stocked in 3900ppm/°C
- Other TCR's Available to Order
- Supplied on Tape and Reel
- Custom Design Enquiries Welcome

Type LT73 Series

Characteristics - Electrical

| | 0805 Size (2A) | 1206 Size (2B) |
|--|---------------------------|---------------------------|
| Resistance Range: | 510R - 3K0 | 510R - 6K2 |
| Resistance Tolerance: | ±5% | ±5% |
| Rated Power at 70°C: | 0.1 watt | 0.125 watt |
| Max. Working Voltage @ T _A 70°C: | 50 volts | 75 volts |
| Max. Overload Voltage @ T _A 70°C: | 100 volts | 150 volts |
| Operating Temperature Range: | -40°C ~ +125°C | -40°C ~ +125°C |
| TCR Measuring Temperature: | +25°C ~ +75°C (See Graph) | +25°C ~ +75°C (See Graph) |
| TCR Tolerance: | ± 10% | ± 10% |
| Insulation Resistance: | More than 10 Meg | More than 10 Meg |

Characteristics - Mechanical



| | |
|---------------------|--------|
| Seal Cover: | Orange |
| Marking Ink Colour: | Black |

Characteristics - Cleaning

The washing process is very important to ensure long term reliability because ionic impurity from flux may cause electrolytic corrosion of the metal film.


| | |
|-------------------------------|---|
| Short time Overload: | Rated Voltage x 2.5 maximum Overload Voltage for 5 seconds, whichever is less |
| Resistance to Soldering Heat: | 260°C ± 5°C, 10 seconds ± 1 second |
| Solderability: | 235°C ± 5°C, 3 seconds ± 0.5 second |

Power Derating

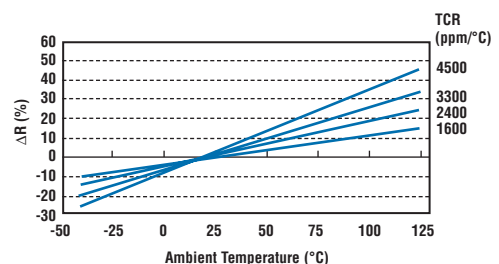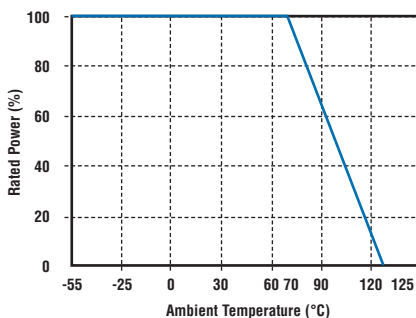

Dimensions

| Chip Size | L | W | H | D | d | Weight /1000 |
|-----------|---------|----------|---------|---------|-----------|--------------|
| 2A-0805 | 2.0±0.2 | 1.25±0.2 | 0.5±0.1 | 0.4±0.2 | 0.35±0.15 | 4.54g |
| 2B-1206 | 3.2±0.2 | 1.60±0.2 | 0.6±0.1 | 0.5±0.3 | 0.45±0.15 | 9.14g |

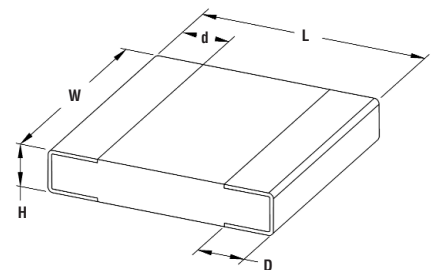

How to Order

| LT73 | 3900 | 2A | 103 | 1K0 | J |
|-----------------|--------------------------|--------------------------|---|-----------|----------------------|
| Common Part | T.C.R | Size | Resistance Value | Tolerance | Pack Style |
| LT73 - Standard | 3000ppm/°C 3900ppm/°C | 2A - 0.1W 2B - 0.125W | The first two digits are significant figures of resistance value and the third denotes the number of zeros following. e.g. 510R: 511 1K0: 102 3K0: 302 | J ±5% | Taped - 4000 on Reel |

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9