

High Resolution, Ball Bearing, 4-Pin

- 25, 32, 50, 64, 100, 128 and 256 Cycles per Revolution Available
- Sealed Version Available
- Rugged Construction
- Cable or Pin Version
- 300 Million Life Cycles
- 5,000 RPM Shaft Rotation



Top View

.215 (5,46) (KEYWAY DEPTH)

1.250 (31,75) DIA.

.033 (0,84)

.066 (1,68)

.650 (16,51) DIA. MOUNTING SURFACE

.219 (5,56)

.725 ± .025 (18,42 ± 0,64)

.250 (6,35)

1/2-32 UN-2A THREADS

.350 (8,89)

.497 (12,62)

.100 (2,54) 3 PLCS.

.300 (7,62)

GRAYHILL XXXX X-X 638-XXX

EPOXY SEAL AROUND PINS AND BACKPLATE PERIMETER

.249/.250 (6,32/6,35)

.025 (0,64) X 45° CHAMFER

.020 (0,51) RADIUS

.001/.004 (0,25/0,10) (MOUNTING SURFACE ON TOP OF HOUSING)

.310 ± .025 (7,87 ± 0,64)

.025 (0,64) SQ. 4 PLCS.

.225 (5,72)

Top View

.215 (5,46) (KEYWAY DEPTH)

1.250 (31,75) DIA.

.033 (0,84)

.066 (1,68)

.650 (16,51) DIA. MOUNTING SURFACE

.219 (5,56)

.725 ± .025 (18,42 ± 0,64)

.250 (6,35)

1/2-32 UN-2A THREADS

.350 (8,89)

.497 (12,62)

1.132 MAX. (28,75)

DIM. XXX* ± .250 (6,25)

*See ordering information for cable length.

GRAYHILL XXXX X-X 638-XXX

.249/.250 (6,32/6,35)

.025 (0,64) X 45° CHAMFER

.020 RADIUS (0,51)

.001/.004 (0,25/0,10) (MOUNTING SURFACE ON TOP OF HOUSING)


EPOXY SEAL AROUND HEADER AND BACKPLATE PERIMETER

.225 (5,72)

CONNECTOR: MOLEX PIN 14-56-3046

Unless otherwise specified, dimension tolerances are as follows: linear ± .010 (0,25), diameters ± .010 (0,25), angular ± 5°

CIRCUITRY AND WAVEFORM: Standard Quadrature 2-Bit Code

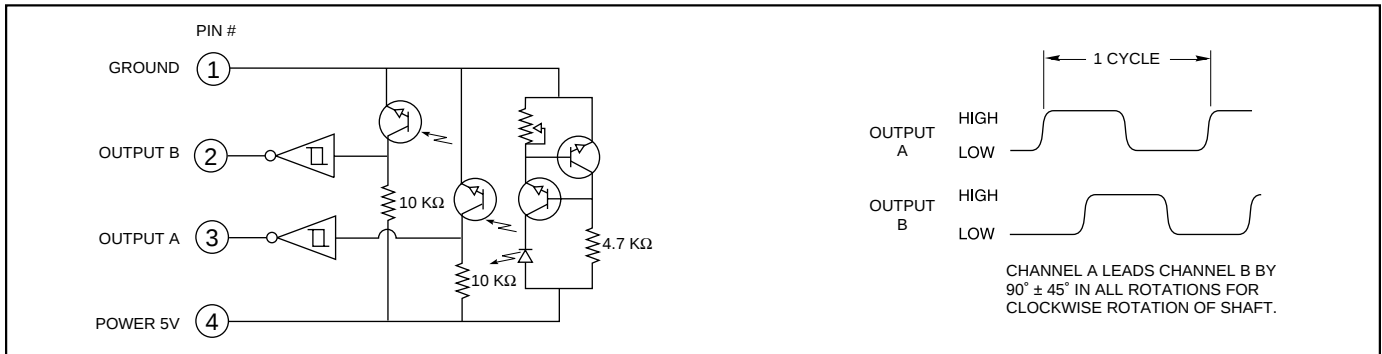

SPECIFICATIONS

Electrical Ratings

Operating Voltage: 5.0 ± 0.25 Vdc

Supply Current: 30 mA maximum at 5 Vdc

Logic Output Characteristics:

Output Type: Open collector with integrated Schmitt Trigger and 10 KΩ pull-up resistor

Maximum Sink Current: 16 mA at .40 volts

Power Consumption: 150 mW maximum

Optical Rise Time: 500 nS typical

Optical Fall Time: 14 nS typical

Mechanical Ratings

Mechanical Life: 300 million revolutions

Time Life: Guaranteed for 10 years of continuous operation (calculated from emitter degradation data)

Mounting Torque: 20 in-lbs maximum

Terminal Strength: 5 lbs terminal pull-out force minimum

Solderability: 95% free of pin holes and voids

Operating Torque: 0.5 in-oz maximum (no detents) for unsealed versions

Externally Applied Shaft Force: Axial: 15 lbs maximum; Radial: 15 lbs maximum

Environmental Ratings

Operating Temperature Range: -40°C to 85°C

Storage Temperature Range: -55°C to 100°C

Relative Humidity: 90-95% at 40°C for 96 hours

Vibration Resistance: Harmonic motion with amplitude of 15g, within a varied 10 to 2000 Hz frequency for 12 hours per MIL-STD-202, Method 204

Shock Resistance: Test 1: 100g for 6 mS, half-sine wave with velocity change of 12.3 ft/s. Test 2: 100g for 6 mS, sawtooth wave with velocity change of 9.7 ft/s.

Materials and Finishes

Bushing: 6262-T9 aluminum alloy

Housing: Hiloy 610B

Code Rotor and Aperture: Chemically etched stainless steel/electroformed nickel

Printed Circuit Board: NEMA Grade FR-4. Five microinches minimum gold over 100 microinches minimum nickel over copper

Optical Barrier: Polyphenylene sulfide, 94 V-0

Backplate: Polyester

Header: Phosphor bronze, 200 microinches tin over 50 microinches nickel (pin version only)

Infrared Emitter: Gallium aluminum arsenide

Photo IC: Planar silicon

Retaining Ring: Stainless steel

Cable: 26 AWG, stranded/tinned wire, PVC coated on .100 (2,54) centers (cable version only)

Connector: Glass-filled PCT, UL94V-0

Bearing Subassembly


Bearing: NSK ABEC 5 (stainless steel)

Preload Collar: 303 (stainless steel)

Spacer: 303 (stainless steel)

Bellville Spring: spring steel (stainless steel)

ORDERING INFORMATION



Series

Style: K = Standard, 4-pin, high resolution

KS = Sealed, 4-pin, high resolution

Cycles: per channel per revolution = 25, 32, 50, 64, 100, 128, 256

Termination:

Blank (no dash or numbers): pins as described in drawing.

Cable Termination: 020 = 2.0 inches minimum to 250 = 25 inches maximum. Provided in increments of 1/2 inch. (Example 035 = 3.5", 060 = 6".) Cable is terminated with standard Molex part no. 14-56-3046. Use any standard .100 center 4-pin header to interface with cable. Recommended to be mounted with Molex header part no. 70543-0003 or 70553-0003.

Control knobs available, see page E-39.

Available from your local Grayhill Distributor. For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

SERIES 63R


High Resolution, Ball Bearing,
5-pin (Polarized Connection)

FEATURES


- 25, 32, 50, 64, 100, 128 and 256 Cycles per Revolution Available
- Sealed Version Available
- Rugged Construction
- Cable or Pin Versions
- 300 Million Life Cycles
- 5000 RPM Shaft Rotation
- Index Pulse Available



DIMENSIONS In Inches (and millimeters)

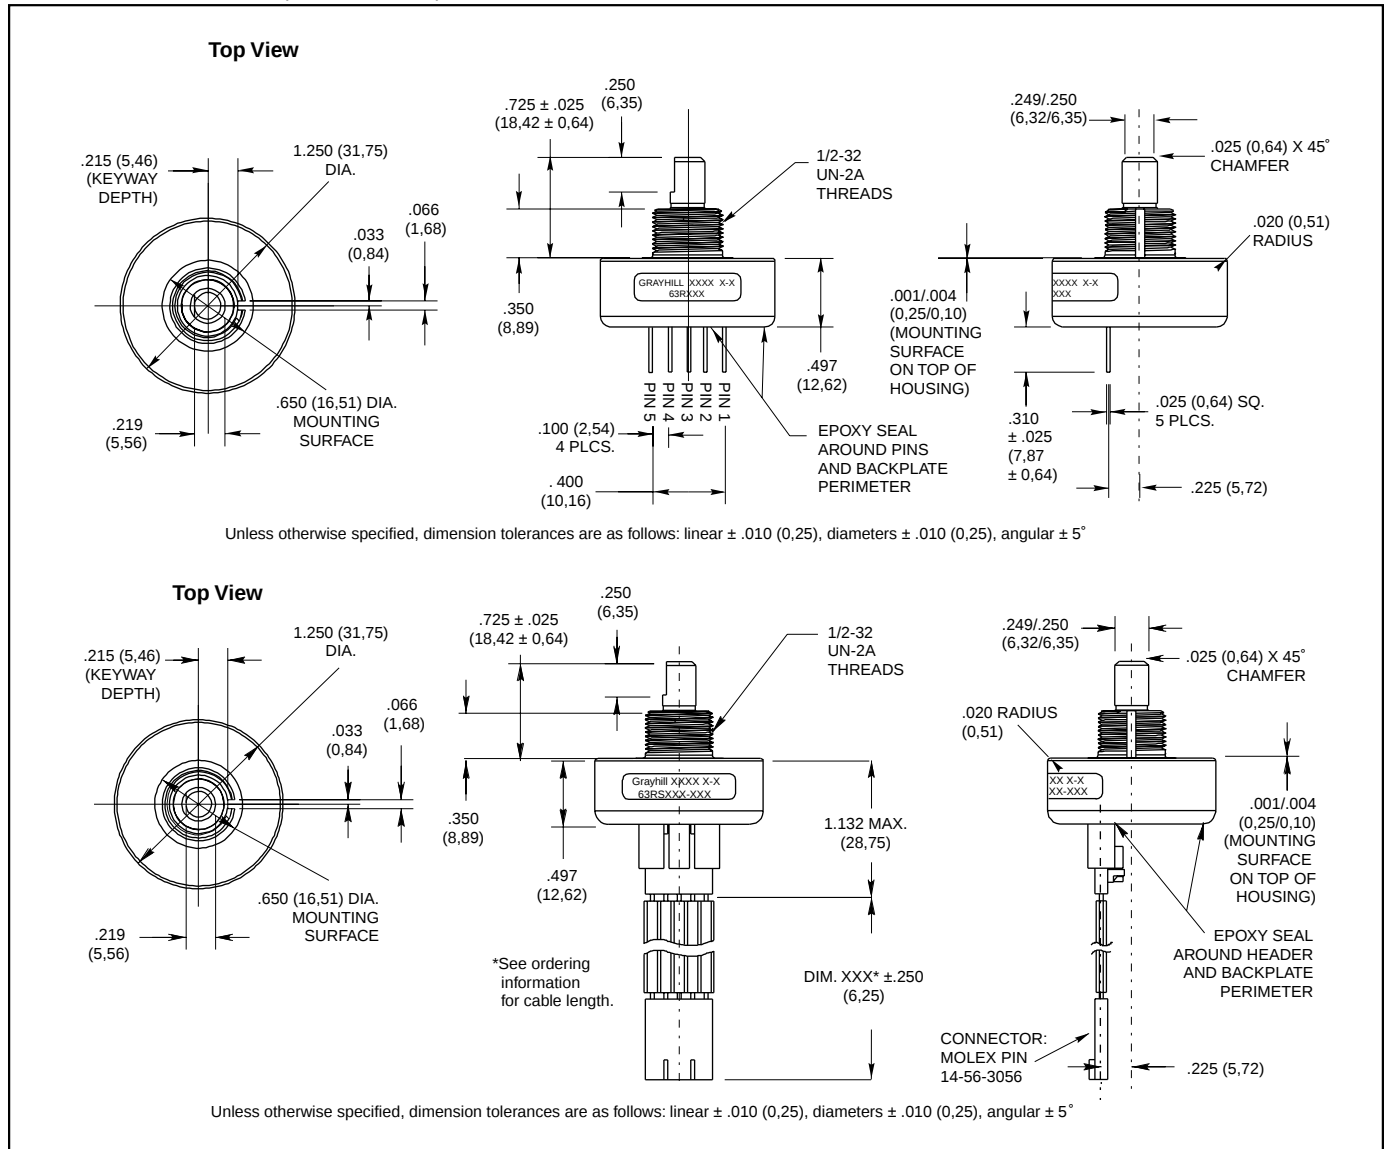

CIRCUITRY AND WAVEFORM: Standard Quadrature 2-Bit Code

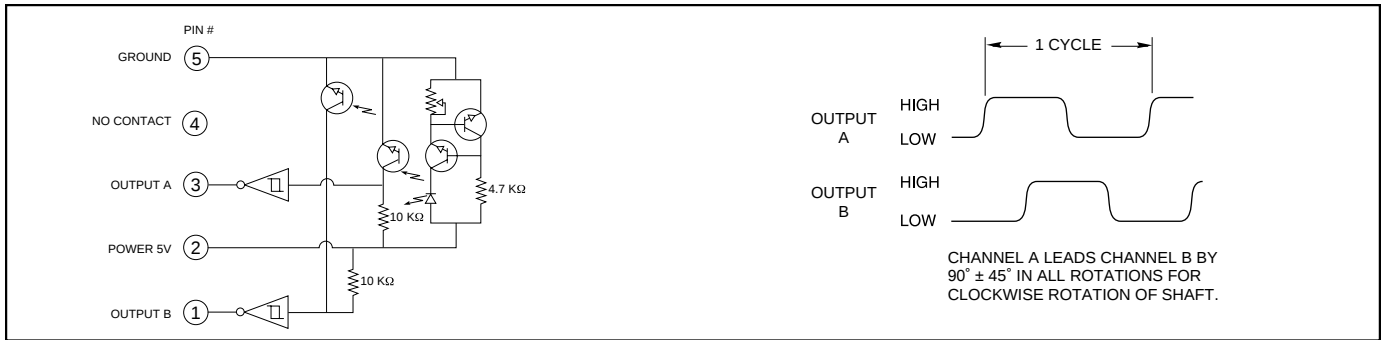

SPECIFICATIONS

Electrical Ratings

Operating Voltage: 5 ±.25 Vdc

Supply Current: 30 mA maximum at 5 Vdc

Logic Output Characteristics:

Output Type: Open collector with integrated

Schmitt Trigger and 10 KW pull-up resistor

Maximum Sink Current: 16 mA at .40 volts

Power Consumption: 150 mW maximum

Optical Rise Time: 500 nS typical

Optical Fall Time: 14 nS typical

Mechanical Ratings

Mechanical Life: 300 million revolutions

Time Life: Guaranteed for 10 years of continuous operation (calculated from emitter degradation data)

Mounting Torque: 20 in-lbs maximum

Terminal Strength: 5 lbs terminal pull-out force minimum

Solderability: 95% free of pin holes and voids

Externally Applied Shaft Force:

Axial: 15 lbs maximum; Radial: 15 lbs maximum

Operating Torque: 0.5 in-oz maximum (no detents) for unsealed versions

Environmental Ratings

Operating Temperature Range: -40°C to 85°C

Storage Temperature Range: -55°C to 100°C

Relative Humidity: 90-95% at 40°C for 96 hours

Vibration Resistance: Harmonic motion with amplitude of 15g, within a varied 10 to 2000 Hz frequency for 12 hours per MIL-STD-202, Method 204

Shock Resistance: Test 1: 100g for 6 mS, half-sine wave with velocity change of 12.3 ft/s. Test 2: 100g for 6 mS, sawtooth wave with velocity change of 9.7 ft/s.

Materials and Finishes

Bushing: 6262-T9 aluminum alloy

Housing: Hiloy 610B

Shaft: Stainless steel insert molded into nylon rotor support

Code Rotor and Aperture: Chemically etched stainless steel/electroformed nickel

Printed Circuit Board: NEMA Grade FR-4. Five microinches minimum gold over 100 microinches minimum nickel over copper

Optical Barrier: Polyphenylene sulfide, 94 V-0

Backplate: Polyester

Header: Phosphor bronze, 200 microinches tin over 50 microinches nickel (pin version only)

Infrared Emitter: Gallium aluminum arsenide

Photo IC: Planar silicon

Retaining Ring: Stainless steel

Cable: 26 AWG, stranded/tinned wire, PVC coated on .100 (2,54) centers (cable version only)

Connector: Glass-filled PCT, UL94V-0

Bearing Subassembly


Bearing: NSK ABEC 5 (stainless steel)

Preload Collar: 303 stainless steel

Spacer: 303 stainless steel

Bellville Spring: Spring steel (stainless steel)

ORDERING INFORMATION

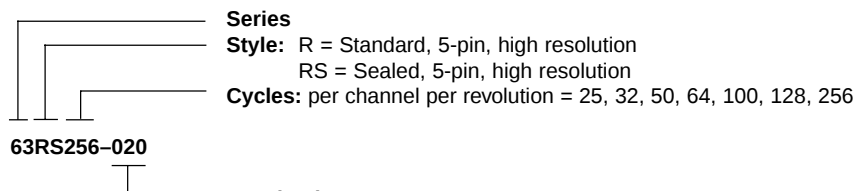

Termination:

Blank (no dash or numbers): pins as described in drawing.

Cable Termination: 020 = 2.0 inches minimum to 250 = 25 inches maximum

Provided in increments of 1/2 inch. (Example 035 = 3.5", 060 = 6".)

Cable is terminated with standard Molex part no. 14-56-3056.

Use any standard .100 center 5-pin header to interface with cable.

Control knobs available, see page E-39.

Available from your local Grayhill Distributor. For prices and discounts, contact a local Sales Office, an authorized local Distributor or Grayhill.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9