

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			A	REVISED PER ECO-10-018157	27SEP10	DH	MM


OBSOLETE	8.892	0.156	8.580	0.156	56	5-5583486-0
OBSOLETE	8.424	0.156	8.112	0.156	53	4-5583486-9
OBSOLETE	0.624	0.156	0.312	0.156	3	4-5583486-8
OBSOLETE	0.780	0.156	0.460	0.156	4	4-5583486-7
OBSOLETE	0.936	0.156	0.624	0.156	5	4-5583486-6
OBSOLETE	1.092	0.156	0.780	0.156	6	4-5583486-5
OBSOLETE	1.248	0.156	0.936	0.156	7	4-5583486-4
OBSOLETE	1.404	0.156	1.092	0.156	8	4-5583486-3
OBSOLETE	1.560	0.156	1.273	0.156	9	4-5583486-2
OBSOLETE	1.716	0.156	1.404	0.156	10	4-5583486-1
OBSOLETE	1.872	0.156	1.568	0.156	11	4-5583486-0
OBSOLETE	2.028	0.156	1.716	0.156	12	3-5583486-9
OBSOLETE	2.184	0.156	1.872	0.156	13	3-5583486-8
OBSOLETE	2.340	0.156	2.026	0.156	14	3-5583486-7
OBSOLETE	2.496	0.156	2.134	0.156	15	3-5583486-6
OBSOLETE	2.652	0.156	2.340	0.156	16	3-5583486-5
OBSOLETE	2.808	0.156	2.496	0.156	17	3-5583486-4
OBSOLETE	2.964	0.156	2.652	0.156	18	3-5583486-3
OBSOLETE	3.120	0.156	2.808	0.156	19	3-5583486-2
OBSOLETE	3.276	0.156	2.964	0.156	20	3-5583486-1
OBSOLETE	3.432	0.156	3.120	0.156	21	3-5583486-0
OBSOLETE	3.588	0.156	3.276	0.156	22	2-5583486-9
OBSOLETE	3.744	0.156	3.432	0.156	23	2-5583486-8
OBSOLETE	3.900	0.156	3.588	0.156	24	2-5583486-7
OBSOLETE	4.056	0.156	3.744	0.156	25	2-5583486-6
OBSOLETE	4.212	0.156	3.900	0.156	26	2-5583486-5
OBSOLETE	4.368	0.156	4.056	0.156	27	2-5583486-4
	4.524	0.156	4.212	0.156	28	2-5583486-3
OBSOLETE	4.680	0.156	4.360	0.156	29	2-5583486-2
OBSOLETE	4.836	0.156	4.524	0.156	30	2-5583486-1
OBSOLETE	4.992	0.156	4.650	0.156	31	2-5583486-0
OBSOLETE	5.148	0.156	4.886	0.156	32	1-5583486-9
	5.304	0.156	4.992	0.156	33	1-5583486-8
OBSOLETE	5.460	0.156	5.143	0.156	34	1-5583486-7
OBSOLETE	5.616	0.156	5.304	0.156	35	1-5583486-6
OBSOLETE	5.772	0.156	5.460	0.156	36	1-5583486-5
OBSOLETE	5.928	0.156	5.616	0.156	37	1-5583486-4
OBSOLETE	6.084	0.156	5.716	0.156	38	1-5583486-3
OBSOLETE	6.240	0.156	5.928	0.156	39	1-5583486-2
OBSOLETE	6.396	0.156	6.084	0.156	40	1-5583486-1
OBSOLETE	6.552	0.156	6.240	0.156	41	1-5583486-0
OBSOLETE	6.708	0.156	6.396	0.156	42	5583486-9
OBSOLETE	6.864	0.156	6.552	0.156	43	5583486-8
OBSOLETE	7.020	0.156	6.708	0.156	44	5583486-7
OBSOLETE	7.176	0.156	6.864	0.156	45	5583486-6
OBSOLETE	7.332	0.156	7.020	0.156	46	5583486-5
OBSOLETE	7.488	0.156	7.176	0.156	47	5583486-4
OBSOLETE	7.644	0.156	7.332	0.156	48	5583486-3
OBSOLETE	7.800	0.156	7.488	0.156	49	5583486-2
OBSOLETE	7.956	0.156	7.644	0.156	50	5583486-1

NOTES	D	C	B	A	NO OF POSN	PART NO
-------	---	---	---	---	------------	---------

- 1

FINISH: .000015 GOLD. SELECTIVE.
- 2


SEE SHEET 2 FOR RECOMMENDED PRINTED CIRCUIT BOARD LAYOUT.

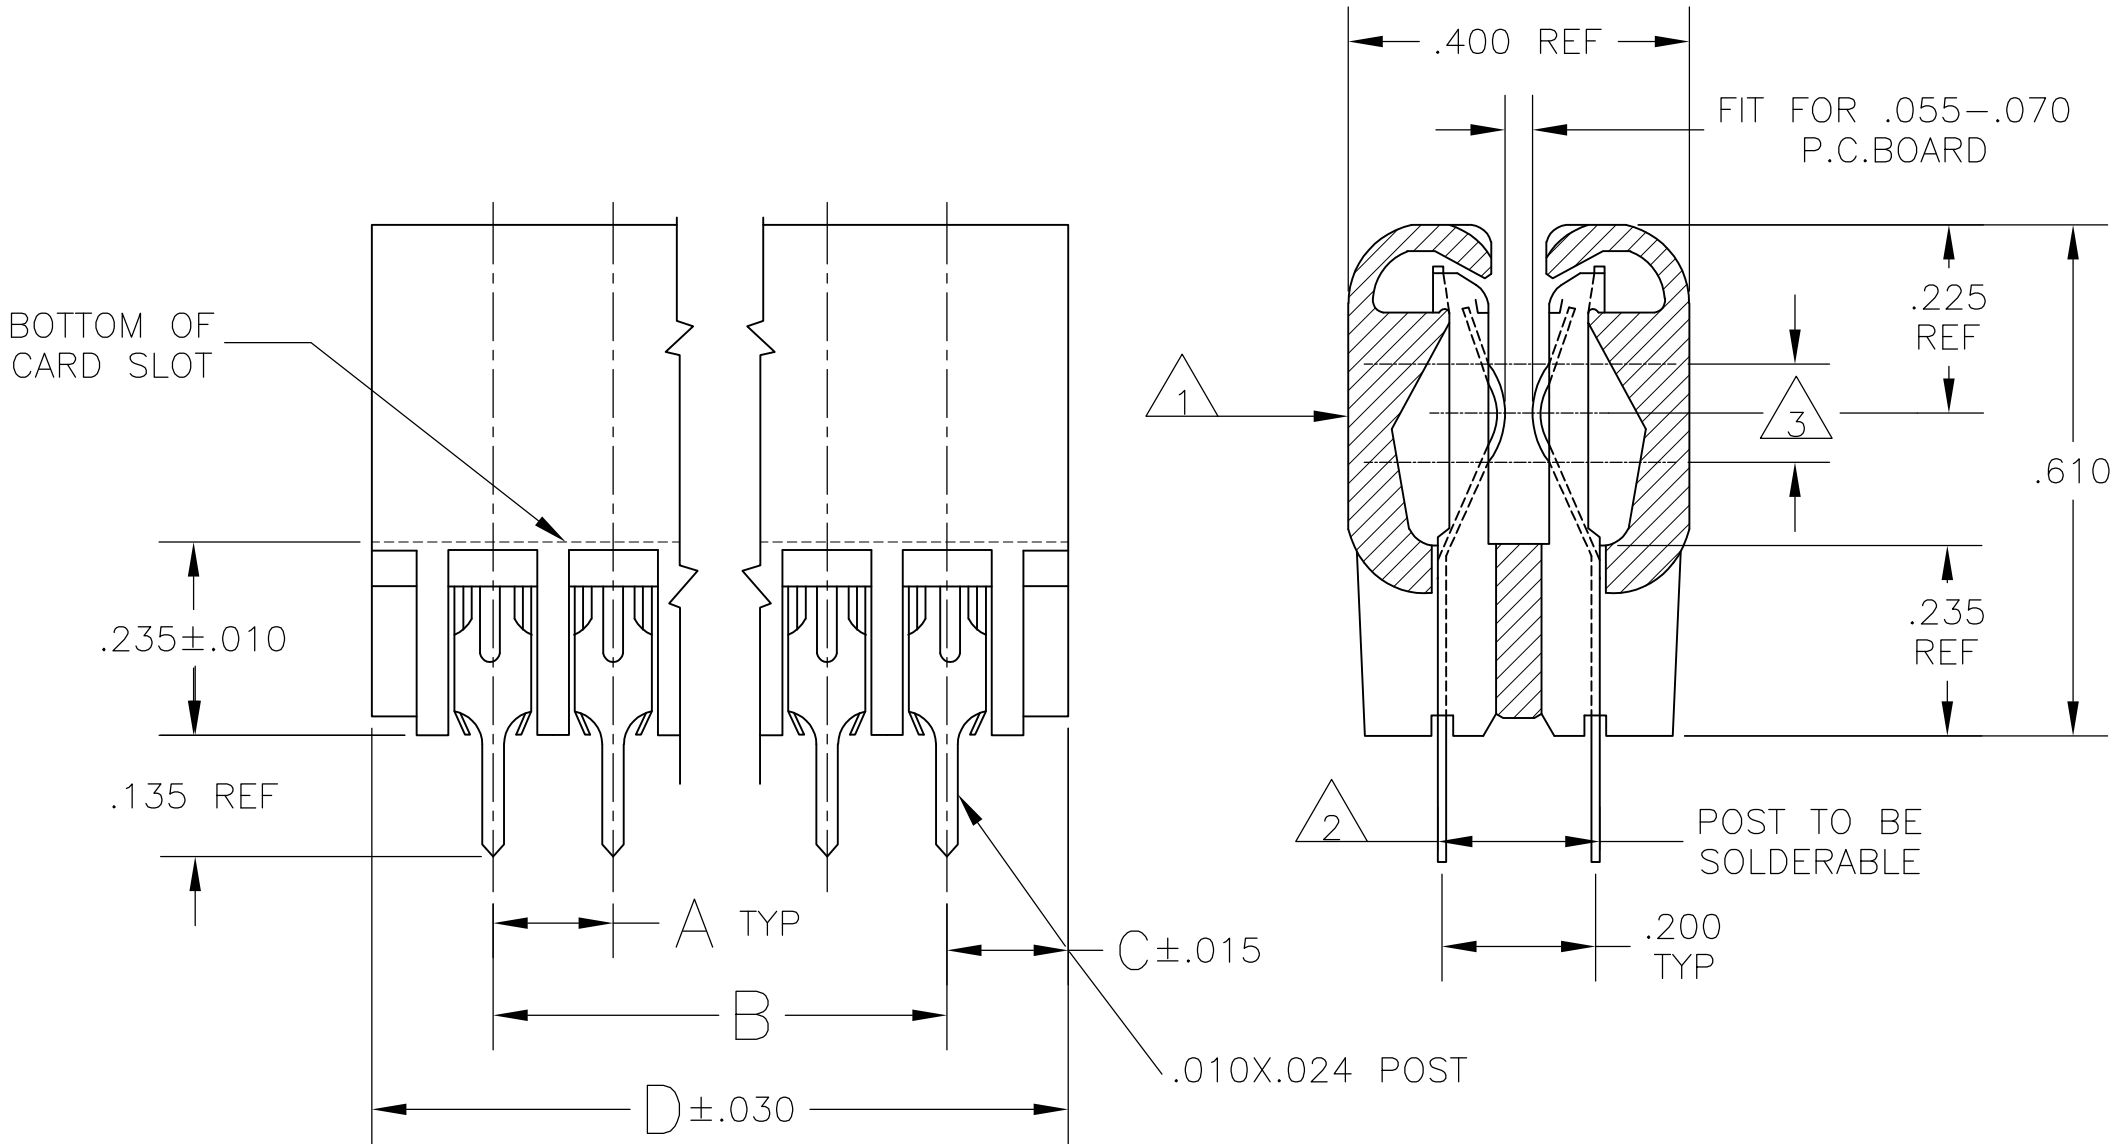

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN — 29-1-73	Tyco Electronics Corporation Harrisburg, Pa 17105-3608			
DIMENSIONS: INCHES		CHK — 5-2-73	NAME J.BROWN			
		APVD — 5-2-73	PRODUCT SPEC			
		APPLICATION SPEC				
MATERIAL △ HOUSING: GLASS FILLED POLYESTER COLOR: BLACK △ CONTACT: PHOS BRONZE		WEIGHT —	SIZE A2	CAGE CODE 00779	DRAWING NO C=5583486	RESTRICTED TO —
CUSTOMER DRAWING			SCALE 4:1	SHEET 1	OF 2	REV A


LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
AD	00			SEE SHEET 1		

D

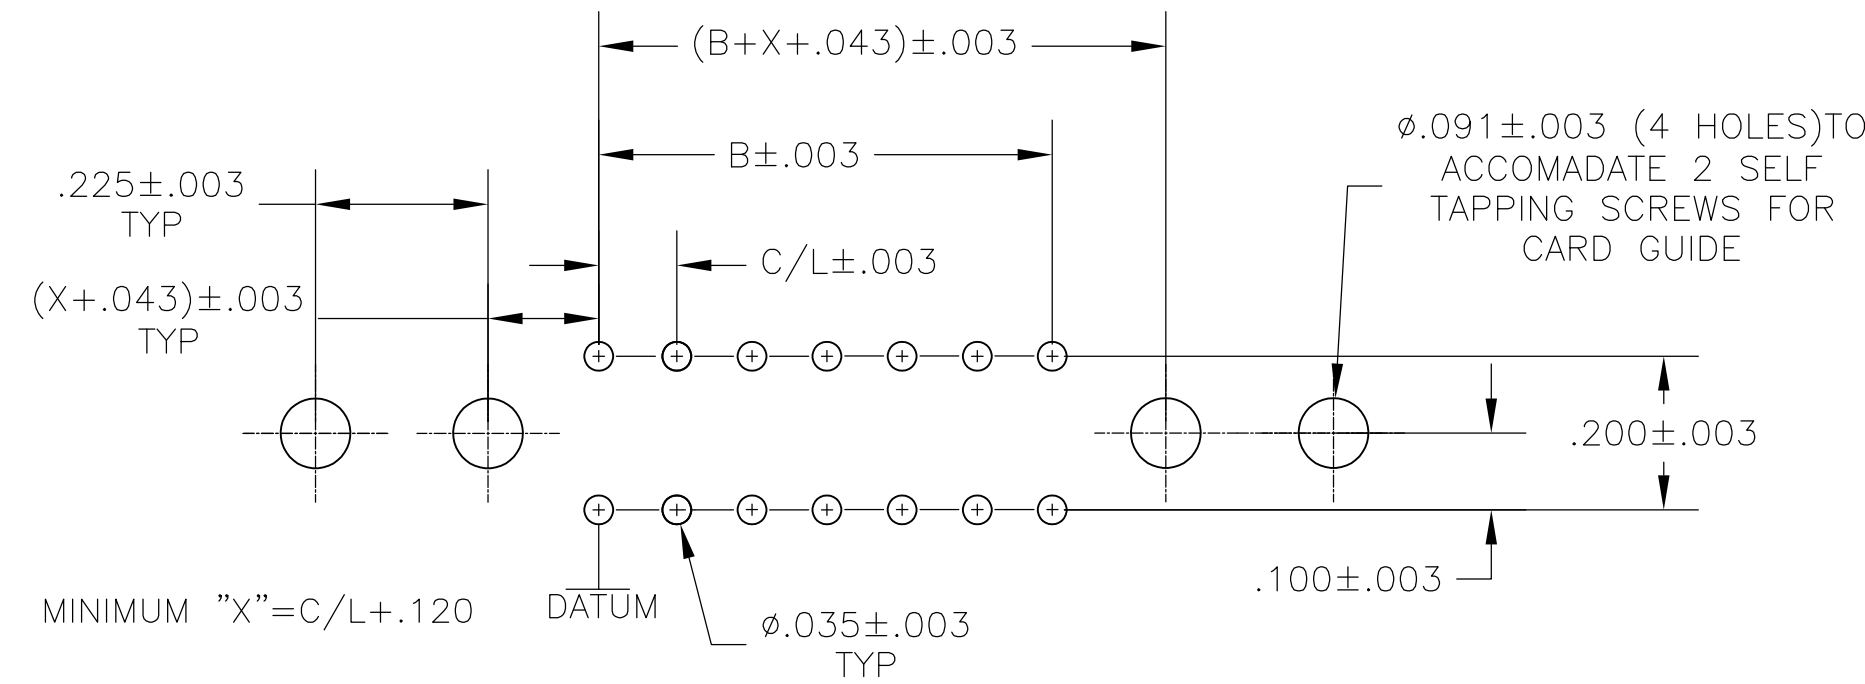


BOARD LAYOUT FOR USE WITH AMP CARD GUIDE PART NO.583671

C

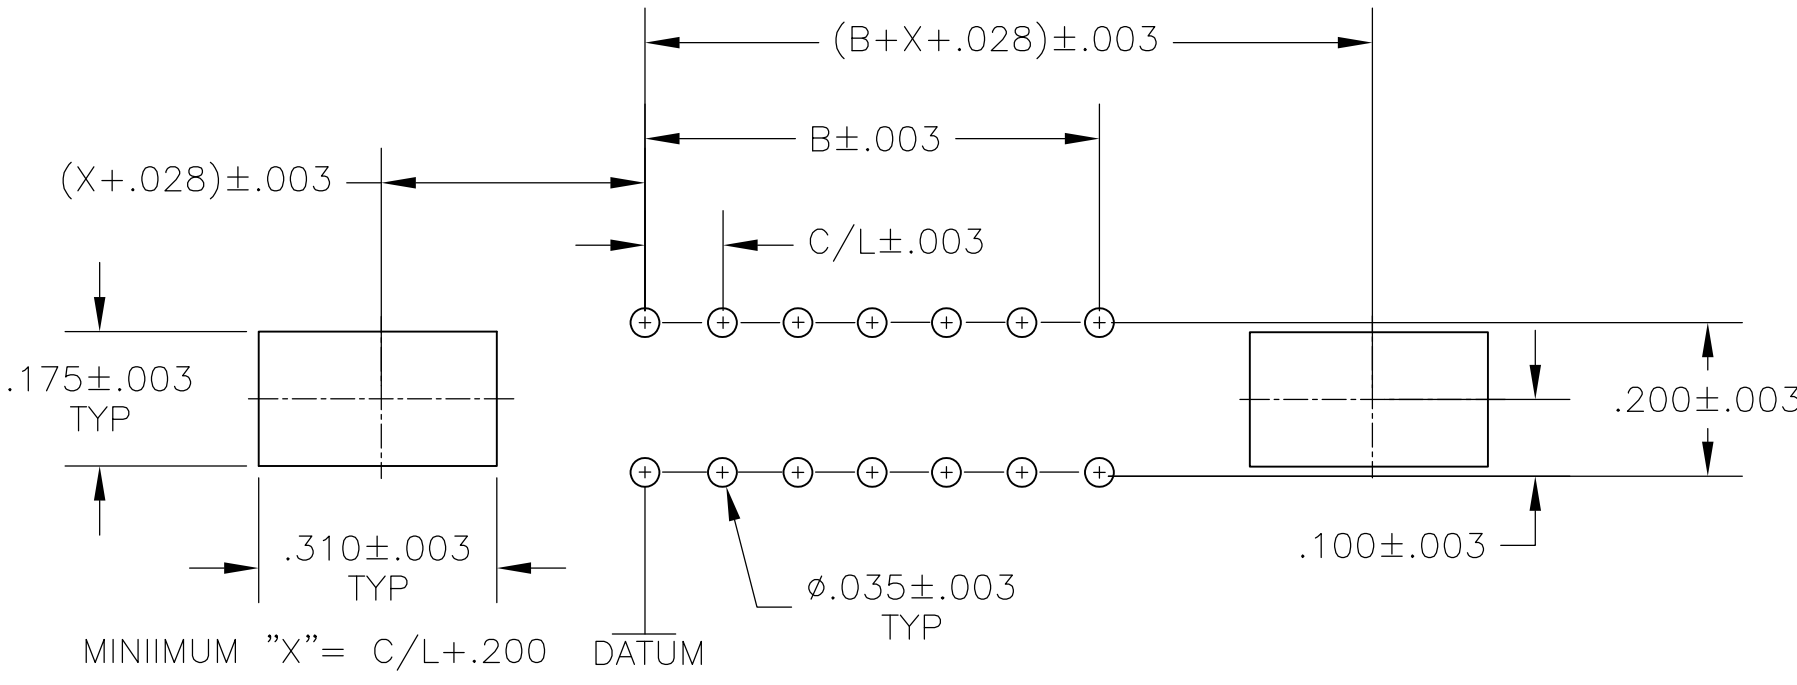

BOARD LAYOUT FOR USE WITH AMP CARD GUIDE PART NO.583408 OR 583425


B

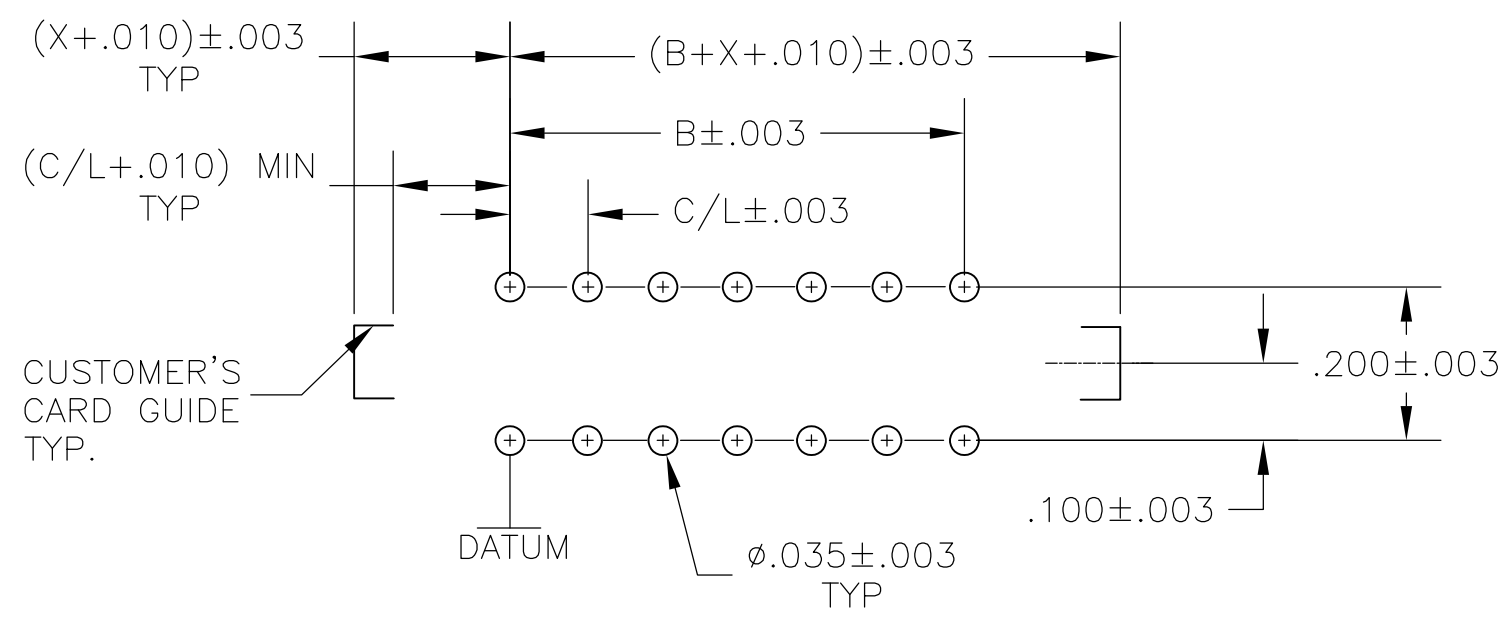


BOARD LAYOUT FOR USE WITH CUSTOMER SUPPLIED CARD GUIDE

INTER-CONTACT KEYING PLUG	"R"	FOR CENTER LINE SPACING
530030-1	.050	.125-.150-.156
530030-2	.040	.100

ON CONTACT KEYING PLUG	"S"	FOR CENTER LINE SPACING
583714-1	.129	.100-.125
583714-2	.160	.150-.156

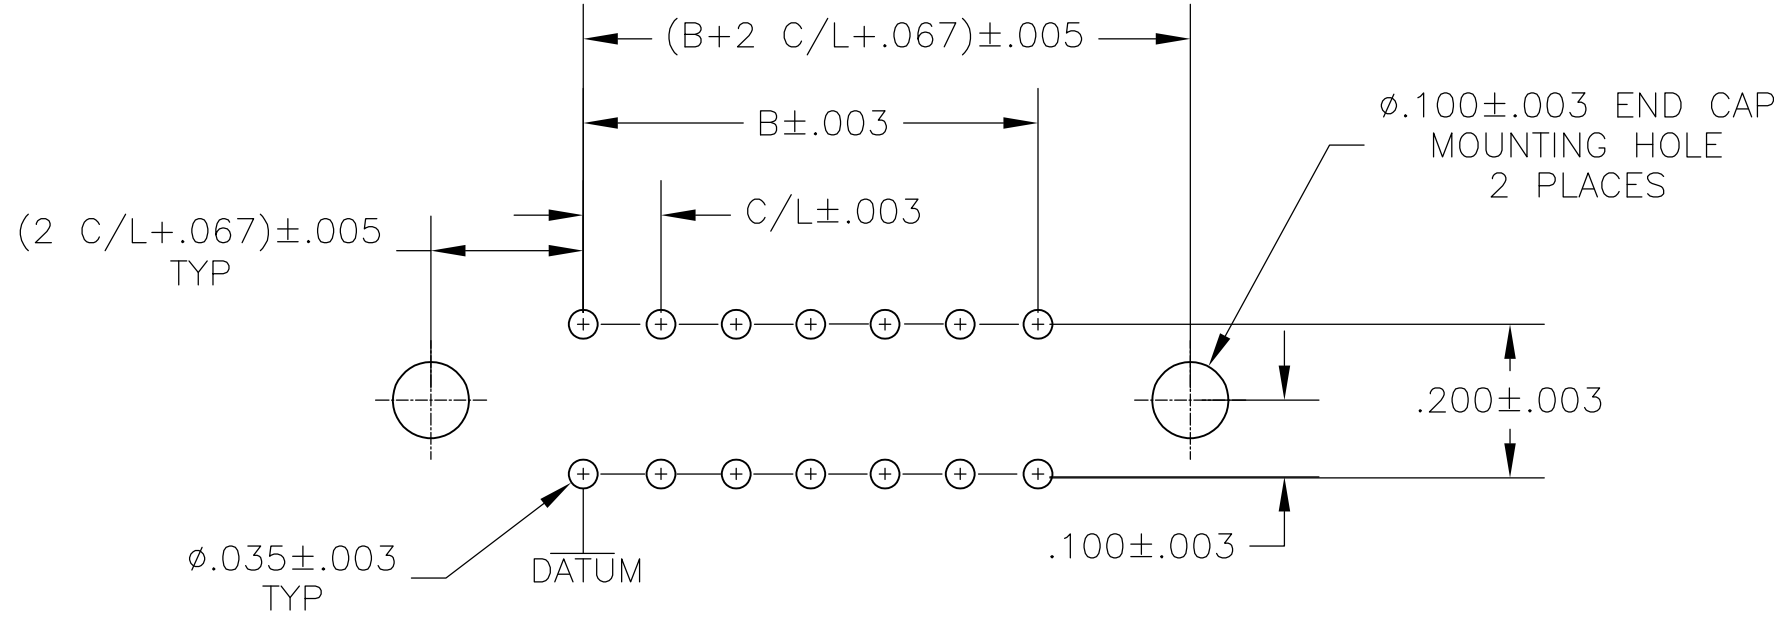

BOARD LAYOUT FOR USE WITH END CAP

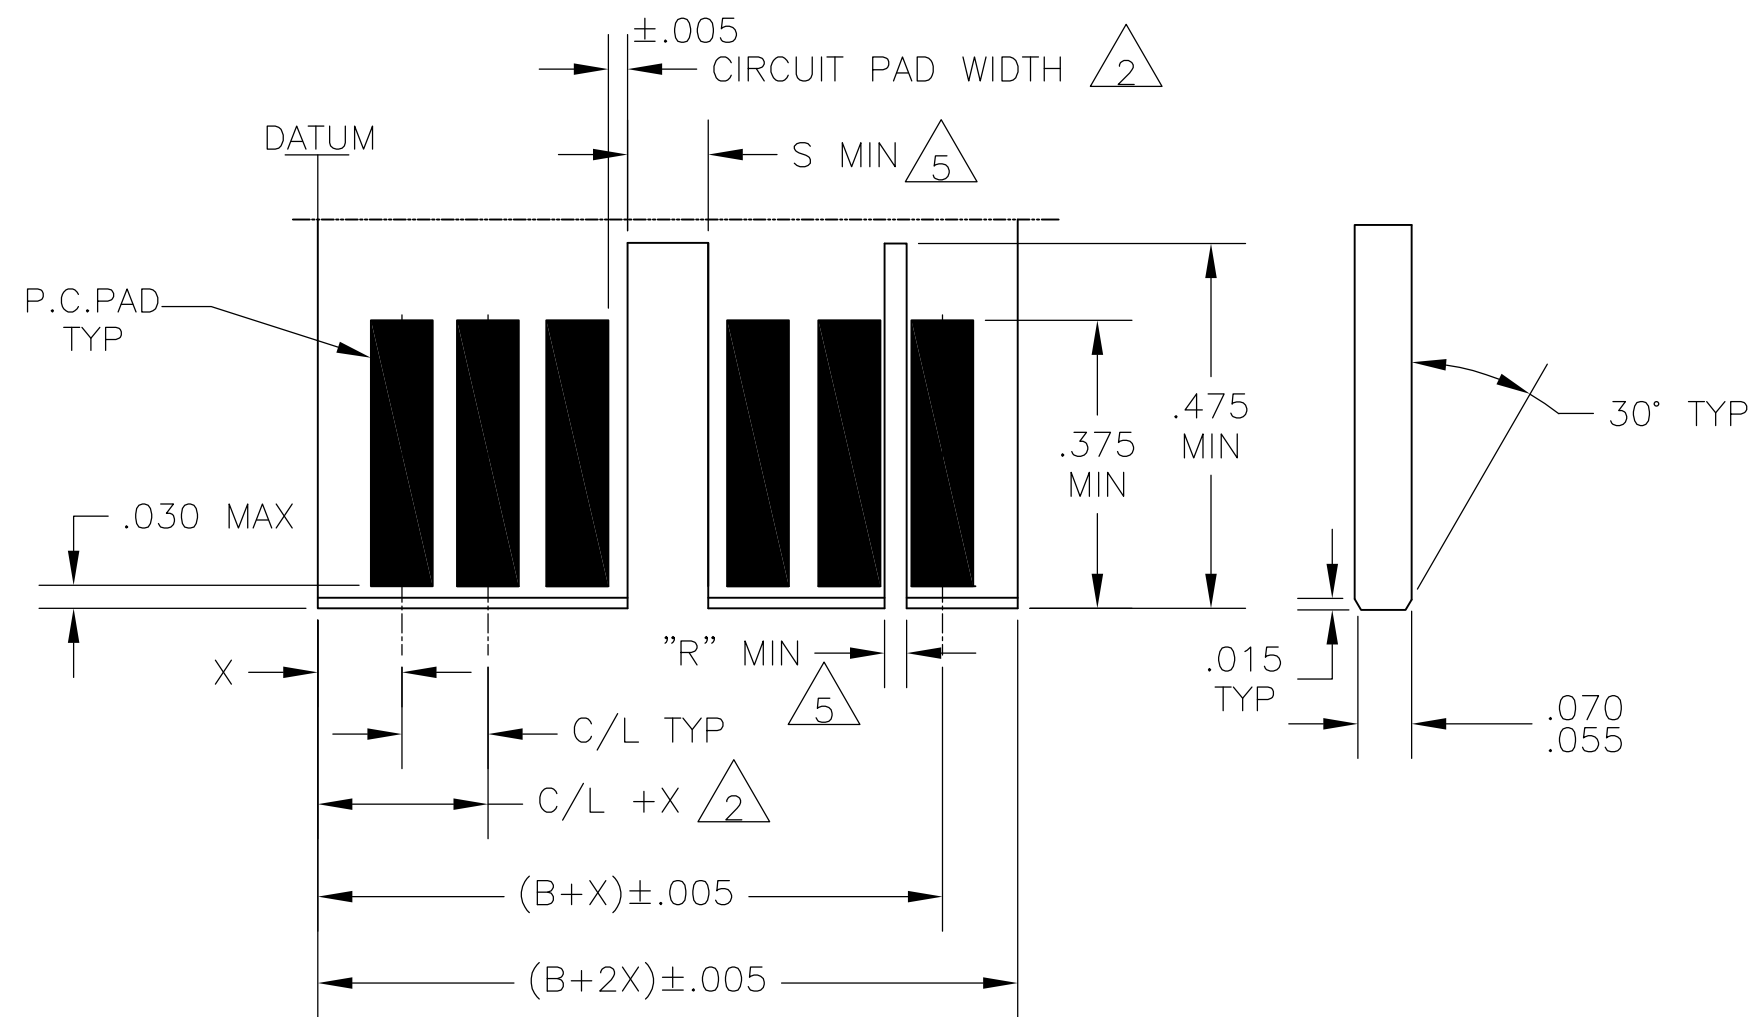

DAUGHTER BOARD LAYOUT

1. MAX ALLOWABLE WARPAGE OF MOTHER BOARD NOT TO EXCEED .005/IN MAX.ALLOWABLE BOW OF DAUGHTER BOARD NOT TO EXCEED .010/IN. THICKNESS OF MOTHER BOARD IS .062 FOR DOUBLE SLOTTED CARD GUIDES AND .104 MAX. FOR ALL OTHER MOUNTING CONDITIONS.
2. EACH PAD LOCATION INCREASES BY C/L±.005 WITH A NON-CUMULATIVE TOLERANCE OF ±.005
3. CIRCUIT PAD WIDTH -.045 FOR .100 C/L, .072 FOR .125 C/L, .072 FOR .150 C/L, .080 FOR .156 C/L
4. DIMENSIONS APPLY TO BOTH SIDES OF DAUGHTER BOARD.
5. C/L INCREMENTS ON MOTHER BOARD HAVE ±.003 NON-CUMULATIVE TOLERANCE.
6. "X" IS A CUSTOMER CONTROLLED DIMENSION EXCEPT FOR END CAP ASSEMBLIES WHERE "X" = C/L - .008
7. THE SLOT FOR INTER-CONTACT KEYING PLUGS MUST BE CENTERED BETWEEN THE PRINTED CIRCUIT PADS, WHILE THE SLOT FOR ON-CONTACT KEYING PLUGS MUST BE CENTERED ON THE AREA OF A PRINTED CIRCUIT PAD.

A

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
—
29-1-73

CHK
—
5-2-73

APVD
J.BROWN
14-2-73

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± -
2 PLC ± -
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH —

DIMENSIONS: INCHES

MATERIAL
—

Tyco Electronics Corporation
Harrisburg, Pa 17105-3608

NAME
HOUSING ASSEMBLY, TWIN LEAF CONNECTOR
.156 CENTERS.

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=5583486

RESTRICTED TO
—

SCALE
4:1

SHEET
2

OF
2

REV
A

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9