


## LioN-Link I/O Module with 8 Digital Inputs and Outputs

0942 UEM 600



### 8 IN / 8 OUT (Universal)

LioN-Link I/O module with 8 digital I/O channels, channels can be used universally as inputs or outputs, M12 sockets (4 x), 5 poles, M12 actuator supply

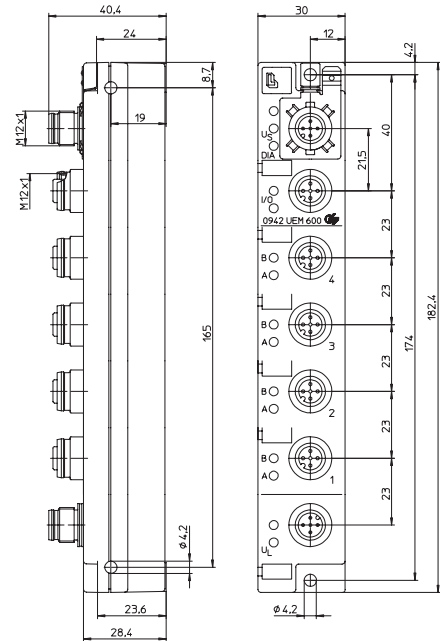




### Bit Assignment


Bit	7	6	5	4	3	2	1	0
<b>M12 Input</b>								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A
<b>M12 Output</b>								
Byte 0	4B	4A	3B	3A	2B	2A	1B	1A

### Diagnostic Indication

LED	Indication	Condition
1...4 A/B	yellow	channel status
1...4 A/B	red	periphery fault
I/O	red red flashing green	wrong configuration / module exchanged not recognized by the BusHead online, communication with BusHead
Us	green	sensor/system power supply
Ul	green	actuator power supply
DIA	red	common indication for periphery faults

### Pin Assignment

Bus connection M12	Actuator/sensor connection M12	Actuator supply M12
 <ul style="list-style-type: none"> <li>1 = Drain</li> <li>2 = 24 V Sensor/System</li> <li>3 = 0 V Sensor/System</li> <li>4 = Data +</li> <li>5 = Data -</li> </ul>	 <ul style="list-style-type: none"> <li>1 = +24 V</li> <li>2 = In /Out B</li> <li>3 = 0 V</li> <li>4 = In / Out A</li> <li>5 = Earth</li> </ul>	 <ul style="list-style-type: none"> <li>1 = +24 V</li> <li>2 = n.c.</li> <li>3 = GND (0 V)</li> <li>4 = n.c.</li> <li>5 = Earth</li> </ul>



## LioN-Link I/O Module with 8 Digital Inputs and Outputs

0942 UEM 600

### Technical Data

#### Environmental

Degree of protection IP 67  
 Operating temperature range -10°C (+14°F) to +60°C (+140°F)

#### Mechanical

Weight 200 g  
 Housing material PBT

#### System/sensors

**power supply**  
 Rated voltage 24 V DC  
 Voltage range 19–30 V DC  
 Power consumption typ. 70 mA  
 Operating indication LED green

#### Input power supply

**Us**  
 Voltage range min. (U<sub>System</sub> – 1.5 V)  
 Sensor current 700 mA/module  
 Short circuit proof yes  
 Indication LED green

#### Input wiring

**Type 3 acc. to IEC 61131-2**  
 Rated input voltage 24 V DC  
 Channel type N.O. p-switching  
 Number of digital channels max. 8  
 Channel status indicator LED yellow per channel  
 Diagnostic indication LED red per channel

#### Output power supply

**Ul**  
 Rated voltage 24 V DC  
 Voltage range 19–30 V DC  
 Reverse polarity protection yes/antiparallel diode  
 Indication LED green

#### Output wiring

Rated output current 1.6 A per channel  
 Short circuit proof yes  
 Max. output current 4 A per module  
 Overload proof yes  
 Number of digital channels max. 8  
 Channel type N.O. p-switching  
 Channel status indicator LED yellow per channel  
 Diagnostic indication LED red per channel

#### Included in

**delivery/accessories** Dust covers M12, attachable labels

#### Diagnostic

Periphery fault diagnosis for sensor short circuit, actuator short circuit /channel, sensor low voltage detection

### Part Number

0942 UEM 600



The application of these products in harsh environments should always be checked before use.  
 Specifications subject to alteration.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9