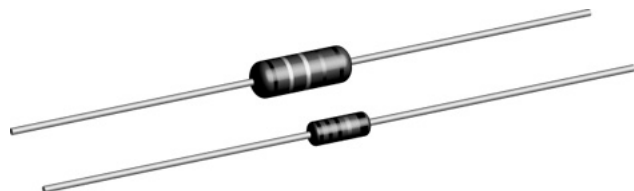


# Metal Film Resistors, Industrial, $\pm 1\%$ Tolerance



## FEATURES

- Power Ratings: 1/4, 1/2, 3/4 and 1 watt at + 70°C
- $\pm 100\text{ppm}/^\circ\text{C}$  temperature coefficient
- Superior electrical performance
- Flame retardant epoxy conformal coating
- Standard 5 band color code marking for ease of identification after mounting
- Tape and reel packaging for automatic insertion (52.4mm inside tape spacing per EIA-296-E)
- Lead (Pb)-Free version is RoHS Compliant



**RoHS\***  
COMPLIANT

## STANDARD ELECTRICAL SPECIFICATIONS

| GLOBAL MODEL | HISTORICAL MODEL | POWER RATING<br>$P_{70^\circ\text{C}}$<br>W | LIMITING ELEMENT<br>VOLTAGE MAX.<br>$V_{\text{max}}$ | TEMPERATURE<br>COEFFICIENT<br>$\text{ppm}/^\circ\text{C}$ | TOLERANCE<br>% | RESISTANCE<br>RANGE<br>$\Omega$ | E-SERIES |
|--------------|------------------|---------------------------------------------|------------------------------------------------------|-----------------------------------------------------------|----------------|---------------------------------|----------|
| CCF55        | CCF-55           | 0.25 / 0.5                                  | 250                                                  | $\pm 100$                                                 | $\pm 1$        | 10R - 3.01M                     | 96       |
| CCF60        | CCF-60           | 0.50 / 0.75 / 1.0                           | 500                                                  | $\pm 100$                                                 | $\pm 1$        | 10R - 1M                        | 96       |

## TECHNICAL SPECIFICATIONS

| PARAMETER                     | UNIT             | CCF55          | CCF60            |
|-------------------------------|------------------|----------------|------------------|
| Rated Dissipation at 70°C     | W                | 0.25 / 0.5     | 0.5 / 0.75 / 1.0 |
| Maximum Working Voltage       | $V_{\text{max}}$ | $\leq 250$     | $\leq 500$       |
| Insulation Voltage (1min)     | $V_{\text{eff}}$ | 500            | 500              |
| Dielectric Strength           | VAC              | 450            | 450              |
| Insulation Resistance         | $\Omega$         | $\geq 10^{11}$ | $\geq 10^{11}$   |
| Operating Temperature Range   | $^\circ\text{C}$ | -65 / +165     | -65 / +165       |
| Terminal Strength (pull test) | lb               | 2              | 2                |
| Weight                        | g                | 0.35 max       | 0.75 max         |

## GLOBAL PART NUMBER INFORMATION

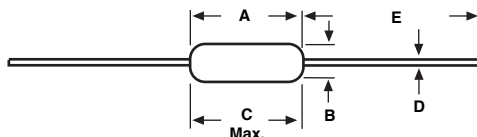
New Global Part Numbering: CCF55301RFKR36 (preferred part numbering format)

|                |   |                                                                                          |   |   |   |                |   |                         |   |                                                                        |   |   |                                                                                |  |  |  |
|----------------|---|------------------------------------------------------------------------------------------|---|---|---|----------------|---|-------------------------|---|------------------------------------------------------------------------|---|---|--------------------------------------------------------------------------------|--|--|--|
| C              | C | F                                                                                        | 5 | 5 | 3 | 0              | 1 | R                       | F | K                                                                      | R | 3 | 6                                                                              |  |  |  |
| GLOBAL MODEL   |   | RESISTANCE VALUE                                                                         |   |   |   | TOLERANCE CODE |   | TEMPERATURE COEFFICIENT |   | PACKAGING                                                              |   |   | SPECIAL                                                                        |  |  |  |
| CCF55<br>CCF60 |   | R = Decimal<br>K = Thousand<br>M = Million<br>10R0 = 10Ω<br>680K = 680KΩ<br>1M00 = 1.0MΩ |   |   |   | F = ± 1%       |   | K = 100ppm              |   | E36 = Lead (Pb)-Free, T/R (5000 pcs)<br>R36 = Tin/Lead, T/R (5000 pcs) |   |   | Blank = Standard (Dash Number)<br>(up to 3 digits)<br>From 1-999 as applicable |  |  |  |

Historical Part Number example: CCF-553010F (will continue to be accepted)

|                  |                  |                |           |
|------------------|------------------|----------------|-----------|
| CCF-55           | 3010             | F              | R36       |
| HISTORICAL MODEL | RESISTANCE VALUE | TOLERANCE CODE | PACKAGING |

\* Pb containing terminations are not RoHS compliant, exemptions may apply

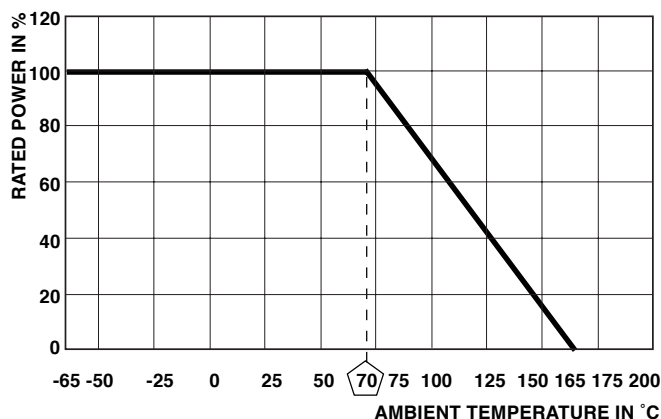
**DIMENSIONS** in inches [millimeters]

| GLOBAL MODEL  | A                                      | B                                      | C (Max.)           | D                                      | E                                       |
|---------------|----------------------------------------|----------------------------------------|--------------------|----------------------------------------|-----------------------------------------|
| CCF55 (Sn/Pb) | $0.245 \pm 0.020$<br>[6.22 $\pm$ 0.51] | $0.090 \pm 0.008$<br>[2.29 $\pm$ 0.20] | $0.265$<br>[6.73]  | $0.025 \pm 0.002$<br>[0.64 $\pm$ 0.05] | $1.100 \pm 0.040$<br>[27.94 $\pm$ 1.02] |
| CCF55 (Sn)    | $0.245 \pm 0.020$<br>[6.22 $\pm$ 0.51] | $0.090 \pm 0.008$<br>[2.29 $\pm$ 0.20] | $0.265$<br>[6.73]  | $0.023 \pm 0.002$<br>[0.60 $\pm$ 0.05] | $1.100 \pm 0.040$<br>[27.94 $\pm$ 1.02] |
| CCF60         | $0.344 \pm 0.031$<br>[8.74 $\pm$ 0.79] | $0.139 \pm 0.009$<br>[3.53 $\pm$ 0.23] | $0.400$<br>[10.16] | $0.025 \pm 0.002$<br>[0.64 $\pm$ 0.05] | $1.000 \pm 0.040$<br>[25.40 $\pm$ 1.02] |

**RESISTANCE VALUES**

Vishay Dale Models CCF55 and CCF60 are available in the standard 96 resistance values per decade. Values are obtained from the following decade table by multiplying by powers of 10. As an example: 30.1 can represent 30.1 ohm, 301 ohm, 3.01 kohm, 30.1 kohm or 301 kohm.

|      |      |      |      |      |      |
|------|------|------|------|------|------|
| 10.0 | 14.7 | 21.5 | 31.6 | 46.4 | 68.1 |
| 10.2 | 15.0 | 22.1 | 32.4 | 47.5 | 69.8 |
| 10.5 | 15.4 | 22.6 | 33.2 | 48.7 | 71.5 |
| 10.7 | 15.8 | 23.2 | 34.0 | 49.9 | 73.2 |
| 11.0 | 16.2 | 23.7 | 34.8 | 51.1 | 75.0 |
| 11.3 | 16.5 | 24.3 | 35.7 | 52.3 | 76.8 |
| 11.5 | 16.9 | 24.9 | 36.5 | 53.6 | 78.7 |
| 11.8 | 17.4 | 25.5 | 37.4 | 54.9 | 80.6 |
| 12.1 | 17.8 | 26.1 | 38.3 | 56.2 | 82.5 |
| 12.4 | 18.2 | 26.7 | 39.2 | 57.6 | 84.5 |
| 12.7 | 18.7 | 27.4 | 40.2 | 59.0 | 86.6 |
| 13.0 | 19.1 | 28.0 | 41.2 | 60.4 | 88.7 |
| 13.3 | 19.6 | 28.7 | 42.2 | 61.9 | 90.9 |
| 13.7 | 20.0 | 29.4 | 43.2 | 63.4 | 93.1 |
| 14.0 | 20.5 | 30.1 | 44.2 | 64.9 | 95.3 |
| 14.3 | 21.0 | 30.9 | 45.3 | 66.5 | 97.6 |

**DERATING****MARKING**

—□Color band

**PERFORMANCE**

| POWER RATING @ + 70°C           |                    |                     |
|---------------------------------|--------------------|---------------------|
| CCF55                           | 1/4 watt           | 1/2 watt            |
| CCF60                           | 1/2 watt           | 3/4 watt and 1 watt |
| TEST*                           | MAXIMUM $\Delta R$ | MAXIMUM $\Delta R$  |
| Thermal Shock                   | $\pm 0.5\%$        | -                   |
| Short Time Overload             | $\pm 0.5\%$        | -                   |
| Low Temperature Operation       | $\pm 0.5\%$        | -                   |
| Moisture Resistance             | $\pm 1.5\%$        | -                   |
| Resistance to Soldering Heat    | $\pm 0.5\%$        | -                   |
| Shock / Bump                    | $\pm 0.5\%$        | -                   |
| Vibration                       | $\pm 0.5\%$        | -                   |
| Life                            | $\pm 0.5\%$        | $\pm 1.0\%$         |
| Terminal Strength               | $\pm 0.2\%$        | -                   |
| Dielectric Withstanding Voltage | $\pm 0.5\%$        | -                   |

\* Test Methods per MIL-STD-202G/IEC 60115/DIN EN 140000 (as applicable).

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9