

Part No. : **MA.203.A.A301621.B301721**

Product Name : GPS/Penta-band Cellular Adhesive Antenna

Feature : High gain LNA up to 32dB
(GSM/CDMA/PCS/DCS/UMTS/GPRS/EDGE/ HSPA)
Height 10.8mm Diameter 55.1mm
IP65 Waterproof
Fakra Connector
ROHS Compliant



1 Introduction

This is a combination high performance GPS and Penta-band Cellular (GSM/CDMA/PCS/DCS/ / UMTS / GPRS / EDGE/ HSPA) antenna to simplify AVL or Fleet management antenna systems worldwide. Its high quality low profile covert housing can be attached onto the glass or even out of sight under the dashboard. This combination of a high gain GPS antenna and a leading edge Penta band cellular antenna is ideal for those applications that require durability, small size and covert installation, and reliable reception and transmission crossing through different mobile networks.

Features

GPS

- High LNA Gain up to 32 dB
- Antenna Gain 30 ± 2 dB
- Miniaturized to 55.15x12mm
- Low Noise 1.5 dB max

Cellular

- Advanced Penta-band cellular antenna (GSM/CDMA/PCS/DCS/UMTS/GPRS/EDGE/ HSPA)

Other

- Water Resistant IP 65(IP 67 MA.203 version also available)
- Quality textured covert design. Low profile
- UV resistant ABS housing
- Comes with high grade 3M double sided tape for quick and easy mounting
- Fakra code C (blue) on GPS and code D(violet) on GSM . Optional cables and connectors

2 Specification

2.1 GPS Antenna


GPS			
Centre Frequency	1575.42MHz		
Bandwidth	10MHz		
Average Gain	28dBic typ. (@DC 3V)		
Radiation Efficiency	50%		
Gain @ Zenith	4.0dBic typ.		
Axial Ratio	3.0dB max.		
Polarization	Right Hand Circular		
VSWR	≤ 2.0		
Impedance	50 Ω		
DC Power Input Range	3 ~ 5 V		
DC input	3V		
LNA Gain(Typ.)	28dB		
Noise Figure(Typ.)	1.5dB		
Power Consumption	7~9mA		
Band Attenuation	± 50 MHz		
	40dB		
Cable	1M RG174 standard, fully customizable		
Connector	SMA(M) standard, standard, fully customizable		


2.2 Cellular Antenna

CELLULAR					
Frequency (MHz)	824~894	880~960	1710~1880	1850~1990	2110~2170
Peak gain (dBi)	>2.5	>0.0	>1.5	>2.5	>0.5
Efficiency	>60%	>45%	>40%	>45%	>50%
Impedance	50Ω				
Polarization	Linear				
VSWR	3 max.				
Cable	1M RG-174 standard, fully customizable				
Connector	SMA(M) standard, fully customizable				

3 Test Setup

3.1 Configuration of SATIMO

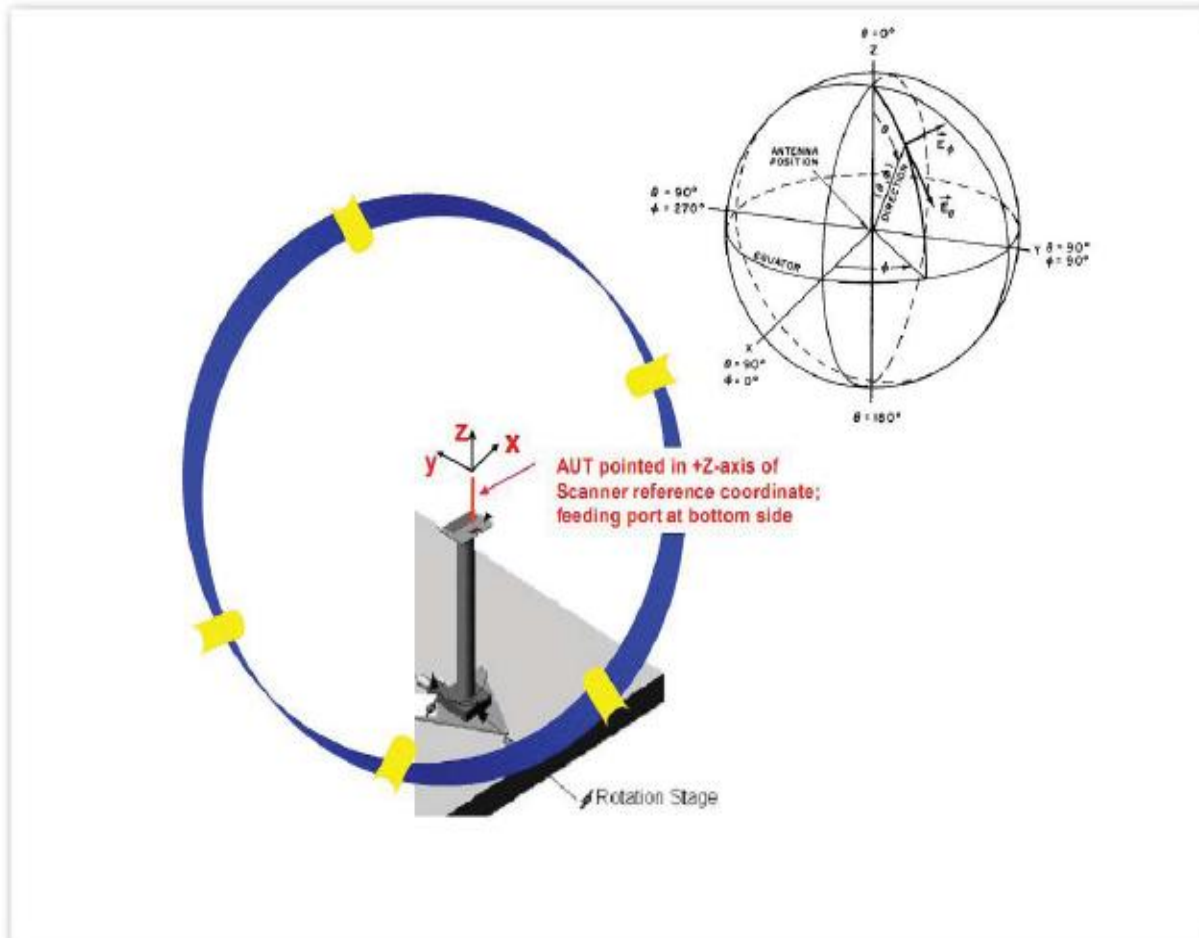

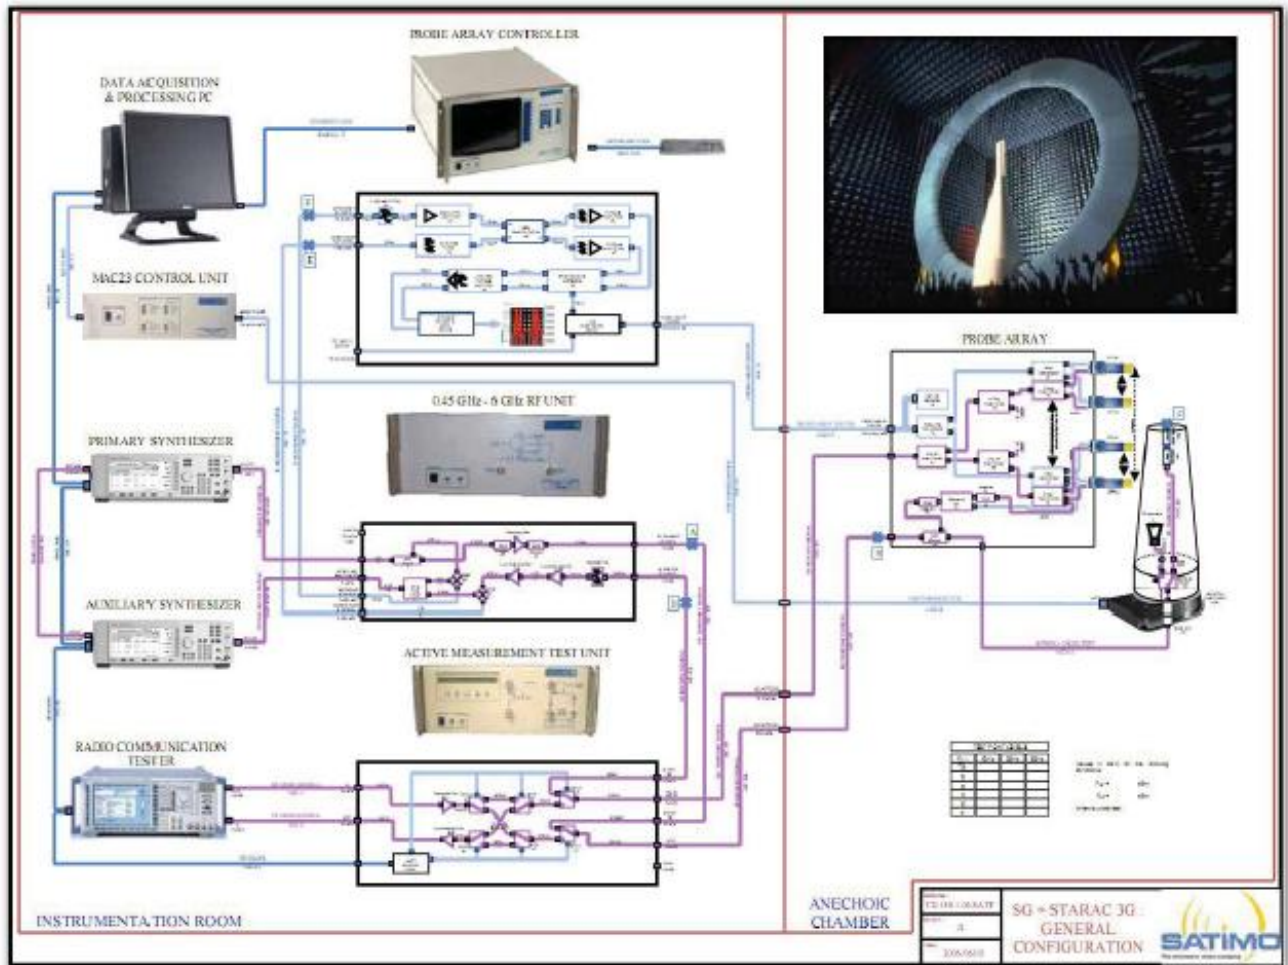




Agilent E5071B Network Analyzer



Anritsu 68147C Signal Generator

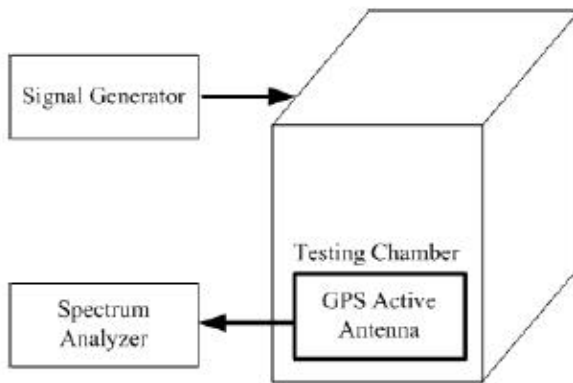

Testing Chamber




Anritsu MS2721A Spectrum

Cable attenuation(dB/100mm)												
GHz	0.5	1	1.5	2	2.5	3	3.5	4	4.5	5	5.5	6
RG-174	67	100	127	153	138	183	207	229	252	272	291	311
CFD-200	26	39	49	58	66	73		86		98		109


4 GPS Antenna Characteristics

4.1 Patch antenna S11

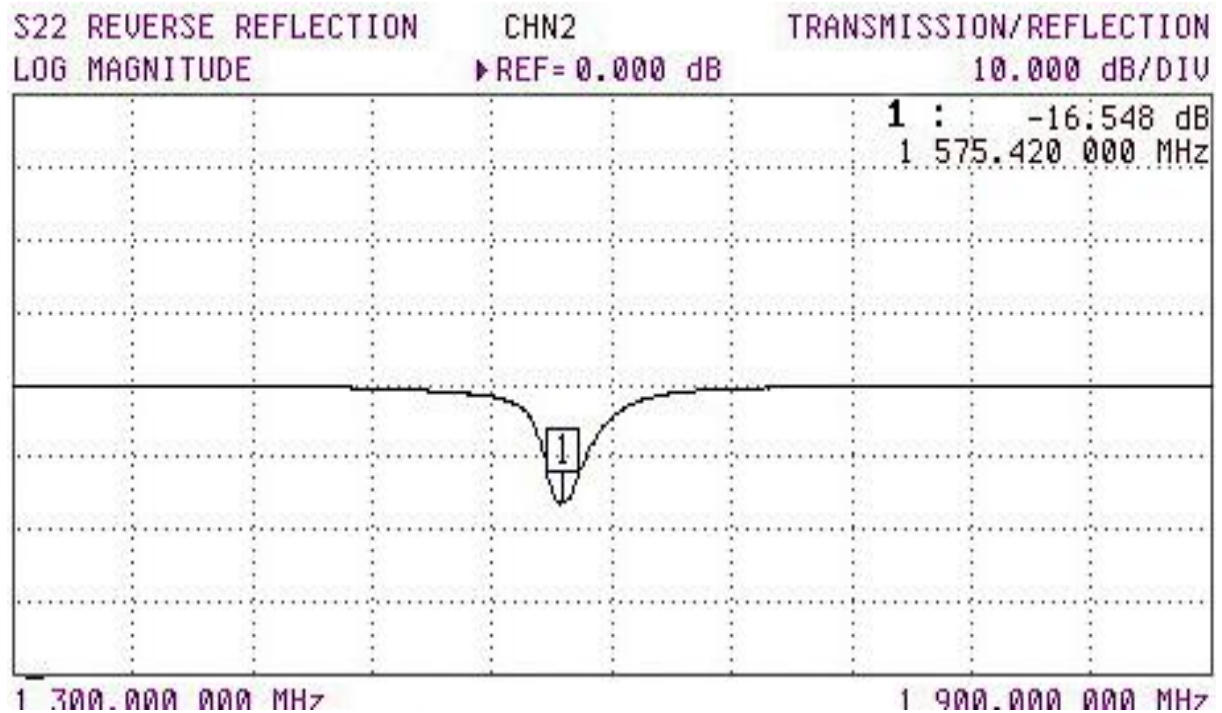


4.2 GPS antenna pattern(XZ plane)

Far-field amplitude of GPS_1_070108.nsi

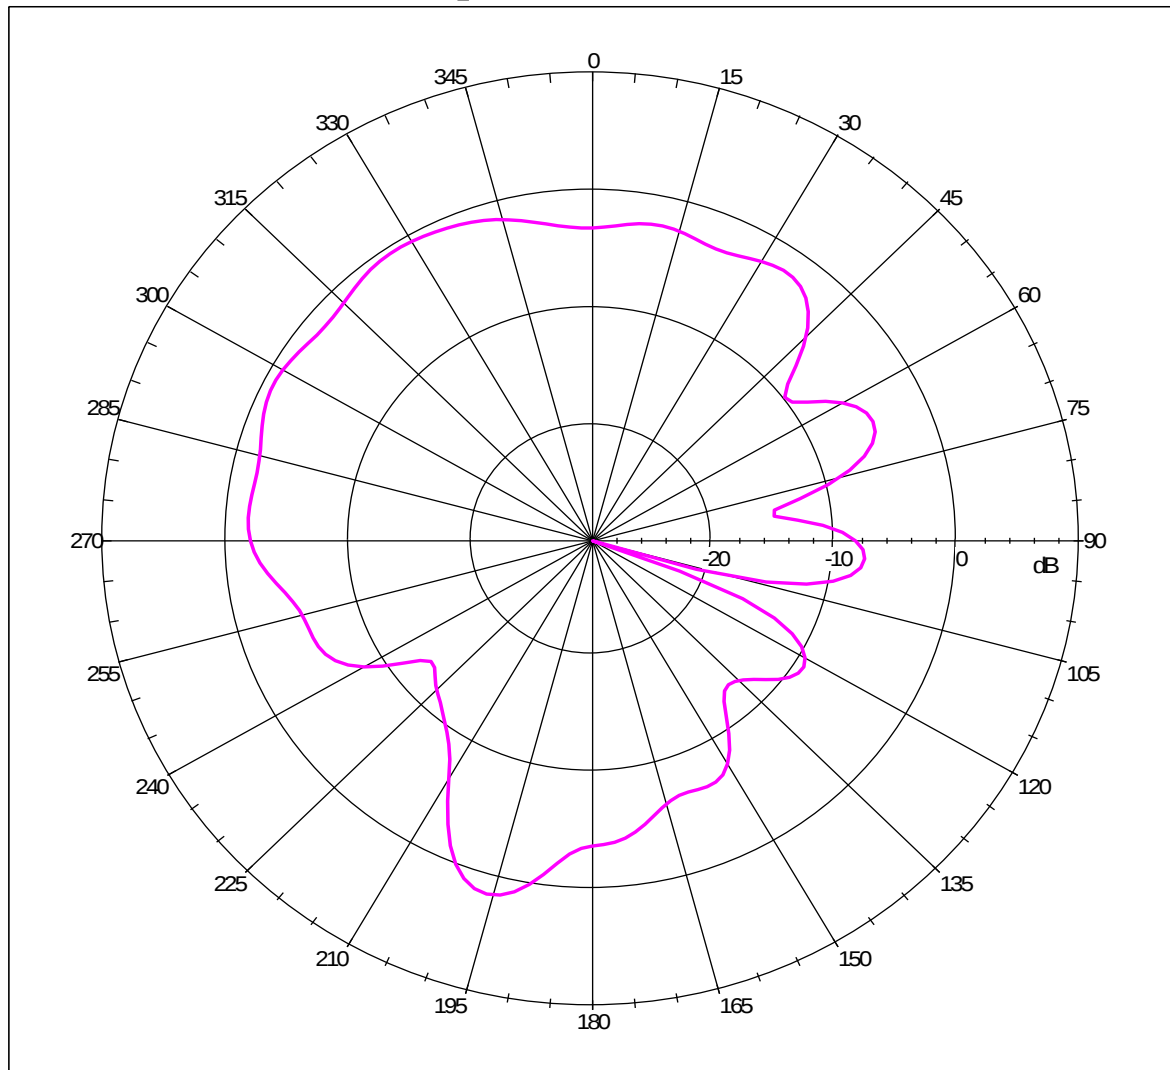


4.3 GPS antenna pattern (YZ plane)


Far-field amplitude of GPS_1_070108.nsi

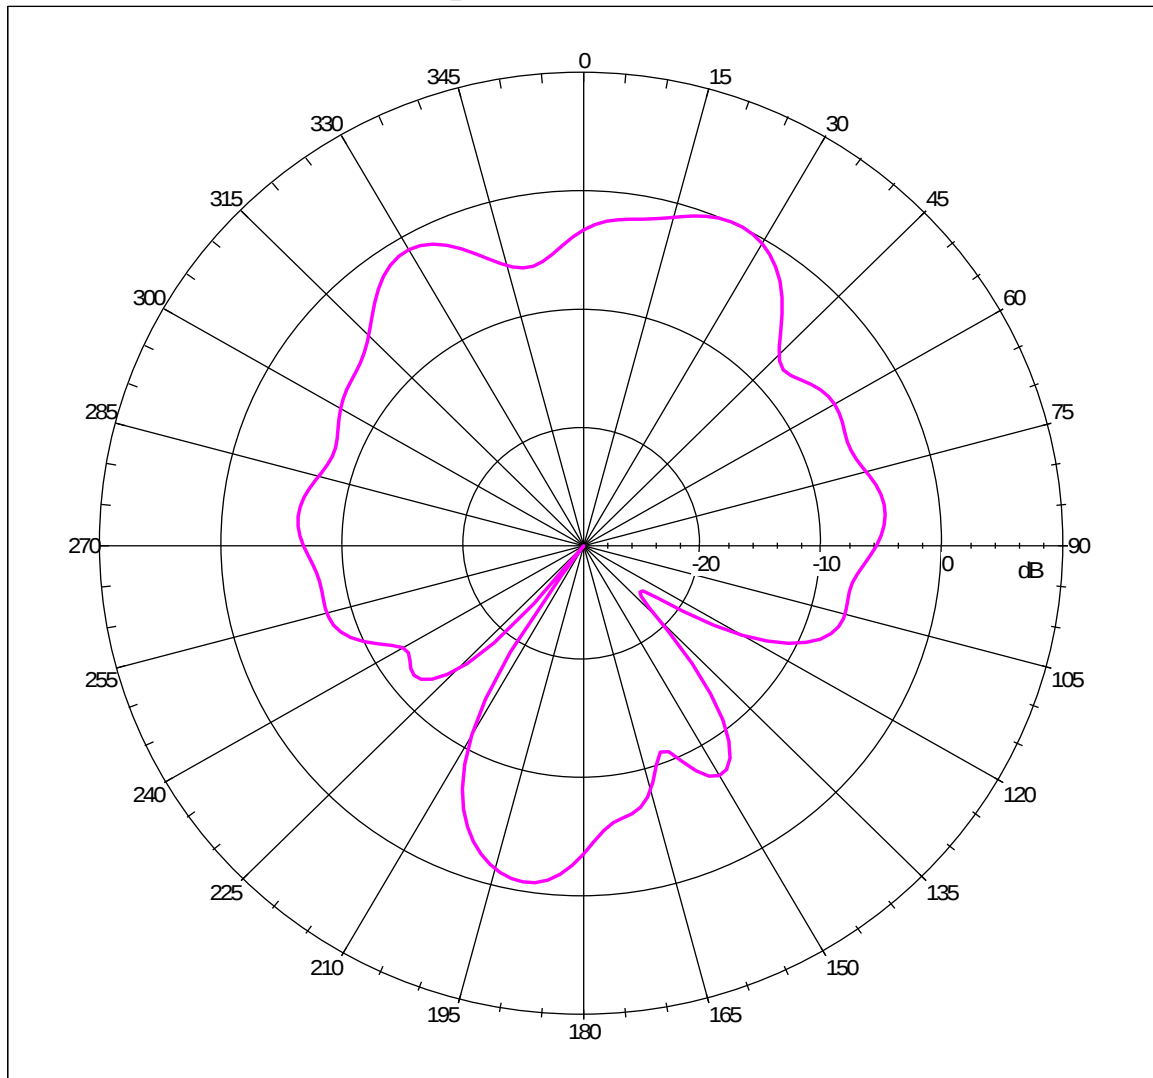

4.4 GPS antenna Gain(with LNA)

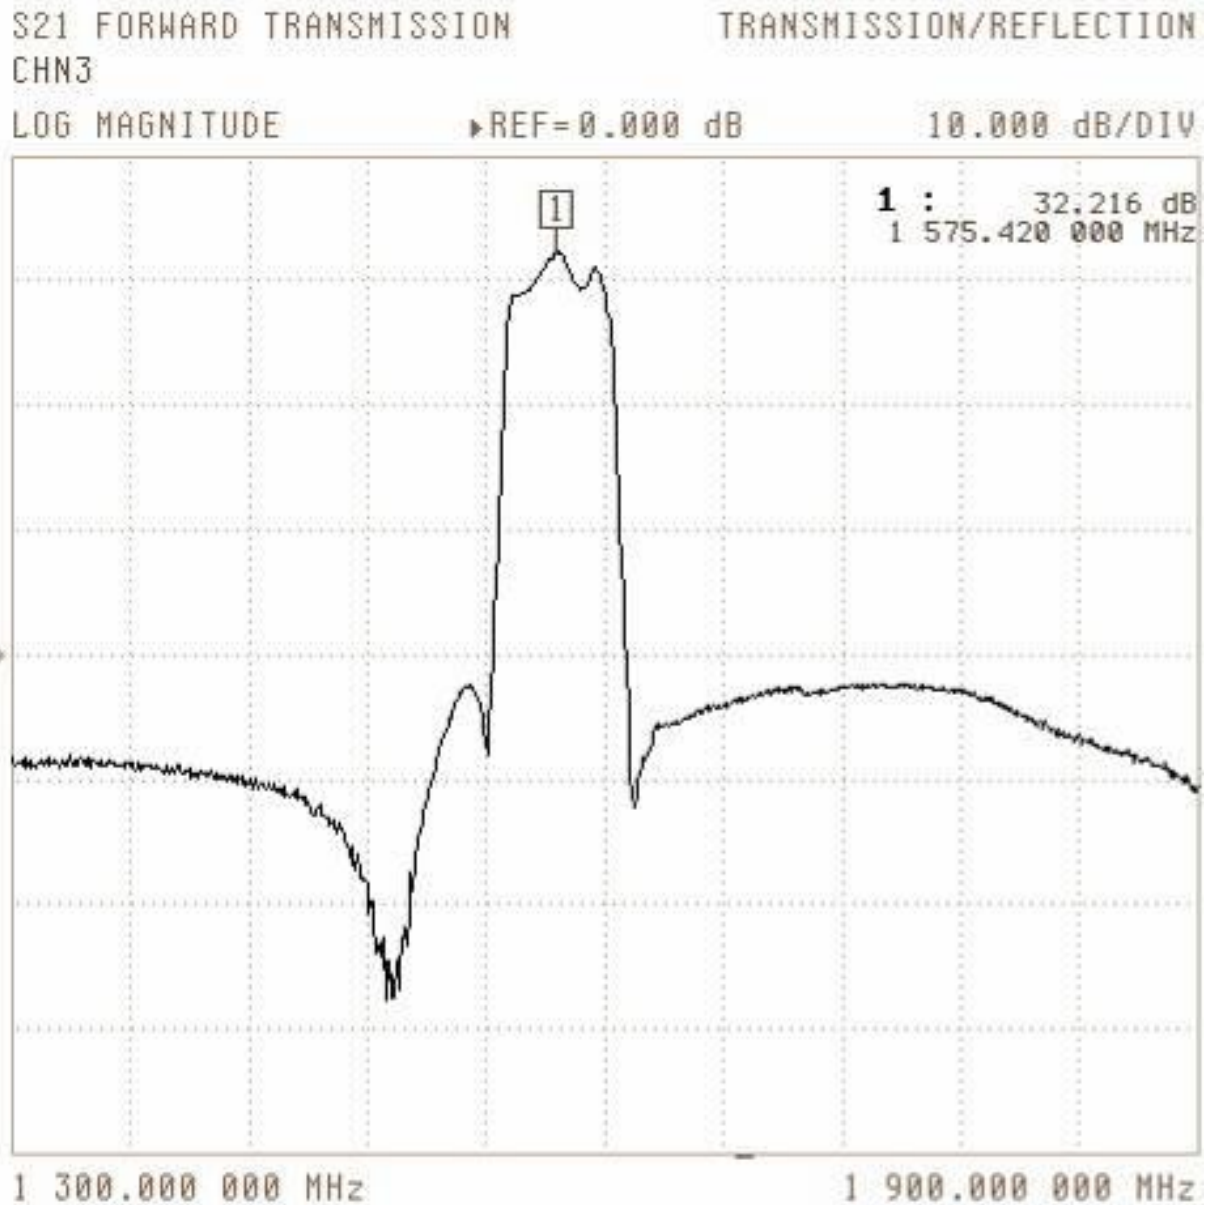

4.5 GPS antenna return loss (With LNA)

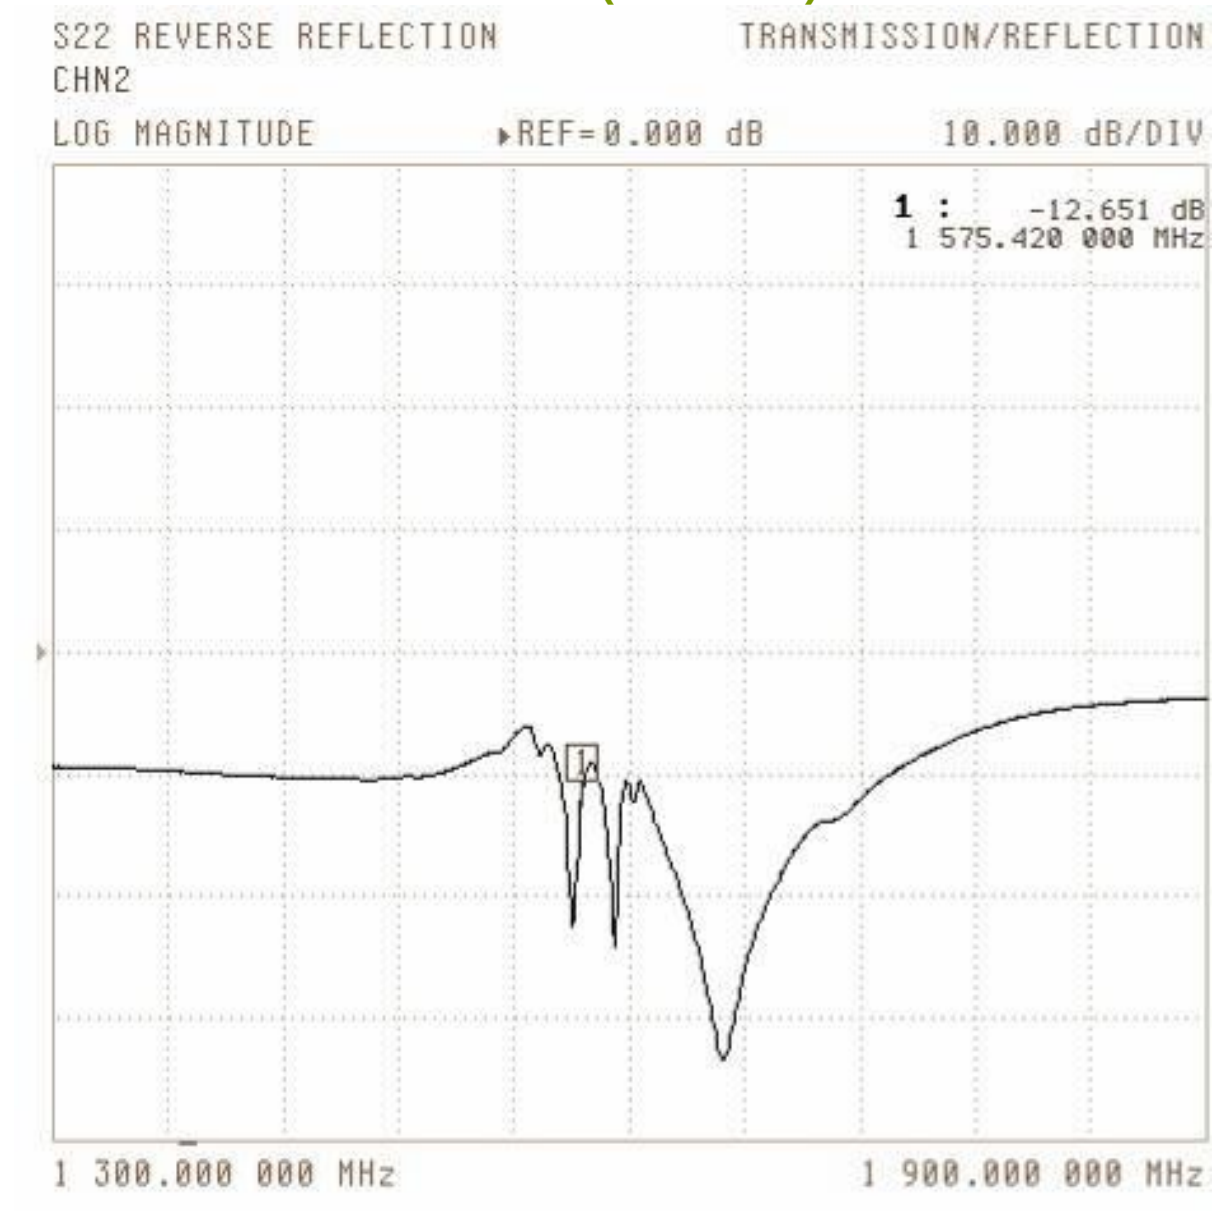


5 Cellular antenna


5.1 Return loss (with 1M RG-174 cable)




5.2 Radiation Pattern


5.2.1 XZ Plane

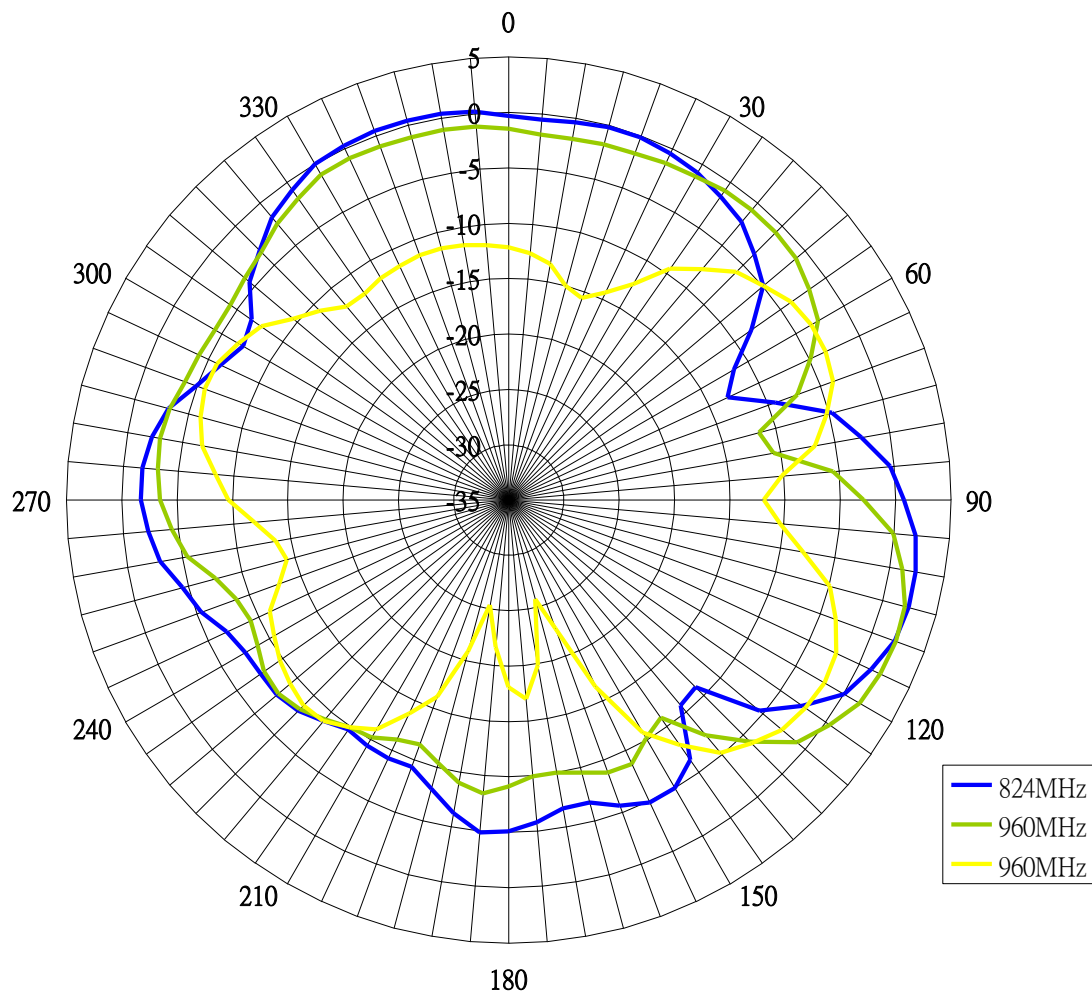

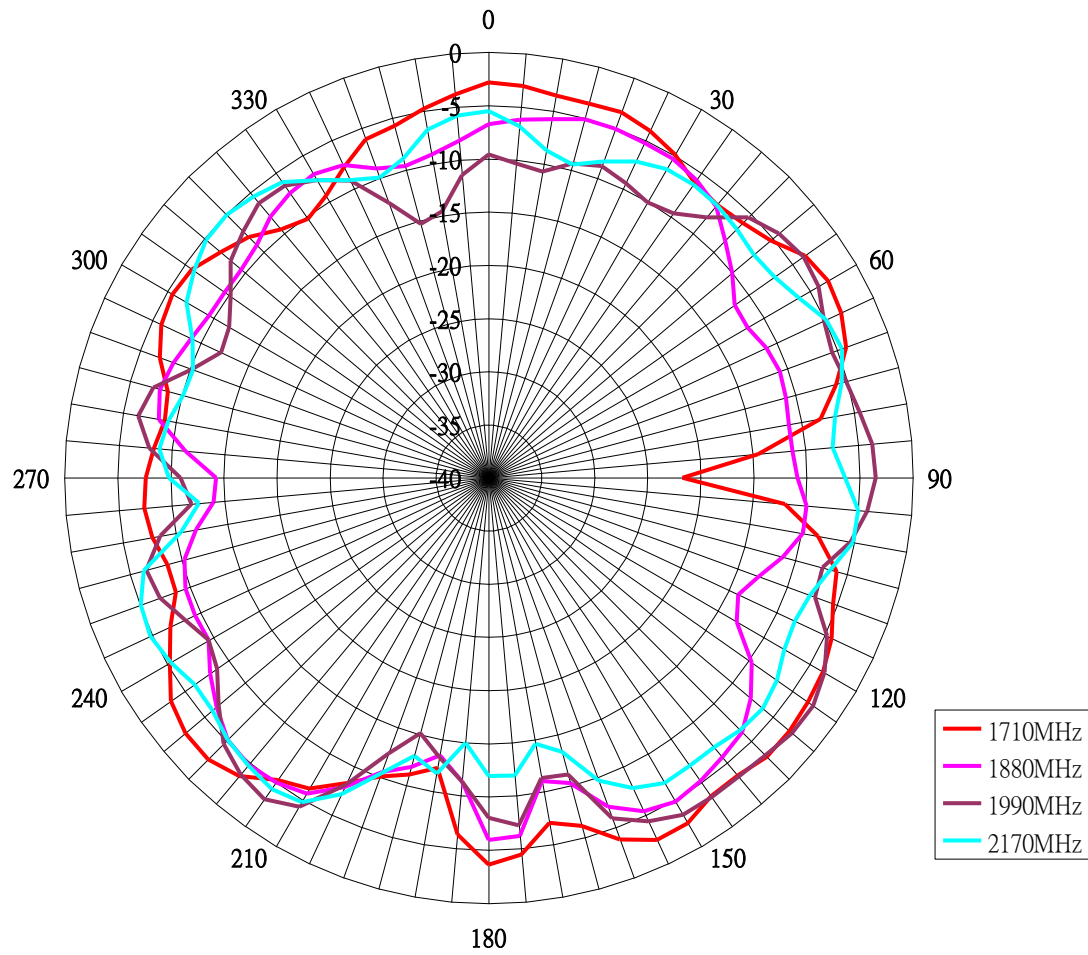



5.2.2 YZ Plane

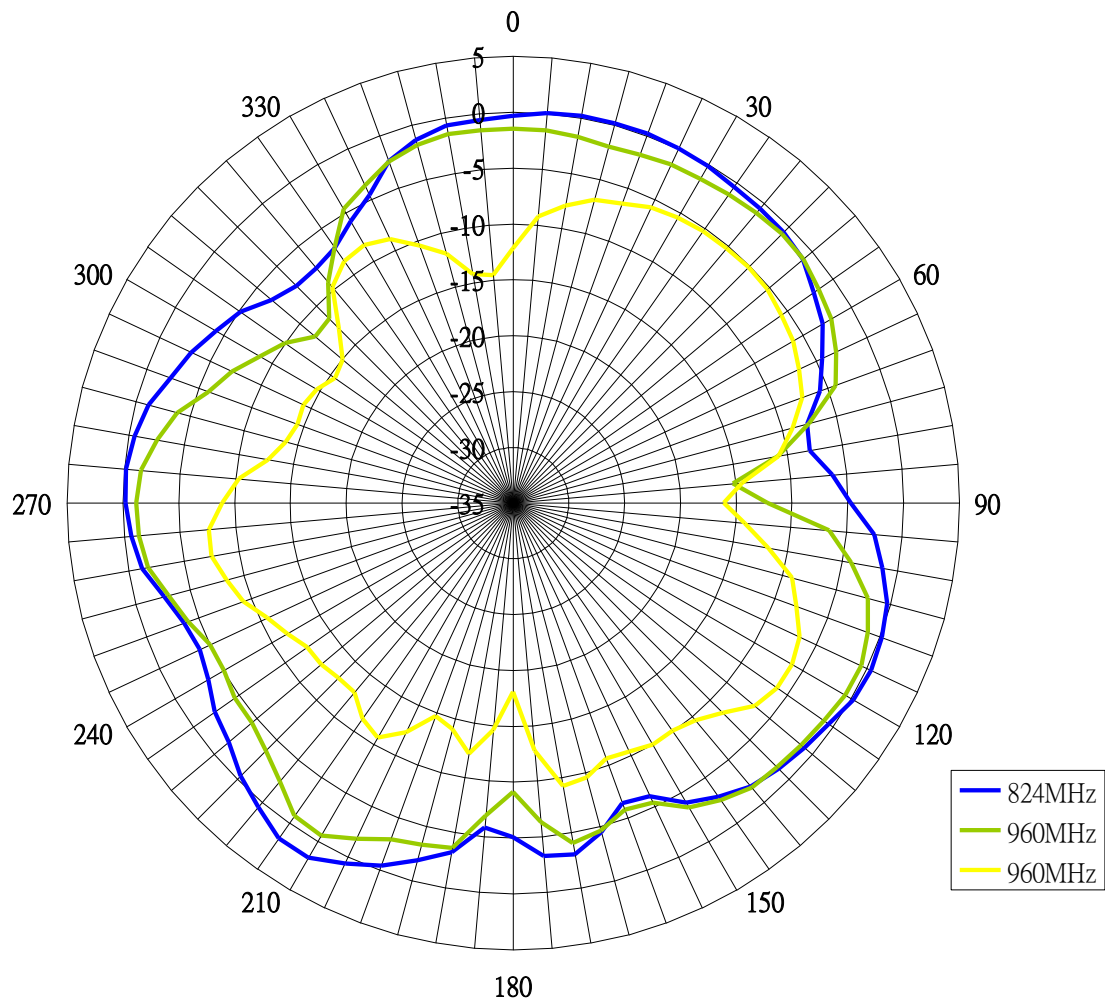

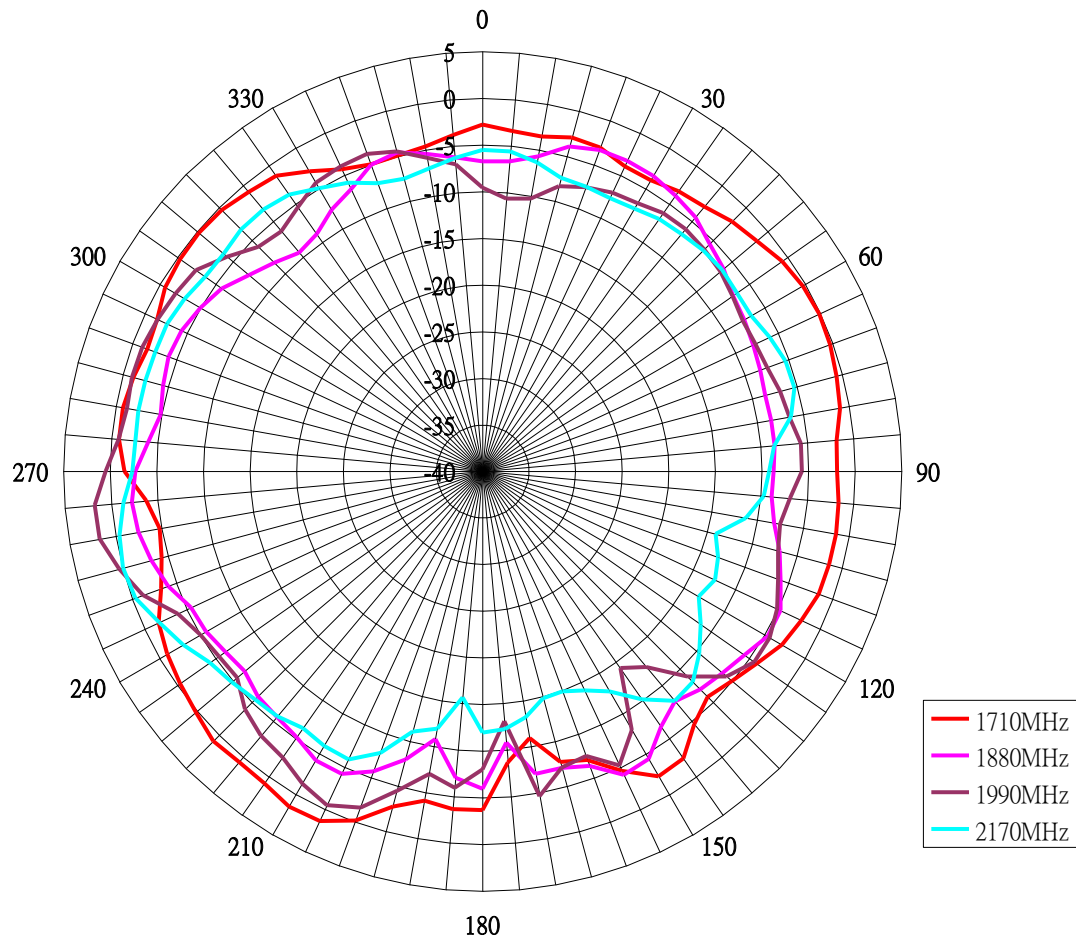


5.2.3 XY Plane

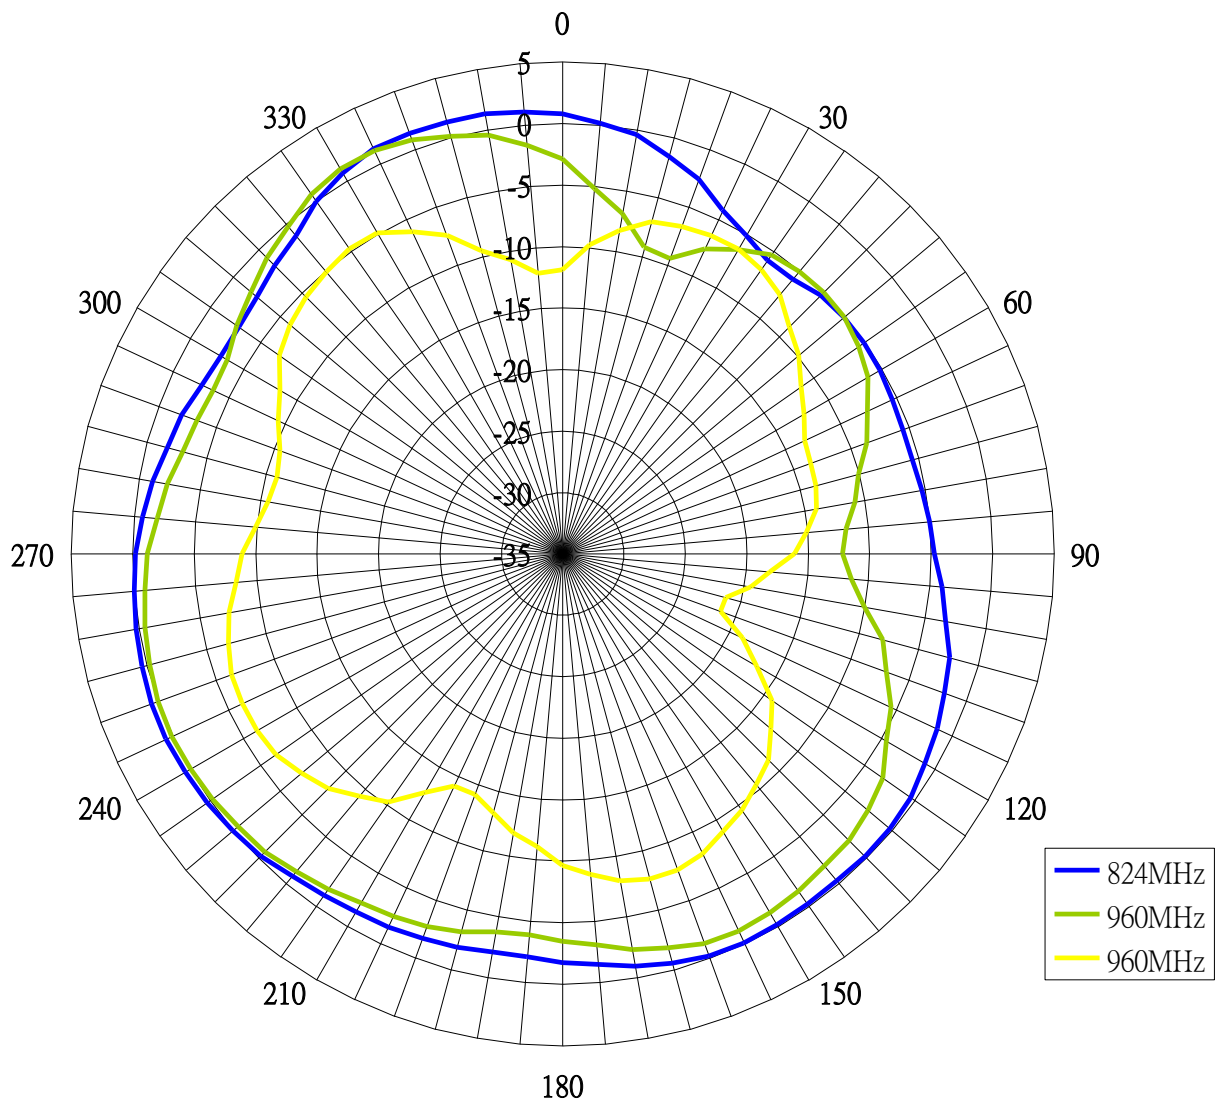

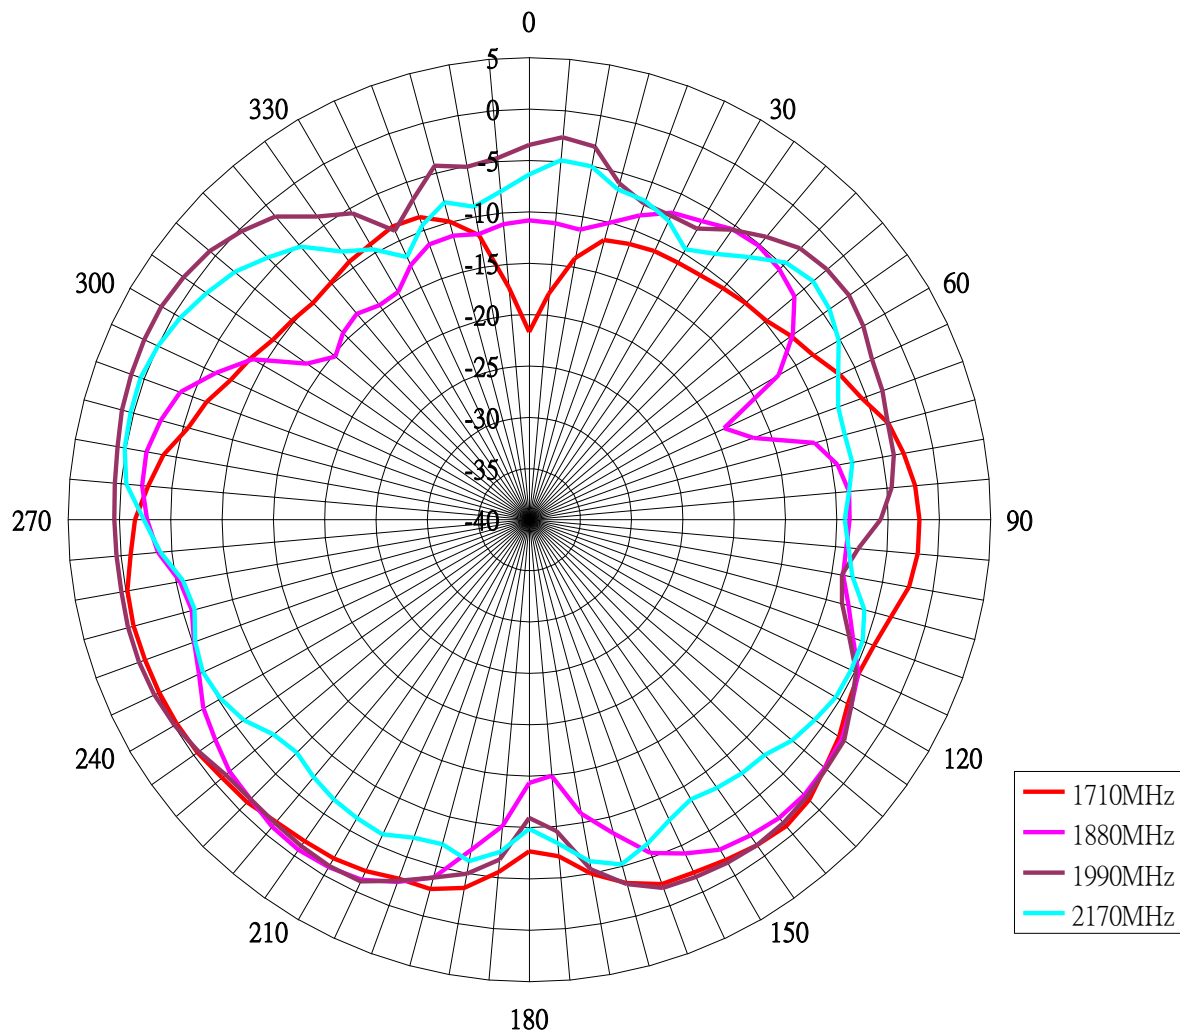

6 Mechanical Drawings


6.1 Unit

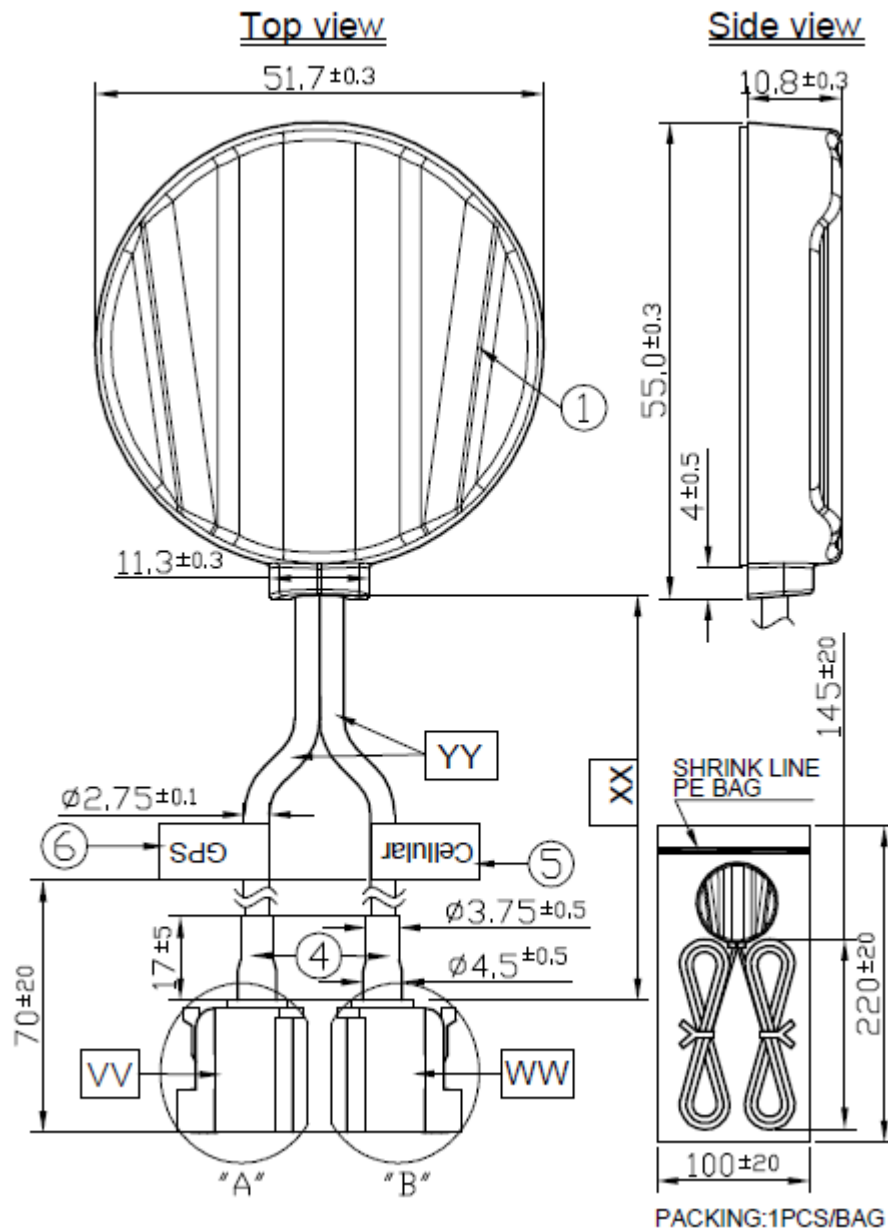

	Name	Material	Finish	QTY
1	Housing	ABS	Black	1
2	Round Label	Art Paper	White	1
3	Scotch Brand Acrylic Foam Tape	3M 4612	White Liner	1
4	Heat Shrink tube	PE	Black	2
5	Cellular Label	Coated Paper	Blue	1
6	GPS Label	Coated Paper	Orange	1

	Name	Spec	Finish	QTY
VV	Connector Type	FAKRA Code C GEN2	Blue	1
WW	Connector Type	FAKRA Code D GEN2	Violet	1
XX	Cable Length	3000mm $\pm$ 30mm	Black	1
YY	Cable Type	RG174	Black	2

6.2 Carton

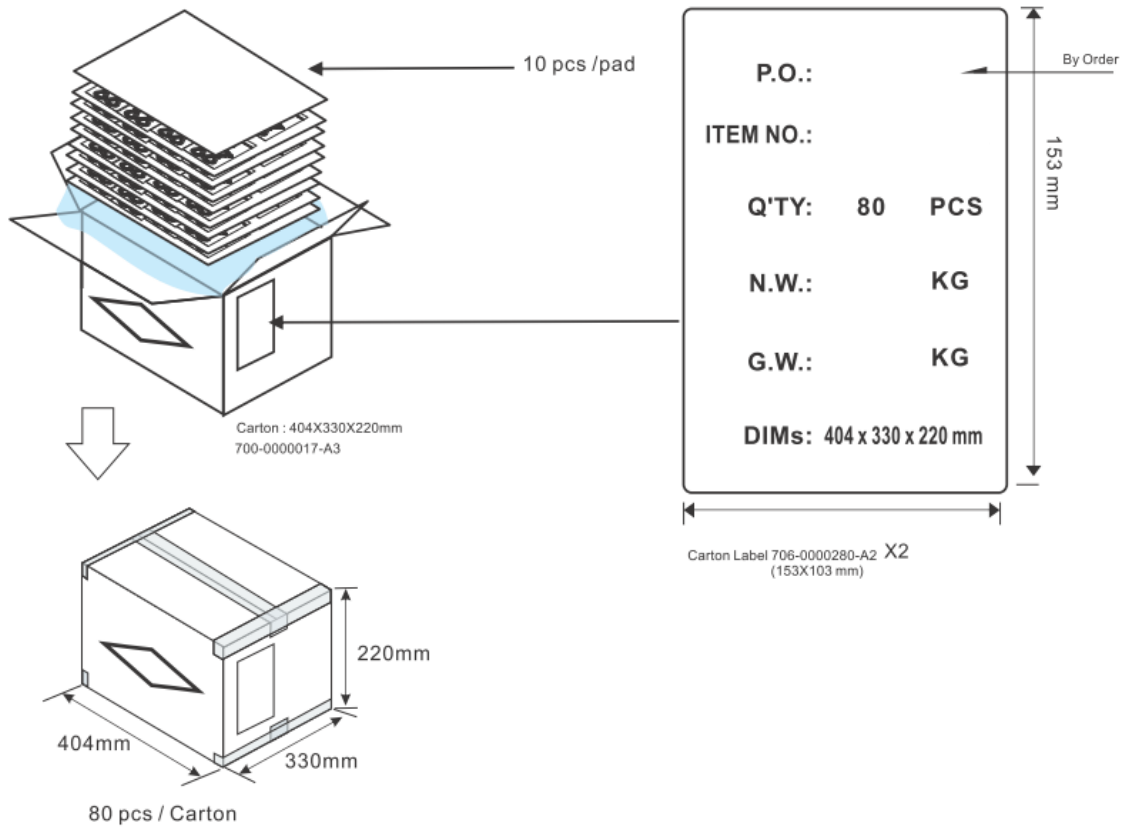

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9