
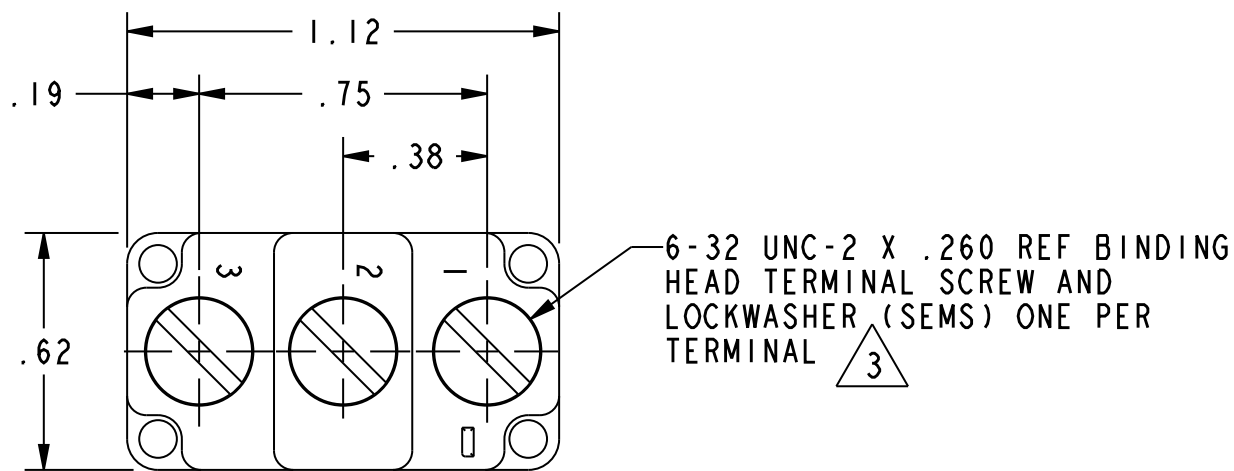
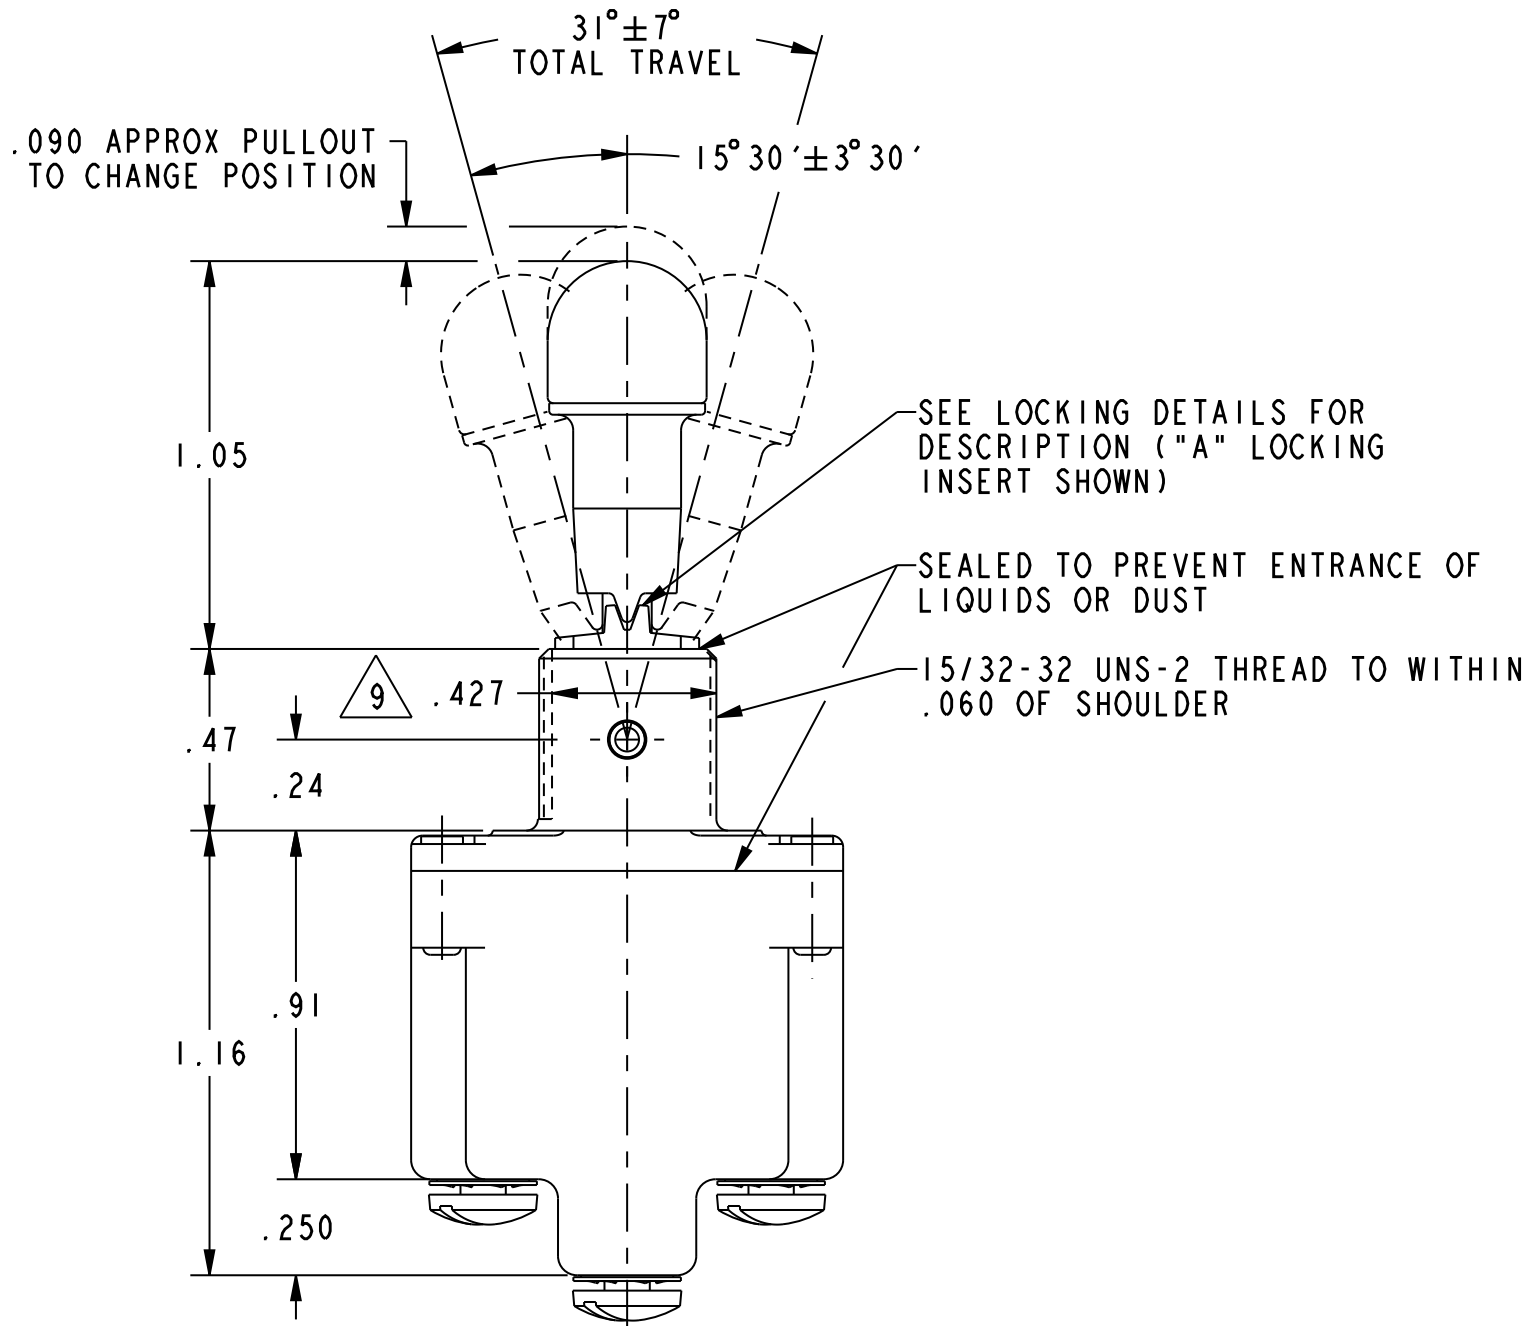



HONEYWELL
PART NUMBER
SEE CHART

REV	DOCUMENT	CHANGED BY	CHECK
32	0056412	SJK 10SEP09	CMH
REDRAWN WITHOUT CHANGE IN PRO-E			

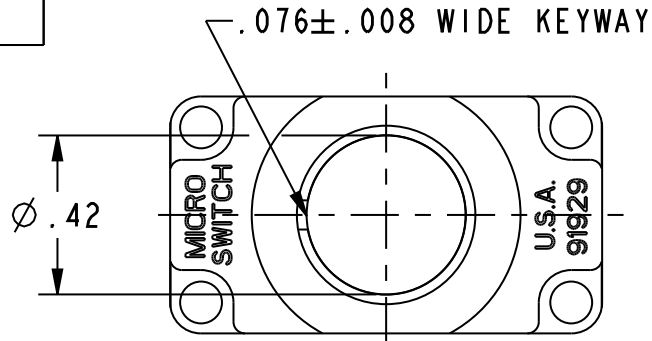

MILITARY STANDARD NUMBER 6	CATALOG LISTING 6	AVAILABLE LOCKING COMBINATIONS FOR CONFIGURATION SEE LETTERED DETAILS	CIRCUIT MADE WITH TOGGLE LEVER IN			MILITARY RATING (AMPS)								
			KEYWAY SIDE (1-2)	CENTER (1-2)	OPPOSITE KEYWAY (2-3)	RESISTIVE LOAD					LAMP LOAD		INDUCTIVE LOAD	
						DC VOLTS			AC VOLTS					
						28	125	250	125	250	28 VDC	125 VAC	28 VDC	125 VAC
MS-24658-21	ITLI-1	A,B,D,E,F,G,H, J,K,L,M,N,P	ON	OFF	ON	20 (REFER TO L191	.75	.5	15	6	5	3	15	10
MS-24658-22	ITLI-2	D,F,G	OFF	NONE	ON									
MS-24658-23	ITLI-3	D,F,G	ON	NONE	ON									
MS-24658-24	ITLI-21	E,F,K,M	NONE	OFF	ON									
MS-24658-33	ITLI-31	E,F,K,M	NONE	ON	ON									
MS-24658-29	ITLI-4	F	MOM OFF	NONE	ON	15 (REFER TO L192	.75	.5	15	6	4	2	10	7
MS-24658-31	ITLI-5	E,F,K,L,M,N	MOM ON	OFF	ON									
MS-24658-30	ITLI-6	F	MOM ON	NONE	OFF									
MS-24658-27	ITLI-7	E,L,N	MOM ON	OFF	MOM ON									
MS-24658-26	ITLI-8	F	MOM ON	NONE	ON									
MS-24658-32	ITLI-51	E	NONE	ON	MOM ON									
MS-24658-28	ITLI-61	E	MOM ON	OFF	NONE									

"A" 5 LOCKED IN THREE POSITIONS	"B" 5 LOCKED IN CENTER AND EXTREME POSITION (KEYWAY SIDE)	"D" 5 LOCKED OUT OF CENTER POSITION	"E" 5 LOCKED IN CENTER POSITION	"F" 5 LOCKED IN EXTREME POSITION (OPPOSITE KEYWAY)
"G" 5 LOCKED IN EXTREME POSITION (KEYWAY SIDE)	"H" 5 LOCKED OUT OF CENTER AND EXTREME POSITION (KEYWAY SIDE)	"J" 5 LOCKED OUT OF CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"K" 5 LOCKED IN CENTER AND EXTREME POSITION (OPPOSITE KEYWAY)	"L" 5 LOCKED OUT OF EXTREME POSITION (KEYWAY SIDE)
"M" 5 LOCKED OUT OF AND INTO EXTREME POSITION (OPPOSITE KEYWAY)	"N" 5 LOCKED OUT OF EXTREME POSITION (OPPOSITE KEYWAY)	"P" 5 LOCKED OUT OF AND INTO EXTREME POSITION (KEYWAY SIDE)		

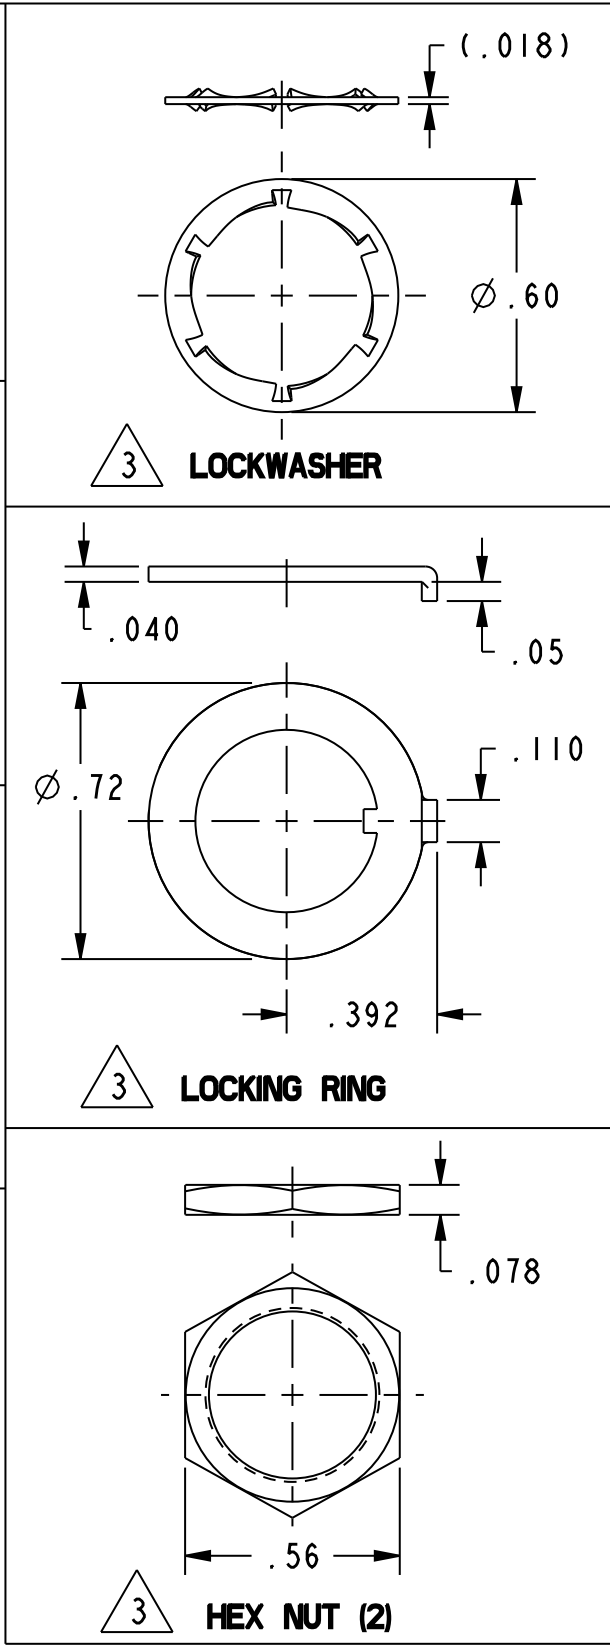

- NOTES:
- 1 - SWITCHES ARE CAPABLE OF WITHSTANDING A TEMPERATURE OF 160°F CONTINUOUSLY AT FULL RATED LOAD.
 - 2 - CIRCUIT DESIGNATION, MICRO SWITCH CATALOG LISTING AND MS NUMBER MARKED ON SIDE OF SWITCH.
 - 3 - FURNISHED UNASSEMBLED.
 - 4 - FOR TERMINAL COVER, SEE MICRO SWITCH CATALOG LISTING 5PA7.
 - 5 - KEYWAY SHOWN ON LEFT SIDE.
 - 6 - SUFFIX LETTER MUST BE ADDED FOR DESIRED TYPE OF TOGGLE LOCKING. SEE CHART FOR AVAILABLE LOCKING COMBINATIONS.
 - 7 - APPLIES ONLY TO "ON" AND "MOMENTARY ON" POSITIONS.
 - 8 - THESE SWITCHES ARE QUALIFIED UNDER MIL-S-3950.
 - 9 - FROM BOTTOM OF KEYWAY TO MAJOR DIA. OF 15/32 THREAD.

15A-125, 250 OR 277VAC 1/2 HP-125VAC; 1HP-250, 277VAC 5A-125VAC "L" CODE L191	CE UL
10A-125, 250 OR 277VAC 1/4HP-125VAC; 1/2HP-250, 277VAC 3A-125VAC "L" CODE L192	CE UL

DESIGN UNITS: INCH TOLERANCES UNLESS NOTED:		DRAWN	JAF	28JUN94	Honeywell			
NO PLACES .X ± .03 ONE PLACE .XX ± .015 TWO PLACE .XXX ± .005 THREE PLACE .X ± .005 ANGLES X ± .005		CHECK	-	-				
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY			TITLE SWITCH - TOGGLE			
THIRD ANGLE PROJECTION		Pro/ENGINEER 3D			SIZE	TYPE	CAGE CODE	DRAWING NAME
					C	I	-	ITLI SERIES CHART 2 32
					SCALE	2:1	WEIGHT: .08 LBS. APPROX	SHEET 1 OF 1

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9