




SMT PLUG RECEPTACLE


REEL OF 750

R223.434.800

Series : MMBX

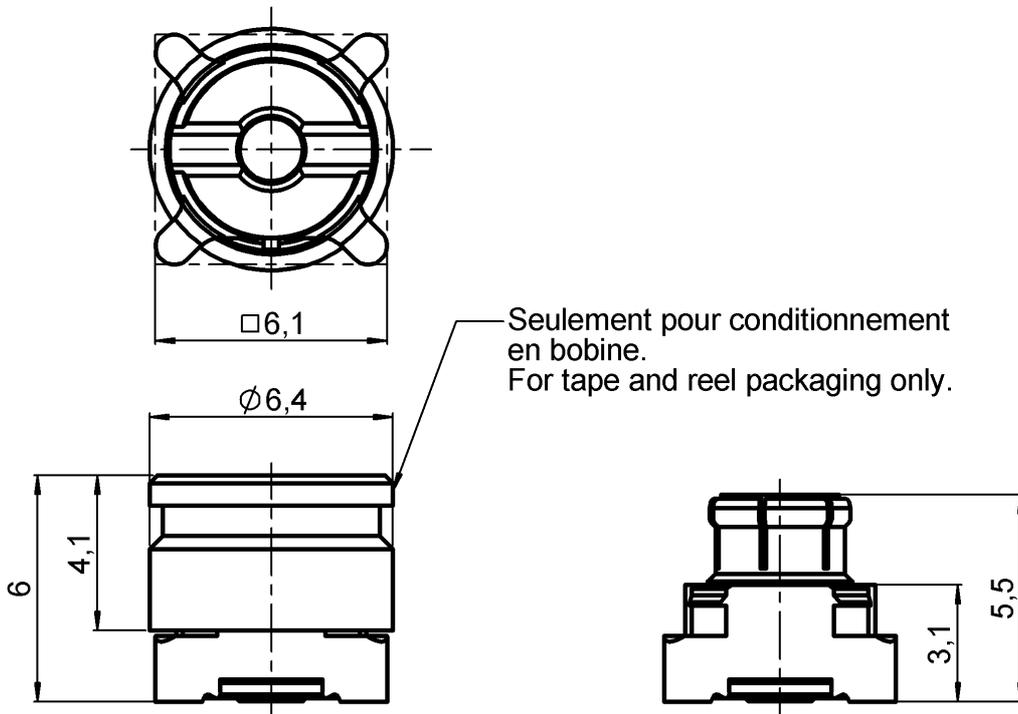

All dimensions are in mm.



COMPONENTS	MATERIALS	PLATINGS (µm)
BODY	BRONZE, BRASS	NPGR
CENTER CONTACT	BERYLLIUM COPPER, BRASS	GOLD 1.3 OVER NICKEL 2
OUTER CONTACT	-	-
INSULATOR	LIQUID CRISTAL POLYMER	-
GASKET	-	-
OTHERS PARTS	PTFE	-
-	-	-
-	-	-

Issue : 0636 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



SMT PLUG RECEPTACLE

R223.434.800

REEL OF 750

Series : MMBX

PACKAGING

SPECIFICATION

Standard	Unit	Other
750		Contact us

ELECTRICAL CHARACTERISTICS

ENVIRONMENTAL

Impedance	50	Ω
Frequency	0-12.4	GHz
VSWR	1.15 * + 0,0000	x F(GHz) Maxi
Insertion loss	0.05	\sqrt{F} (GHz) dB Maxi
RF leakage	- (100**	- F(GHz)) dB Maxi
Voltage rating	330	Veff Maxi
Dielectric withstanding voltage	1000	Veff mini
Insulation resistance	1000	M Ω mini

Operating temperature	-55/+155°	$^{\circ}$ C
Hermetic seal	NA	Atm.cm3/s
Panel leakage	NA	

OTHERS CHARACTERISTICS

Assembly instruction

Others :

* to 2 GHz

** Interface only, up to 2.5GHz

MECHANICAL CHARACTERISTICS

Center contact retention		
Axial force – Mating end	10	N mini
Axial force – Opposite end	10	N mini
Torque	NA	N.cm mini
Recommended torque		
Mating	NA	N.cm
Panel nut	NA	N.cm
Mating life	500	Cycles mini
Weight	0,5800	g

Issue : 0636 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



SMT PLUG RECEPTACLE

R223.434.800

REEL OF 750

Series : MMBX


**SOLDER PROCEDURE OF MMBX RECEPTACLE
IN INDUSTRIAL ENVIRONMENT**

1. Deposit solder paste ‘SnAg4Cu0.5’ on mounting zone by screen printing application.
We recommend a low residue flux.
We advise a thickness of 150 micromm (5.850 microinch). Verify that the edges of the zone are clean.
2. Placement of the receptacle on the mounting zone with an automatic machine of ‘pick and place’ type.

A video camera is recommended for positioning of the component.

Adhesive agents must not be used on the receptacle.
3. This process of soldering has been tested with convection oven.
Below please find, the typical profile to use.
4. The cleaning of printed circuit boards is not obliged.
5. Verification of solder joints and position of the component by visual inspection.

TEMPERATURE PROFILE

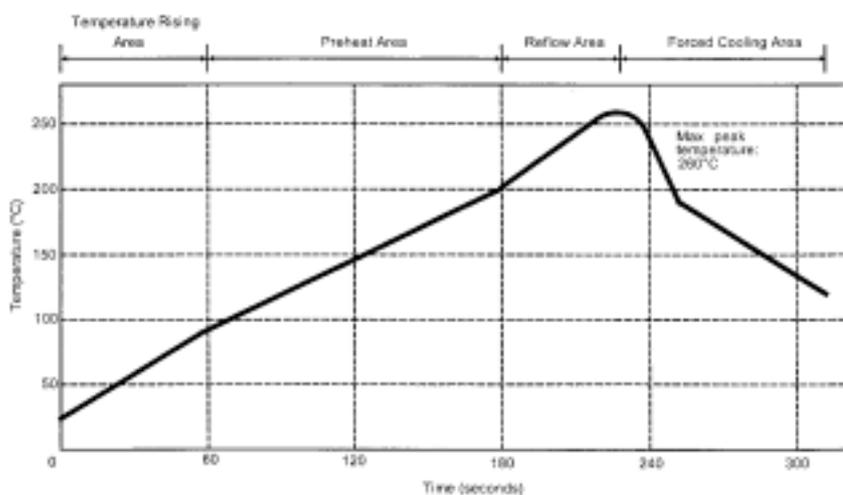

Parameter	Value	Unit
Temperature rising Area	1 - 4	°C/sec
Max Peak Temperature	260	°C
Max dwell time @260°C	10	sec
Min dwell time @235°C	20	sec
Max dwell time @235°C	60	sec
Temperature drop in cooling Area	-1 to - 4	°C/sec
Max dwell time above 100°C	420	sec

Issue : 0636 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



SMT PLUG RECEPTACLE


R223.434.800

REEL OF 750

Series : MMBX

MMBX SERIES INFORMATIONS

PCB

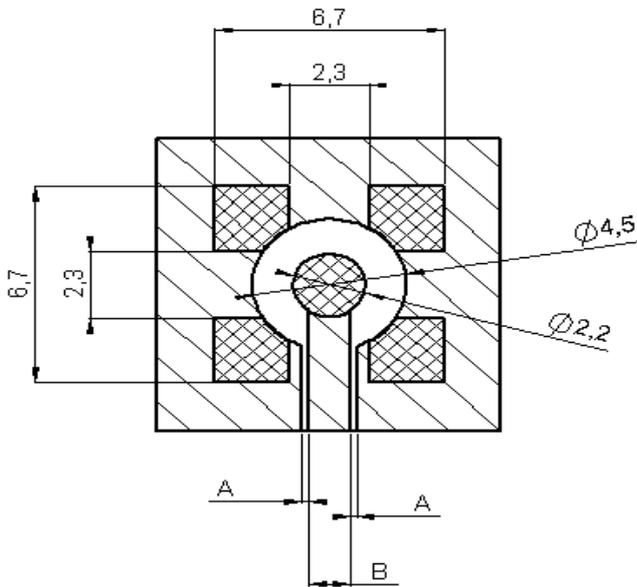

COPLANAR LINE

Pattern and signal are on the same side
 The material of PCB is epoxy resin (FR4)
 . (Er = 4.6)
 The solder resist should be printed
 Except for the land pattern on the PCB



Pattern



Land for solder paste

APPLICATION 75Ω

WITH B = 0,55mm


PCB thickness (mm)	Coplanar ligne A (mm)
0,8	0,350
1,0	0,360
1,2	0,365
1,6	0,375

APPLICATION 50Ω


WITH B = 1,2mm

PCB thickness (mm)	Coplanar ligne A (mm)
0,8	0,190
1,0	0,200
1,2	0,205
1,6	0,210

SHADOW FOR VIDEO CAMERA

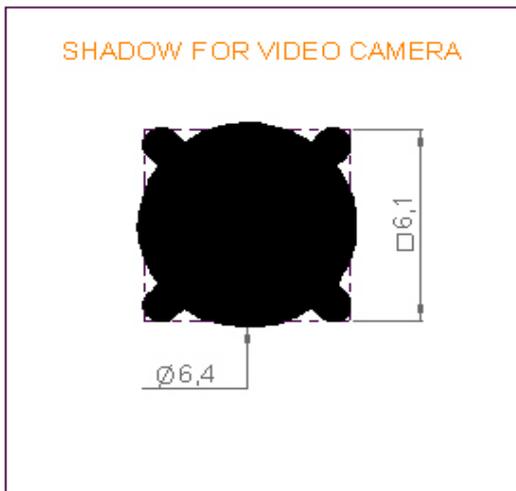

ASPIRATION PORT

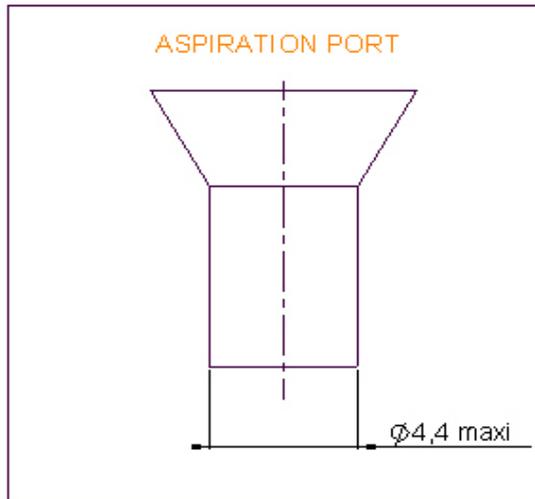

Issue : 0636 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.




SMT PLUG RECEPTACLE

R223.434.800




REEL OF 750

Series : MMBX

MMBX SERIES INFORMATIONS

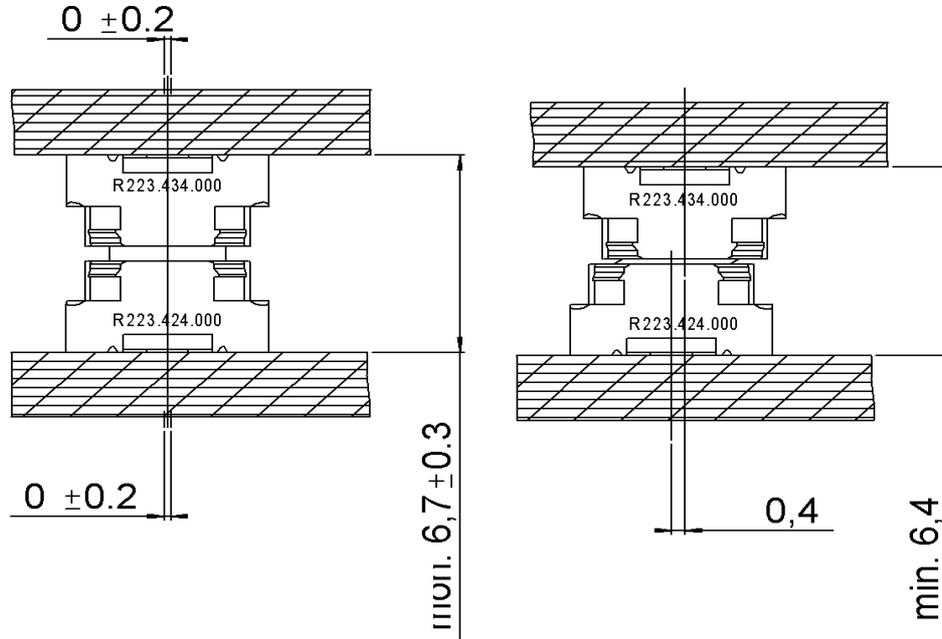

A VIEW

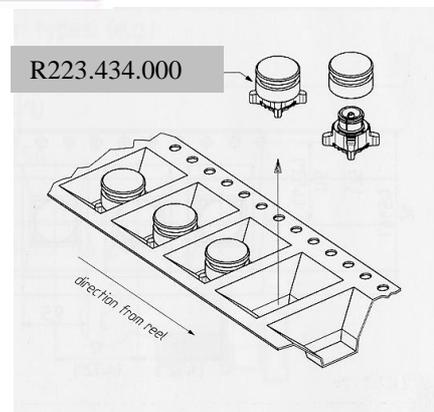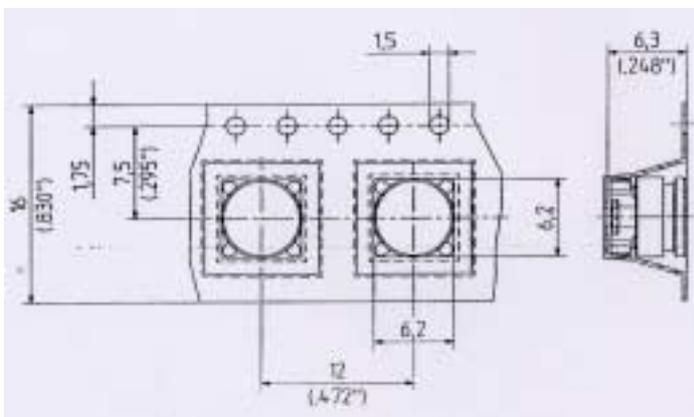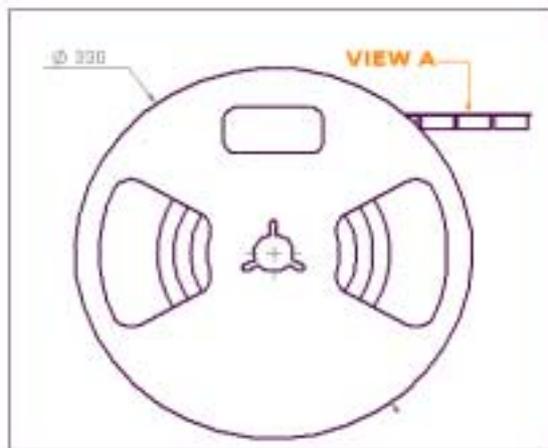

Issue : 0636 B

In the effort to improve our products, we reserve the right to make changes judged to be necessary.



Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9