

PHYSICAL PROPERTIES:
HOUSING MATERIAL: THERMOPLASTIC, PC
FLAMABILITY: UL94V-0
COLOR: BLACK


TERMINAL:
TERMINALS: BRASS, TIN PLATED
SCREWS: 6-32 STEEL, NICKEL PLATED

MECHANICAL:
PITCH: .437
WIRE RANGE: 14-22 AWG
RECOMMENDED TIGHTENING TORQUE: 12IN-LB


ELECTRICAL PROPERTIES:
MAX CURRENT: 25A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
OPERATING TEMP: -40°C TO 120°C

- 1 SEE FIGURE.
- 2 PRELIMINARY PART NUMBER.
- 3 STAINLESS STEEL SCREWS.
- 4 WHITE INK STAMP.
- 5 TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA.

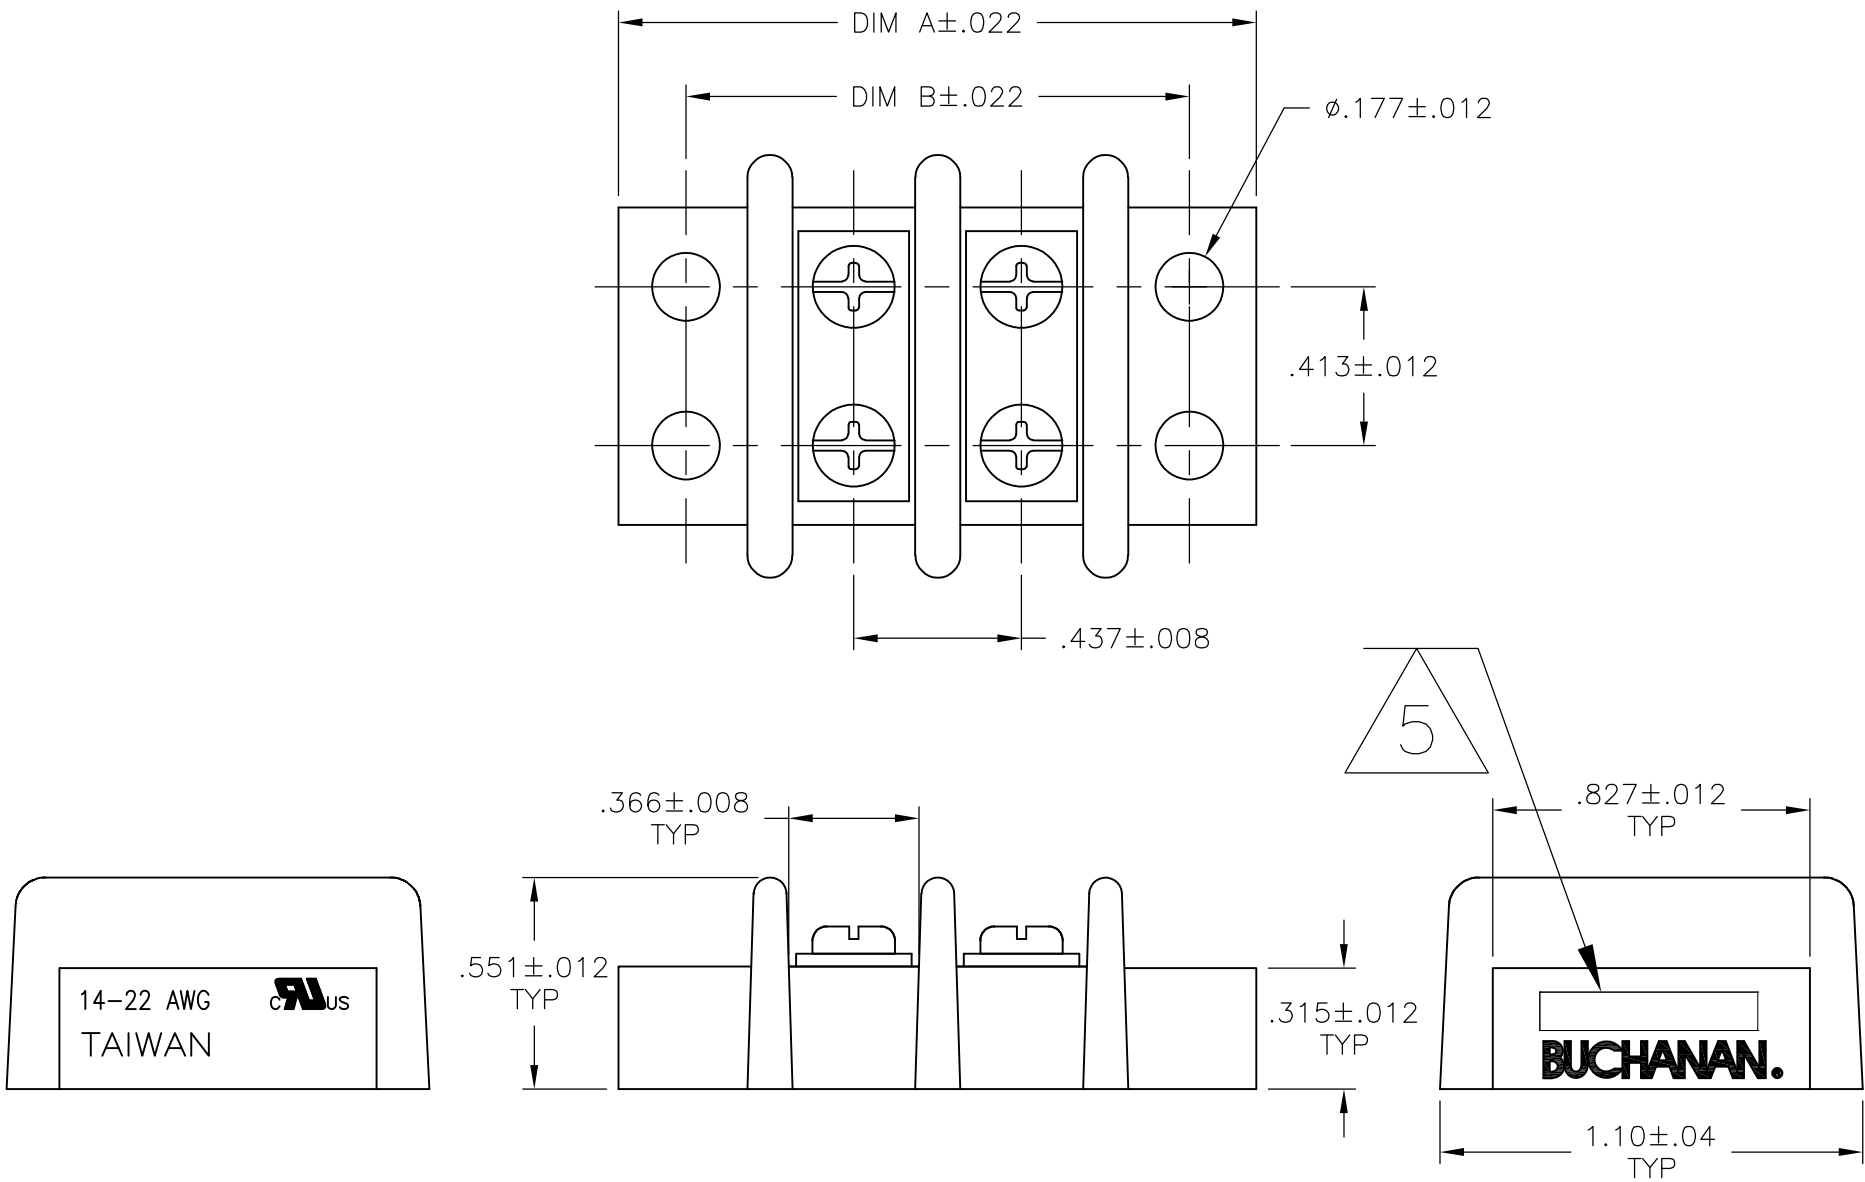


	5.646	5.992	12	4-1546670-2
	9.142	9.488	20	2-1546670-0
	8.705	9.051	19	1-1546670-9
2	8.268	8.614	18	3-1546670-0
	8.268	8.614	18	1-1546670-8
	7.831	8.177	17	1-1546670-7
	7.394	7.740	16	1-1546670-6
	6.957	7.303	15	1-1546670-5
	6.520	6.866	14	1-1546670-4
	6.083	6.429	13	1-1546670-3
	5.646	5.992	12	1-1546670-2
	5.209	5.555	11	1-1546670-1
4	4.772	5.118	10	4-1546670-3
2	4.772	5.118	10	3-1546670-8
	4.772	5.118	10	1-1546670-0
2	4.335	4.681	9	3-1546670-5
2	4.335	4.681	9	3-1546670-2
	4.335	4.681	9	1546670-9
1	3.898	4.244	8	4-1546670-1
3	3.898	4.244	8	3-1546670-6
2	3.898	4.244	8	3-1546670-4
2	3.898	4.244	8	3-1546670-3
	3.898	4.244	8	1546670-8
	3.461	3.807	7	1546670-7
1	3.024	3.370	6	3-1546670-1
	3.024	3.370	6	1546670-6
1	2.587	2.933	5	2-1546670-8
1	2.587	2.933	5	2-1546670-7
	2.587	2.933	5	1546670-5
2	2.496	2.933	4	3-1546670-9
1	2.150	2.496	4	2-1546670-9
	2.150	2.496	4	1546670-4
	1.713	2.059	3	1546670-3
	1.276	1.622	2	1546670-2
	DIM B	DIM A	NO OF POS	PART NUMBER



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHEGEL 4/4/03		 TE Connectivity	
		CHK C RICHARD 4/4/03			
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING	
		APVD C RICHARD 4/4/03			
		PRODUCT SPEC —			
		APPLICATION SPEC —			
		SIZE A2			
MATERIAL —		FINISH —		CAGE CODE 00779	
		WEIGHT —		DRAWING NO C=1546670	
		CUSTOMER DRAWING		RESTRICTED TO —	
				SCALE NTS	
				SHEET 1 of 3	
				REV K18	

LOC	DIST	REVISIONS				
FT	0	P	LTR	DESCRIPTION	DATE	DWN
		-	-	SEE SHEET 1	-	-
				APVD		

DOUBLE SIDED, DOUBLE HOLE
QC TAB, QTY 5

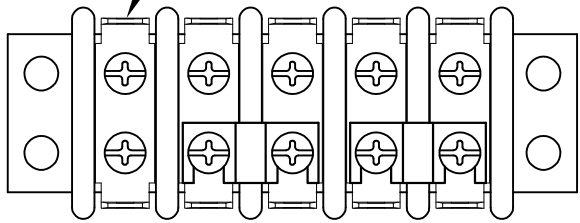


JUMPER QTY 2

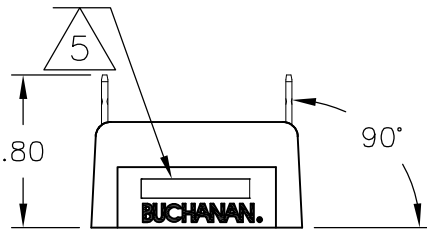
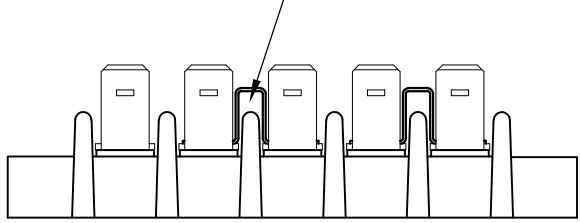


2-1546670-7

DOUBLE SIDED, DOUBLE HOLE
QC TAB, QTY 5


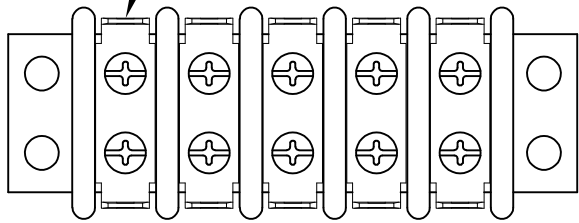


.250
TYP

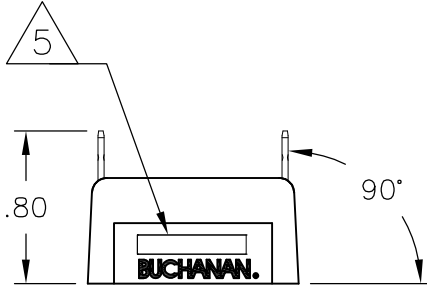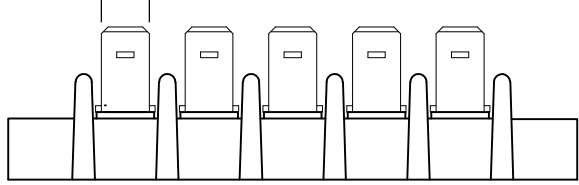

2-1546670-8


JUMPER, QTY 1

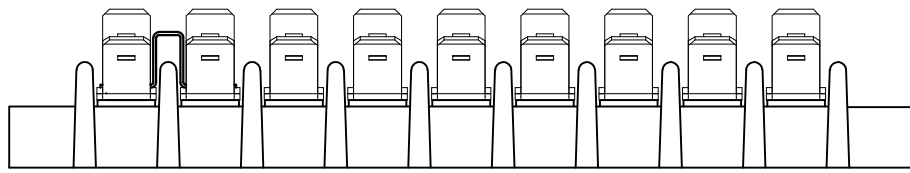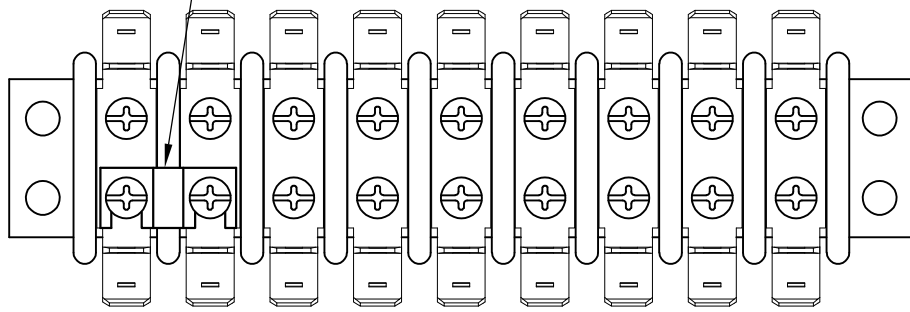


3-1546670-2

DOUBLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 9


DOUBLE SIDED, DOUBLE HOLE
90° QC TAB, QTY 9

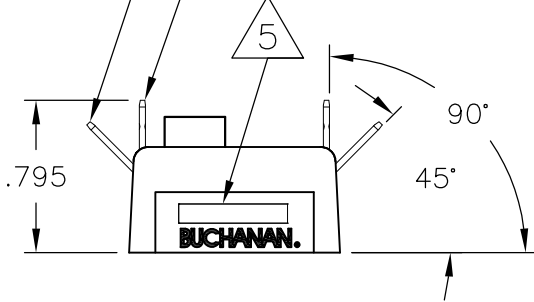

DOUBLE SIDED, DOUBLE HOLE
QC TAB, QTY 5

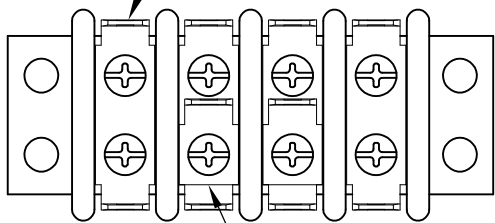


SINGLE SIDED, SINGLE HOLE
QC TAB, QTY 2


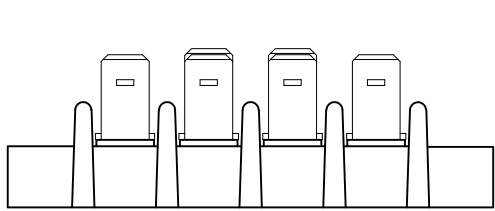


2-1546670-9

SINGLE SIDED, DOUBLE HOLE
QC TAB, QTY 6

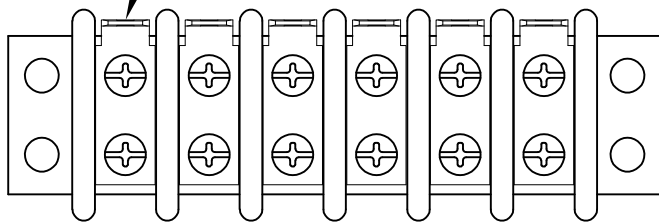



.250
TYP

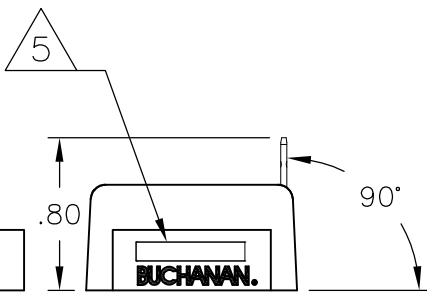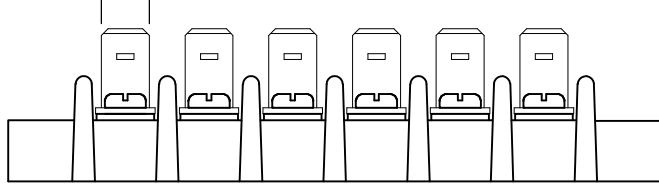

3-1546670-1

DOUBLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 8.


JUMPER, QTY 2

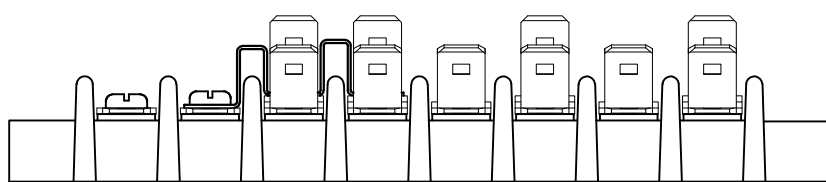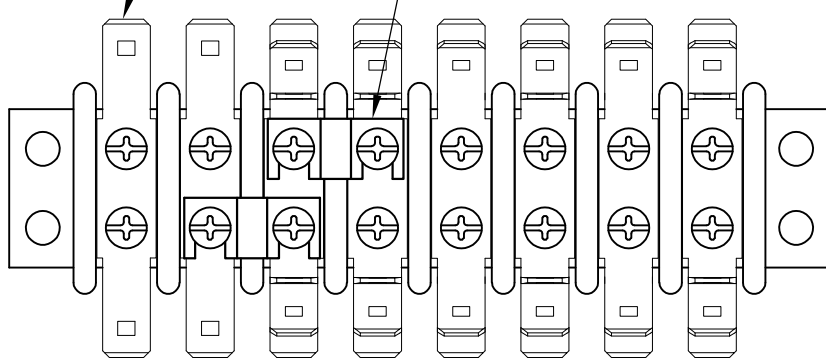


3-1546670-3

DOUBLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 6


DOUBLE SIDED, DOUBLE HOLE
90° QC TAB, QTY 4

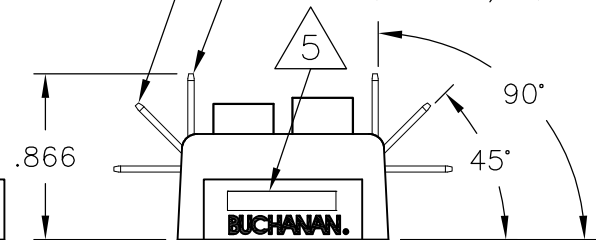

SINGLE SIDED, DOUBLE HOLE
QC TAB, QTY 18


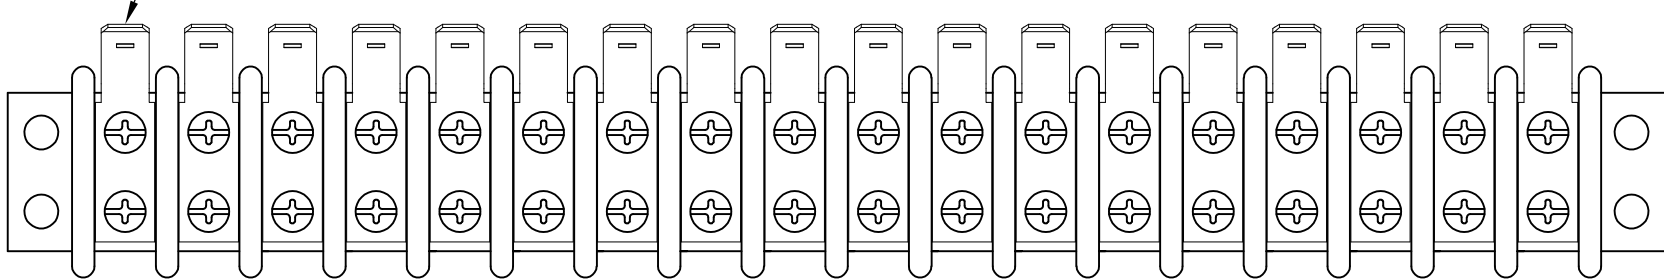


.250
TYP

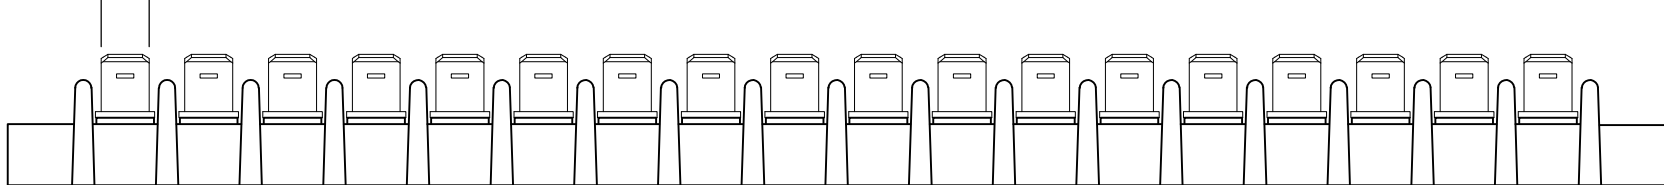


3-1546670-0

DOUBLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 8.

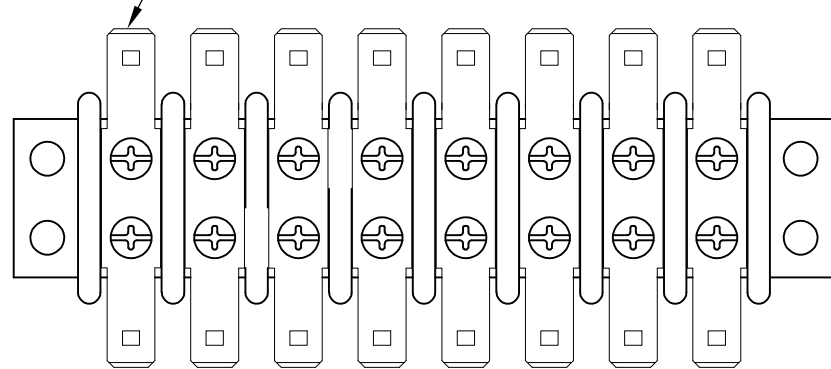

3-1546670-4



11.764	12.110	26	2-1546670-6
11.327	11.673	25	2-1546670-5
10.90	11.236	24	2-1546670-4
10.453	10.799	23	2-1546670-3
10.016	10.362	22	2-1546670-2
9.579	9.925	21	2-1546670-1
9.142	9.488	20	3-1546670-7
DIM B	DIM A	NO OF POS	PART NUMBER



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	S SCHEGEL		4/4/03	 TE Connectivity						
DIMENSIONS: INCHES		CHK	C RICHARD		4/4/03							
	0 PLC	±	—		APVD	NAME DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING						
	1 PLC	±	—		PRODUCT SPEC							
	2 PLC	±	.01		—							
	3 PLC	±	.005		APPLICATION SPEC							
	4 PLC	±	—		—	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO			
MATERIAL	FINISH	WEIGHT		—		A2		00779	C=1546670	—		
CUSTOMER DRAWING					SCALE		NTS		SHEET	2 of 3	REV	K18

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

D


DOUBLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 9.

JUMPER, QTY 1

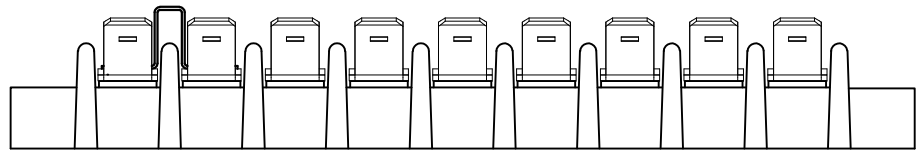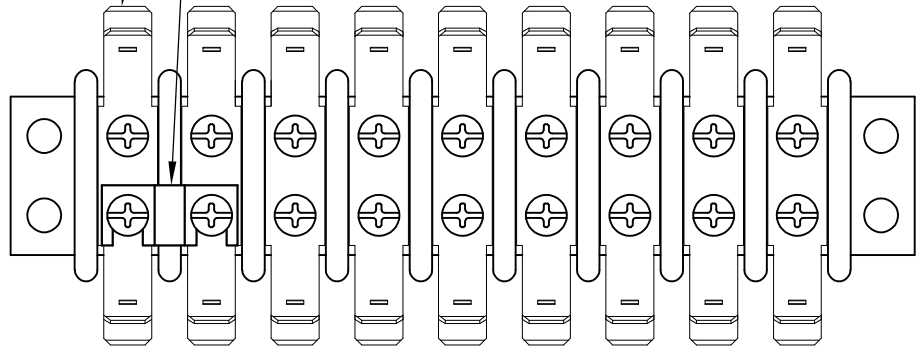


3-1546670-5

DOUBLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 9

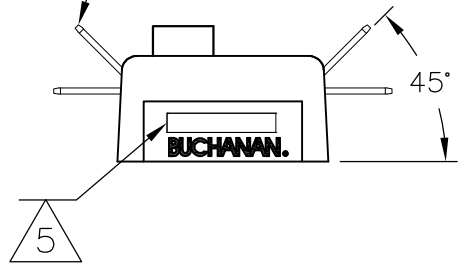


C

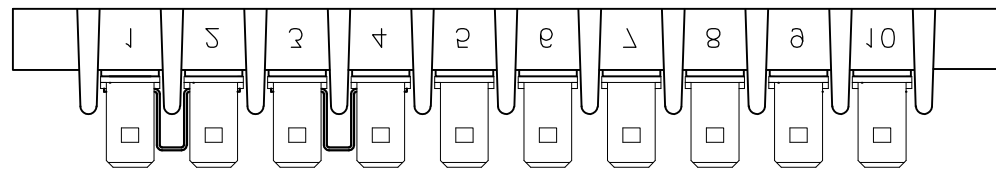


SINGLE SIDED, DOUBLE HOLE
45° QC TAB, QTY 10

SINGLE SIDED, DOUBLE HOLE
90° QC TAB, QTY 10

JUMPER, QTY 4

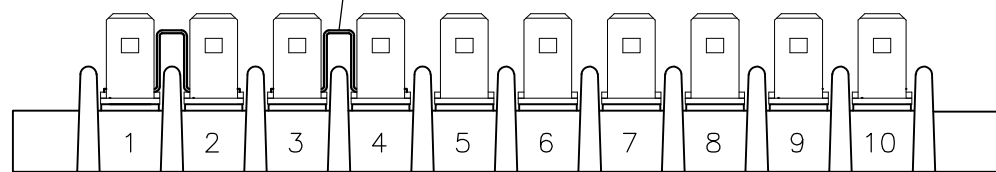


4-1546670-3

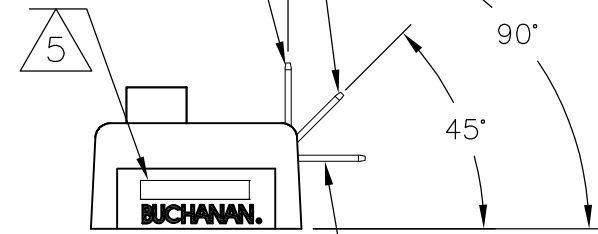


SINGLE SIDED, DOUBLE HOLE
FLAT QC TAB, QTY 10


B

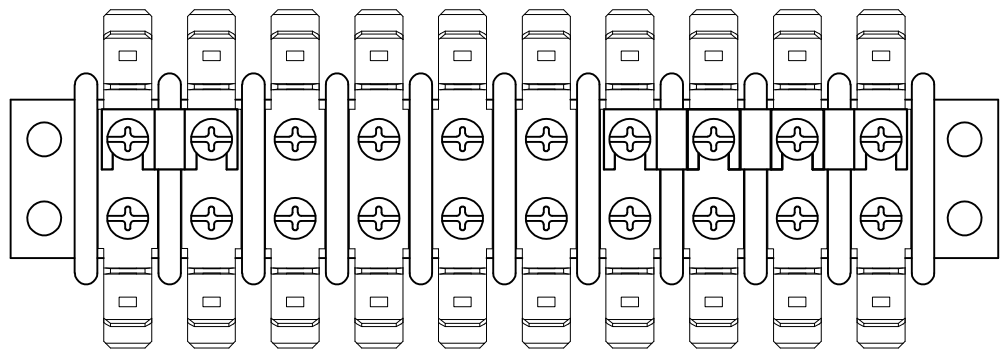



3-1546670-8

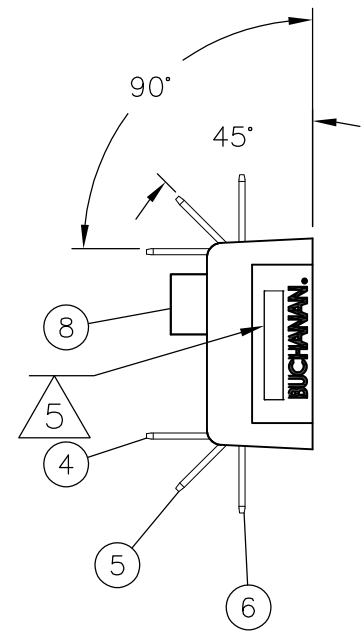

A

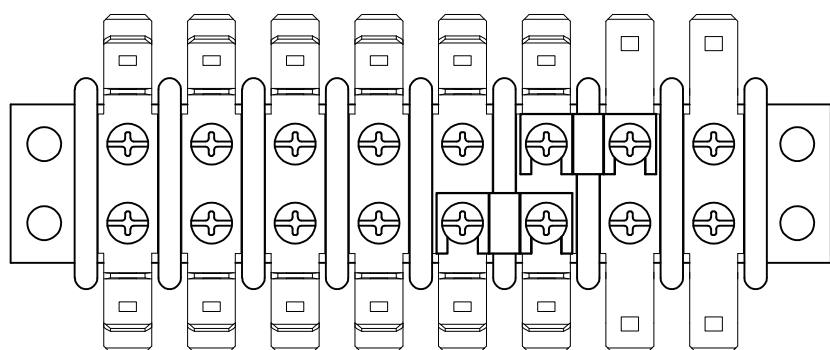

4-1546670-1

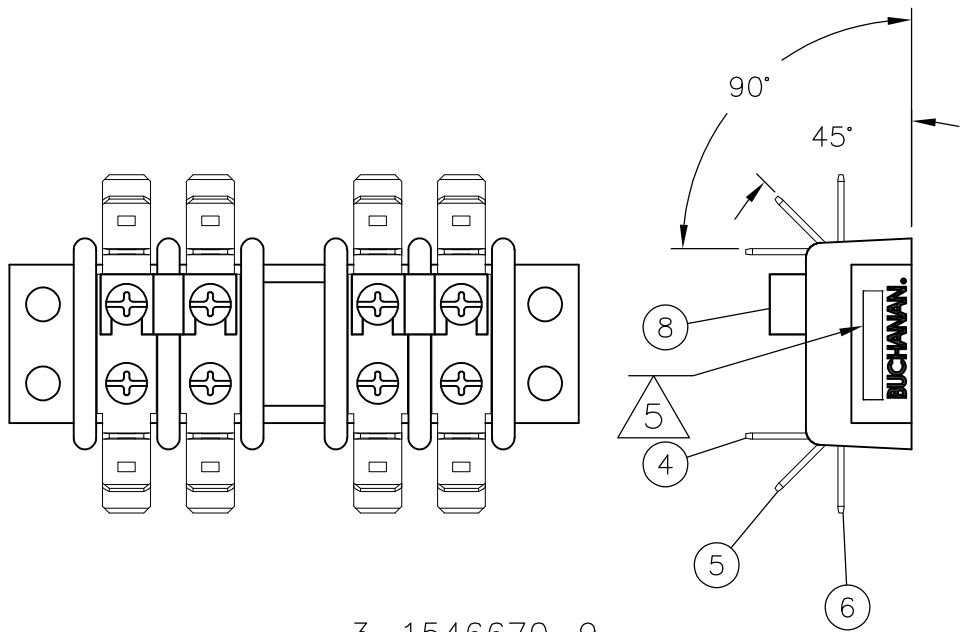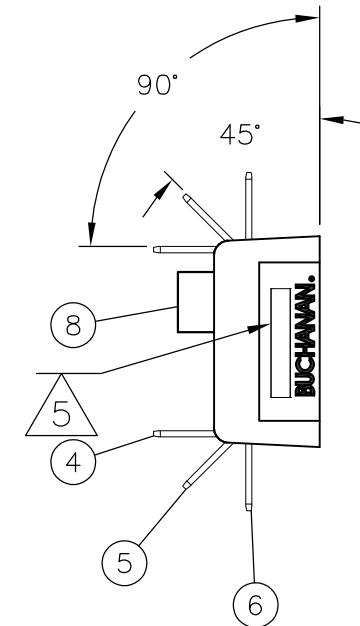

3-1546670-9

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHEGEL CHK C RICHARD APVD C RICHARD	4/4/03 4/4/03 4/4/03	 TE Connectivity									
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME									
		PRODUCT SPEC		DOUBLE ROW BARRIER STRIP W/ BINDING HD SCREW, .437 SPACING									
		APPLICATION SPEC											
		—		SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO			
		—		A2		00779		C-1546670		—			
		—		CUSTOMER DRAWING		SCALE		SHEET		REV			
MATERIAL		FINISH		WEIGHT		—		NTS		3 of 3		K18	
—		—		—		—		—		—		—	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9