

rfid as a feature



SkyePlus MXH



13.56MHz HF Multiplexer

APPLICATIONS:

- Retail Item-Level Management
- Manufacturing Lines
- Other Multiple Read-Point Applications

FEATURES:

- Low Insertion Loss
- Configurable as 4 Way or 8 Way
- Added Flexibility
- Excellent Signal Integrity
- Fast Switching Speed

BENEFITS:

- Robust signal Processing
- Straightforward Customization
- 360° Spatial Diversity

Product Overview

The SkyePlus™ MXH expands an HF reader's capability by adding support for up to 8 antennas. Digital control of the MXH is accomplished by either the host processor or reader module allowing any of the 8 antennas to be explicitly addressed using 3 GPIO pins. Additional multiplexers can be added to increase the number of antennas a module can support beyond 8 presenting a scalable solution.

- Low Insertion loss: < 0.7 dB
- Isolation: 45 dB Minimum
- Control Voltage: CMOS/TTL levels

About SkyePlus MXH

The MXH can be equipped with 4 or 8 antenna ports depending on the application requirements. Infrastructure costs are reduced by using the MXH to minimize the number of readers required to support multiple read-points.

Electrical Specifications

| Parameter | Frequency | Min | Typ | Max | Units |
|----------------|-----------|-----|-----|------|-------|
| Insertion Loss | 8-20 MHz | | 0.5 | 0.75 | dB |
| Isolation | 8-20 MHz | 45 | 49 | | dB |
| Return Loss | 8-20 MHz | | 32 | | dB |

Applications

The SkyePlus MXH, used in conjunction with a SkyeTek HF reader, eases integration efforts for those devices requiring multiple read-points by eliminating the need for multiple modules in such applications as:

- Retail Item-Level Management
- Manufacturing Lines
- Other Multiple Read-Point Applications

The MXH compliments SkyeTek HF Tagnostic reader technology which is offered in a variety of form factors making it easy to embed in any device.


About Skyetek:

SkyeTek, Inc., maker of ReaderWare™ is the leading supplier of RFID reader software and reference designs that enable the pervasive adoption of RFID technology. SkyeTek's Tagnostic™ reader technology works with most industry standard tags and smart labels, its low power requirements and a small form factor make it the optimal choice for embedding into new or existing products. SkyeTek's RFID reader technology is available in several formats including reader modules, hardware reference designs, and the ReaderWare™ software suite. SkyeTek markets to OEM customers in targeted vertical markets with several high-volume licensing options available. For more information about SkyeTek, visit www.skyetek.com or call 720-565-0441.

SkyeTek is based in Colorado.
Our Address: 11030 Circle Point Road
Ste 300, Westminster, CO 80020 USA



Copyright © 2005 Skyetek, Inc.
Tagnostic™ ReaderWare™ and SkyeModule™ are trademarks or registered trademarks of Skyetek, Inc. All other trademarks or brand names are the properties of their respective holders. Features and specifications are subject to change without notice.



SkyePlus MXH

SkyePlus MXH Specifications

Physical Characteristics

| | | | |
|--------------------|---|-----------------|--------------------|
| Dimensions (LxWxH) | 95.5x70.4x11.3 mm (Including 8 SMAs) | RF Connections: | 50 ohm SMA (input) |
| Weight | TBD | - 4x Output | 50 ohm SMA |
| | | - 8x Output | 50 ohm SMA |

Absolute Maximum Ratings


| | | |
|---|-----------|------------------|
| Max Input Power $V_{ctl} = 0/+5V$ | 13.56 MHz | 39 dBm |
| Control Voltage Range (A&B) | | -0.2 to +5.5 Vdc |
| Hot Switching Power Level $V_{ctl} = 0/+5V$ | | 39 dBm |
| Channel Temperature | | 150° C |
| Continuous Pdiss (T = +85° C) (derate 6 mW/°C above 85° C) | | 0.38W |
| Max Allowed switching Capacity | | 2W |
| Thermal Resistance | | 173°C/W |
| Storage Temperature | | -65 to 150° C |
| Operating Temperature | | -40 to +85° C |

Electrical Characteristics


| | |
|---------------------|--------------------------|
| Power Supply | 3.2 – 5.5V |
| Power Consumption | 200 µA |
| Operating Frequency | 13.56 MHz +/- 7 KHz |
| Digital Inputs | 3 inputs 0/3.3V, 0/5V |

| | |
|-------|-----------------|
| State | Bias Condition |
| Low | 0 to +0.2 Vdc |
| High | +3 Vdc +5Vdc |


Insertion Loss

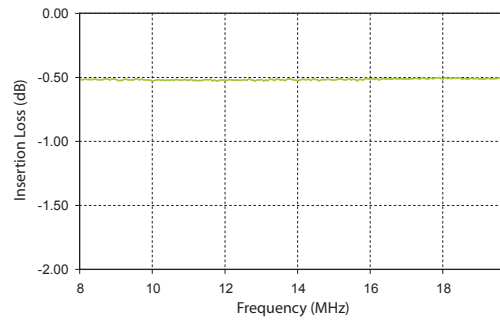

Isolation

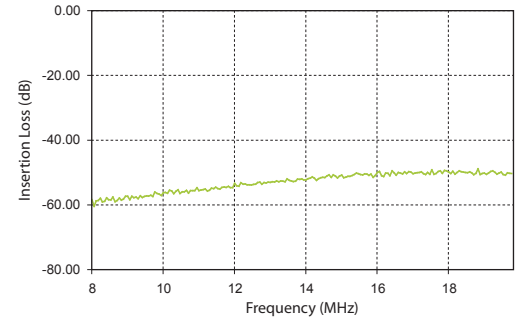

Return Loss

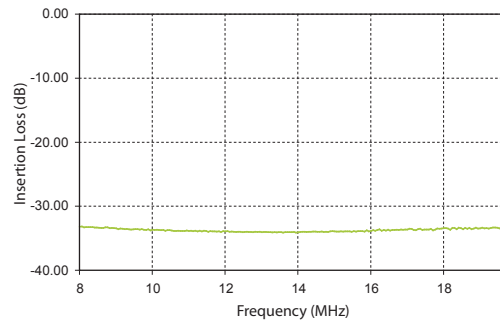

Other Offerings from Skyetek

Skyetek provides a variety of reader technology at both 13.56 MHz (HF) and ~900 MHz (UHF). The M1-Mini, also part of the SkyeModule HF line, offers an even smaller design with comparable features. ReaderDNA is a comprehensive reference design available for component level integration of RFID reader technology, including complete design files, BOM, and test fixtures. ReaderWare, an open-architected software suite residing on all Skyetek's modules and available with ReaderDNA, provides intelligence to the RFID reader hardware. The SkyeModule M8 is a low power, compact, UHF reader compatible with EPC and ISO transponders. All SkyeModules are controlled via the Skyetek Protocol, a powerful but simple communication protocol that grants the user access to all features of an RFID transponder. Further, they have been designed with flexible and modular embedded software that allows one to select only the desired features.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[SkyeTek:](#)

[SP-MX-04-HF-M2](#) [SP-MX-08-HF-M2](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9