

Resistance thermometer measuring transducer - MINI MCR-2-RTD-UI - 2902049

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Configurable temperature transducer with plug-in connection technology for connecting 2, 3, and 4-conductor resistance thermometers and resistance-type sensors. Configurable via DIP switch or software. Screw connection technology, standard configuration

Figure shows MINI MCR-2-RTD-UI-PT version

Product description

Configurable, 3-way isolated temperature transducer with plug-in connection technology. The device is suitable for the connection of resistance thermometers and remote resistance-type sensors with 2, 3, and 4-conductor connection technology. The measured values are converted into a linear and freely adjustable current or voltage signal. You can configure the device using one of the free software solutions. Default settings can also be made directly on the device by simply using the DIP switches (see configuration table). The measuring transducer supports fault monitoring and NFC communication.



Key commercial data

| | |
|--------------------------------------|-----------|
| Packing unit | 1 pc |
| Weight per Piece (excluding packing) | 100.0 GRM |
| Custom tariff number | 85437090 |
| Country of origin | Germany |

Technical data

Note

| | |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

Dimensions

| | |
|--------|----------|
| Width | 6.2 mm |
| Height | 110.5 mm |
| Depth | 120.5 mm |

Resistance thermometer measuring transducer - MINI MCR-2-RTD-UI - 2902049

Technical data

Ambient conditions

| | |
|---|------------------|
| Ambient temperature (operation) | -40 °C ... 70 °C |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C |
| Degree of protection | IP20 |

Input data

| | |
|-------------------------------------|--|
| Configurable/programmable | Yes |
| Sensor types (RTD) that can be used | Pt, Ni, Cu sensors |
| Linear resistance measuring range | 0 Ω ... 4000 Ω (Minimum measuring span: 10% of the selected measuring range) |
| Sensor input current | approx. 200 μA |
| Temperature measuring range | -200 °C ... 850 °C (Range depends on sensor type, range can be set freely via software or in increments from -150°C to 850°C via DIP switches) |
| Connection method | 2, 3, 4-wire |

Output data

| | |
|---------------------------------|--|
| Number of inputs | 1 |
| Configurable/programmable | Yes |
| Voltage output signal | 0 V ... 5 V (via DIP switch) |
| | 1 V ... 5 V (via DIP switch) |
| | 0 V ... 10 V (via DIP switch) |
| | 10 V ... 0 V (via DIP switch) |
| | 0 V ... 10.5 V (Can be set via software) |
| Current output signal | 0 mA ... 20 mA (via DIP switch) |
| | 4 mA ... 20 mA (via DIP switch) |
| | 20 mA ... 0 mA (via DIP switch) |
| | 20 mA ... 4 mA (via DIP switch) |
| | 0 mA ... 21 mA (Can be set via software) |
| Max. output voltage | approx. 12.3 V |
| Max. output current | 24.6 mA |
| Short-circuit current | < 31.5 mA |
| Load/output load voltage output | ≥ 10 kΩ |
| Load/output load current output | ≤ 600 Ω (at 20 mA) |

Power supply

| | |
|-----------------------------|--|
| Supply voltage range | 9.6 V DC ... 30 V DC (The DIN rail bus connector (ME 6,2 TBUS-2 1,5/5-ST-3,81 GN, Order No. 2869728) can be used to bridge the supply voltage. It can be snapped onto a 35 mm DIN rail according to EN 60715)) |
| Typical current consumption | 32 mA (24 V DC) |
| | 63 mA (12 V DC) |

Resistance thermometer measuring transducer - MINI MCR-2-RTD-UI - 2902049

Technical data

Power supply

| | |
|-------------------|--|
| Power consumption | ≤ 850 mW (at I _{OUT} = 20 mA, 9.6 V DC, 600 Ω load) |
|-------------------|--|

Connection data

| | |
|---|---------------------|
| Connection method | Screw connection |
| Single conductor/terminal point, solid, with ferrule, min. | 0.2 mm ² |
| Single conductor/terminal point, solid, with ferrule, max. | 1.5 mm ² |
| Single conductor/terminal point, solid, without ferrule, min. | 0.2 mm ² |
| Single conductor/terminal point, solid, without ferrule, max. | 2.5 mm ² |
| Conductor cross section flexible min. | 0.2 mm ² |
| Conductor cross section flexible max. | 1.5 mm ² |
| Min. AWG conductor cross section, flexible | 24 |
| Max. AWG conductor cross section, flexible | 12 |
| Stripping length | 10 mm |
| Screw thread | M3 |

General

| | |
|-----------------------------------|--|
| Maximum temperature coefficient | 0.01 %/K |
| Protective circuit | Transient protection |
| Electrical isolation | Reinforced insulation in accordance with IEC 61010-1 |
| Surge voltage category | II |
| Pollution degree | 2 |
| Rated insulation voltage | 300 V |
| Test voltage, input/output/supply | 3 kV (50 Hz, 1 min.) |
| Electromagnetic compatibility | Conformance with EMC Directive 2004/108/EC |
| Noise emission | EN 61000-6-4 |
| Noise immunity | EN 61000-6-2 When being exposed to interference, there may be minimal deviations. |
| Housing material | PBT |
| Mounting position | any |
| Assembly instructions | The T connector can be used to bridge the supply voltage. It can be snapped onto a 35 mm DIN rail according to EN 60715. |
| Conformance | CE-compliant |
| ATEX | # II 3 G Ex nA IIC T4 Gc X |
| UL, USA / Canada | UL 508 Listed |
| | Class I, Div. 2, Groups A, B, C, D T6 |
| | Class I, Zone 2, Group IIC T6 |

EMC data

Resistance thermometer measuring transducer - MINI MCR-2-RTD-UI - 2902049

Technical data

EMC data

| | |
|--|--------------------------|
| Designation | Electromagnetic RF field |
| Standards/regulations | EN 61000-4-3 |
| Typical deviation from the measuring range final value | 0.06 % |
| Designation | Fast transients (burst) |
| Standards/regulations | EN 61000-4-4 |
| Typical deviation from the measuring range final value | 0.1 % |
| Designation | Conducted interferences |
| Standards/regulations | EN 61000-4-6 |
| Typical deviation from the measuring range final value | 0.07 % |

Classifications

eCl@ss

| | |
|------------|----------|
| eCl@ss 4.0 | 27210120 |
| eCl@ss 4.1 | 27210120 |
| eCl@ss 5.0 | 27210120 |
| eCl@ss 5.1 | 27210120 |
| eCl@ss 6.0 | 27210120 |
| eCl@ss 7.0 | 27210120 |
| eCl@ss 8.0 | 27371503 |

ETIM

| | |
|----------|----------|
| ETIM 3.0 | EC001485 |
| ETIM 4.0 | EC001485 |
| ETIM 5.0 | EC002568 |

UNSPSC

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211506 |
| UNSPSC 7.0901 | 39121008 |
| UNSPSC 11 | 39121008 |
| UNSPSC 12.01 | 39121008 |
| UNSPSC 13.2 | 39121008 |

Approvals

Approvals

Resistance thermometer measuring transducer - MINI MCR-2-RTD-UI - 2902049

Approvals

Approvals

UL Listed / cUL Listed / GL / cULus Listed


Ex Approvals

ATEX / UL Listed / cUL Listed / cULus Listed


Approvals submitted

Approval details

UL Listed 

cUL Listed 


GL

cULus Listed 


Drawings

Resistance thermometer measuring transducer - MINI MCR-2-RTD-UI - 2902049

Block diagram

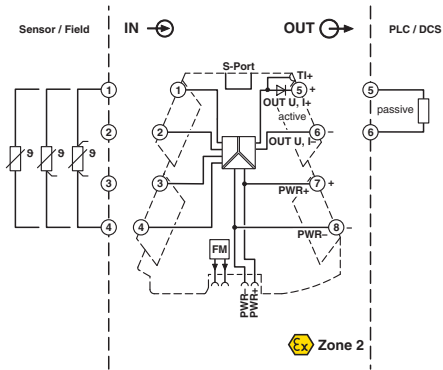

Pictogram

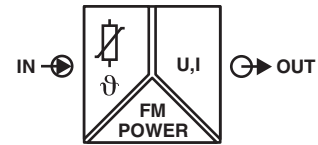

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9