

## ETH-HP SERIES

Model	Output		Efficiency
ETH24HP	24V	42A	85%
ETH26HP	26V	39A	85%
ETH28HP	28V	35A	85%
ETH48HP	48V	21A	85%

### DESCRIPTION

The High Power PFC isolated Front Ends HOT-PLUG power supply provide 24, 26, 28 and 48VDC single output. Complete front-end solutions for driving high-density DC-to-DC modules in distributed Power Systems with (N+1) redundancy. Using Elcon Top Drawer Connector, this ET series provides high reliable and rugged compact power with DMTBF over 500,000 hours.

### FEATURES

- Power Factor (>0.99)
- 0 C to +50 C at full load
- Standard 5" X 5" X 11.25" envelope
- Output Fully Floating
- Over current Protection
- Over voltage Protection
- Remote Sense
- Over temperature Protection
- Self-contained Forced Air Cooling
- Meets UL, CSA and VDE Safety
- Meets EMI EN88155 Level A ISO9001

### OPTIONS

- -6B CURRENT SHARING
- -20c ISOLATION DIODE
- -128I DC POWER GOOD

### ELECTRICAL SPECIFICATIONS

#### INPUTS

RANGE: Full input Range 90 to 264 VAC. Single Phase  
 FREQUENCY: 43 to 63Hz.  
 INRUSH CURRENT: 25A averaged over ½ cycle  
 HARMONIC CURRENT: <5%  
 EFFICIENCY: 80% to 85% (Measured at full load and 208 VAC Input)

#### OUTPUTS

VOLTAGE: 24, 26, 28, and 48 VDC  
 CURRENT: See Tables  
 ADJUSTMENT RANGE: +5 to -10% of nominal output voltage.  
 POLARITY: Output is isolated. It may be referenced plus/minus as required.  
 REMOTE SENSING: Compensates for up to 0.5V total loop drop in the output line.  
 STATIC REGULATION: Line: +/- 0.25% over full line range.  
 Load: Option: +/-% zero load to full load. Droop IFE: Option: the output sags from +5% when the load is increased from 10% to 100%.  
 VOLTAGE STABILITY: +/-0.1% FOR 24 hour period after 30 minute warm up.  
 OUTPUTS  
 TEMP COEFFICIENT: +/-0.02%/ C FROM 0 c TO +50 c.  
 P-P RIPPLE AND NOISE: 1% (20Hz to 50MHz Bandwidth).  
 MINIMUM LOAD: Not Required.  
 TURN ON DELAY: 1 sec. Max from application of AC line.  
 OVER VOLTAGE PROTECTION: 125% +/-5% of nominal. OVP shutdown is latched until the input line is removed for 5 secs and then reapplied. OVP sensing is don at the output terminals.  
 OVERCURRENT PROTECTION: Current I=Limit Point: 110% to 120% of full load.

# ETH-HP SERIES

## ENVIRONMENTAL

### OVERTEMPERATURE PROTECTION:

Automatically shuts down and latches the unit in the event of an over temperature condition. After cool down, power must be recycled to restart the unit.

**AUDIBLE NOISE:** 63 dBA max at 1 meter. 70 dBA for high-speed fans. (See Output Tables for units with high-speed fan).

**TEMPERATURE:** Standard: 0 C to +50 C at full load. Storage: -55 C to +85 C.

**HUMIDITY:** 20% to 95% non-condensing.

**ALTITUDE:** Operating: 8,000 Ft. Derates to 90% at 10,000 Ft. Non-Operating at 30,000 feet.

**VIBRATION:** Operating: From 5 to 27Hz, 0.02" double amplitude: from 27 to 500Hz, 0.75G, 3 Axes, 5 min/octave sweep, dwell 1 min at resonance.

**Non-Operating:** From 5 to 17Hz, 0.01" double amplitude: from 17 to 500Hz, 1.5G peak: 3 axes, 5min/octave sweep, dwell 1 min at resonance.

**MTBF:** 500,000 hours



**SHOCK:** Operating: 5G, half sine, 11msec 3 axes. Non-Operating: 15G half sine, 11 msec, 3 axes.

**COOLING:** Forced air, internal fan Airflow normally exits at connector.

**EMI:** Conducted & Radiated EN55022 level A

**SAFETY:** Meets UL1950, CSA1950, and TUV t EN60950.

## DIMENSIONS:

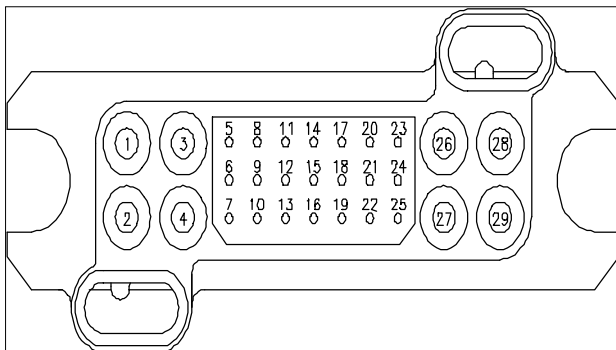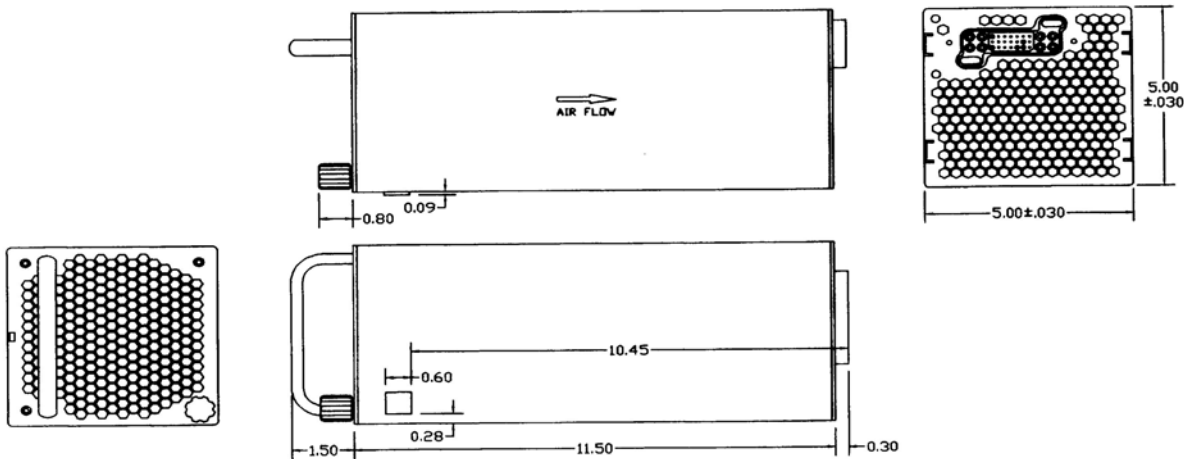

### Elcon Lower Drawer Connector

Pin 1: AC Input (N)	Pin 21: Power Fail
Pin 2: AC Input (L)	Pin 22: Under voltage Detect
Pin 3: Chassis Gnd	Pin 23: Remote Sense +
Pin 4: Chassis Gnd	Pin 25: Remote Sense -
Pin 5: Unit Present	Pin 26: Output +
Pin 7: Unit Present	Pin 27: Output -
Pin 17: Current Sharing	Pin 28: Output +
Pin 18: Current Monitor	Pin 29: Output -
Pin 19: Logic Return	
Pin 20: Logic Inhibit	

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9