

## HWB60 SEALED POWER DISTRIBUTION MODULE

Compact Hard-wired PDM for 280 Style Components



### Description

Due to its compact size the Littelfuse HWB60 PDM is the perfect fit for accessory circuits and overflow circuits from your main PDM. But in conjunction with its durable, IP rated construction this unit also makes a suitable main module on smaller vehicles. With the elimination of internal bussing the user can customize their own circuitry utilizing direct wire-to-component connections.

### Features/Benefits

- The elimination of internal bussing allows user to customize their own circuitry with direct wire-to-component connections.
- User can install any mini (280 style) circuit protection component.
- Compact size. PDM is perfect fit for accessory circuits, overflow circuits from main PDM, or as a main module on smaller vehicles.
- IP67/IP69K sealed units can be installed virtually anywhere on the vehicle. HWB60 stands up to road splash and salt spray, and gives robust protection to devices.
- TPAs (terminal position assurance locks) give secondary locking protection of the wire leads, which aid in prevention of leads from being pulled out. TPAs snap onto the back of the HWB60 after wires are installed, and do not interfere with the cable seals needed to ensure IP protection.
- Easy to connect. Wires plug into the back of the unit using industry-standard Delphi Metri-Pack Series 280 tanged terminals.
- Modular. Multiple HWB60s can be dovetailed together to expand circuit protection capacity. They can also be interlocked to other Littelfuse PDMs and fuse holders (i.e. FLEC, MEGA Flex holder, MIDI Flex holder, etc.) for complete system protection.
- Cover tethers also available to prevent loss of component during service.

### Specifications Overview

<b>Max Fuse Rating:</b>	30A per circuit
<b>Max Continuous Current:</b>	250A
<b>Number of Cavities</b>	60
<b>Mounting Torque:</b>	4-6 Nm
<b>Operating Temp:</b>	-40 °C to 85 °C
<b>Ingress Protection:</b>	IP67/IP69K
<b>Material:</b>	Body & Cover: UL94-V0 TPA: UL94-V0 Gasket: Silicone

### Applications

- Accessory Circuits
- Overflow Circuits
- Primary on Small Vehicles

### Web Resources

Download 2D print and technical resources at:  
[littelfuse.com/HWB60](http://littelfuse.com/HWB60)

### Ordering Information

PART NUMBER	DESCRIPTION
PDM21001LXM	Complete Assembly: Base, cover, gasket and 6 TPAs

### Accessories and Service Parts

PART NUMBER	DESCRIPTION
868-163	Base
873-029	Cover
901-315	Gasket
883-083	TPA (6 needed per assembly)
973-680	Optional Tether

## HWB60 SEALED POWER DISTRIBUTION MODULE

### Specifications


<b>Max Fuse Rating</b>	30A per circuit
<b>Max Continuous Current</b>	250A
<b>Number of Cavities</b>	60
<b>Recommended Mounting</b>	M6 bolt and lock washer
<b>Mounting Torque</b>	4-6 Nm
<b>Temperature Range</b>	-40 °C to +85 °C
<b>Ingress Protection Rating</b>	IP67/IP69K
<b>Dimensions</b>	154 x 58 x 82 mm
<b>Labels</b>	Consult Littelfuse for label options
<b>Wire Sizes</b>	0.35-5.00 mm <sup>2</sup>
<b>Mating Terminals &amp; Seals</b>	Delphi Metri-Pack 280 Sealed female (tanged) See chart below for details. Sold separately.
<b>Accessories</b>	Optional: Cover tether

### Mating Terminals and Seals Compatibility

Wire Size Range (mm <sup>2</sup> )	Insulation Diameter (mm)	Terminal	Cable Seal	Cable Plug
0.50-0.35 mm <sup>2</sup>	1.84-2.51 mm	12084201	15324985 / 15324984	12010300
1.00-0.50 mm <sup>2</sup>	2.03-3.12 mm	12077411	15324984 / 15324982	12010300
3.00-2.00 mm <sup>2</sup>	2.45-3.80 mm	12129493	15324982 / 12015355	12010300

Sold separately. Available from Delphi.

### Dimensions in millimeters

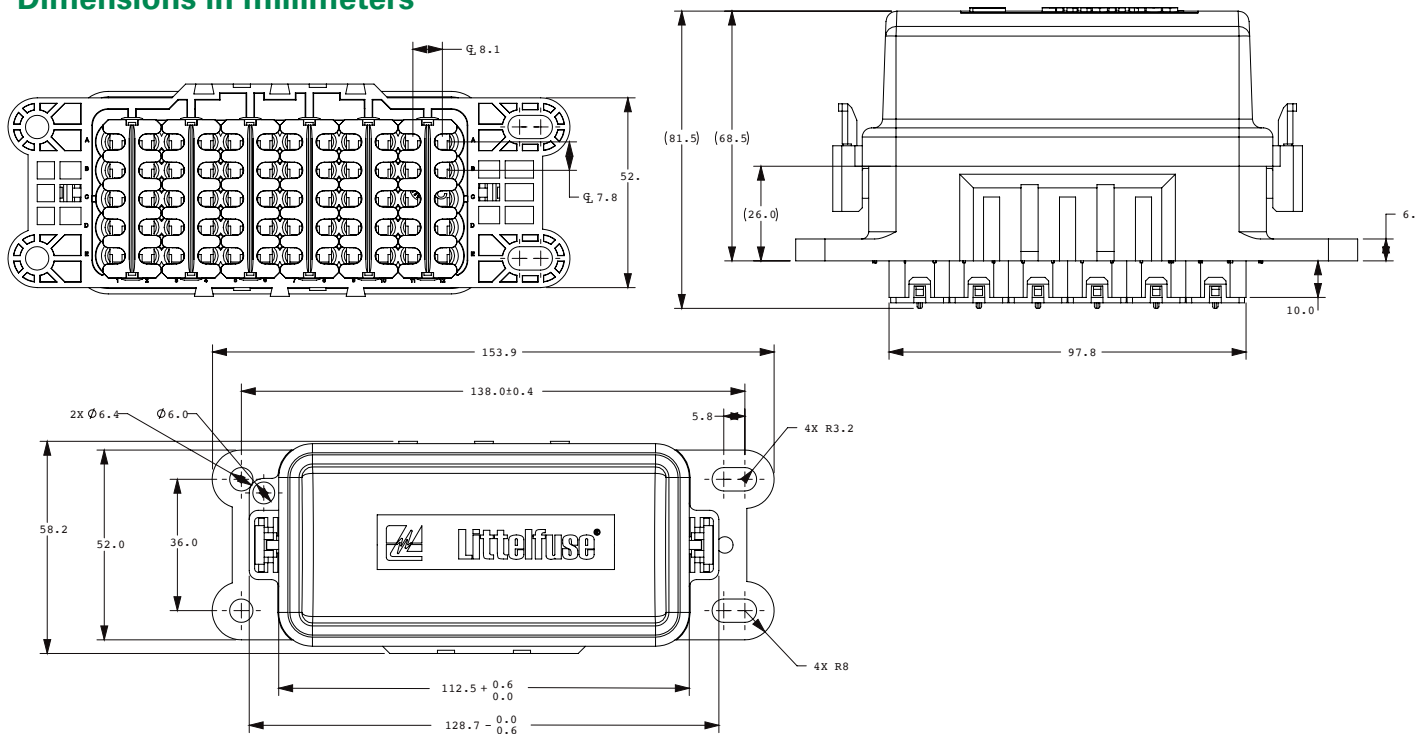

Visit [Littelfuse.com](http://Littelfuse.com) for the most up-to-date product information. Littelfuse reserves the right to make product changes, without notice. Material in this document is as accurate as known at the time of publication.

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9