

REFERENCE SPECIFICATIONS

-NFC 93425 (in compliance with HE 507)

PHYSICAL CHARACTERISTICS

-INSULATOR MATERIAL: THERMOPLASTIC ,UL94V0

-CONTACT MATERIAL: BRASS

-ACCESSORIES: BRASS

-SHELLS: STEEL

ELECTRICAL CHARACTERISTICS

-NOMINAL CURRENT: 40A

-CONTACT RESISTANCE: <= 7.3 mOhms

-CONTACT/CONTACT : >=1000 V

-CONTACT/GROUND : >=1200 V

-INSULATION RESISTANCE: >=5000 MOhms

ENVIRONMENTAL CHARACTERISTICS

- CLIMATIC CATEGORY: 55/125/21

TEMPERATURE RANGE -55°C TO +125°C

DAMP HEAT STEADY STATE 21 DAYS

SALT SPRAY 24 HOURS

MECHANICAL CHARACTERISTICS

- RETENTION AGAINST TORQUE: - Threaded insert: 0.7 N.m minimum

- Female screw : 0.5 N.m minimum

PRESS FIT PERFORMANCES

PRESS FIT CONTACTS	
INSERTION FORCE	<= 200 N
Average insertion 160N	
EXTRACTION FORCE	>= 30 N

NOTE RoHS INFORMATION

- The "LF" products meet european union Directives and other country regulations as described in GS-22-008.
- Termination plating spec:
 - Ni 1.27µm+Sn 0.5 to 1.5µ(pure bright)
- Active area plating spec:
 - Ni + Gold
- Shell plating :2 to 4µm Cu + Ni + 3 to 10µmm Sn(pure bright)
- Accessories: Sn pure bright + nickel
- Packaging spec: See GS-14-920

Series

DBL5W5S81C6M40LF

Shell size: **E A B C**
(see sheet 3)

Front accessory definition
(see sheet 2)

blank: without accessory

L : threaded insert M3

O : threaded insert UNC 4-40

V : female screw UNC 4-40

Layout of contacts (see sheet 3)

Contacts

S : Socket

Termination type

81C Right angle/Europe standard

Plating

5 200 matings/unmatings

6 500 matings/unmatings

PCB accessories definition(see sheet 2)

M Metal brackets

A Without accessory

Power contacts

40 : Fitted with power contacts 40 Amp.

See note RoHS


TABLE 1:PCB HOLE DIAMETERS

P.C.B HOLE DEFINITION	DRILL DIAMETER	SnPb holes for CONTACTS	Sn holes for CONTACTS	holes ACCESSORIES
	Ø3.22 REF(NOTE 3)	Ø3.22 REF(NOTE 3)	Ø3.22 REF(NOTE 3)	
	DRILLED HOLE	Ø3.19-3.25	Ø3.19-3.25	
	COPPER PLATING	25µ MINI (RECOMMENDED 50µ MAXI)	25µ MINI (RECOMMENDED 50µ MAXI)	
	TIN-LEAD PLATING	15µ MAXI (RECOMMENDED 5µ MINI)		
(NOTE-1 AND 2)	TIN PLATING		0.8 tol,2µ	Ø3.10±0.10
	FINISH HOLE (AFTER REFLOW)	Ø 3.02-3.20	Ø3.08-3.20	


NOTE-1:THESE DIMENSIONS MUST BE RESPECT TO SECURE PRESS-FIT PIN PERFORMANCES.

NOTE-2: ACCORDING TO IEC-352-5 SPEC.

NOTE-3: MAJOR REQUIREMENT FOR PRESS FIT PIN PERFORMANCE




DETAIL OF PRESS FIT



5W5 FOR EXAMPLE

www.fciconnect.com				surface ☒ tolerance std ISO 1302 ISO 406 ISO 1101			projection 		mm 		
				TOLERANCES UNLESS OTHERWISE SPECIFIED							
Dr		M PESSON		2005-10-11		ANGULAR		size		Scale	
Eng		P LEHARE		2005-10-11		LINEAR		A2		2:1	
Chr						0° $\pm 2^\circ$		ECN		LS07-0273	
Appr						Product family		- Spec ref			
rev		ecn		dr		date					
A		LS05-0113		MPE		2005-10-11					
B		LS06-0208		LGO		2006-12-13					
C		LS07-0273		MPE		2007/11/05					
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											
-											

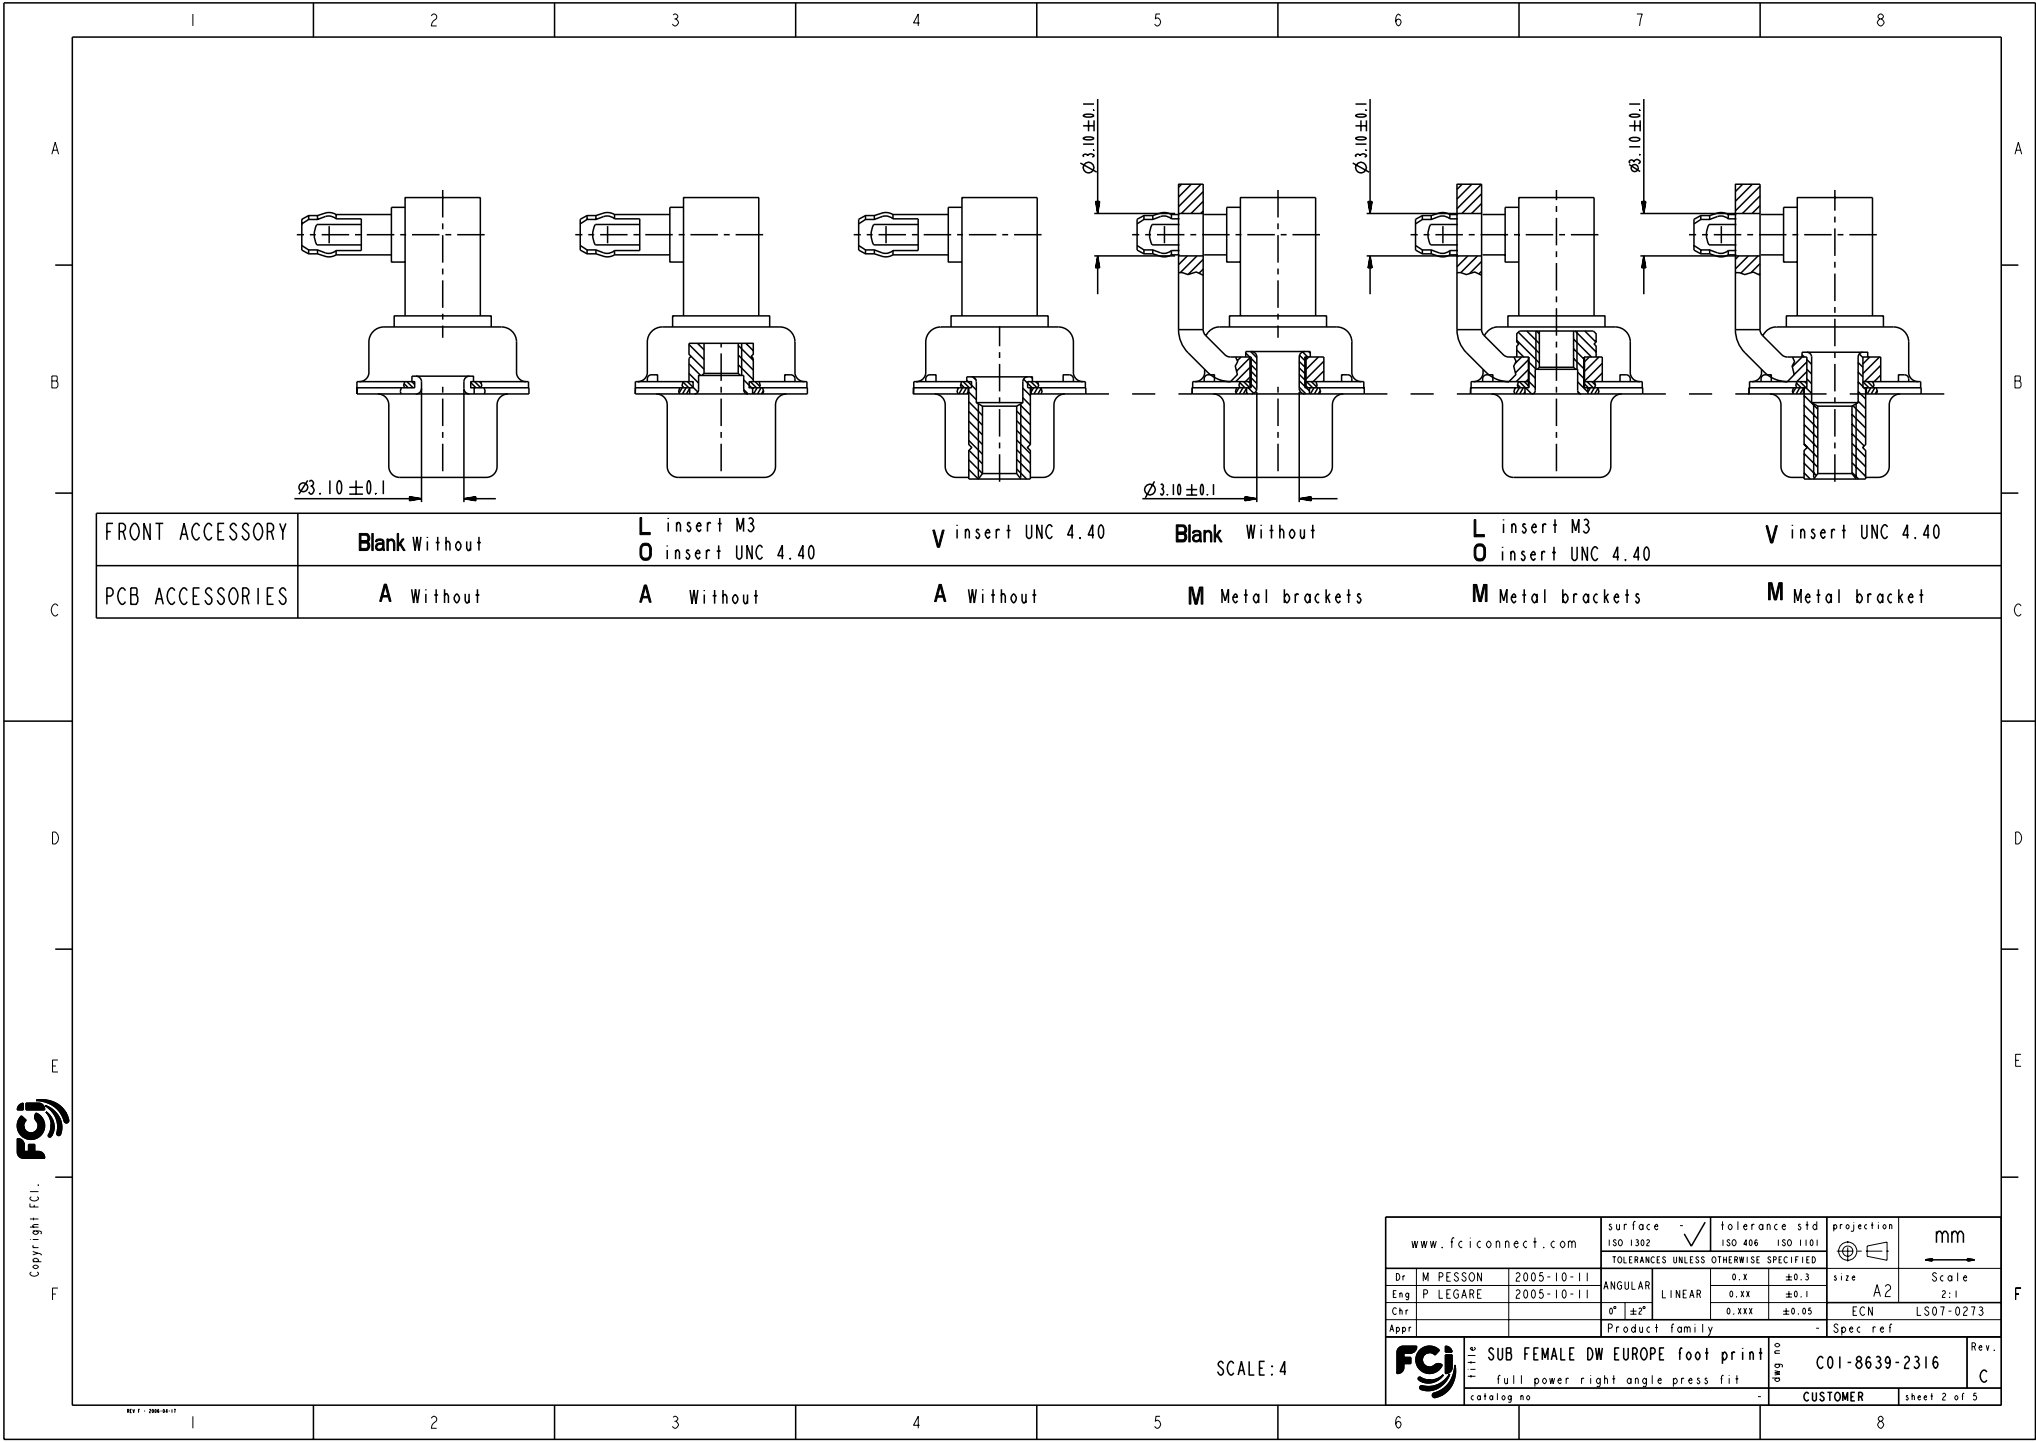












Copyright FCI.

www.fciconnect.com			surface ☒ tolerance std ISO 1302 ISO 406 ISO 1101			projection 		mm 	
TOLERANCES UNLESS OTHERWISE SPECIFIED									
Dr	M PESSON	2005-10-11	ANGULAR	LINEAR	0.X	±0.3	size A2	Scale 2:1	ECN LS07-0273
Eng	P LEGARE	2005-10-11			0.XX	±0.1			
Chr			0° ±2°		0.XXX	±0.05			
Appr			Product family			- Spec ref			
			SUB FEMALE DW EUROPE foot print			deg no C01-8639-2316		Rev. C	
			full power right angle press fit			CUSTOMER		sheet 2 of 5	
			catalog no						


SCALE: 4


shell size #	LAYOUTS xWx
E	2V2
A	3V3
A	3W3
B	5W5
C	8W8

www.fciconnect.com			surface - ☒ tolerance std ISO 1302 ISO 406 ISO 1101		projection 		mm 	
			TOLERANCES UNLESS OTHERWISE SPECIFIED					
Dr	M PESSON	2005-10-11	ANGULAR	LINEAR	0.X	±0.3	size	Scale 2:1
Eng	P LEGARE	2005-10-11			0.x	±0.1		
Chr			0° ±2°		0.xxx	±0.05	ECN	LS07-0273
Appr			Product family			-	Spec ref	
			title SUB FEMALE DW EUROPE foot print			drawing no. C01-8639-2316		Rev. C
			full power right angle press fit			CUSTOMER		sheet 3 of 3
catalog no.								

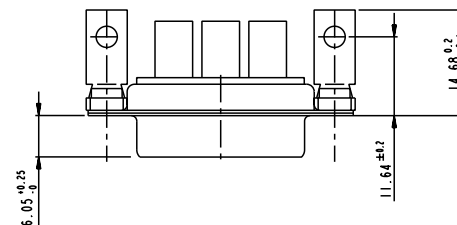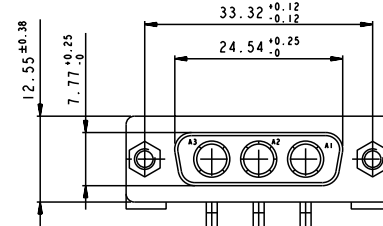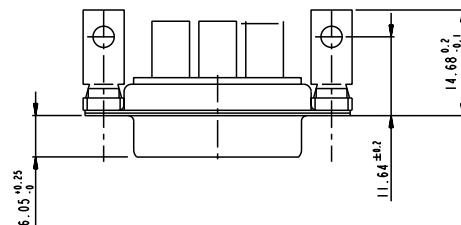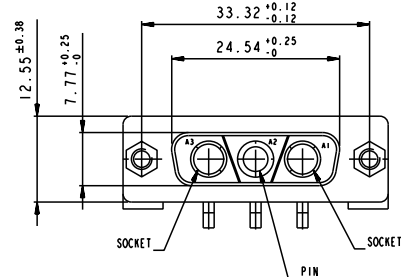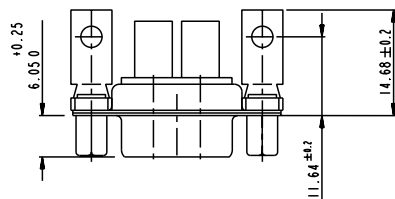

SIDE VIEW FOR ALL LAYOUTS



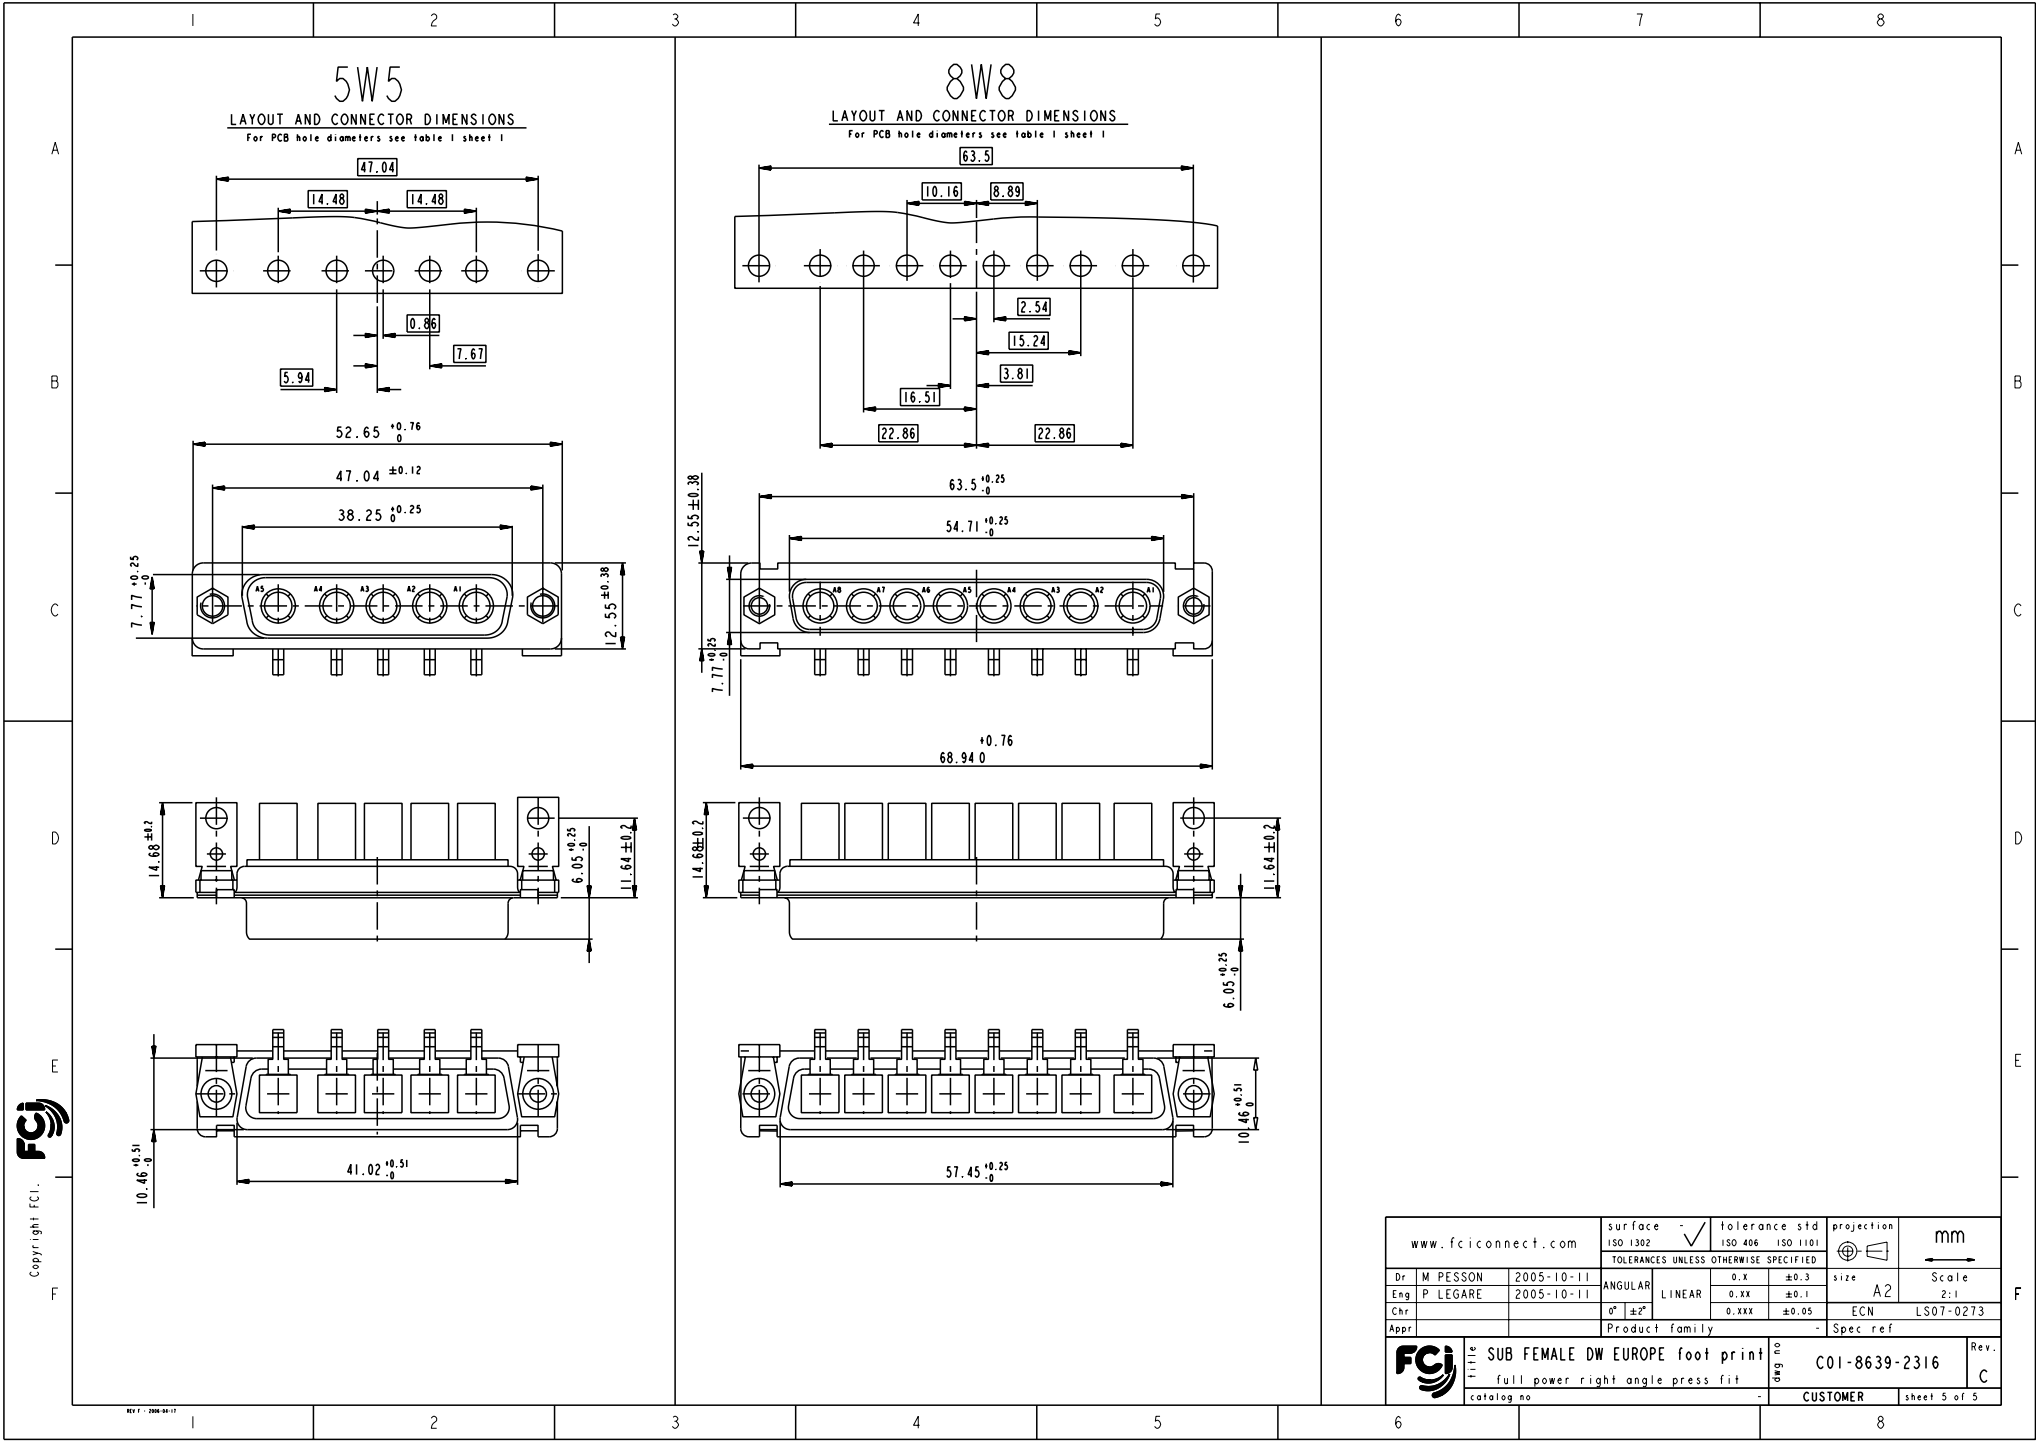

Copyright FCi.

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406	projection ISO 1101	mm	
		TOLERANCES UNLESS OTHERWISE SPECIFIED				
Dr	M PESSON	2005-10-11	ANGULAR	0.X	±0.3	size A2
Eng	P LEGARE	2005-10-11	LINEAR	0.XX	±0.1	Scale 2:1
Chr			0° ±2°	0.XXX	±0.05	ECN LS07-0273
Appr			Product family	Spec ref		
FCi		SUB FEMALE DW EUROPE foot print			dwg no	Rev.
		full power right angle press fit			C01-8639-2316	C
		catalog no	CUSTOMER			sheet 5 of 5

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9