


Small size, controlled 7.5A inrush current possible

TX RELAYS TH types



RoHS compliant

FEATURES

- 1. Small size, controlled 7.5A inrush current possible**
- 2. 2,000 V breakdown voltage between contact and coil**
The body block construction of the coil that is sealed at formation offers a high breakdown voltage of 2,000 V between contact and coil, and 1,000 V between open contacts.

- 3. Outstanding surge resistance.**
Surge breakdown voltage between open contacts:
1,500 V 10×160μ sec. (FCC part 68)
Surge breakdown voltage between contact and coil:
2,500 V 2×10μ sec. (Bellcore)
- 4. Nominal operating power: High sensitivity of 140mW**
By using the highly efficient polar magnetic circuit "seesaw balance mechanism", a nominal operating power of 140 mW (minimum operating power of 79 mW) has been achieved.
- 5. High contact capacity: 2 A 30 V DC**
- 6. Compact size**
15.0(L) × 7.4(W) × 8.2(H) .591(L) × .291(W) × .323(H)
- 7. Outstanding vibration and shock resistance.**
Functional shock resistance: 750 m/s²
Destructive shock resistance:
1,000 m/s²
Functional vibration resistance:
10 to 55 Hz (at double amplitude of 3.3 mm .130 inch)
Destructive vibration resistance:
10 to 55 Hz (at double amplitude of 5 mm .197 inch)

- 8. Sealed construction allows automatic washing.**
- 9. A range of surface-mount types is also available**
SA: Low-profile surface-mount terminal type
SS: Space saving surface-mount terminal type

TYPICAL APPLICATIONS

- 1. Air-conditioning control (solenoid load)**
- 2. Others, High-capacity control etc.**

ORDERING INFORMATION

TX **2** - [] - [] - [] - [] - TH - []

Contact arrangement
2: 2 Form C

Surface-mount availability
Nil: Standard PC board terminal type
SA: SA type
SS: SS type

Operating function
Nil: Single side stable
L: 1 coil latching
L2: 2 coil latching
LT: 2 coil latching

Terminal shape
Nil: Standard PC board terminal or surface-mount terminal

Nominal coil voltage (DC)*
1.5, 3, 4.5, 5, 6, 9, 12, 24, 48V

Contact material
TH: Power type (Ag+Au clad/stationary, movable)

Packing style
Nil: Tube packing
X: Tape and reel (picked from 1/3/4/5-pin side)
Z: Tape and reel packing (picked from the 8/9/10/12-pin side)

Notes: 1. *48 V coil type: Single side stable only
2. In case of 5 V transistor drive circuit, it is recommended to use 4.5 V type relay.

TYPES

1. Standard PC board terminal

| Contact arrangement | Nominal coil voltage | Single side stable | 1 coil latching | 2 coil latching (L2) | 2 coil latching (LT) |
|---------------------|----------------------|--------------------|-----------------|----------------------|----------------------|
| | | Part No. | Part No. | Part No. | Part No. |
| 2 Form C | 1.5V DC | TX2-1.5V-TH | TX2-L-1.5V-TH | TX2-L2-1.5V-TH | TX2-LT-1.5V-TH |
| | 3V DC | TX2-3V-TH | TX2-L-3V-TH | TX2-L2-3V-TH | TX2-LT-3V-TH |
| | 4.5V DC | TX2-4.5V-TH | TX2-L-4.5V-TH | TX2-L2-4.5V-TH | TX2-LT-4.5V-TH |
| | 5V DC | TX2-5V-TH | TX2-L-5V-TH | TX2-L2-5V-TH | TX2-LT-5V-TH |
| | 6V DC | TX2-6V-TH | TX2-L-6V-TH | TX2-L2-6V-TH | TX2-LT-6V-TH |
| | 9V DC | TX2-9V-TH | TX2-L-9V-TH | TX2-L2-9V-TH | TX2-LT-9V-TH |
| | 12V DC | TX2-12V-TH | TX2-L-12V-TH | TX2-L2-12V-TH | TX2-LT-12V-TH |
| | 24V DC | TX2-24V-TH | TX2-L-24V-TH | TX2-L2-24V-TH | TX2-LT-24V-TH |
| | 48V DC | TX2-48V-TH | — | — | — |

Standard packing: Tube: 40 pcs.; Case: 1,000 pcs.

2. Surface-mount terminal

1) Tube packing

| Contact arrangement | Nominal coil voltage | Single side stable | 1 coil latching | 2 coil latching (L2) | 2 coil latching (LT) |
|---------------------|----------------------|--------------------|-----------------|----------------------|----------------------|
| | | Part No. | Part No. | Part No. | Part No. |
| 2c | 1.5V DC | TX2S□-1.5V-TH | TX2S□-L-1.5V-TH | TX2S□-L2-1.5V-TH | TX2S□-LT-1.5V-TH |
| | 3V DC | TX2S□-3V-TH | TX2S□-L-3V-TH | TX2S□-L2-3V-TH | TX2S□-LT-3V-TH |
| | 4.5V DC | TX2S□-4.5V-TH | TX2S□-L-4.5V-TH | TX2S□-L2-4.5V-TH | TX2S□-LT-4.5V-TH |
| | 5V DC | TX2S□-5V-TH | TX2S□-L-5V-TH | TX2S□-L2-5V-TH | TX2S□-LT-5V-TH |
| | 6V DC | TX2S□-6V-TH | TX2S□-L-6V-TH | TX2S□-L2-6V-TH | TX2S□-LT-6V-TH |
| | 9V DC | TX2S□-9V-TH | TX2S□-L-9V-TH | TX2S□-L2-9V-TH | TX2S□-LT-9V-TH |
| | 12V DC | TX2S□-12V-TH | TX2S□-L-12V-TH | TX2S□-L2-12V-TH | TX2S□-LT-12V-TH |
| | 24V DC | TX2S□-24V-TH | TX2S□-L-24V-TH | TX2S□-L2-24V-TH | TX2S□-LT-24V-TH |
| | 48V DC | TX2S□-48V-TH | — | — | — |

□: For each surface-mounted terminal identification, input the following letter. SA type: A, SS type: S

Standard packing: Tube: 40 pcs.; Case: 1,000 pcs.

2) Tape and reel packing

| Contact arrangement | Nominal coil voltage | Single side stable | 1 coil latching | 2 coil latching (L2) | 2 coil latching (LT) |
|---------------------|----------------------|--------------------|-------------------|----------------------|----------------------|
| | | Part No. | Part No. | Part No. | Part No. |
| 2 Form C | 1.5V DC | TX2S□-1.5V-TH-Z | TX2S□-L-1.5V-TH-Z | TX2S□-L2-1.5V-TH-Z | TX2S□-LT-1.5V-TH-Z |
| | 3V DC | TX2S□-3V-TH-Z | TX2S□-L-3V-TH-Z | TX2S□-L2-3V-TH-Z | TX2S□-LT-3V-TH-Z |
| | 4.5V DC | TX2S□-4.5V-TH-Z | TX2S□-L-4.5V-TH-Z | TX2S□-L2-4.5V-TH-Z | TX2S□-LT-4.5V-TH-Z |
| | 5V DC | TX2S□-5V-TH-Z | TX2S□-L-5V-TH-Z | TX2S□-L2-5V-TH-Z | TX2S□-LT-5V-TH-Z |
| | 6V DC | TX2S□-6V-TH-Z | TX2S□-L-6V-TH-Z | TX2S□-L2-6V-TH-Z | TX2S□-LT-6V-TH-Z |
| | 9V DC | TX2S□-9V-TH-Z | TX2S□-L-9V-TH-Z | TX2S□-L2-9V-TH-Z | TX2S□-LT-9V-TH-Z |
| | 12V DC | TX2S□-12V-TH-Z | TX2S□-L-12V-TH-Z | TX2S□-L2-12V-TH-Z | TX2S□-LT-12V-TH-Z |
| | 24V DC | TX2S□-24V-TH-Z | TX2S□-L-24V-TH-Z | TX2S□-L2-24V-TH-Z | TX2S□-LT-24V-TH-Z |
| | 48V DC | TX2S□-48V-TH-Z | — | — | — |

□: For each surface-mounted terminal identification, input the following letter. SA type: A, SS type: S

Standard packing: Tape and reel: 500 pcs.; Case: 1,000 pcs.

Note: Tape and reel packing symbol "Z" is not marked on the relay. "X" type tape and reel packing (picked from 1/2/3/4-pin side) is also available.

RATING

1. Coil data

1) Single side stable

| Nominal coil voltage | Pick-up voltage (at 20°C 68°F) | Drop-out voltage (at 20°C 68°F) | Nominal operating current [±10%] (at 20°C 68°F) | Coil resistance [±10%] (at 20°C 68°F) | Nominal operating power | Max. applied voltage (at 20°C 68°F) |
|----------------------|--|--|---|---------------------------------------|-------------------------|-------------------------------------|
| 1.5V DC | 75%V or less of nominal voltage* (Initial) | 10%V or more of nominal voltage* (Initial) | 93.8mA | 16Ω | 140mW | 150%V of nominal voltage |
| 3V DC | | | 46.7mA | 64.3Ω | | |
| 4.5V DC | | | 31mA | 145Ω | | |
| 5V DC | | | 28.1mA | 178Ω | | |
| 6V DC | | | 23.3mA | 257Ω | | |
| 9V DC | | | 15.5mA | 579Ω | | |
| 12V DC | | | 11.7mA | 1,028Ω | | |
| 24V DC | | | 5.8mA | 4,114Ω | | |
| 48V DC | | | 5.6mA | 8,533Ω | 270mW | 120%V of nominal voltage |

TX-TH

2) 1 coil latching

| Nominal coil voltage | Set voltage (at 20°C 68°F) | Reset voltage (at 20°C 68°F) | Nominal operating current [±10%] (at 20°C 68°F) | Coil resistance [±10%] (at 20°C 68°F) | Nominal operating power | Max. applied voltage (at 20°C 68°F) |
|----------------------|--|--|---|---------------------------------------|-------------------------|-------------------------------------|
| 1.5V DC | 75%V or less of nominal voltage* (Initial) | 75%V or less of nominal voltage* (Initial) | 66.7mA | 22.5Ω | 100mW | 150%V of nominal voltage |
| 3V DC | | | 33.3mA | 90Ω | | |
| 4.5V DC | | | 22.2mA | 202.5Ω | | |
| 5V DC | | | 20mA | 250Ω | | |
| 6V DC | | | 16.7mA | 360Ω | | |
| 9V DC | | | 11.1mA | 810Ω | | |
| 12V DC | | | 8.3mA | 1,440Ω | | |
| 24V DC | | | 4.2mA | 5,760Ω | | |

3) 2 coil latching (L2, LT)

| Nominal coil voltage | Set voltage (at 20°C 68°F) | Reset voltage (at 20°C 68°F) | Nominal operating current [±10%] (at 20°C 68°F) | | Coil resistance [±10%] (at 20°C 68°F) | | Nominal operating power | | Max. applied voltage (at 20°C 68°F) |
|----------------------|--|--|---|------------|---------------------------------------|------------|-------------------------|------------|-------------------------------------|
| | | | Set coil | Reset coil | Set coil | Reset coil | Set coil | Reset coil | |
| 1.5V DC | 75%V or less of nominal voltage* (Initial) | 75%V or less of nominal voltage* (Initial) | 93.8mA | 93.8mA | 16Ω | 16Ω | 140mW | 140mW | 150%V of nominal voltage |
| 3V DC | | | 46.7mA | 46.7mA | 64.3Ω | 64.3Ω | | | |
| 4.5V DC | | | 31mA | 31mA | 145Ω | 145Ω | | | |
| 5V DC | | | 28.1mA | 28.1mA | 178Ω | 178Ω | | | |
| 6V DC | | | 23.3mA | 23.3mA | 257Ω | 257Ω | | | |
| 9V DC | | | 15.5mA | 15.5mA | 579Ω | 579Ω | | | |
| 12V DC | | | 11.7mA | 11.7mA | 1,028Ω | 1,028Ω | | | |
| 24V DC | | | 5.8mA | 5.8mA | 4,114Ω | 4,114Ω | | | |

*Pulse drive (JIS C 5442-1986)

2. Specifications


| Characteristics | Item | Specifications | |
|--|--|--|---|
| Contact | Arrangement | 2 Form C | |
| | Initial contact resistance, max. | Max. 100 mΩ (By voltage drop 6 V DC 1A) | |
| | Contact material | Ag+Au plating | |
| Rating | Nominal switching capacity | 2 A 30 V DC, 0.5 A 125 V AC (resistive load) | |
| | Max. switching power | 60 W, 60 VA (resistive load) | |
| | Max. switching voltage | 220V DC, 250V AC | |
| | Max. switching current | 7.5 A (When used at 7.5 A. Regarding connection method, you must follow the precaution, below*.) | |
| | Min. switching capacity (Reference value)*1 | 10μA 10mV DC | |
| | Nominal operating power | Single side stable 1 coil latching 2 coil latching | 140 mW (1.5 to 24 V DC), 270 mW (48 V DC) 100 mW (1.5 to 24 V DC) 140 mW (1.5 to 24 V DC) |
| Electrical characteristics | Insulation resistance (Initial) | Min. 1,000MΩ (at 500V DC) Measurement at same location as "Initial breakdown voltage" section. | |
| | Breakdown voltage (Initial) | Between open contacts | 1,000 Vrms for 1min. (Detection current: 10mA) |
| | | Between contact and coil | 2,000 Vrms for 1min. (Detection current: 10mA) |
| | | Between contact sets | 1,000 Vrms for 1min. (Detection current: 10mA) |
| | Temperature rise (at 20°C 68°F) | Max. 50°C (By resistive method, nominal coil voltage applied to the coil; contact carrying current: 2A.) | |
| | Surge breakdown voltage (Initial) | Between open contacts | 1,500 V (10×160μs) (FCC Part 68) |
| | | Between contacts and coil | 2,500 V (2×10μs) (Telcordia) |
| Operate time [Set time] (at 20°C 68°F) | Max. 4 ms [Max. 4 ms] (Nominal coil voltage applied to the coil, excluding contact bounce time.) | | |
| Release time [Reset time] (at 20°C 68°F) | Max. 4 ms [Max. 4 ms] (Nominal coil voltage applied to the coil, excluding contact bounce time.) (without diode) | | |
| Mechanical characteristics | Shock resistance | Functional | Min. 750 m/s ² (Half-wave pulse of sine wave: 6 ms; detection time: 10μs.) |
| | | Destructive | Min. 1,000 m/s ² (Half-wave pulse of sine wave: 6 ms.) |
| | Vibration resistance | Functional | 10 to 55 Hz at double amplitude of 3.3 mm (Detection time: 10μs.) |
| | | Destructive | 10 to 55 Hz at double amplitude of 5 mm |
| Expected life | Mechanical | Min. 10 ⁸ (at 180 cpm) | |
| | Electrical | Min. 10 ⁵ (2 A 30 V DC resistive), 5×10 ⁵ (1 A 30 V DC resistive), Min. 10 ⁵ (0.5 A 125 V AC resistive) (at 20 cpm) Min. 2×10 ⁵ (7.5 A inrush (250 ms)/1.5 A normal 30 V AC (cosφ = 0.4)) (ON/OFF = 1s/9s) | |
| Conditions | Conditions for operation, transport and storage*2 | Ambient temperature: -40°C to +85°C (up to 24 V coil) -40°F to +185°F [-40°C to +70°C (48 V coil) -40°F to +158°F]; Humidity: 5 to 85% R.H. (Not freezing and condensing at low temperature) | |
| | Max. operating speed (at rated load) | 20 cpm | |
| Unit weight | | Approx. 2 g .071 oz | |

Notes: *1 This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

*2 Refer to 6. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT (Page 24).


REFERENCE DATA

1. Electrical life (2×10^5 operation is possible)
 Tested sample: TX2SA-24V-TH, 6 pcs.
 Switching frequency: ON:OFF = 1s:9s
 Ambient temperature: 25°C 77°F
 Circuit

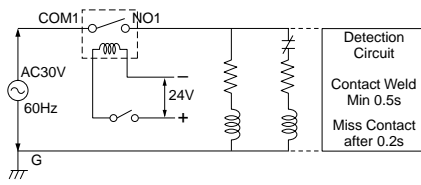

Condition: 30 V AC
 Inrush current 7.5 A (execution value),
 inrush time 250 ms
 Normal current 1.5 A (execution value),
 (inductive load $\cos\phi = 0.4$)


Inrush current wave form vs time

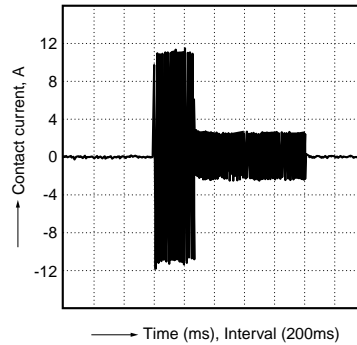

***Precaution**

When using at 7.5 A, connection of NO (pin #5 and #8) and COM (pin #4 and #9) in the circuit is required.

Pin layout and schematic (BOTTOM VIEW)



For general REFERENCE DATA, DIMENSIONS and NOTES, please refer to the “TX Relay”.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Panasonic:

[TX2SA-L2-6V-X](#) [TX2SA-LT-5V-TH](#) [TX2-LT-12V-TH](#) [TX2-LT-24V-TH](#) [TX2-LT-3V-TH](#) [TX2-LT-4.5V-TH](#) [TX2-LT-5V](#)
[TX2SA-LT-4.5V-TH](#) [TX2SS-LT-12V-TH](#) [TX2SS-LT-24V-TH](#) [TX2SS-LT-3V-TH](#) [TX2SS-LT-4.5V-TH](#) [TX2SA-LT-1.5V-](#)
[TH](#) [TX2SA-LT-24V-TH](#) [TX2SA-LT-3V-TH](#) [TX2SA-LT-12V-TH](#) [TX2-LT-6V-TH](#) [TX2SA-LT-6V-TH-Z](#) [TX2-9V-TH](#) [TX2-](#)
[12V-TH](#) [TX2-LT-1.5V-TH](#) [TX2-5V-TH](#) [TX2SA-LT-5V-TH-Z](#) [TX2SA-4.5V-TH](#) [TX2-LT-5V-TH](#) [TX2SA-LT-6V-TH](#) [TX2-](#)
[1.5V-TH](#) [TX2-LT-9V-TH](#) [TX2SS-LT-4.5V-TH-Z](#) [TX2SA-LT-3V-TH-Z](#) [TX2SS-L-24V-TH-Z](#) [TX2SS-L-4.5V-TH-Z](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9