



## N-Channel MOSFET

Power MOS 8™ is a high speed, high voltage N-channel switch-mode power MOSFET. A proprietary planar stripe design yields excellent reliability and manufacturability. Low switching loss is achieved with low input capacitance and ultra low  $C_{rss}$  "Miller" capacitance. The intrinsic gate resistance and capacitance of the poly-silicon gate structure help control slew rates during switching, resulting in low EMI and reliable paralleling, even when switching at very high frequency. Reliability in flyback, boost, forward, and other circuits is enhanced by the high avalanche energy capability.


**APT56M60B2**
**APT56M60L**

Single die MOSFET



### FEATURES

- Fast switching with low EMI/RFI
- Low  $R_{DS(on)}$
- Ultra low  $C_{rss}$  for improved noise immunity
- Low gate charge
- Avalanche energy rated
- RoHS compliant 

### TYPICAL APPLICATIONS

- PFC and other boost converter
- Buck converter
- Two switch forward (asymmetrical bridge)
- Single switch forward
- Flyback
- Inverters

### Absolute Maximum Ratings

| Symbol   | Parameter  | Ratings  | Unit |
|----------|--|----------|------|
| $I_D$    | Continuous Drain Current @ $T_C = 25^\circ\text{C}$  | 60       | A    |
|          | Continuous Drain Current @ $T_C = 100^\circ\text{C}$ | 38       |      |
| $I_{DM}$ | Pulsed Drain Current <sup>①</sup>                    | 210      |      |
| $V_{GS}$ | Gate-Source Voltage                                  | $\pm 30$ | V    |
| $E_{AS}$ | Single Pulse Avalanche Energy <sup>②</sup>           | 1580     | mJ   |
| $I_{AR}$ | Avalanche Current, Repetitive or Non-Repetitive      | 28       | A    |

### Thermal and Mechanical Characteristics

| Symbol          | Characteristic   | Min | Typ  | Max  | Unit               |
|-----------------|--|-----|------|------|--------------------|
| $P_D$           | Total Power Dissipation @ $T_C = 25^\circ\text{C}$     |     |      | 1040 | W                  |
| $R_{\theta JC}$ | Junction to Case Thermal Resistance                    |     |      | 0.12 | $^\circ\text{C/W}$ |
| $R_{\theta CS}$ | Case to Sink Thermal Resistance, Flat, Greased Surface |     | 0.11 |      |                    |
| $T_J, T_{STG}$  | Operating and Storage Junction Temperature Range       | -55 |      | 150  | $^\circ\text{C}$   |
| $T_L$           | Soldering Temperature for 10 Seconds (1.6mm from case) |     |      | 300  |                    |
| $W_T$           | Package Weight   |     | 0.22 |      | oz                 |
|                 |  |     | 6.2  |      | g                  |
| Torque          | Mounting Torque ( TO-264 Package), 4-40 or M3 screw    |     |      | 10   | in·lbf             |
|                 |  |     |      | 1.1  | N·m                |

**Static Characteristics**
**T<sub>J</sub> = 25°C unless otherwise specified**
**APT56M60B2\_L**

| Symbol                                 | Parameter                                 | Test Conditions  | Min | Typ  | Max  | Unit  |
|--|---|--|-----|------|------|-------|
| V <sub>BR(DSS)</sub>                   | Drain-Source Breakdown Voltage            | V <sub>GS</sub> = 0V, I <sub>D</sub> = 250μA               | 600 |      |      | V     |
| ΔV <sub>BR(DSS)</sub> /ΔT <sub>J</sub> | Breakdown Voltage Temperature Coefficient | Reference to 25°C, I <sub>D</sub> = 250μA                  |     | 0.57 |      | V/°C  |
| R <sub>DS(on)</sub>                    | Drain-Source On Resistance <sup>③</sup>   | V <sub>GS</sub> = 10V, I <sub>D</sub> = 28A                |     | 0.09 | 0.11 | Ω     |
| V <sub>GS(th)</sub>                    | Gate-Source Threshold Voltage             | V <sub>GS</sub> = V <sub>DS</sub> , I <sub>D</sub> = 2.5mA | 3   | 4    | 5    | V     |
| ΔV <sub>GS(th)</sub> /ΔT <sub>J</sub>  | Threshold Voltage Temperature Coefficient |  |     | -10  |      | mV/°C |
| I <sub>DSS</sub>                       | Zero Gate Voltage Drain Current           | V <sub>DS</sub> = 600V<br>V <sub>GS</sub> = 0V             |     |      | 100  | μA    |
|  |   | T <sub>J</sub> = 25°C                                      |     |      | 500  |       |
|  |   | T <sub>J</sub> = 125°C                                     |     |      |      |       |
| I <sub>GSS</sub>                       | Gate-Source Leakage Current               | V <sub>GS</sub> = ±30V                                     |     |      | ±100 | nA    |

**Dynamic Characteristics**
**T<sub>J</sub> = 25°C unless otherwise specified**

| Symbol                          | Parameter                                    | Test Conditions  | Min | Typ   | Max | Unit |
|---------------------------------|--|--|-----|-------|-----|------|
| g <sub>fs</sub>                 | Forward Transconductance                     | V <sub>DS</sub> = 50V, I <sub>D</sub> = 28A  |     | 55    |     | S    |
| C <sub>iss</sub>                | Input Capacitance                            | V <sub>GS</sub> = 0V, V <sub>DS</sub> = 25V<br>f = 1MHz  |     | 11300 |     | pF   |
| C <sub>rss</sub>                | Reverse Transfer Capacitance                 |  |     | 115   |     |      |
| C <sub>oss</sub>                | Output Capacitance                           |  |     | 1040  |     |      |
| C <sub>o(cr)</sub> <sup>④</sup> | Effective Output Capacitance, Charge Related | V <sub>GS</sub> = 0V, V <sub>DS</sub> = 0V to 400V   |     | 550   |     | pF   |
| C <sub>o(er)</sub> <sup>⑤</sup> | Effective Output Capacitance, Energy Related |  |     | 285   |     |      |
| Q <sub>g</sub>                  | Total Gate Charge                            | V <sub>GS</sub> = 0 to 10V, I <sub>D</sub> = 28A,<br>V <sub>DS</sub> = 300V  |     | 280   |     | nC   |
| Q <sub>gs</sub>                 | Gate-Source Charge                           |  |     | 60    |     |      |
| Q <sub>gd</sub>                 | Gate-Drain Charge                            |  |     | 120   |     |      |
| t <sub>d(on)</sub>              | Turn-On Delay Time                           | <b>Resistive Switching</b><br>V <sub>DD</sub> = 400V, I <sub>D</sub> = 28A<br>R <sub>G</sub> = 2.2Ω <sup>⑥</sup> , V <sub>GG</sub> = 15V |     | 65    |     | ns   |
| t <sub>r</sub>                  | Current Rise Time                            |  |     | 75    |     |      |
| t <sub>d(off)</sub>             | Turn-Off Delay Time                          |  |     | 190   |     |      |
| t <sub>f</sub>                  | Current Fall Time                            |  |     | 60    |     |      |

**Source-Drain Diode Characteristics**

| Symbol          | Parameter                                       | Test Conditions   | Min | Typ | Max | Unit |
|-----------------|---|---|-----|-----|-----|------|
| I <sub>S</sub>  | Continuous Source Current (Body Diode)          | MOSFET symbol showing the integral reverse p-n junction diode (body diode)              |     |     | 60  | A    |
| I <sub>SM</sub> | Pulsed Source Current (Body Diode) <sup>①</sup> |   |     |     | 210 |      |
| V <sub>SD</sub> | Diode Forward Voltage                           | I <sub>SD</sub> = 28A, T <sub>J</sub> = 25°C, V <sub>GS</sub> = 0V                      |     |     | 1.0 | V    |
| t <sub>rr</sub> | Reverse Recovery Time                           | I <sub>SD</sub> = 28A <sup>②</sup>  |     | 745 |     | ns   |
| Q <sub>rr</sub> | Reverse Recovery Charge                         | di <sub>SD</sub> /dt = 100A/μs, T <sub>J</sub> = 25°C                                   |     | 19  |     | μC   |
| dv/dt           | Peak Recovery dv/dt                             | I <sub>SD</sub> ≤ 28A, di/dt ≤ 1000A/μs, V <sub>DD</sub> = 100V, T <sub>J</sub> = 125°C |     |     | 8   | V/ns |

① Repetitive Rating: Pulse width and case temperature limited by maximum junction temperature.

② Starting at T<sub>J</sub> = 25°C, L = 4.03mH, R<sub>G</sub> = 25Ω, I<sub>AS</sub> = 28A.

③ Pulse test: Pulse Width < 380μs, duty cycle < 2%.

④ C<sub>o(cr)</sub> is defined as a fixed capacitance with the same stored charge as C<sub>OSS</sub> with V<sub>DS</sub> = 67% of V<sub>(BR)DSS</sub>.

⑤ C<sub>o(er)</sub> is defined as a fixed capacitance with the same stored energy as C<sub>OSS</sub> with V<sub>DS</sub> = 67% of V<sub>(BR)DSS</sub>. To calculate C<sub>o(er)</sub> for any value of V<sub>DS</sub> less than V<sub>(BR)DSS</sub>, use this equation: C<sub>o(er)</sub> = -1.10E-7/V<sub>DS</sub><sup>2</sup> + 4.60E-8/V<sub>DS</sub> + 1.72E-10.

⑥ R<sub>G</sub> is external gate resistance, not including internal gate resistance or gate driver impedance. (MIC4452)

Microsemi reserves the right to change, without notice, the specifications and information contained herein.

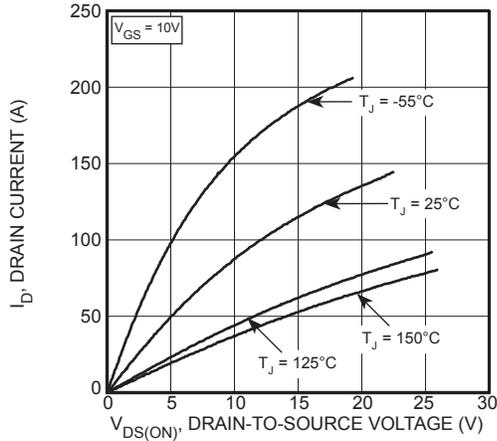


Figure 1, Output Characteristics

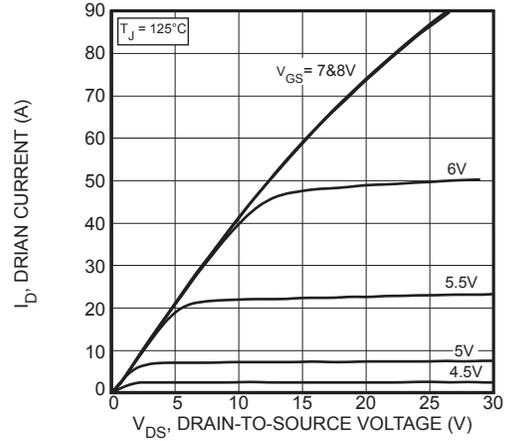


Figure 2, Output Characteristics

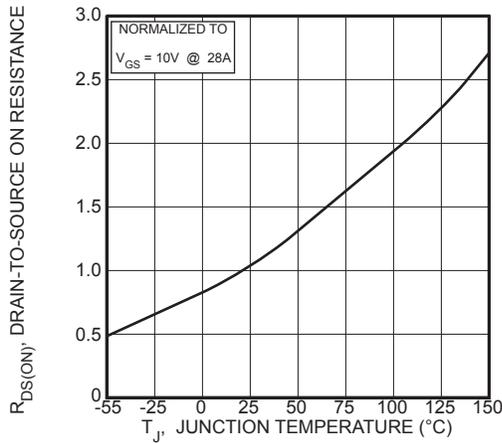


Figure 3,  $R_{DS(ON)}$  vs Junction Temperature

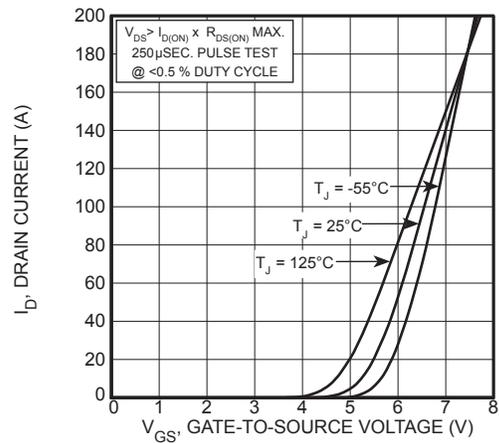


Figure 4, Transfer Characteristics

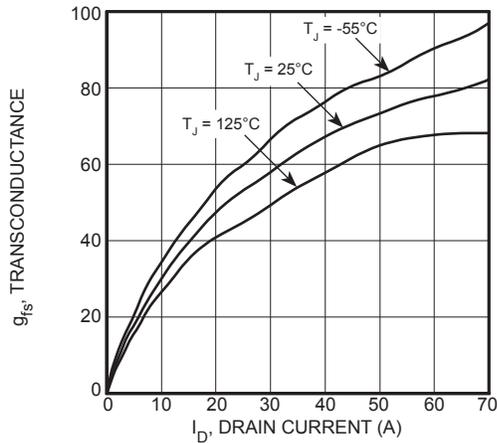


Figure 5, Gain vs Drain Current

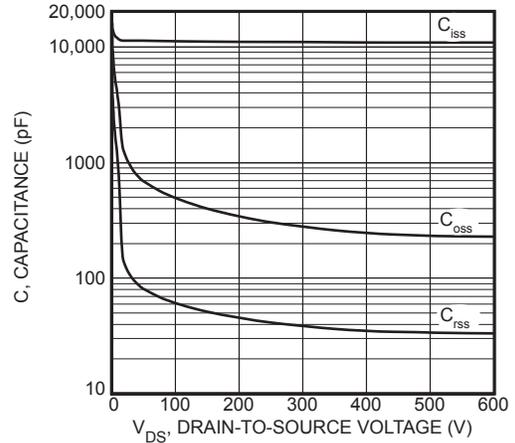


Figure 6, Capacitance vs Drain-to-Source Voltage

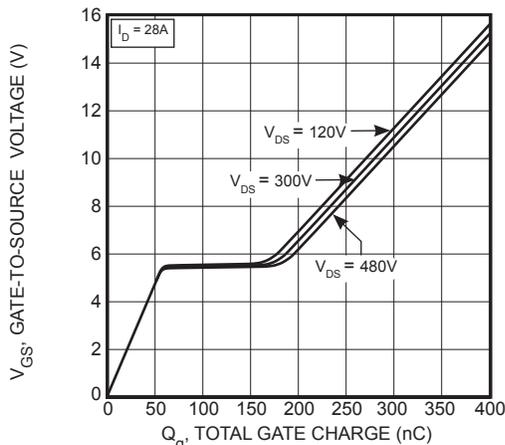


Figure 7, Gate Charge vs Gate-to-Source Voltage




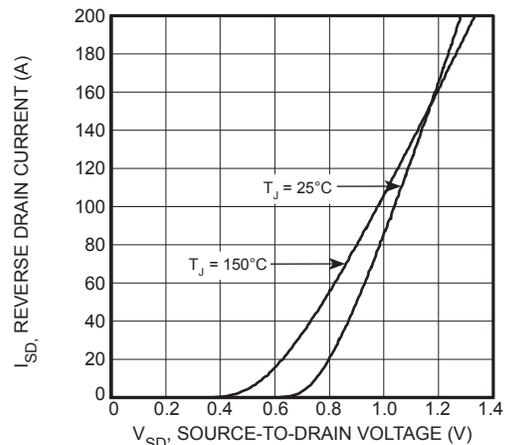




Figure 8, Reverse Drain Current vs Source-to-Drain Voltage

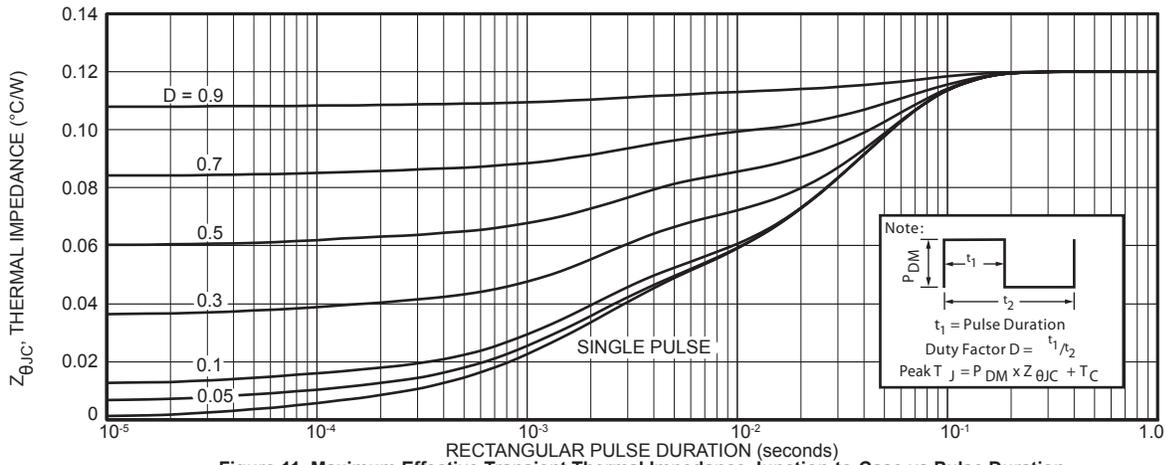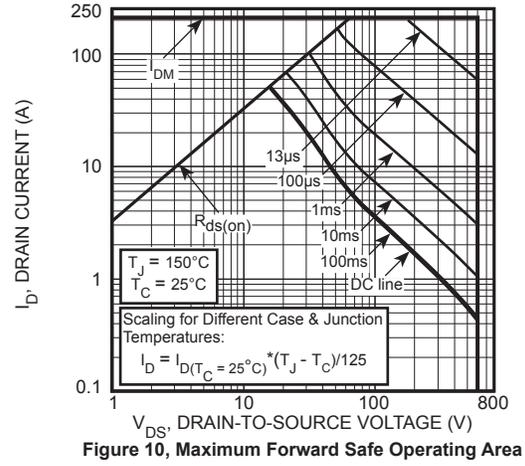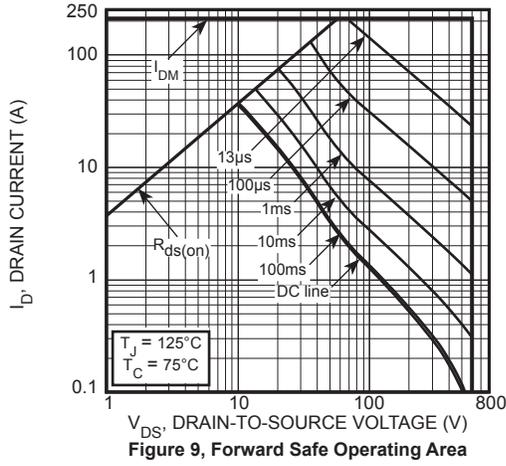

**T-MAX™ (B2) Package Outline**

**TO-264 (L) Package Outline**

Ⓜ 100% Sn Plated

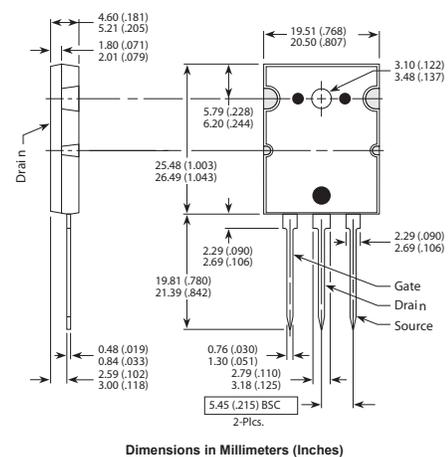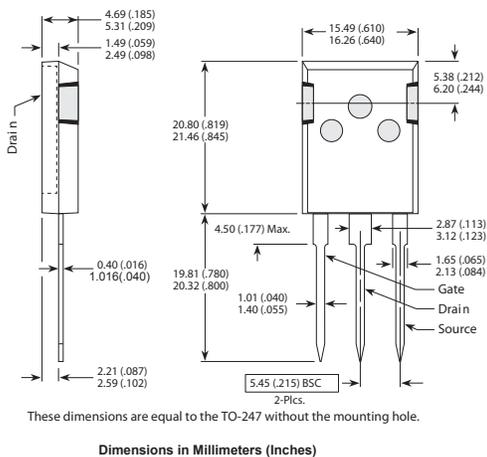

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9