

## **S662 Preset Batch/Dual Counter**



File# E199939



- Easily programmed from the front panel
- Remote reset capability
- Input variety:  
    Quadrature, Switch, TTL, CMOS, NAMUR, PNP, NPN
- Software functions include:  
    Password  
    Display Scaling  
    Set Point Programming  
    Decimal Point Selection
- 5A Relay Outputs
- Optional 12DCV Excitation

The S662 is a multi-function counter that can be easily configured to operate either in a dual mode or in a totalizing/batch mode, each with separate scaling and reset functions.

When functioning in the dual mode, full direction control is maintained for the totalizing and batch counts.

In the totalizing batch mode, the secondary value (batch count) is incremented after the primary totalizing count has completed its cycle.


The counter is powered from 120 or 240VAC and has a non-volatile EEPROM to retain all programming and count information when the power source is removed or interrupted.

An option 12DCV excitation output module can provide power for external sensors.

This versatile counter has latching, boundary or timed (0.01 to 599.99 seconds) output modes.

## S662 Preset Batch/Dual Counter

### Ordering Information

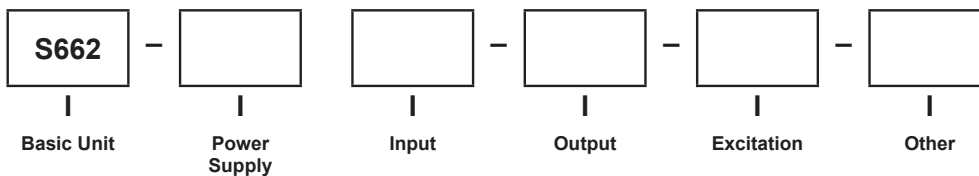

| Select From Each One Below |   |                           |
|----------------------------|---|---------------------------|
| Basic Unit                 |   |                           |
|                            |   | S662                      |
| Power Supply               |   |                           |
|                            | 1 | 120 ACV                   |
|                            | 2 | 240 ACV                   |
| Input                      |   |                           |
|                            | 1 | Standard                  |
|                            | 2 | Quadrature                |
| Output                     |   |                           |
|                            | 0 | None                      |
|                            | 1 | One Relay                 |
|                            | 2 | Two Relays                |
| Excitation                 |   |                           |
|                            | 0 | None                      |
|                            | 1 | 12DCV (100mA Max Current) |
| Other                      |   |                           |
|                            | 0 | None                      |

## S662 Preset Batch/Dual Counter

| Specifications                      |                                                                                                                                          |
|-------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DISPLAY</b>                      |                                                                                                                                          |
| Type                                | 6-digit, 7-segment, red LED                                                                                                              |
| Height                              | 0.56" (14.2mm)                                                                                                                           |
| Decimal Point                       | User-programmable                                                                                                                        |
| Count Direction                     | "+" indication implied, "-" indication displayed                                                                                         |
| Display Range                       | -99,999 to +999,999                                                                                                                      |
| Output Indicators                   | 1 and 2                                                                                                                                  |
| <b>POWER REQUIREMENTS</b>           |                                                                                                                                          |
| AC Voltages                         | 120 or 240VAC, $\pm 10\%$                                                                                                                |
| Power Consumption                   | 3VA                                                                                                                                      |
| <b>INPUT RATINGS</b>                |                                                                                                                                          |
| Current Sinking                     | 10K $\Omega$ 5% Resistor pull-up to (9.0 - 16DCV) $\pm 10\%$                                                                             |
| Current Sourcing                    | 5.1K $\Omega$ 5% Resistor pull-down to common                                                                                            |
| Minimum Pulse Width                 | $\sim 5\mu s$                                                                                                                            |
| Low Pass Filter                     | <200Hz                                                                                                                                   |
| Low Bias                            | VLT = 1.6V $\pm 10\%$ VUT = 3.6V $\pm 10\%$                                                                                              |
| High Bias                           | VLT = 5.0V $\pm 10\%$ VUT = 7.0V $\pm 10\%$                                                                                              |
| Count Rate                          | 20KHz (Pulse Max) 5KHz (Quadrature X4 Max)                                                                                               |
| Maximum Voltage Input A,B, and User | 30DCV (Max)                                                                                                                              |
| User Input                          | VLT $\leq 0.9$ DCV, VUT = 3.15DCV (max)<br>(Second channel reset) Count on the second channel is reset when the User Input is pulled low |
| <b>ENVIRONMENTAL</b>                |                                                                                                                                          |
| Operating Temperature               | 0°C to +40°C                                                                                                                             |
| Storage Temperature                 | -10°C to +60°C                                                                                                                           |
| Relative Humidity                   | 0 to 80% non-condensing for temperatures less than 32°C, decreasing linearly to 50% at 40°C                                              |
| Ambient Temperature                 | 25°C                                                                                                                                     |
| Temp. Coefficient (per °C)          | $\pm 100$ ppm/°C                                                                                                                         |
| Warm-up Time                        | 15 minutes                                                                                                                               |
| <b>MECHANICAL</b>                   |                                                                                                                                          |
| Bezel                               | 3.93" x 2.04" x .52" (99.8mm x 51.8mm x 13.2mm)                                                                                          |
| Depth                               | 3.24" (82.3mm)                                                                                                                           |
| Panel Cutout                        | 3.62" x 1.77" (92mm x 45mm)                                                                                                              |
| Case Material                       | PBT-ABS                                                                                                                                  |
| Weight                              | 9oz (255.1g)                                                                                                                             |

## **S662 Preset Batch/Dual Counter**

### **Mounting Requirements -**


The S662 series 1/8 DIN counters require a panel cutout of 1.77" (45mm) high by 3.62" (92mm) wide.

To install the counter into a panel cutout, remove the clips from the side of the meter.

Slide the meter through your panel cutout, then slide the mounting clips back on the meter.

Press evenly to ensure a proper fit.

### **Dimensions**

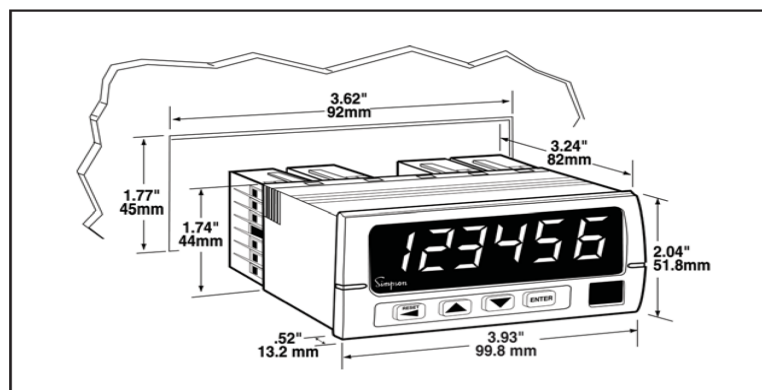

## S662 Preset Batch/Dual Counter

### Accessories available for the S662



#### Chariot

The Chariot is used to mount most cube-style quadrature encoders and measuring wheels. Made of anodized aluminum, the chariot includes mounting hardware and selectable pivotal points. Wheels, tires, and flexible shaft couplings are sold separately.

**Catalog No. 46012**

#### Flexible Shaft Couplings

The one-piece flexible coupling connects the shaft of a cube-style encoder to an ancillary equipment shaft without worry of misalignment of rotary frequency. The coupling ensures minimum windup, minimum rotary oscillation, and no hysteresis.

**Coupling:** For connecting an encoder to a 3/8" shaft. **Catalog No. 46002**

**Coupling package:** For connecting an encoder to 1/4" or 5/16" diameter shaft.  
Package includes: One flexible coupling (1/2" I.D.) and three reducing inserts (1/4", 5/16", 3/8").  
**Catalog No. 46003**



#### Tire Durometer

A Simpson 12" circumference anodized aluminum measuring wheel is the right choice to complete the setup of a length measurement system.

Whether the application requires one or two, Simpson's measuring wheels will perform accurately and reliably throughout the measuring process.

Also included on the measuring wheel is a printed alignment scale which assists in the installation and measurement of the length measurement system.

Simpson offers four replaceable durometer tires that consist of a black tire that has a longer life span and three non marking tires. The three non marking tires are for delicate materials such as plastics, textiles, wood, metal and paper to prevent tearing, damage or marking of delicate materials.

80A, black tire; longer service life for plastics, metals. **Catalog No. 46004**

83A, non-marking tire for textiles, medium textures. **Catalog No. 46005**

92A, non-marking tire for plastics, metals, coarse wood. **Catalog No. 46006**

70A, non-marking tire for soft textiles. **Catalog No. 46007**

5 Feet Cable Assembly **Catalog No. 46013**

10 Feet Cable Assembly **Catalog No. 46014**

15 Feet Cable Assembly **Catalog No. 46015**

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9