


PCI-9111 Series

16-CH 12/16-Bit 100 kS/s Low-Cost Multi-Function DAQ Cards

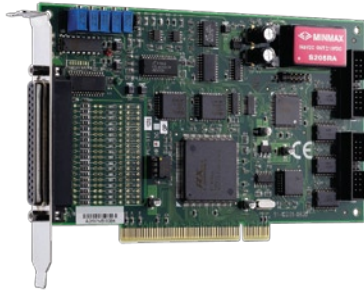

Introduction

ADLINK's PCI-9111 series are 16-CH, 100 kS/s low-cost multi-function DAQ cards that feature flexible analog input configurations. An RC filter is implemented on each A/D input channel to allow attenuation or filtering of the input signals. The PCI-9111 series provide analog inputs with 5 programmable input ranges for bipolar inputs. The PCI-9111 series also support automatic analog input scanning. The PCI-9111DG provides 12-bit A/D resolution while the PCI-9111HR provides 16-bit A/D resolution.

The PCI-9111 series also feature 1-CH 12-bit analog output, 16-CH TTL digital inputs and 16-CH TTL digital outputs. ADLINK's PCI-9111 series delivers cost-effective and reliable data acquisition capabilities, and is ideal for a broad variety of applications.

Features

- Supports a 32-bit 5 V PCI bus
- 12-bit A/D resolution (PCI-9111DG)
- 16-bit A/D resolution (PCI-9111HR)
- 16-CH single-ended analog inputs
- Up to 100 kS/s sampling rate
- Onboard 1 k-sample A/D FIFO
- Programmable gains of x1, x2, x4, x8, x16
- Bipolar analog input ranges
- Onboard low-pass filtering capability for analog inputs
- Automatic analog inputs scanning
- One 12-bit multiplying analog outputs
- 16-CH TTL digital inputs and 16-CH TTL digital outputs
- 4-CH TTL extended digital inputs and 4-CH TTL extended digital outputs
- Compact, half-size PCB
- Operating Systems
 - Windows 7/Vista/XP/2000/2003 Server
 - Linux
- Recommended Software
 - AD-Logger
 - VB.NET/VC.NET/VB/VC++/BCB/Delphi
 - DAQBench
- Driver Support
 - DAQPilot for LabVIEW™
 - DAQ-MTLB for MATLAB®
 - PCIS-DASK for Windows
 - PCIS-DASK/X for Linux

Specifications

Analog Input

- Number of channels: 16 single-ended
- Resolution
 - 12 bits (PCI-9111DG)
 - 16 bits (PCI-9111HR)
- Conversion time: 8 μs
- Maximum sampling rate: 100 kS/s
- Input signal ranges (software programmable)

| Gain | Input Range |
|------|-------------|
| | Bipolar |
| 1 | ±10 V |
| 2 | ±5 V |
| 4 | ±2.5 V |
| 8 | ±1.25 V |
| 16 | ±0.625 V |

Accuracy

| Gain | Accuracy |
|------|----------------------|
| 1, 2 | 0.01% of FSR ± 1 LSB |
| 4, 8 | 0.02% of FSR ± 1 LSB |
| 16 | 0.04% of FSR ± 1 LSB |

- Input coupling: DC
- Overvoltage protection: continuous ±35 V
- Input impedance: 10 MΩ
- Trigger modes: software, pacer, and external trigger (5 V/TTL compatible)
- FIFO buffer size: 1 k samples
- Data transfers: polling, interrupt

Analog Output

- Number of channels: 1 voltage output (NO s)
- Resolution: 12 bits
- Output ranges (jumper selectable)

| Output Range | |
|--------------|-----------|
| Bipolar | ±10 V |
| Unipolar | 0 to 10 V |

- Output driving capacity: ±5 mA max
- Settling time: 30 μs
- Data transfers: programmed I/O

Digital I/O

- Number of channels: 16 inputs and 16 outputs
- Compatibility: 5 V/TTL
- Data transfers: programmed I/O

General Specifications

- I/O connector
 - 37-pin D-sub female
 - 20-pin ribbon male x 2
- Operating temperature: 0°C to 60°C
- Storage temperature: -20°C to 80°C
- Relative humidity: 5% to 95%, non-condensing
- Power requirements

| Device | +5 V |
|------------|----------------|
| PCI-9111DG | 570 mA typical |
| PCI-9111HR | 570 mA typical |

- Dimensions (not including connectors)
175 mm x 107 mm

Terminal Boards & Cables

- **DIN-37D-01***
Terminal Board with One 37-pin D-sub Connector and DIN-Rail Mounting
- **DIN-20P-01***
Terminal Board with One 20-pin Ribbon Connector and DIN-Rail Mounting
- **ACLD-9137-01**
General-Purpose Terminal Board with One 37-pin D-sub Male Connector
- **ACLD-9188-01***
General-Purpose Terminal Board with Two 20-pin Ribbon Connectors and One 37-pin D-sub Connector
- **ACLD-9182A-01***
Terminal Board with 16-CH Isolated Digital Inputs
- **ACLD-9185-01***
Terminal Board with 16-CH Relay Outputs

* Cables are not included. For information on mating cables, refer to P2-61/62

Ordering Information

- **PCI-9111DG**
16-CH 12-Bit 100 kS/s Low-Cost Multi-Function DAQ Card
- **PCI-9111HR**
16-CH 16-Bit 100 kS/s Low-Cost Multi-Function DAQ Card

Pin Assignment

| CN3 | | | CN1 | | |
|---------|----|-----------|--------|----|------------|
| AI0 | 1 | 20 AI8 | DI0 | 1 | 2 DI1 |
| AI1 | 2 | 21 AI9 | DI2 | 3 | 4 DI3 |
| AI2 | 3 | 22 AI10 | DI4 | 5 | 6 DI5 |
| AI3 | 4 | 23 AI11 | DI6 | 7 | 8 DI7 |
| AI4 | 5 | 24 AI12 | DI8 | 9 | 10 DI9 |
| AI5 | 6 | 25 AI13 | DI10 | 11 | 12 DI11 |
| AI6 | 7 | 26 AI14 | DI12 | 13 | 14 DI13 |
| AI7 | 8 | 27 AI15 | DI14 | 15 | 16 DI15 |
| A.GND | 9 | 28 A.GND | GND | 17 | 18 GND |
| A.GND | 10 | 29 A.GND | +5Vout | 19 | 20 +12Vout |
| N/C | 11 | 30 DA Out | | | |
| PreTrg | 12 | 31 EDI0 | | | |
| +12Vout | 13 | 32 EDI1 | | | |
| D.GND | 14 | 33 EDI2 | | | |
| D.GND | 15 | 34 EDI3 | | | |
| ExtTrg | 16 | 35 EDO0 | | | |
| EDO1 | 17 | 36 EDO2 | | | |
| EDO3 | 18 | 37 N/C | | | |
| +5Vout | 19 | | | | |
| | | | CN2 | | |
| | | | DO0 | 1 | 2 DO1 |
| | | | DO2 | 3 | 4 DO3 |
| | | | DO4 | 5 | 6 DO5 |
| | | | DO6 | 7 | 8 DO7 |
| | | | DO8 | 9 | 10 DO9 |
| | | | DO10 | 11 | 12 DO11 |
| | | | DO12 | 13 | 14 DO13 |
| | | | DO14 | 15 | 16 DO15 |
| | | | GND | 17 | 18 GND |
| | | | +5Vout | 19 | 20 +12Vout |

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9