
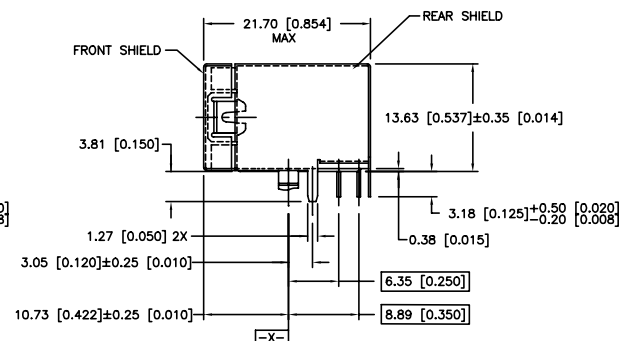


Printed: Sep 12, 2013

PRODUCT NO

SEE TABLE


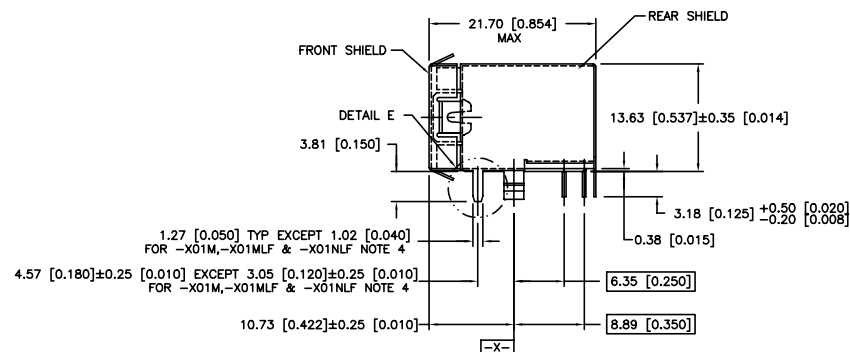


VIEW A-A

NOTE 5

NOTES:

- RECOMMENDED P.C.B. THICKNESS 1.60 [0.063].
- CONTACTS: PHOS BRONZE ALLOY UNS-C51000, ϕ 0.460 [0.0181] ROUND WIRE, PLATING SEE TABLE.
- SHIELDING MAT'L: .25 [0.010] THICK BRASS ALLOY.
SHIELDING PLATING: FOR 94910-XXXM: 2.54 μ m/100u" MIN BRIGHT TIN-LEAD PLATED OVER 0.76 μ m/30u" MIN NICKEL UNDERPLATING PER BUS-15-002/M.
LEAD FREE OPTION:
FOR 94910-XXXNLF: 0.76 μ m/30u" MIN NICKEL PLATING, WITH SELECTIVE TIN ON SOLDER TAILS, SEE DETAIL E.
SHIELDING PLATING: FOR 94910-XXXMLF: 2.54 μ m/100u" MIN BRIGHT PURE TIN PLATED OVER 0.76 μ m/30u" MIN NICKEL UNDERPLATING PER BUS-15-002/M.
- SPECIALLY FOR ONE-PORT P/N 94910-X01M, -X01MLF & 94910-X01NLF ONLY. SOLDER TAIL OF SHIELD IS 1.02 [0.040] WIDE, DISTANCE FROM PCB PEG TO THE SOLDER TAIL IS 3.05 [0.120].
- SPECIALLY FOR ONE-PORT P/N 94910-X01AM, -X01AMLF & 94910-X01ANLF ONLY. SOLDER TAIL OF SHIELD IS 1.27 [0.050] WIDE, DISTANCE FROM PCB PEG TO THE SOLDER TAIL IS 3.05 [0.120].
- ALL DIMENSIONS IN MILLIMETERS/INCHES.
- CENTER PEG FOR 8-PORTS AND ABOVE, (-XXXM, -XXXMLF PRODUCT ONLY).
- NO CENTER PEG AVAILABLE ON -XXXNLF PRODUCT.
- 'LF' SUFFIX AT THE END OF PART NUMBER IS LEAD FREE.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 15 SECONDS IN A WAVE SOLDER APPLICATION WITH A 1.5mm MINIMUM THICK CIRCUIT BOARD. SEE APPLICATION NOTES/PROCEDURES IF THEY ARE AVAILABLE.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATION AS DESCRIBED IN GS-22-008
- PLATING OPTIONS:
MAY BE EITHER GOLD OR GXT PLATED AT MANUFACTURER'S OPTION.

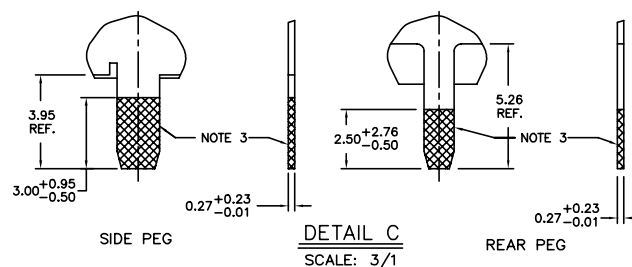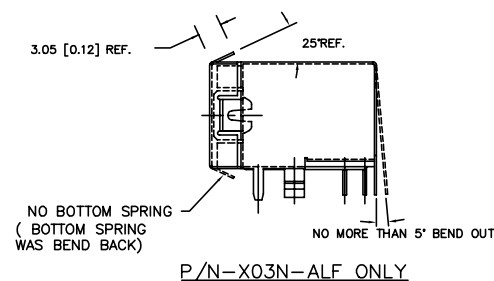

mat'l. code				surface		tolerance		projection		product family	
ISO1302				ISO1101		ISO406		ISO1101		MOD JACK	
tolerances unless otherwise specified				tolerances unless otherwise specified		tolerances unless otherwise specified		tolerances unless otherwise specified		tolerances unless otherwise specified	
R	M05-0067	MHT	4/8/05	angle		0.X±0.3		mm		R/A 8 POS GANG JACK ASSY	
S	N08-0001	SH	1/3/07	0°±2'		0.XX±0.15		scale 1.0		SHIELDED, SNAP PEG	
T	N08-0100	SH	09/25/08	dr		KCHOU		3/18/93		dwg no	
U	N08-0239	SH	11/10/08	engr		TC		3/18/93		sheet 2 of 6	
V	ELX-N-010997	SH	3/14/12	chr		J.TSAO		3/18/93		size	
appd				J.TSAO		3/18/93		type		Product Customer Drawing	
sheet index				revision							



PRODUCT No.	No. OF PORTS	DIM A +0.60 [0.024] -0	DIM B	DIM C±0.10 [0.004]	DIM D±0.15 [0.006]	GROUND LEG NO. ON THE BACK (VIEW B)	NOTE
94910-X01M	1	15.74 [0.620]	-----	5.72 [0.225]	11.43 [0.450]	NONE	NOTE 4
94910-X01AM	1	15.74 [0.620]	-----	5.72 [0.225]	11.43 [0.450]	NONE	NOTE 5
94910-X04M	4	58.92 [2.320]	41.91 [1.650]	26.67 [1.050]	53.34 [2.100]	3	
94910-X08M	8	114.80 [4.520]	97.79 [3.850]	54.61 [2.150]	109.22 [4.300]	3	
94910-X01MLF	1	15.74 [0.620]	-----	5.72 [0.225]	11.43 [0.450]	NONE	NOTE 4
94910-X01AMLF	1	15.74 [0.620]	-----	5.72 [0.225]	11.43 [0.450]	NONE	NOTE 5
94910-X04MLF	4	58.92 [2.320]	41.91 [1.650]	26.67 [1.050]	53.34 [2.100]	3	
94910-X08MLF	8	114.80 [4.520]	97.79 [3.850]	54.61 [2.150]	109.22 [4.300]	3	
94910-X11MLF	1	15.74 [0.620]	-----	5.72 [0.225]	11.43 [0.450]	NONE	NOTE 4
94910-X11AMLF	1	15.74 [0.620]	-----	5.72 [0.225]	11.43 [0.450]	NONE	NOTE 5
94910-X14MLF	4	58.92 [2.320]	41.91 [1.650]	26.67 [1.050]	53.34 [2.100]	3	
94910-X18MLF	8	114.80 [4.520]	97.79 [3.850]	54.61 [2.150]	109.22 [4.300]	3	

0: MEETS WAVE SOLDER PROCESS PRODUCT NO.
1: MEETS PIP PROCESS PRODUCT NO.

PLATING CODE X	PLATING ⑫
0	5u" Au + high performance lubricant
1	.38uM/15u" GOLD
3	5u" Au + high performance lubricant
5	1.27uM/50u" GOLD

mat'l. code				surface ISO1302 ✓	tolerance ISO1101 ISO406	projection 	product family MOD JACK			
ltr	ecn	nodr	date	tolerances unless otherwise specified			R/A 8 POS GANG JACK ASSY SHIELDED, SNAP PEG			
R	M05-0067	MHT	4/8/05	angle 0°±2'	0.X±0.3					
S	N08-0001	SH	1/3/07		0.XX±0.15					
T	N08-0100	SH	09/25/08		0.XXX±0.05					
U	N08-0239	SH	11/10/08	dr	KCHOU	3/18/93				
V	ELX-N-010897	SH	MMO	3/14/12	engr	TC				
					chr	J.TSAO				
					appd	J.TSAO	94910			
sheet index	revision	sheet								
							type	Product	Customer	Drawing



PRODUCT No.	PORTS	DIM A _0	DIM B±0.20 [0.008]	DIM C±0.10 [0.004]	DIM D±0.15 [0.006]	THE BACK (VIEW B)	
94910-X01NLF	1	15.74 [0.620]	-----	5.72 [0.225]	11.43 [0.450]	NONE	NOTE 4
94910-X01ANLF	1	15.74 [0.620]	-----	5.72 [0.225]	11.43 [0.450]	NONE	NOTE 5
94910-X04NLF	4	58.92 [2.320]	41.91 [1.650]	26.67 [1.050]	53.34 [2.100]	3	
94910-X08NLF	8	114.80 [4.520]	97.79 [3.850]	54.61 [2.150]	109.22 [4.300]	3	
94910-X11NLF	1	15.74 [0.620]	-----	5.72 [0.225]	11.43 [0.450]	NONE	NOTE 4
94910-X11ANLF	1	15.74 [0.620]	-----	5.72 [0.225]	11.43 [0.450]	NONE	NOTE 5
94910-X14NLF	4	58.92 [2.320]	41.91 [1.650]	26.67 [1.050]	53.34 [2.100]	3	
94910-X18NLF	8	114.80 [4.520]	97.79 [3.850]	54.61 [2.150]	109.22 [4.300]	3	


0: MEETS WAVE SOLDER PROCESS PRODUCT NO.
1: MEETS PIP PROCESS PRODUCT NO.

PLATING CODE X	PLATING ⑫
0	.76uM/30u" G.X.T.
1	.38uM/15u" GOLD
3	5u" Au + high performance lubricant
5	1.27uM/50u" GOLD


mat'l. code				surface ISO1302 ✓	tolerance ISO1101 ISO406	projection 	product family MOD JACK
ltr	ecn	nodr	date	tolerances unless otherwise specified		 mm scale 1.0	R/A 8 POS GANG JACK ASSY SHIELDED, SNAP PEG
R	M05-0067	MHT	4/8/05	angle	0.X±0.3		
S	N08-0001	SH	1/3/07	0°±2'	0.XX±0.15		
T	N08-0100	SH	09/25/08		0.XXX±0.05		
U	N08-0239	SH	11/10/08	dr	KCHOU	3/18/93	
V	ELX-N-010997	SH	MMO	3/14/12	engr	TC	3/18/93
				chr	J.TSAO	3/18/93	
				appd	J.TSAO	3/18/93	
sheet	revision						
index	sheet						

PRODUCT NO.


SEE TABLE

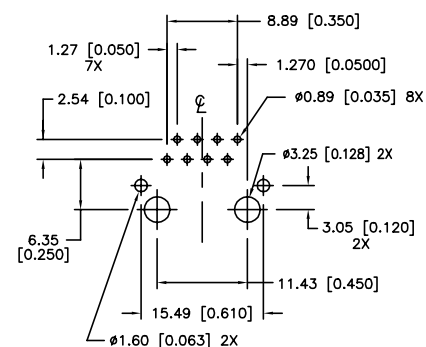


FOR 1-PORT, -X01AM, -X01A, -X01ANLF
-X01AMLF & -X01ALF

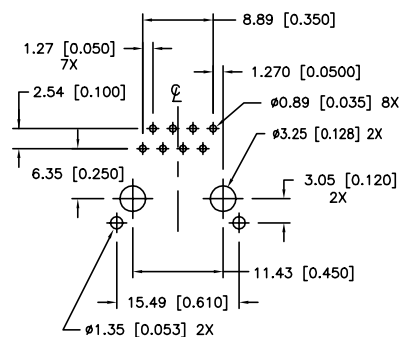

FOR 1-PORT, -X01M, -X01MLF & -X01NLF

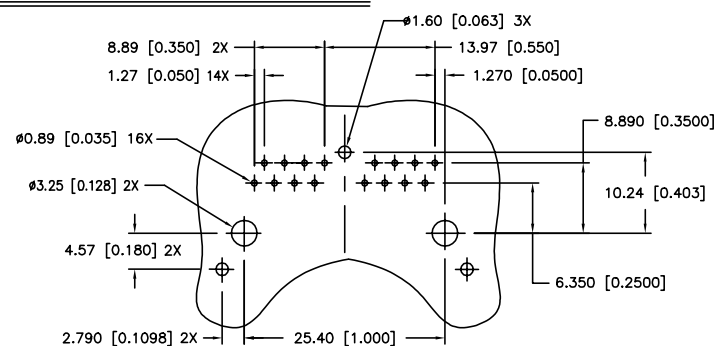


2-PORT

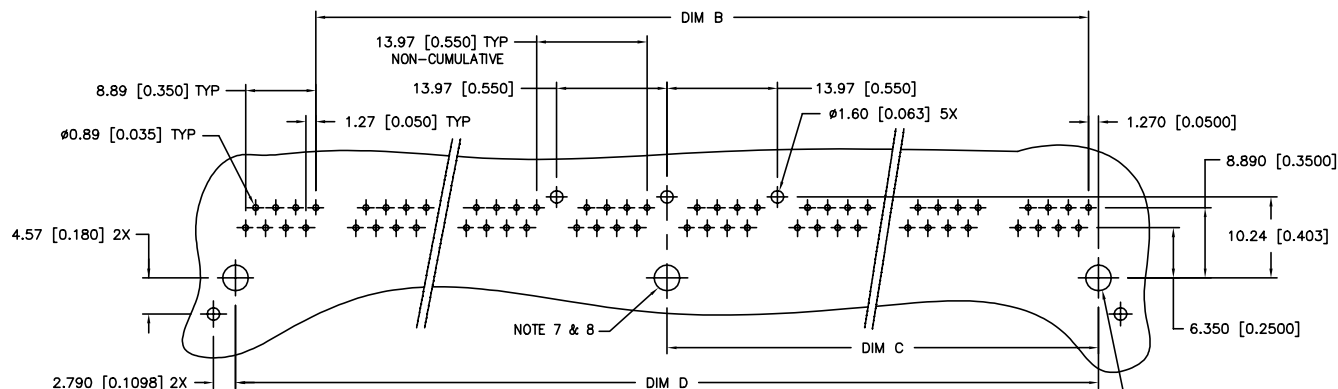

PORT NO. 4,6,8,10,12

-XXXM, -XXXMLF 8, 10, & 12 PORTS-3X
 -XXXM, -XXXMLF BELOW 8 PORTS-2X
 -XXXNLF ALL PORTS-2X

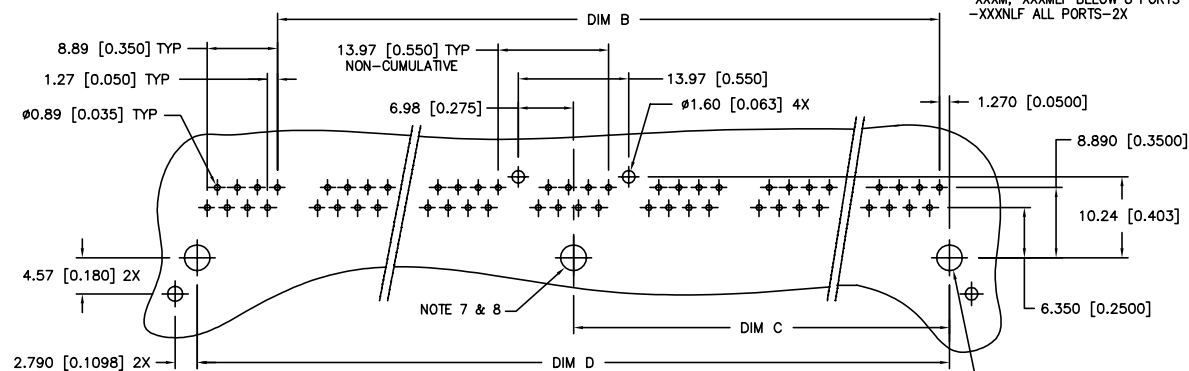

PORT NO. 3,5,7,9,11

-XXXM, -XXXMLF 9, & 11 PORTS-3X
 -XXXM, -XXXMLF BELOW 8 PORTS-2X
 -XXXNLF ALL PORTS-2X

RECOMMENDED P.C.B LAYOUT


mat'l. code				surface ☒ tolerance		projection		product family			
				ISO1302 ☒ ISO1101 ISO406				MOD JACK			
ltr		ecn		nodr		date		tolerances unless otherwise specified		title	
R	M05-0067		MHT	4/8/05		angle		linear		R/A 8 POS GANG JACK ASSY	
S	N08-0001		SH	1/3/07		0.X±0.3		mm		SHIELDED, SNAP PEG	
T	N08-0100		SH	09/25/08		0'±2'		scale 1.0			
U	N08-0239		SH	11/10/08		dr		KCHOU		sheet 5 of 6	
V	ELX-N-010997		SH MMD	3/14/12		engr		TC		94910	
						chr		J.TSAO		A4	
						appd		J.TSAO		type Product Customer Drawing	
sheet		revision									
index		sheet									

LATCHING AND GROUNDING TAB LOCATING CONFIGURATION


- INDICATES LATCHING TAB (SEE SHEET 1)
□ INDICATES GROUNDING TAB ON THE FRONT OF PRODUCT (SEE SHEET 1)
▨ INDICATES GROUNDING LEG ON THE BACK OF PRODUCT (VIEW B)

OBSOLETE

PORT NUMBERS

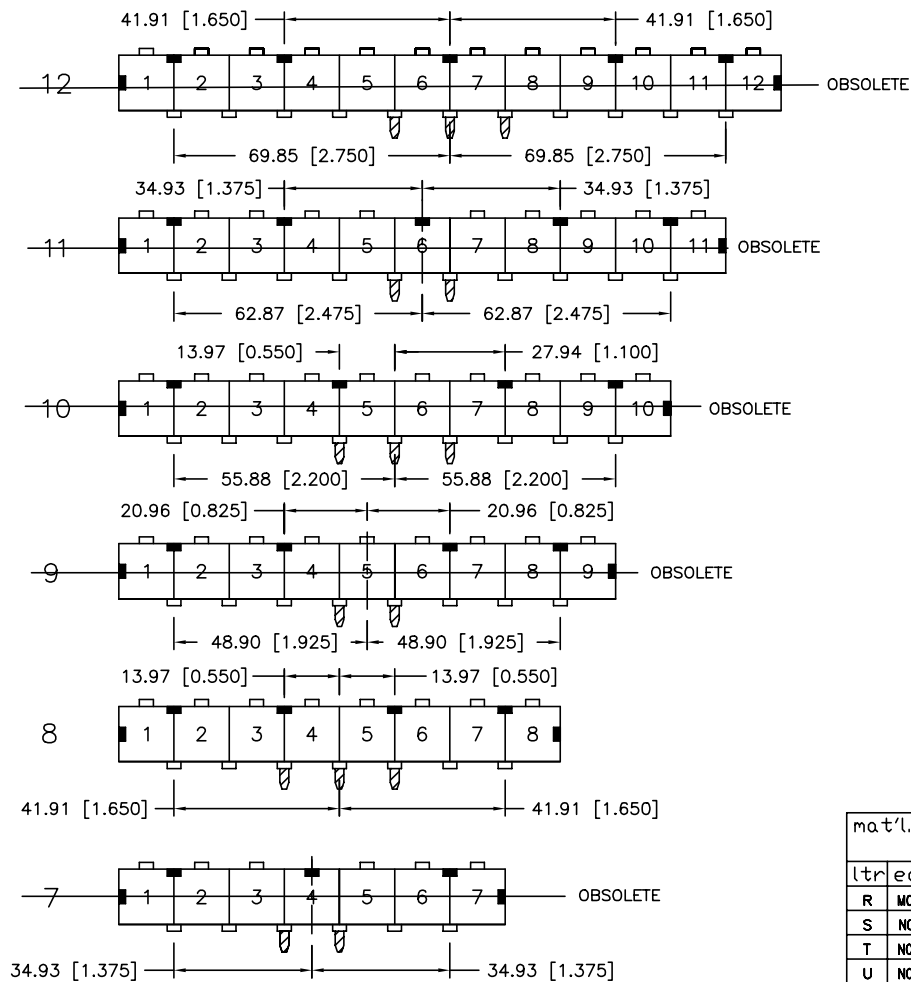

PORT NUMBERS

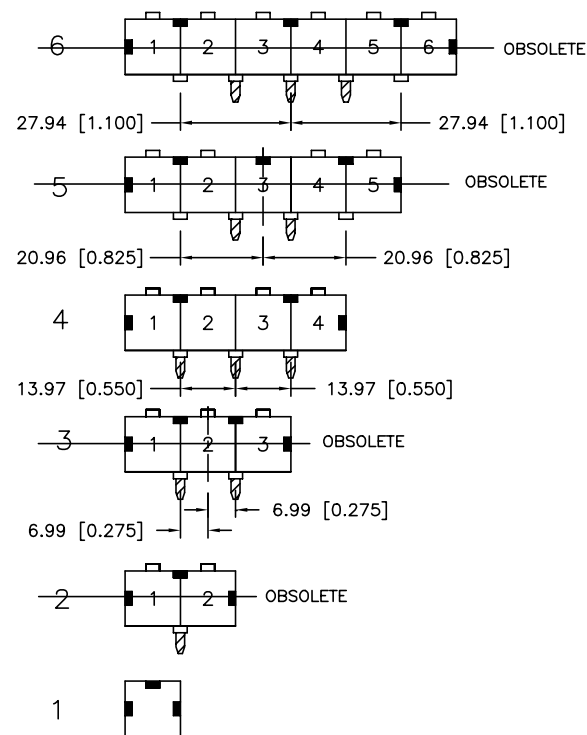

mat'l. code		surface		tolerance		projection		product family	
ISO1302		ISO1101		ISO406		mm		MOD JACK	
ltr ecn nodr		date		tolerances unless otherwise specified		scale		title	
R	M05-0067	MHT	4/8/05	0.X±0.3		1.0		R/A 8 POS GANG JACK ASSY	
S	N08-0001	SH	1/3/07	0.XX±0.15		1.0		SHIELDED, SNAP PEG	
T	N08-0100	SH	09/25/08	0.XXX±0.05		1.0			
U	N08-0239	SH	11/10/08	KCHOU		3/18/93		dwg no	
V	ELX-N-010997	SH	3/14/12	engr TC		3/18/93		sheet 6 of 6	
				chr J.TSAO		3/18/93		size	
				appd J.TSAO		3/18/93		A4	
sheet		revision						type	
index		sheet						Product Customer Drawing	

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9