
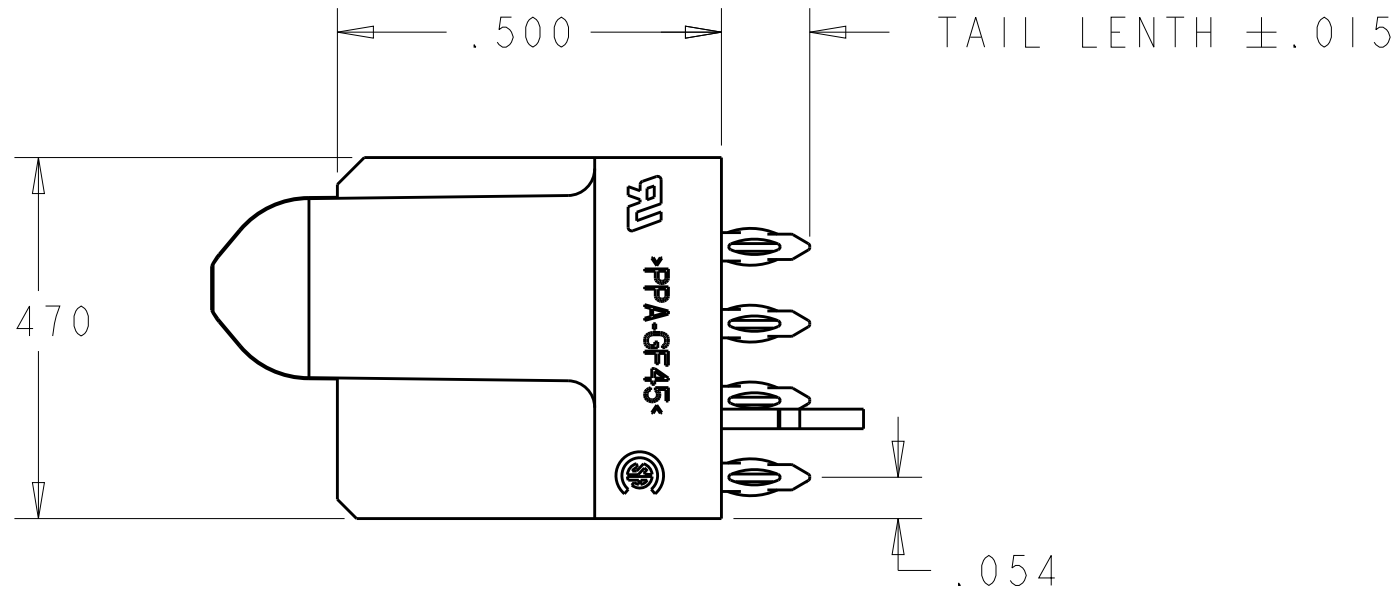
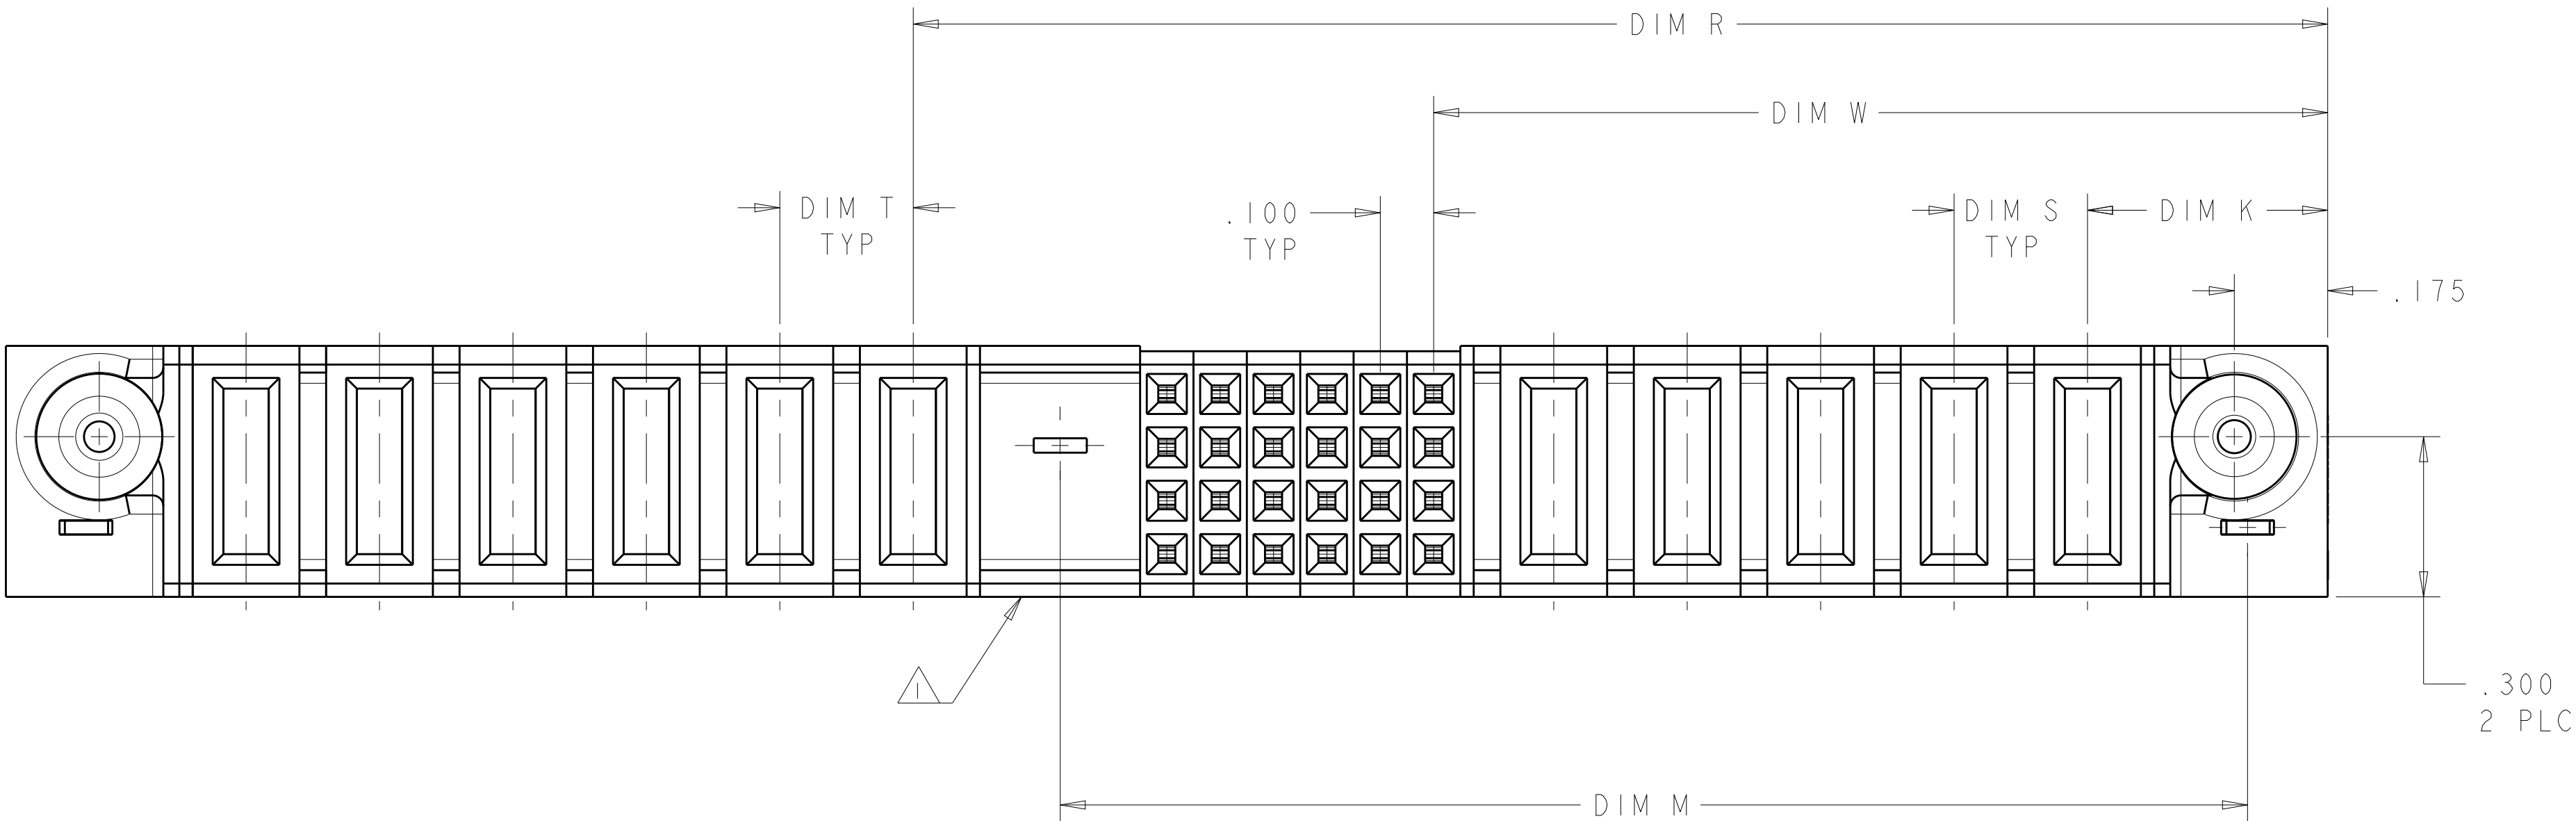
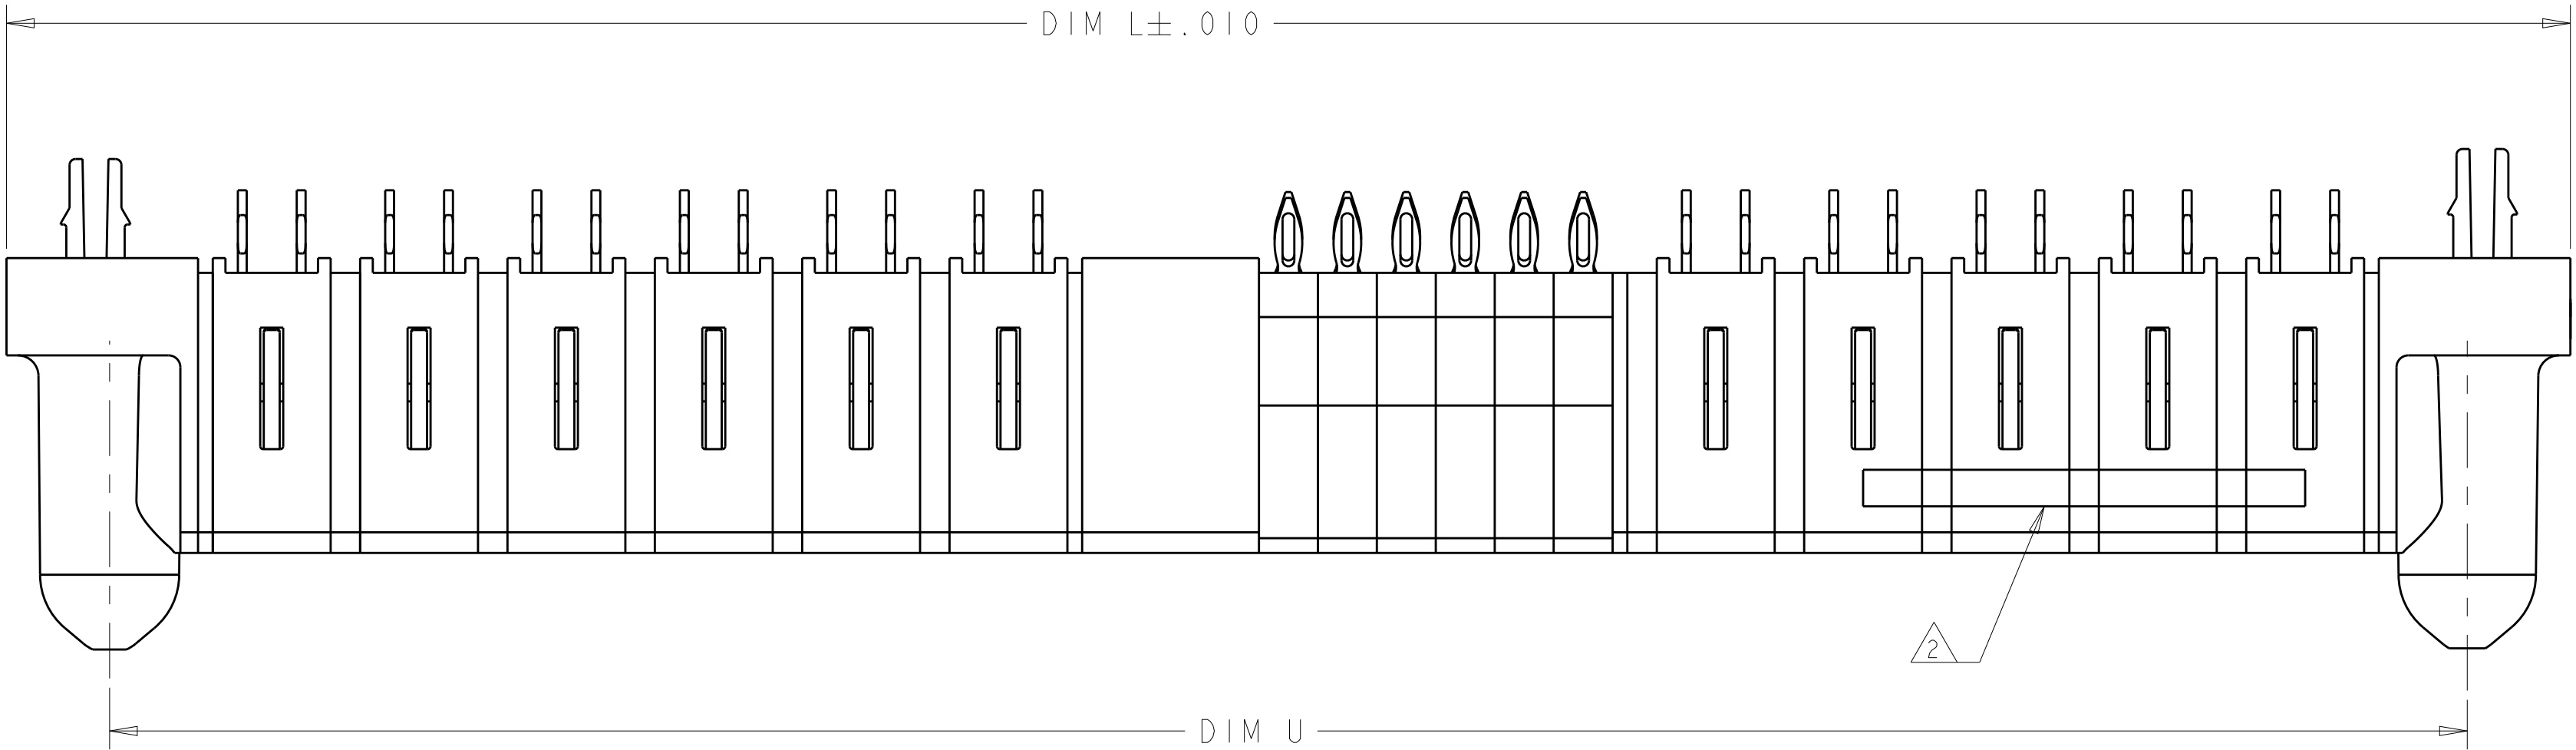


LOC		DIST		REVISIONS				
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD	
		K9		REV PER ECR-12-018831	30OCT2012	AY	SZ	

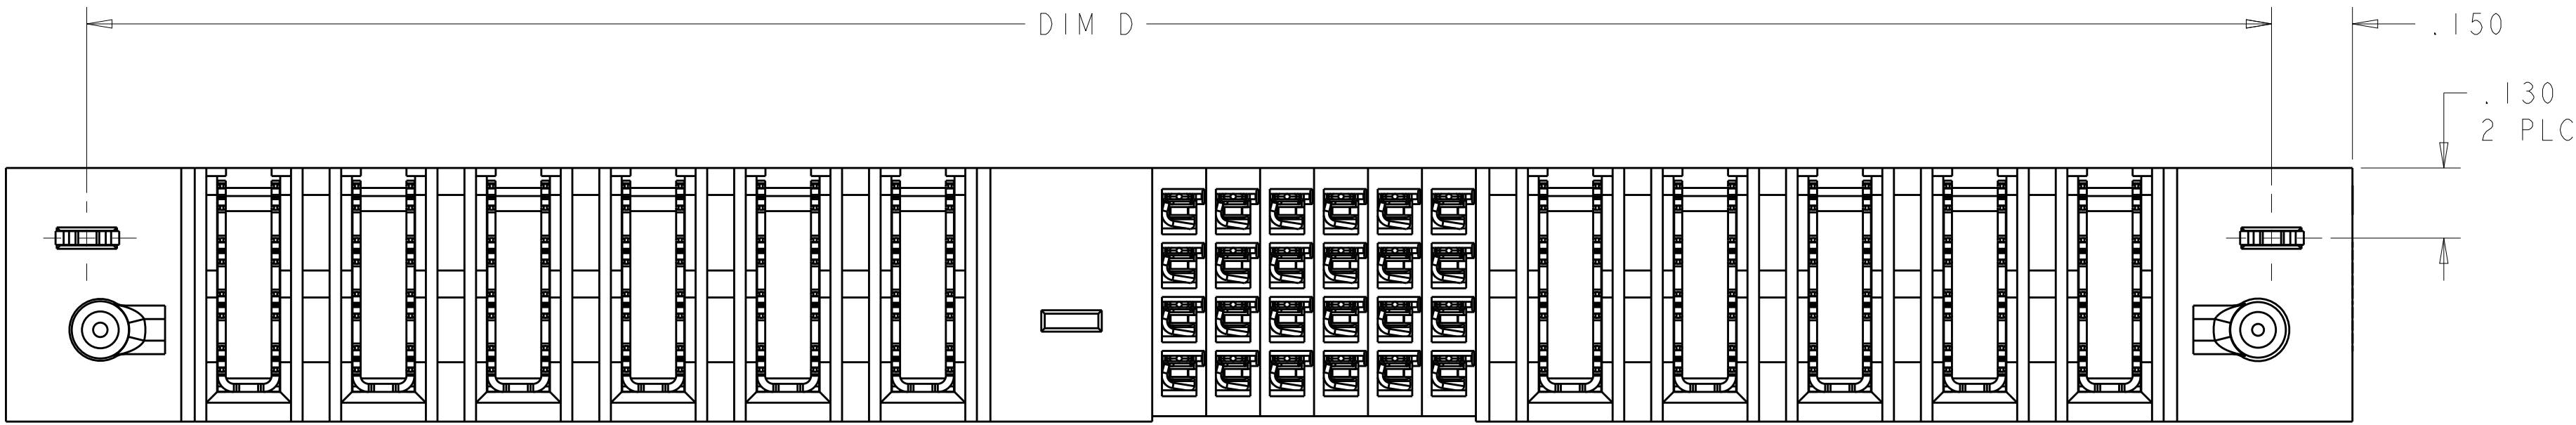

- 1
- OPTIONAL CENTER MODULE, WITH Ø.150 THRU HOLE OR HOLD DOWN FEATURE
- 2
- "AMP", PART NUMBER AND DATE CODE TO BE MARKED IN AREA SHOWN
PARTS UNDER 2.00 LONG MAY BE MARKED ON BOTH SIDES
- 3
- MATERIAL: HOUSING - GLASS FILLED HIGH TEMP THERMO PLASTIC, UL94 V-O
SIGNAL CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY
- 4
- CONTACT PLATING: NOBLE METAL PLATING ON CONTACT FUNCTIONAL AREA
OF POWER CONTACTS AND SIGNAL CONTACTS.
- 5
- MECHANICAL CONNECTOR KEEP OUT ZONE
- 6
- DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
- 7
- PCB - ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES
- 8
- PCB - 0.0453 ±.0010 DRILLED HOLES PLATED WITH .0003 MIN Sn
OVER .001 TO .003 Cu PLATING TO ACHIEVE A .040 HOLE
- 9
- VARAIBLE DIMENSION SHOWN VIEW (SHEET 6)


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI CHK M.PERCHERKE APVD M.PERCHERKE	29APR05 29APR05 -
DIMENSIONS: INCHES	TOLERANCES UNLESS OTHERWISE SPECIFIED:	PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038	NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
	0 PLC ±" 1 PLC ±.01 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±2° FINISH	SIZE A1 CAGE CODE 00779 DRAWING NO 6450540	RESTRICTED TO -
MATERIAL		WEIGHT -	CUSTOMER DRAWING
SCALE 2:1		SHEET 1 OF 19	REV K9

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

K9	1.350	1.300	-	-	1.200	.625	-	1.650	.450	1P + 20S + 1P	6-6450540-6
	2.550	2.500	.250	.250	1.650	1.375	-	2.85	.450	4P + 8S + 4P	6-6450540-5
	1.350	1.300	-	-	1.200	.625	-	1.650	.450	1P + 20S + 1P	6-6450540-2
	-	3.300	.200	.200	2.200	1.625	-	3.650	.450	6P + 20S + 6P	6-6450540-1
	2.950	2.900	.250	.250	2.050	1.375	-	3.250	.450	4P + 24S + 4P	6-6450540-0
	2.050	2.000	.250	.250	1.650	.925	-	2.350	.450	2P + 24S + 2P	5-6450540-9
	2.050	2.000	.250	.250	1.400	1.125	-	2.350	.450	3P + 8S + 3P	5-6450540-5
	2.500	2.450	.250	.250	1.850	1.375	-	2.800	.450	4P + 16S + 3P	5-6450540-4
	2.950	2.900	.250	.250	2.050	1.375	-	3.250	.450	4P + 24S + 4P	5-6450540-3
	1.350	1.300	-	-	1.200	.675	-	1.650	.450	1P + 16S + 1P	5-6450540-2
	1.750	1.700	.250	.250	1.350	.875	-	2.050	.450	2P + 16S + 2P	5-6450540-1
	5.950	5.900	.250	.250	3.550	2.8750	-	6.250	.450	10P + 24S + 10P	5-6450540-0
	5.150	5.100	.250	.250	3.250	2.375	-	5.450	.450	8P + 32S + 8P	4-6450540-9
	1.250	1.200	-	-	1.100	.625	-	1.550	.450	1P + 16S + 1P	4-6450540-8
	2.150	2.100	.250	.250	1.500	1.175	-	2.450	.450	3P + 8S + 3P	4-6450540-7
	1.150	1.100	-	-	1.000	.675	-	1.450	.450	1P + 8S + 1P	4-6450540-6
	-	-	-	.200	-	-	-	2.820	.450	12HDP	4-6450540-5
	-	-	.200	.200	2.600	1.625	-	3.970	.450	6HDP + 36S + 7HDP	4-6450540-4
	2.65	2.60	.250	.250	2.250	1.625	-	2.950	.450	5P + 20S + 2P	(E)4-6450540-3
	-	-	-	.200	-	-	-	2.620	.450	11HDP	(E)4-6450540-2
	-	-	.200	.200	2.600	1.625	-	3.770	.450	6P + 36S + 6P	4-6450540-1
	-	-	.200	.200	4.500	3.425	-	7.470	.450	15P + 40S + 15P	4-6450540-0
	-	-	.200	.200	-	-	-	7.470	-	15P + 40S + 15P	(D)3-6450540-9
	4.650	4.600	.250	.250	3.250	1.875	-	4.950	.450	6P + 52S + 6P	(D)2-6450540-7
	1.950	1.900	-	-	1.550	.875	-	2.250	.450	2P + 24S + 2P	(D)2-6450540-5
	2.450	2.400	.250	.250	1.800	1.125	-	2.750	.450	3P + 24S + 3P	(D)2-6450540-0
	-	1.575	-	-	1.425	.700	-	1.925	.475	1P + 24S + 1P	(E)1-6450540-8
	-	5.450			3.075	2.425	-	5.800	.425	10P + 24S + 12P	1-6450540-4
	3.250	3.200	.200	.200	2.125	1.575	-	3.550	.425	6P + 20S + 6P	1-6450540-2
	-	2.850	.250	.250	2.000	1.125	-	3.200	.450	3P + 32S + 4P	1-6450540-1
	1.950	1.900	.250	.250	1.550	.875	-	2.250	.450	2P + 24S + 2P	1-6450540-0
	-	1.400	.250	.250	1.300	.625	-	1.750	.450	1P + 24S + 1P	6450540-7
	-	2.400	.250	.250	2.050	1.375	-	2.750	.450	4P + 24S + 2P	6450540-6
	-	3.100	.250	.250	2.000	1.625	-	3.450	.450	5P + 12S + 5P	6450540-5
	-	3.400	.250	.250	2.050	1.375	-	3.750	.450	4P + 24S + 6P	6450540-4
	-	7.400	.250	.250	5.050	2.875	-	7.750	.450	10P + 84S + 10P	6450540-3
	-	4.000	.250	.250	2.650	1.675	2.225	4.350	.450	5P+24S+1M+6P	6450540-2
	-	1.575	-	-	1.425	.700	-	1.925	.475	1P + 24S + 1P	6450540-1
	D	U	T	S	R	W	M	L	K	DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.
TOLERANCES UNLESS OTHERWISE SPECIFIED:

DIMENSIONS:
INCHES



MATERIAL

D PLC ±.0
1 PLC ±.01
2 PLC ±.005
3 PLC ±.005
4 PLC ±.0020
ANGLES ±.2°
FINISH

DWN
R. GRZYBOWSKI
CHK
M. PERCHERKE
APVD
M. PERCHERKE

29APR05
29APR05

PRODUCT SPEC
108-1973
APPLICATION SPEC
114-13038
WEIGHT
-

CUSTOMER DRAWING

NAME
VERTICAL RECEPTACLE ASSEMBLY
WITH GUIDES
MULTI-BEAM XL

SIZE
A1

CAGE CODE
100779

DRAWING NO
6450540

RESTRICTED TO
-

SCALE
2:1


SHEET
2

OF
19

REV
K9

ITE Connectivity

PART NUMBER	ROWS		POWER		SIGNAL						POWER				
			P4	P3	6	5	4	3	2	1	P2	P1			
2-6450540-5	D C B A				AP	AP	AP	AP	AP	AP	AP				
					AP	AP	AP	AP	AP	AP	AP				
					AP	AP	AP	AP	AP	AP	AP				
					AP	AP	AP	AP	AP	AP	AP				
2P + 24S + 2P															

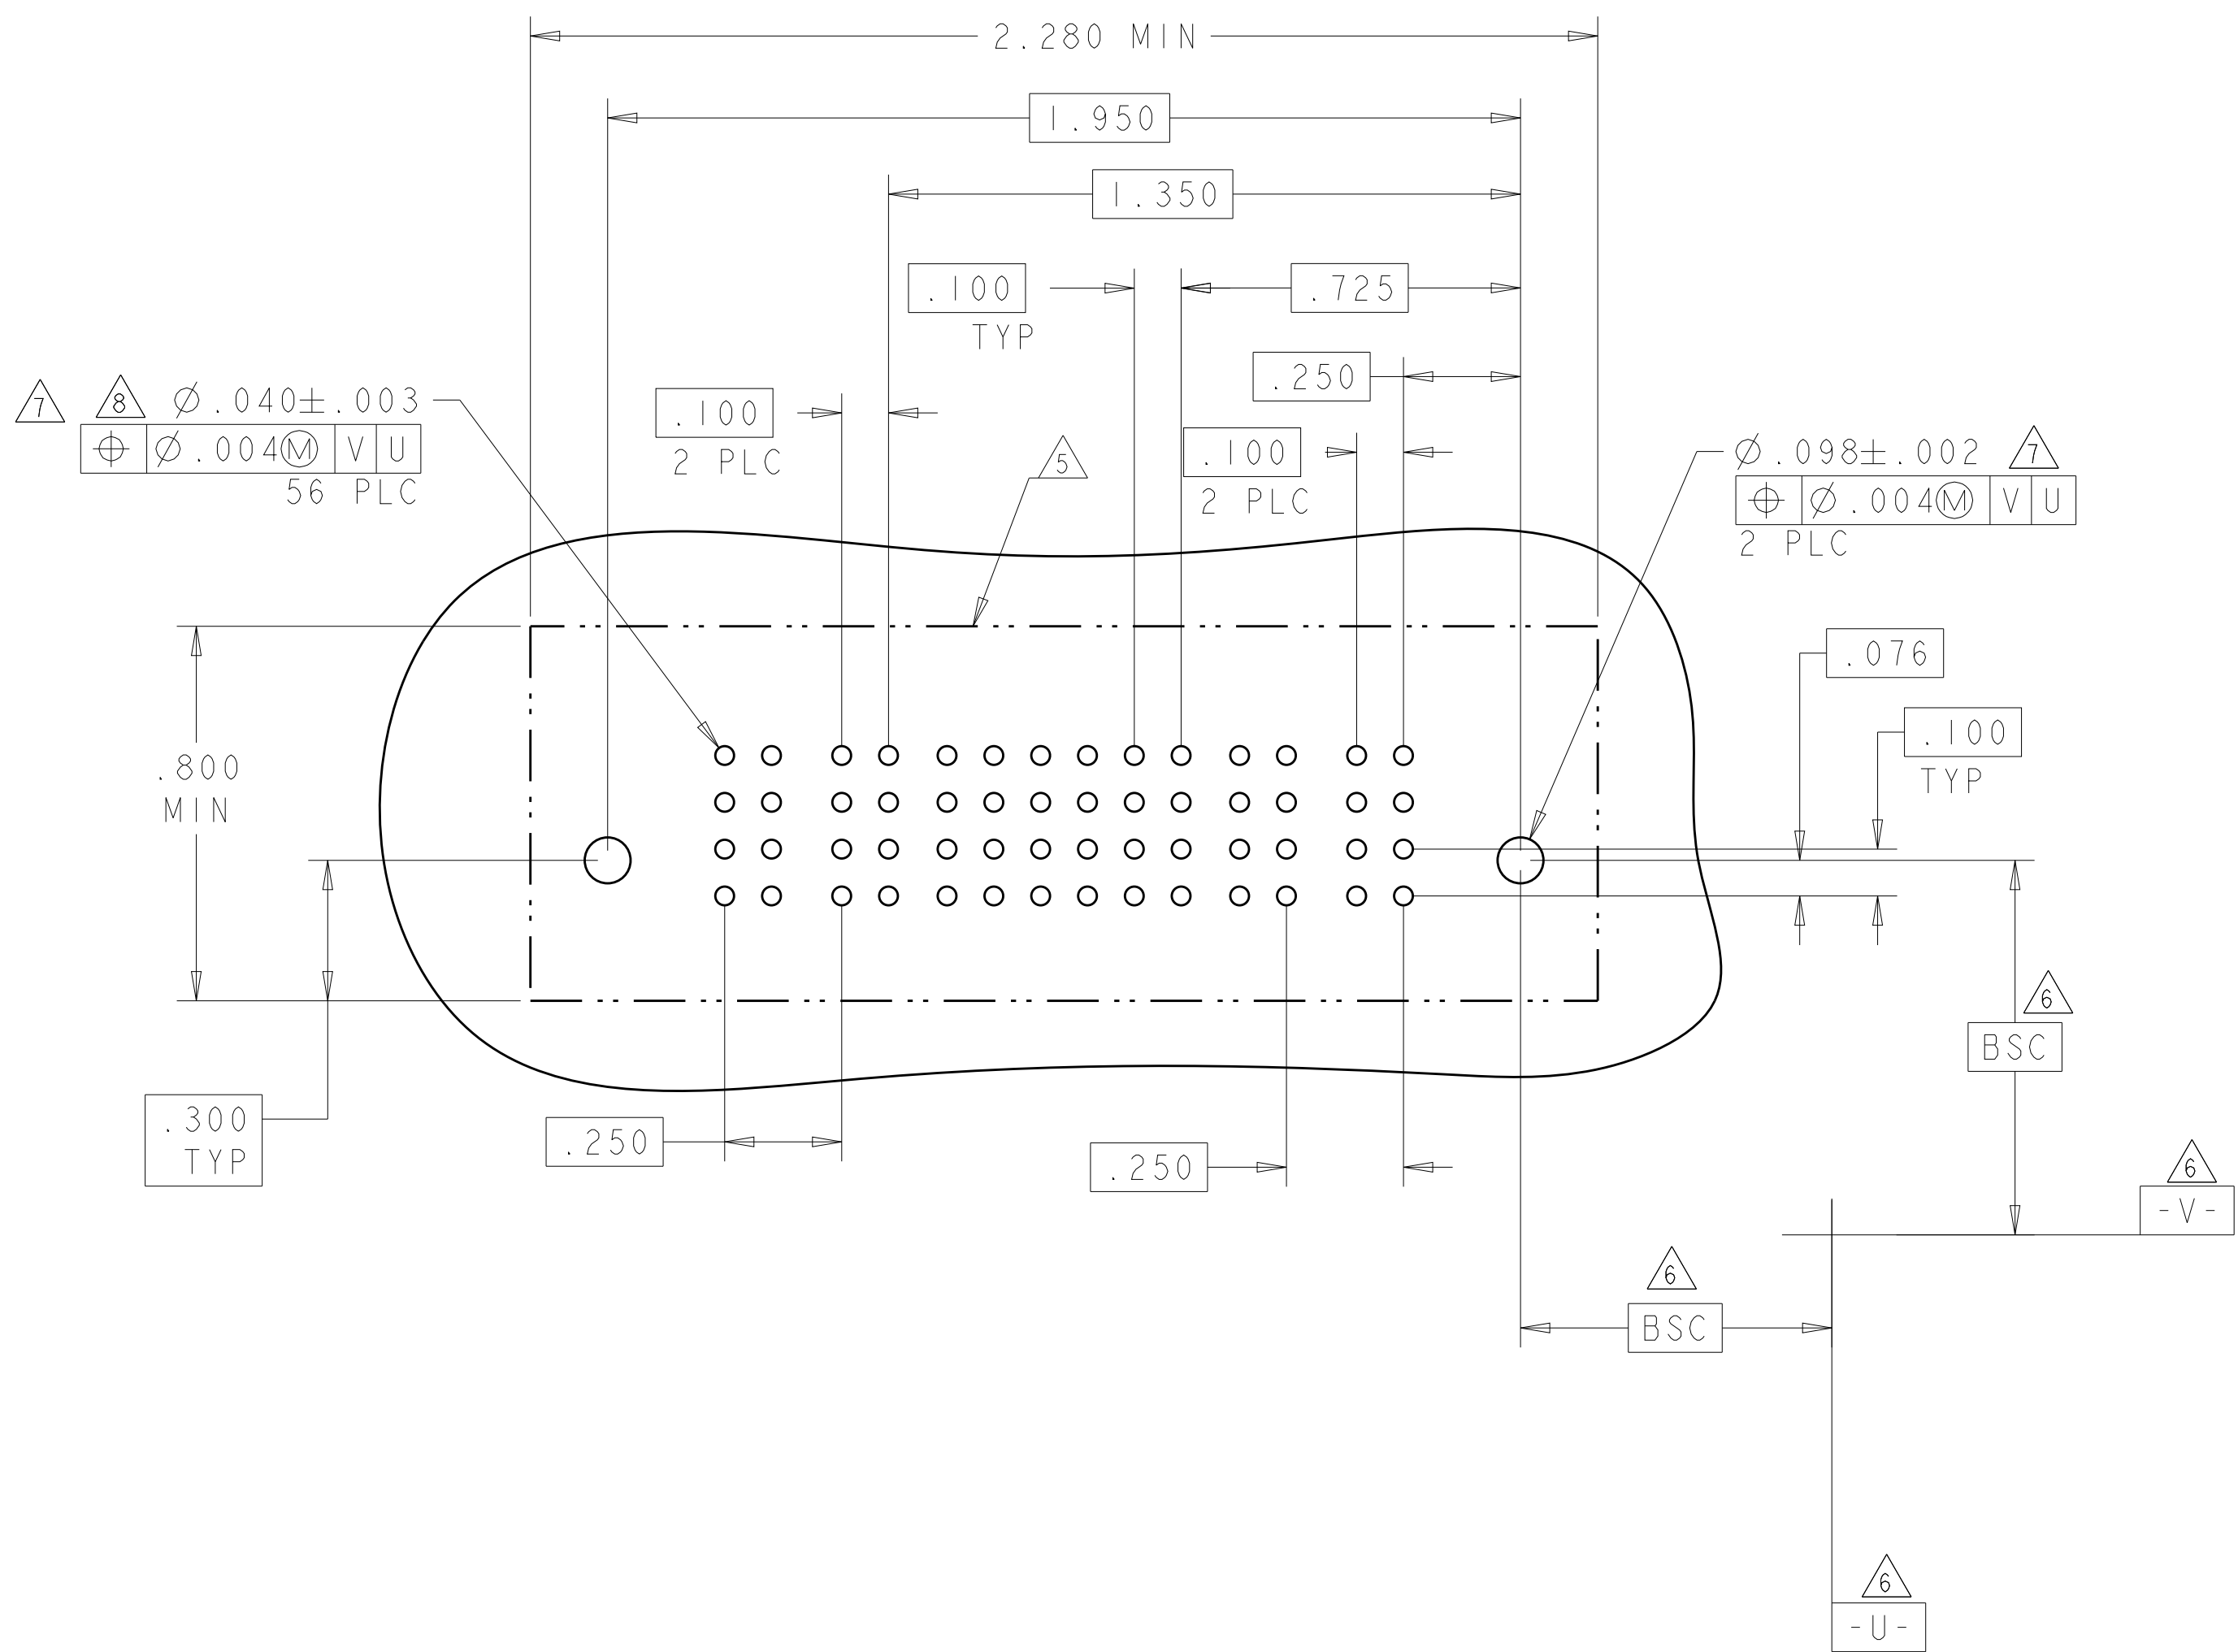

VS	STD POWER PRESSFIT CONTACT .115 LG
VP	MFBL POWER PRESSFIT CONTACT .115 LG
GS	STD POWER PRESSFIT CONTACT .135 LG
GP	MFBL POWER PRESSFIT CONTACT .135 LG
P	SIGNAL PRESSFIT CONTACT .115 LG
AP	SIGNAL PRESSFIT CONTACT .135 LG
CODE	TAIL LENGTH

4805 (3/11)



[illegible]

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI 29APR05		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±. 1 PLC ±. 2 PLC ±.01 3 PLC ±.005 4 PLC ±.0020 ANGLES ±°		NAME M. PERCHERKE PRODUCT SPEC 108-1973 APPLICATION SPEC 114-13038	
		WEIGHT - FINISH		SIZE CASE CODE DRAWING NO RESTRICTED TO A 100779 C-6450540 -	
MATERIAL		CUSTOMER DRAWING		SCALE 2:1 SHEET 4 of 19 REV K9	

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-

PART NUMBER	ROWS		POWER						SIGNAL						POWER																																														
			P10	P9	P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1																																											
6450540-4	D C B A																																																												


PART NUMBER	ROWS		POWER					SIGNAL			POWER																			
			P10	P9	P8	P7	P6	3	2	1	P5	P4	P3	P2	P1															
6450540-5	D C B A																													
															5P + 12S + 5P															



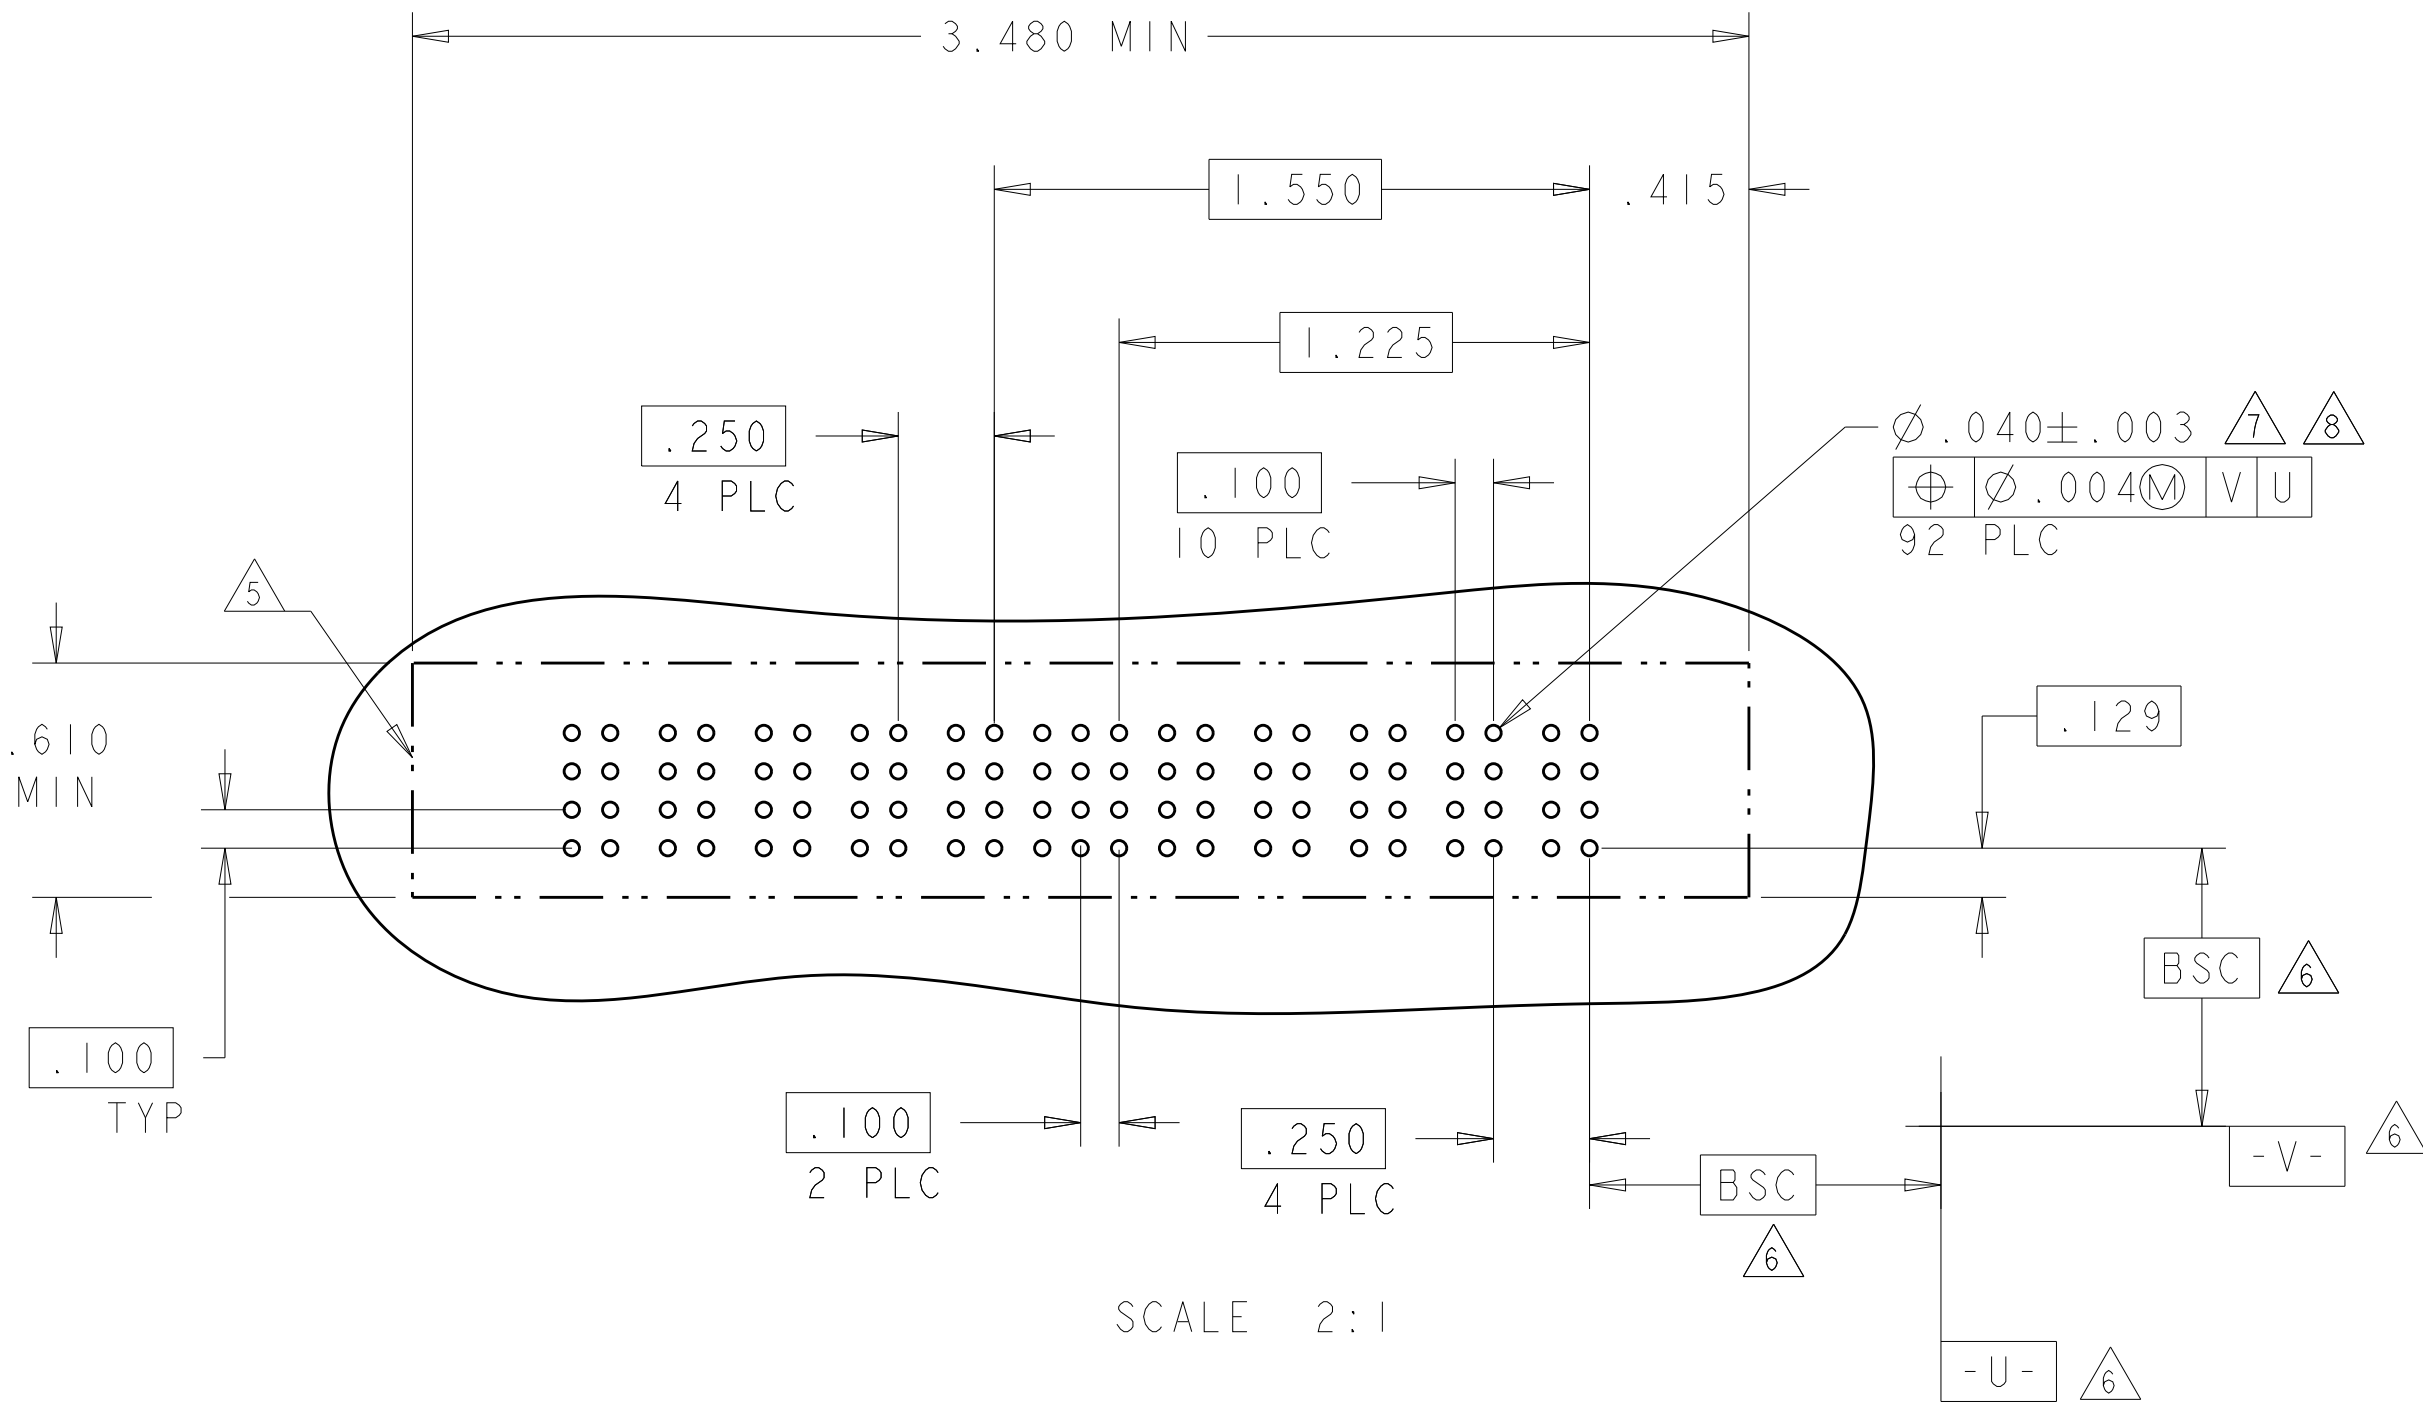
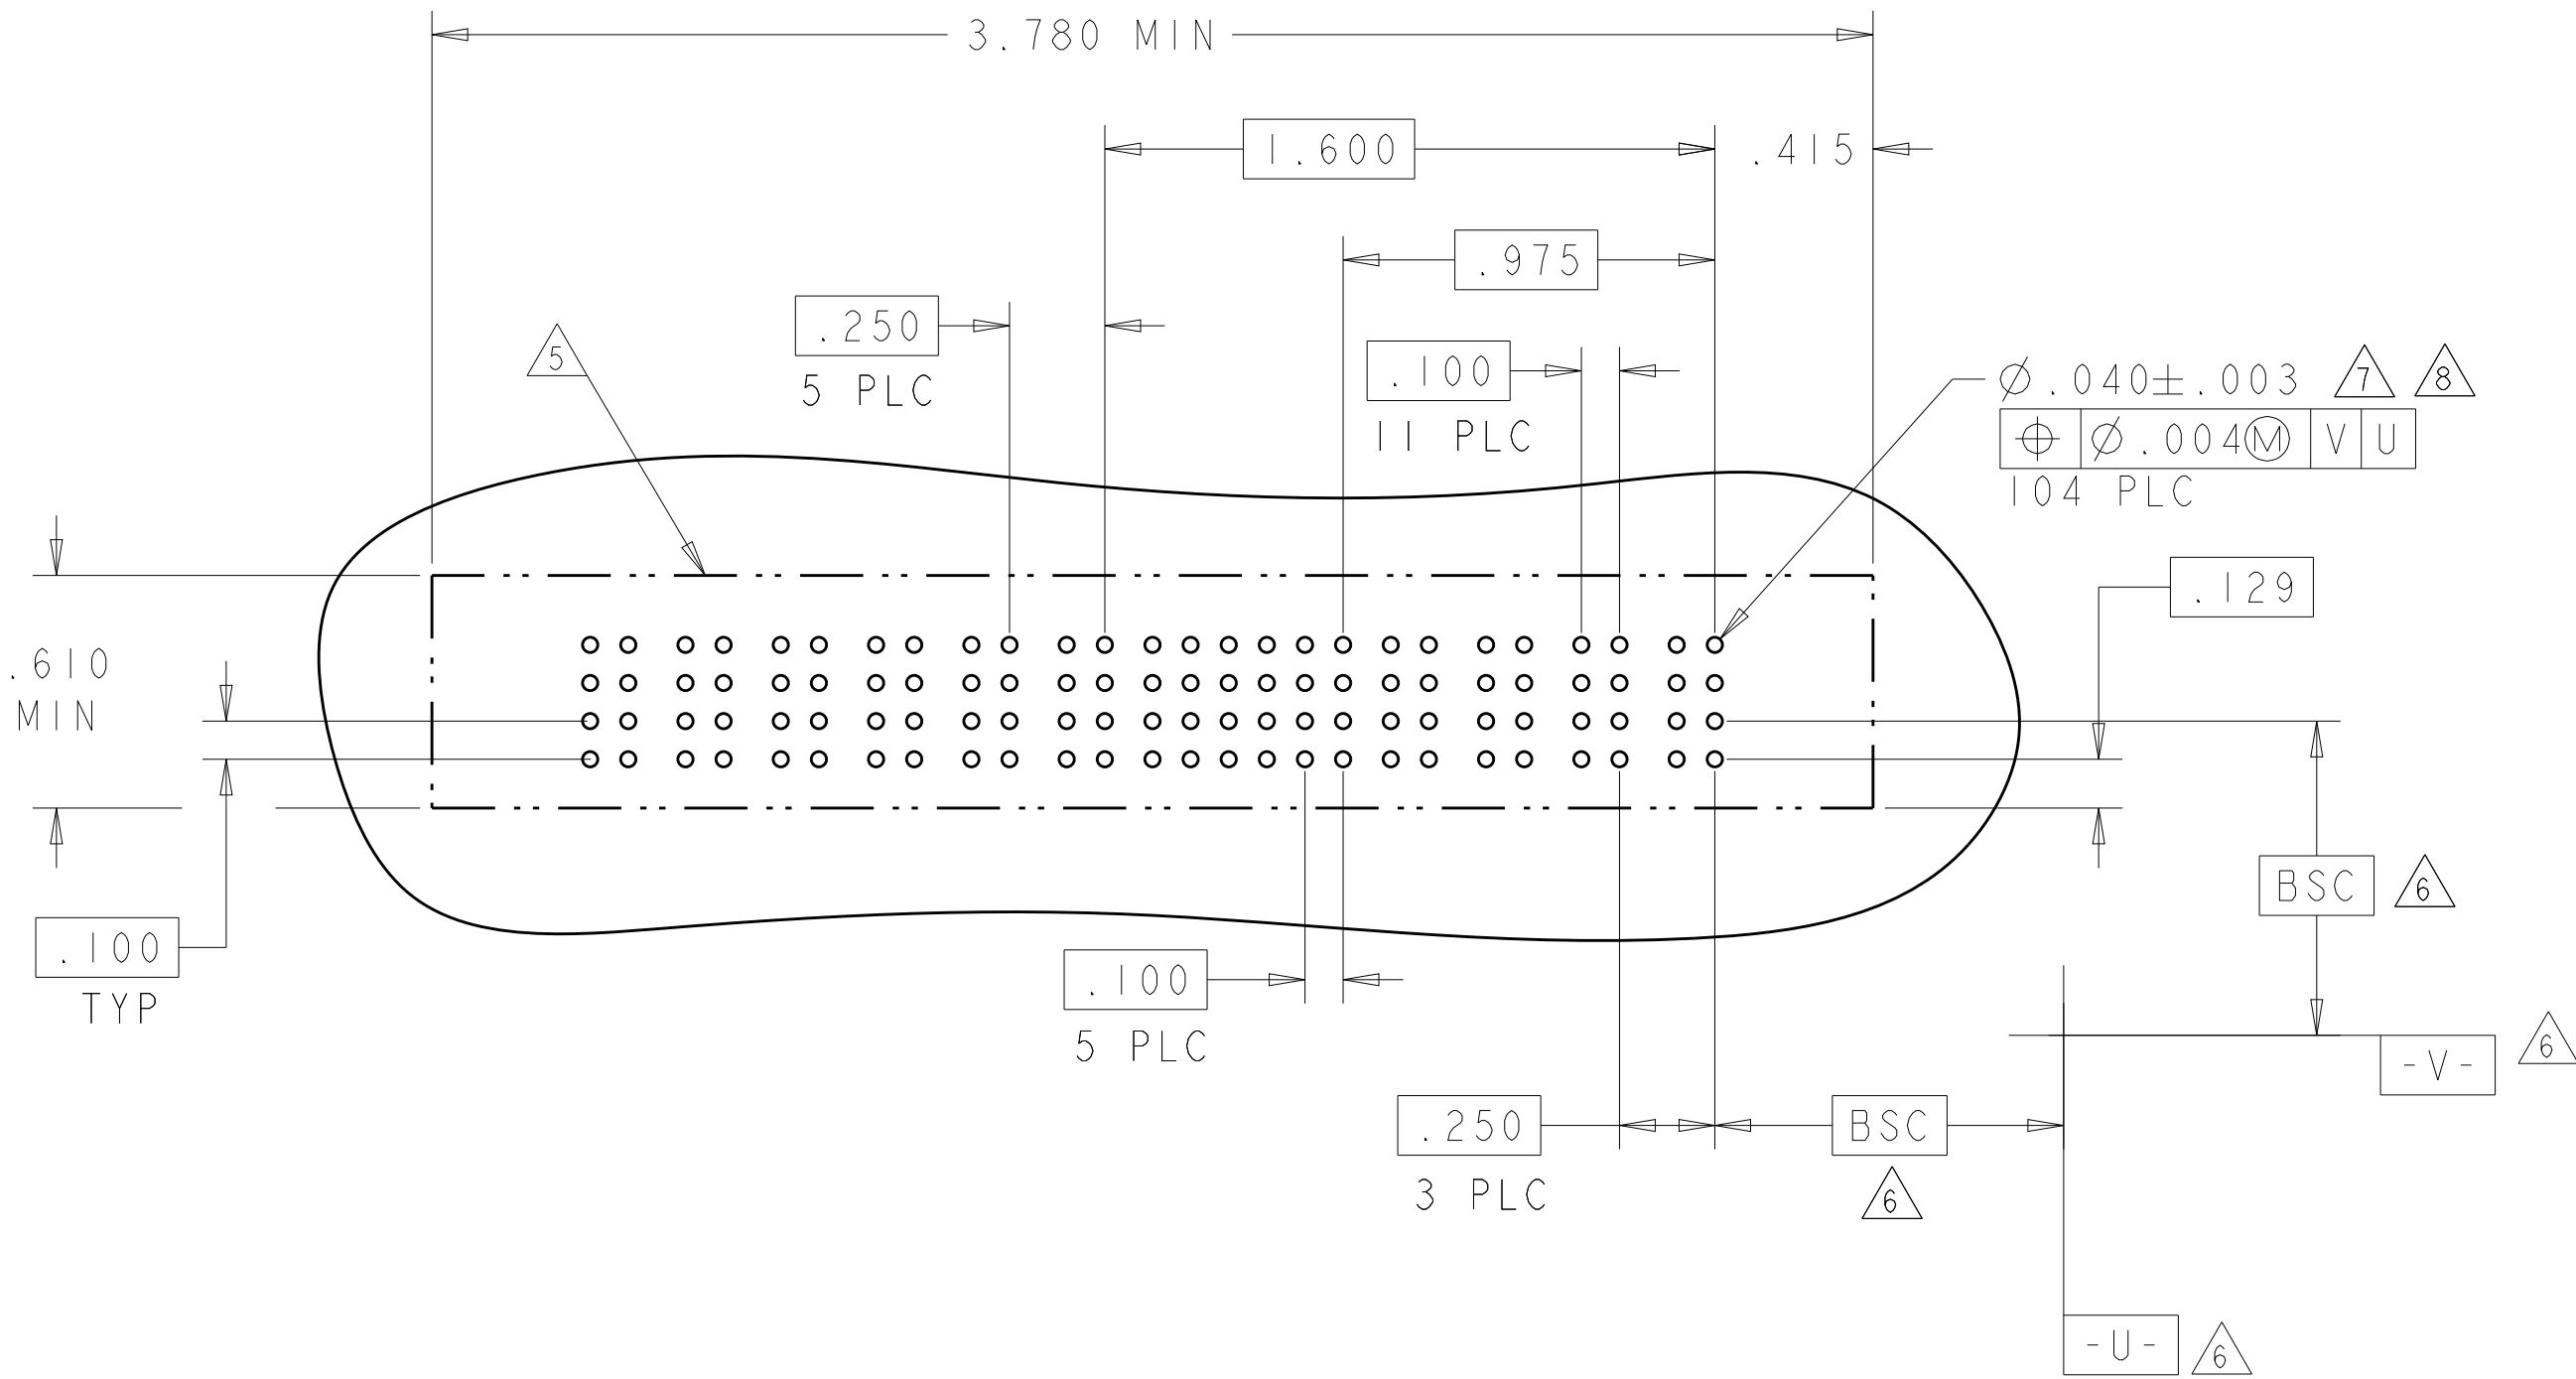


GP	MFBL POWER PRESSFIT CONTACT .135 LG
AP	SIGNAL PRESSFIT CONTACT .135 LG
CODE	TAIL LENGTH
CONTACT TABLE	


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI CHK M. PERCHERKE APVD M. PERCHERKE	29APR05 29APR05 -
DIMENSIONS: INCHES		PRODUCT SPEC 108-1973	NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC 114-13038	SIZE A1
MATERIAL		WEIGHT -	CAGE CODE 6450540
FINISH		CUSTOMER DRAWING	RESTRICTED TO -
SCALE 2:1		SHEET 5	OF 19
REV K9			


PART NUMBER	ROWS		POWER	SIGNAL							POWER																						
			P2	6	5	4	3	2	1	P1																							
6450540-7	D C B A		GP <table><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr><tr><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td><td>AP</td></tr></table> GP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP	AP		
AP	AP	AP	AP	AP	AP	AP																											
AP	AP	AP	AP	AP	AP	AP																											
AP	AP	AP	AP	AP	AP	AP																											
AP	AP	AP	AP	AP	AP	AP																											
IP + 24S + IP																																	

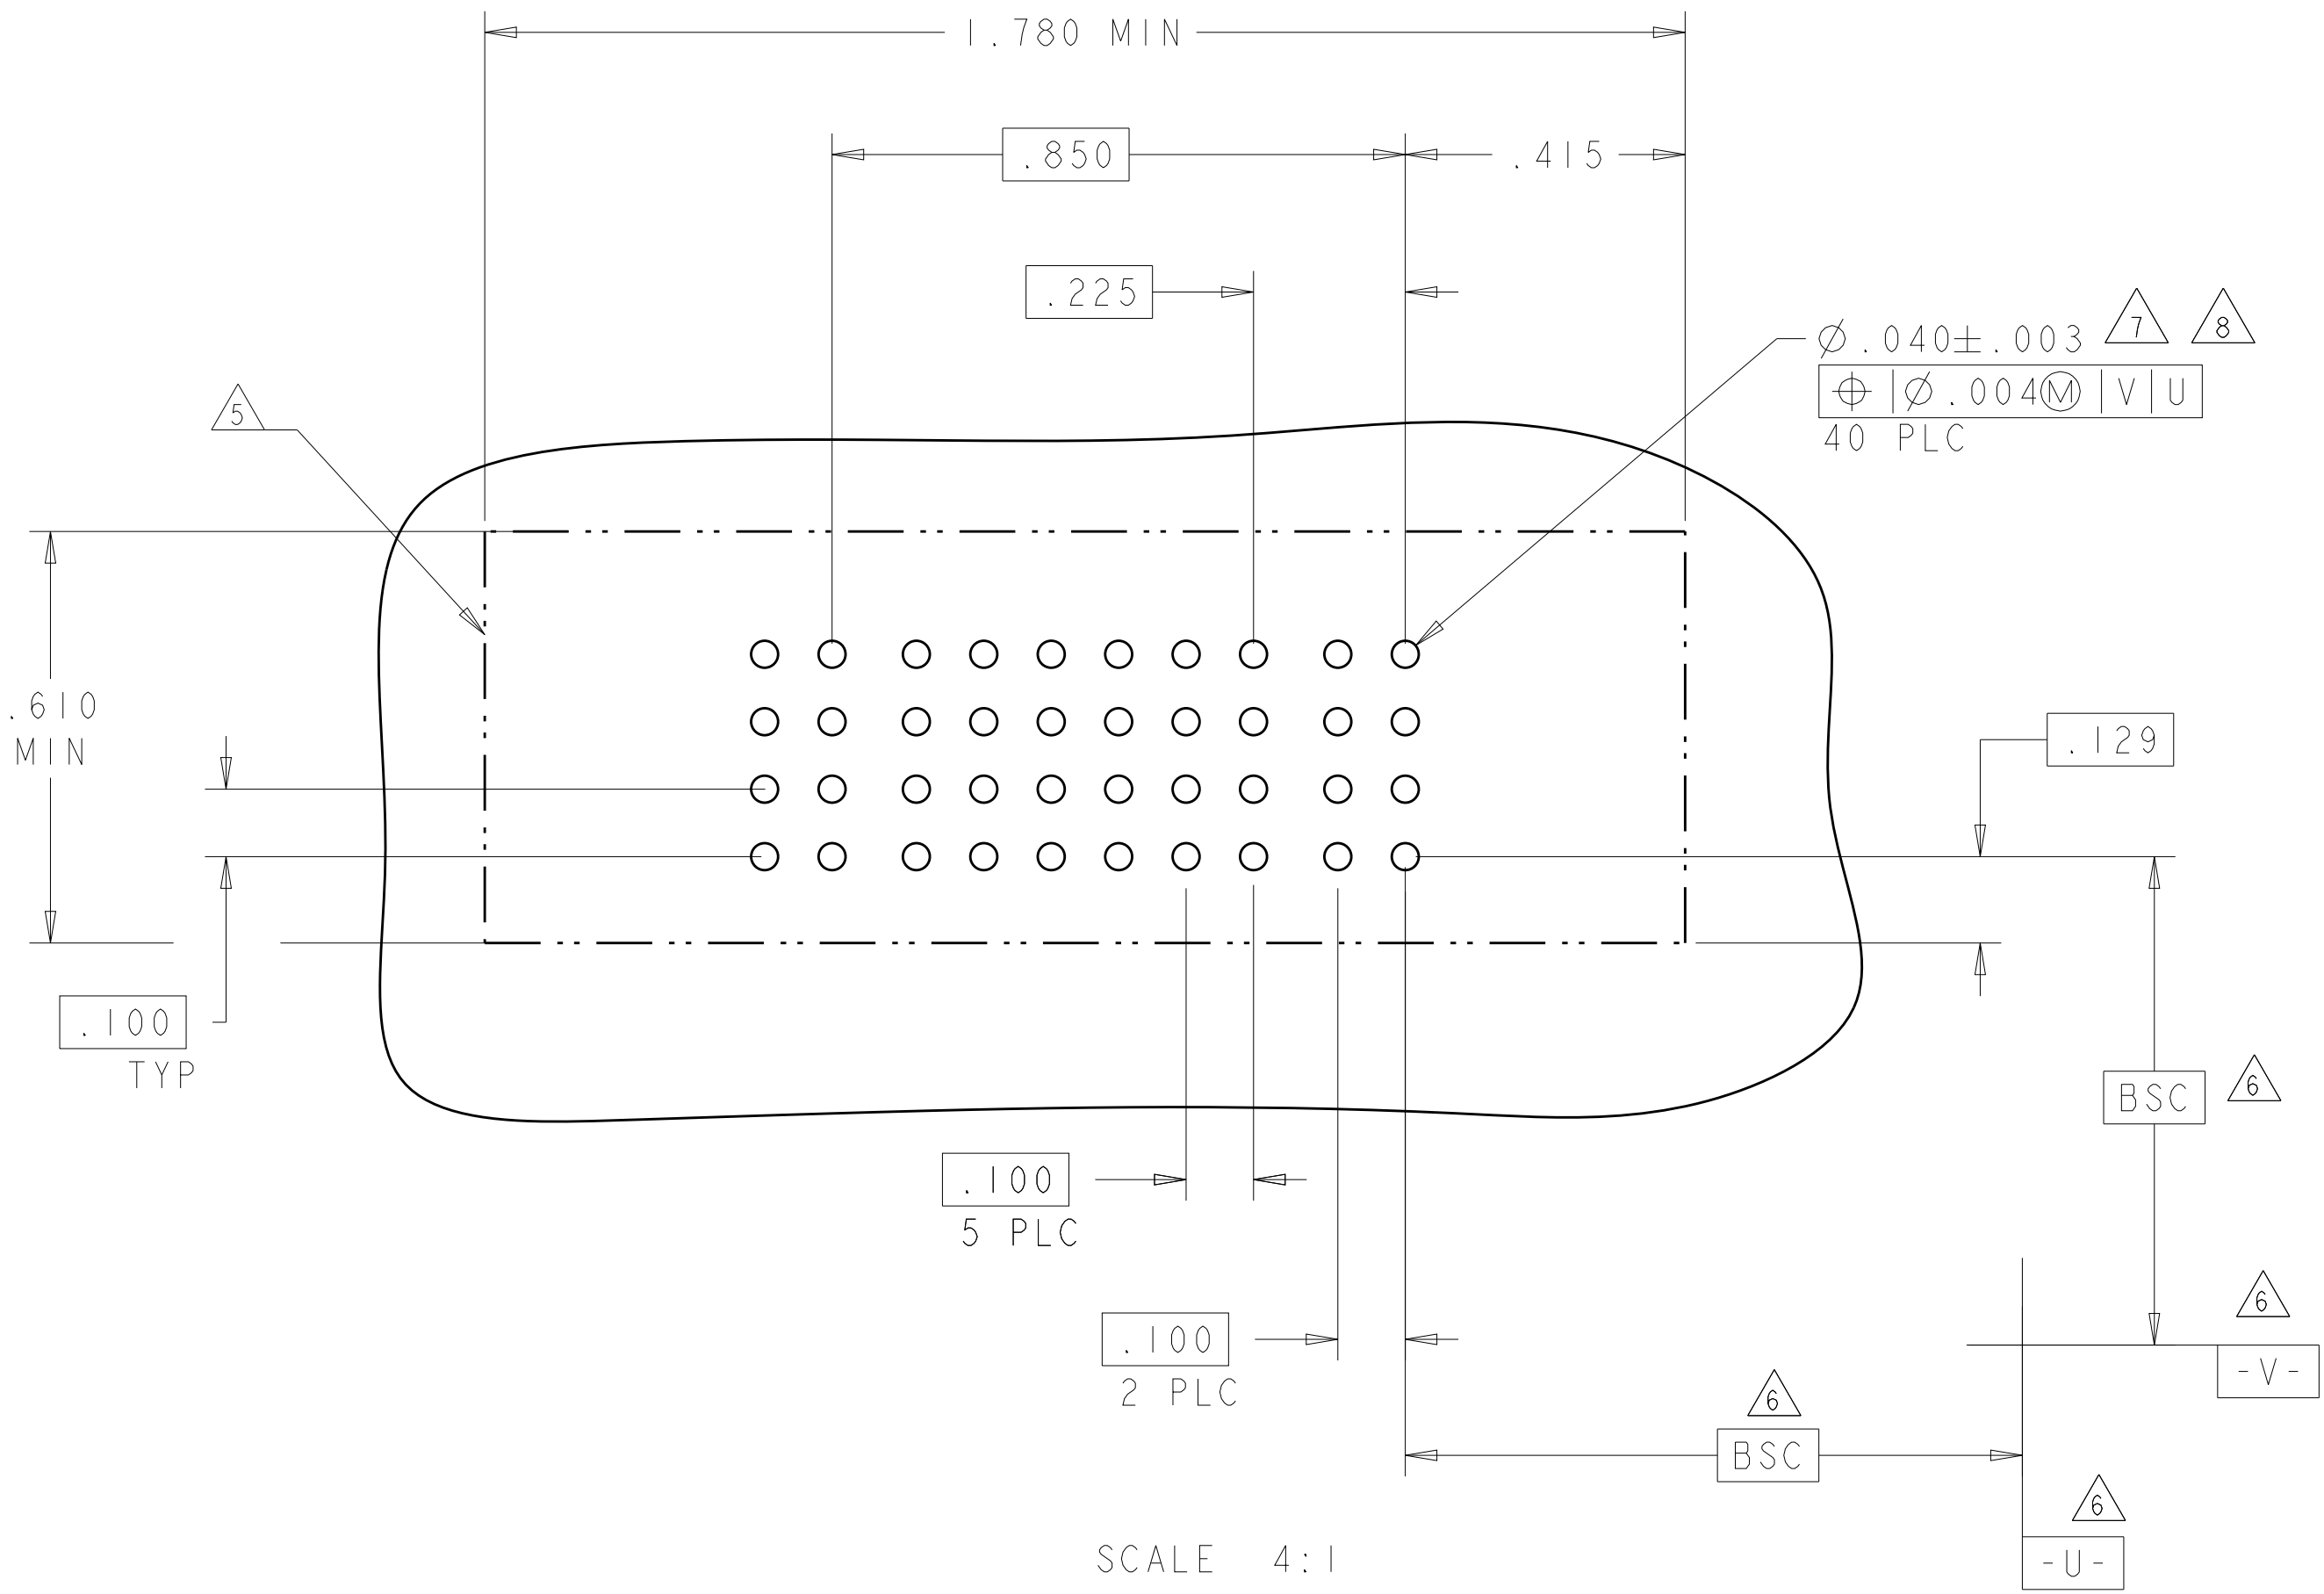4805 (3/11)

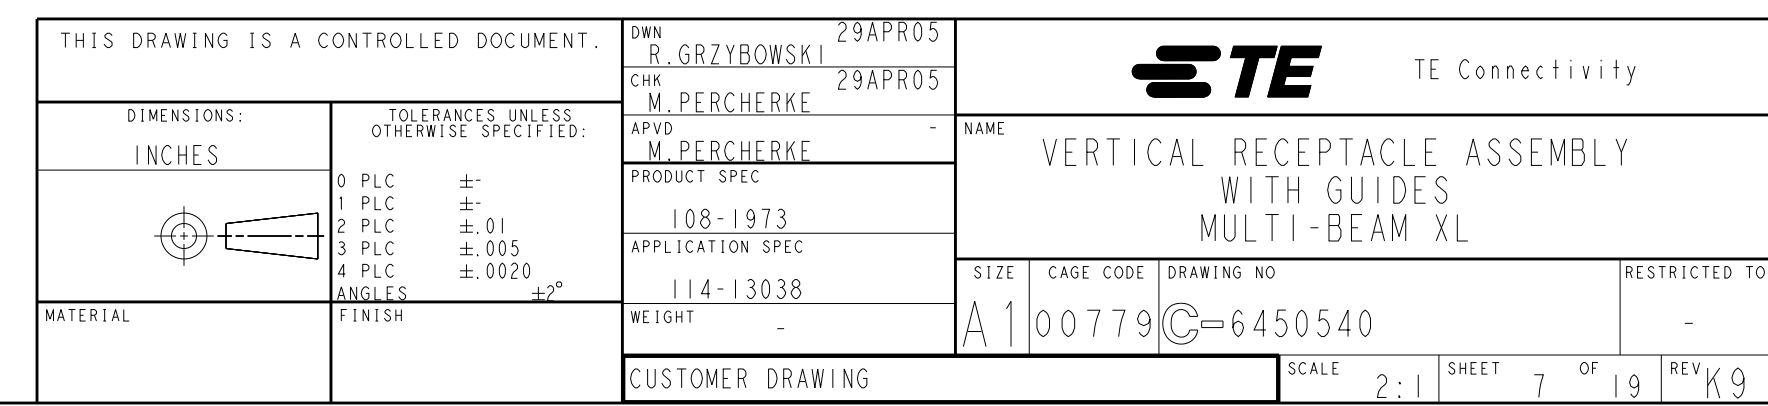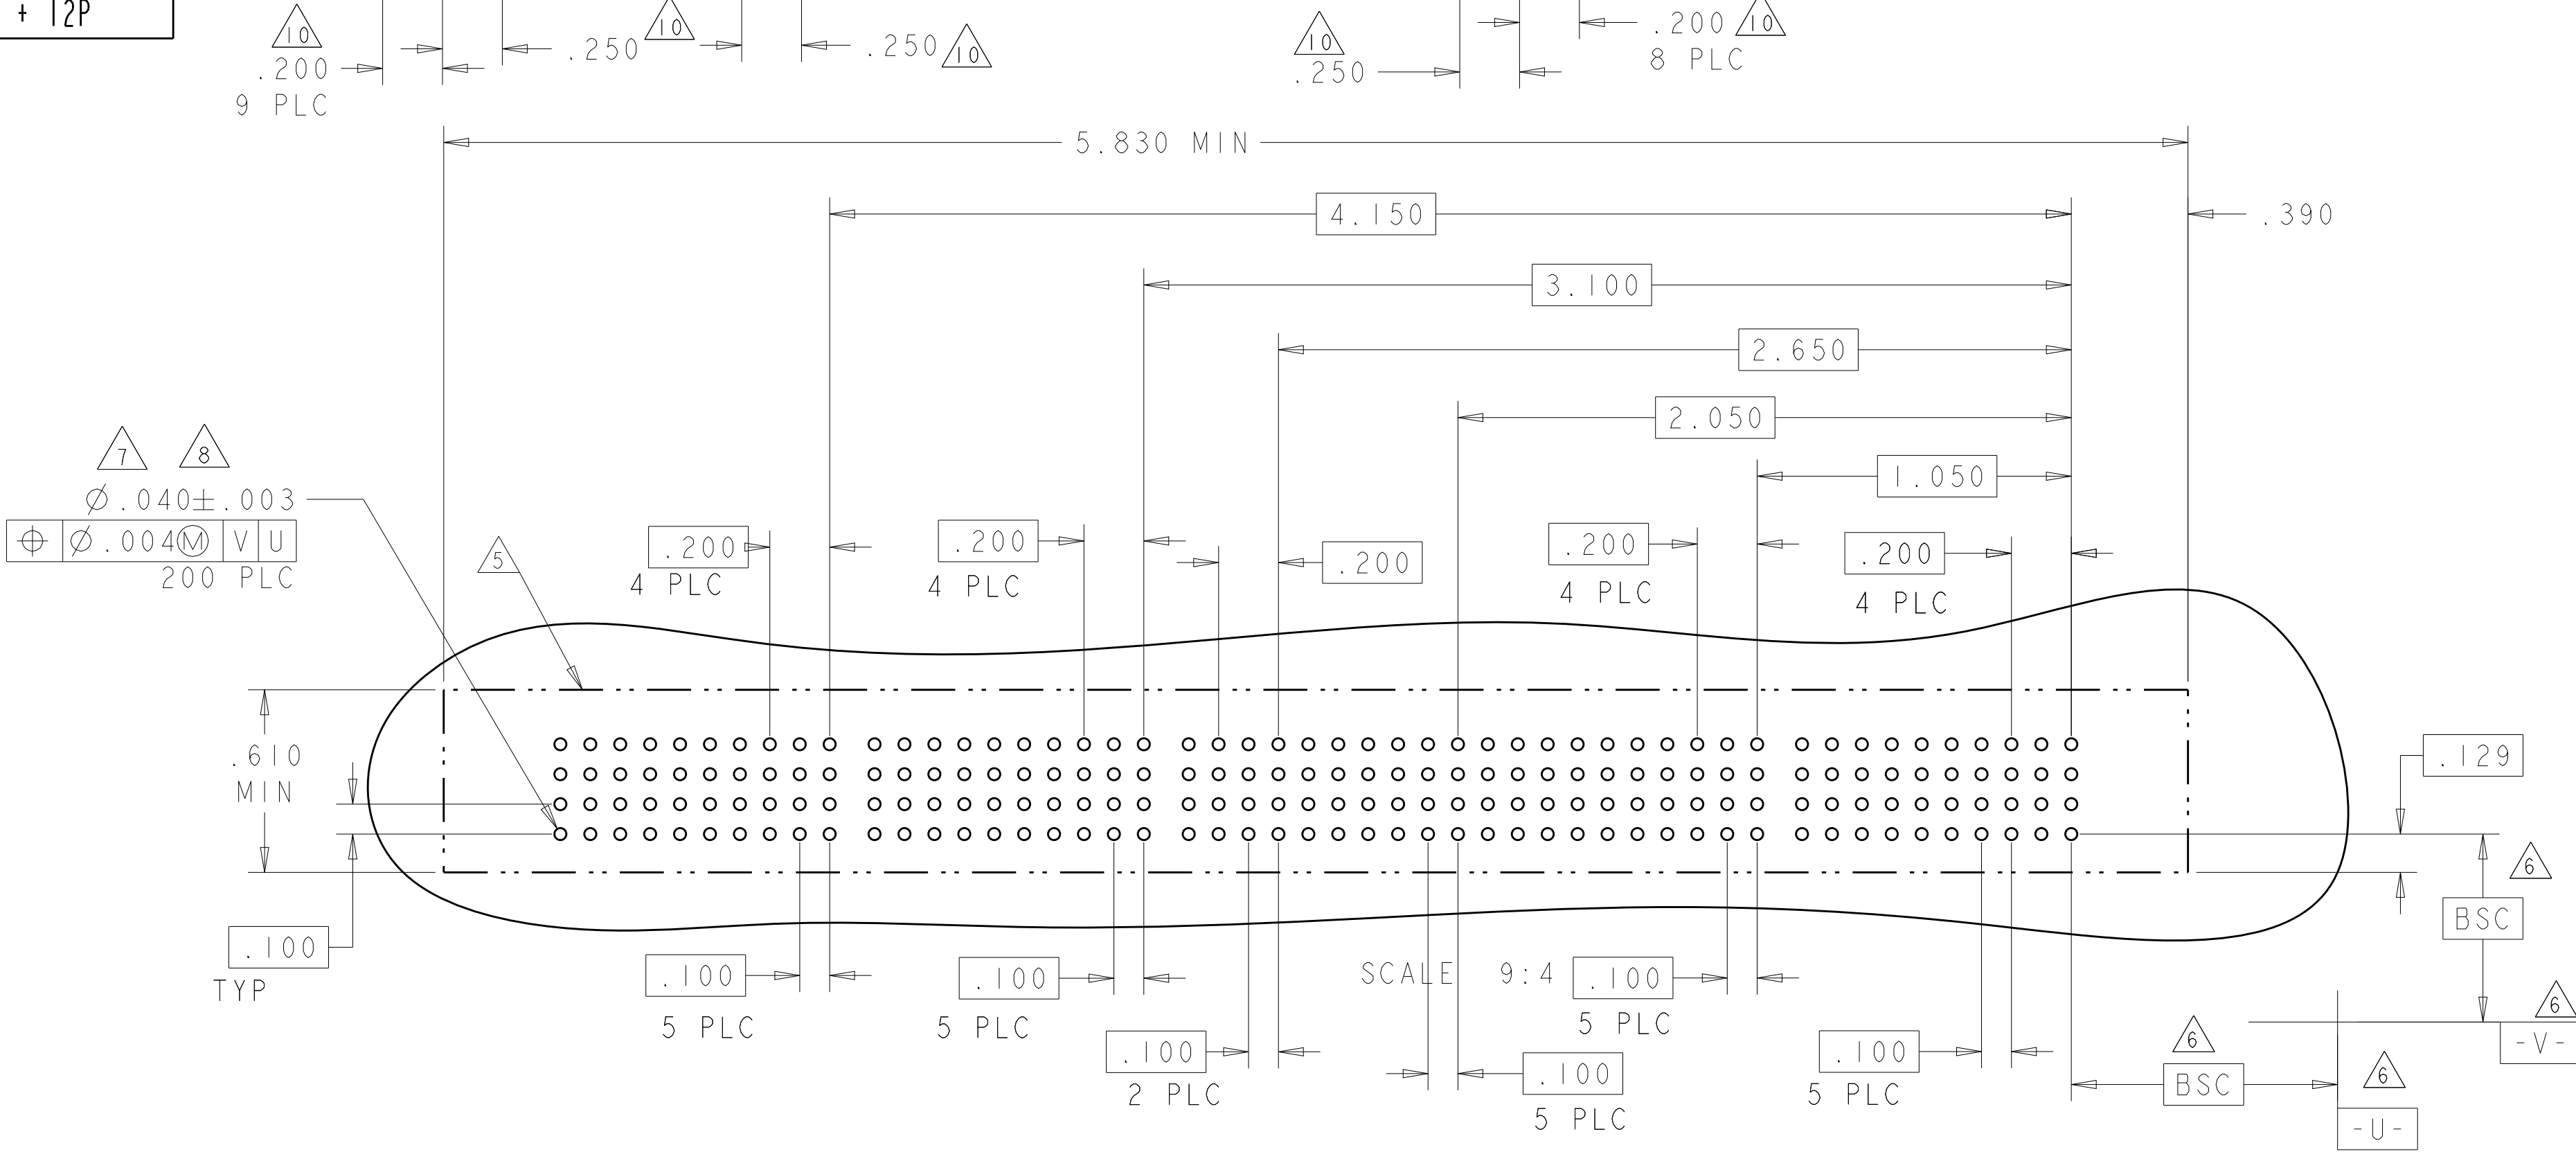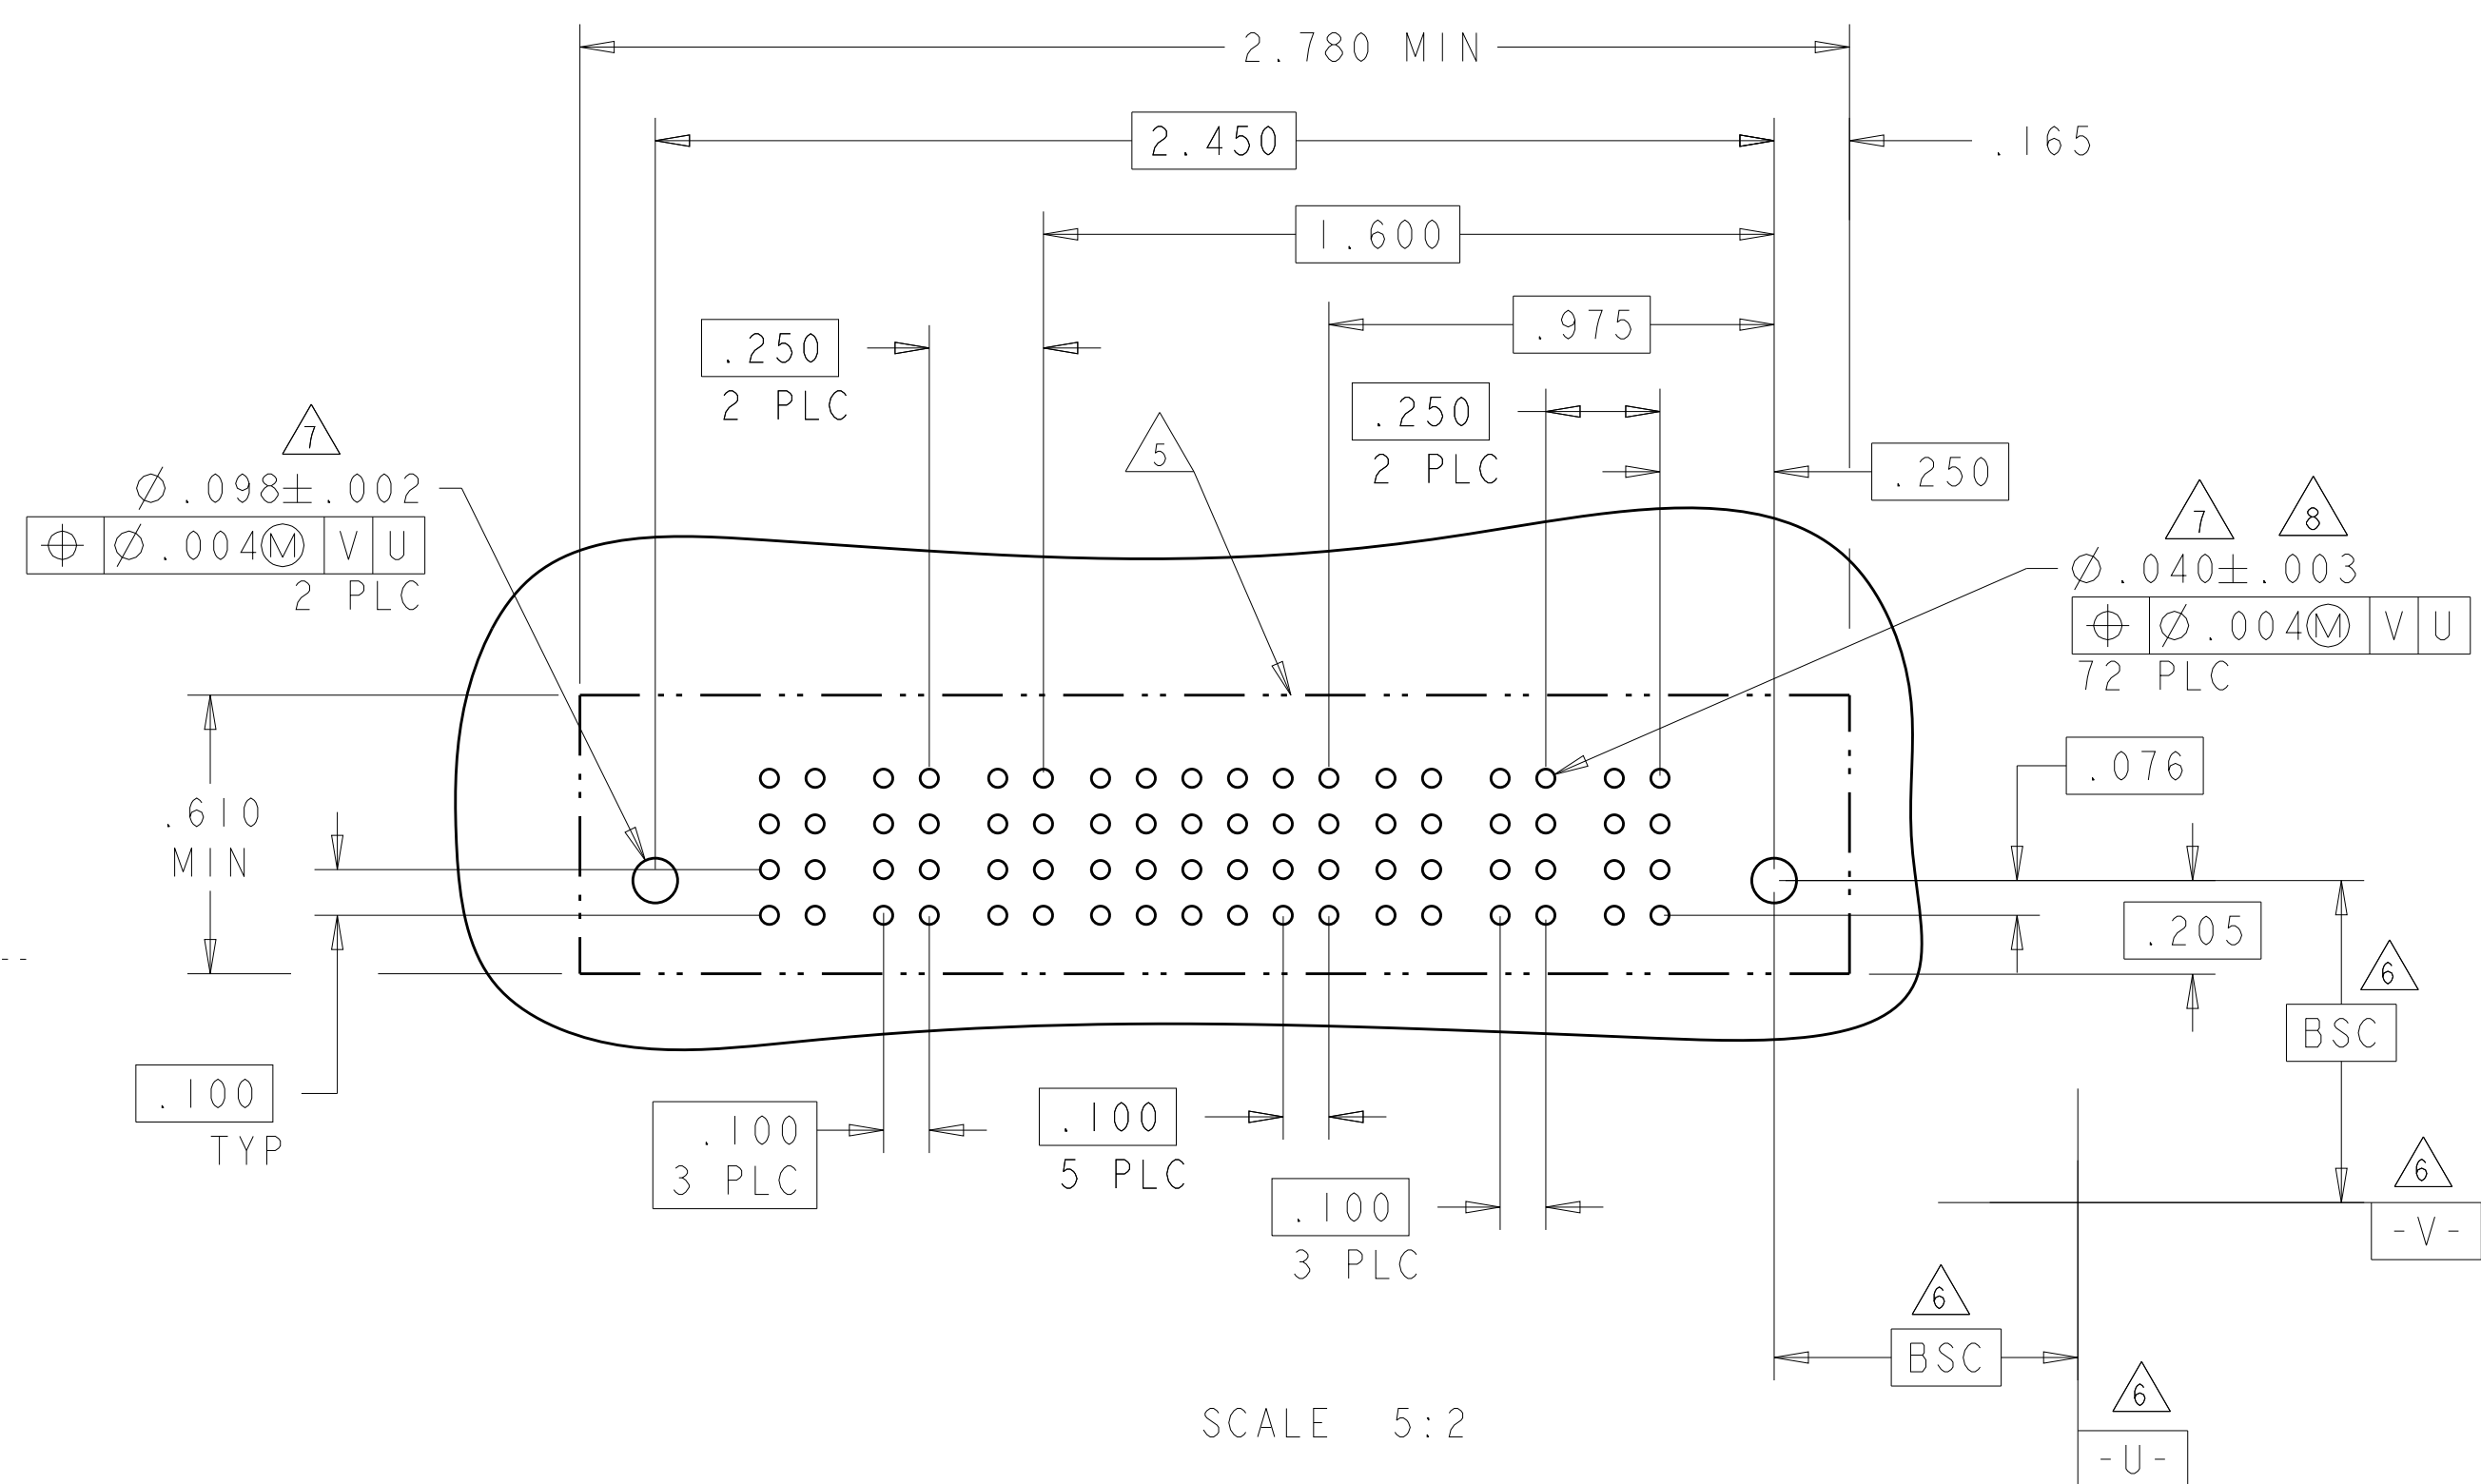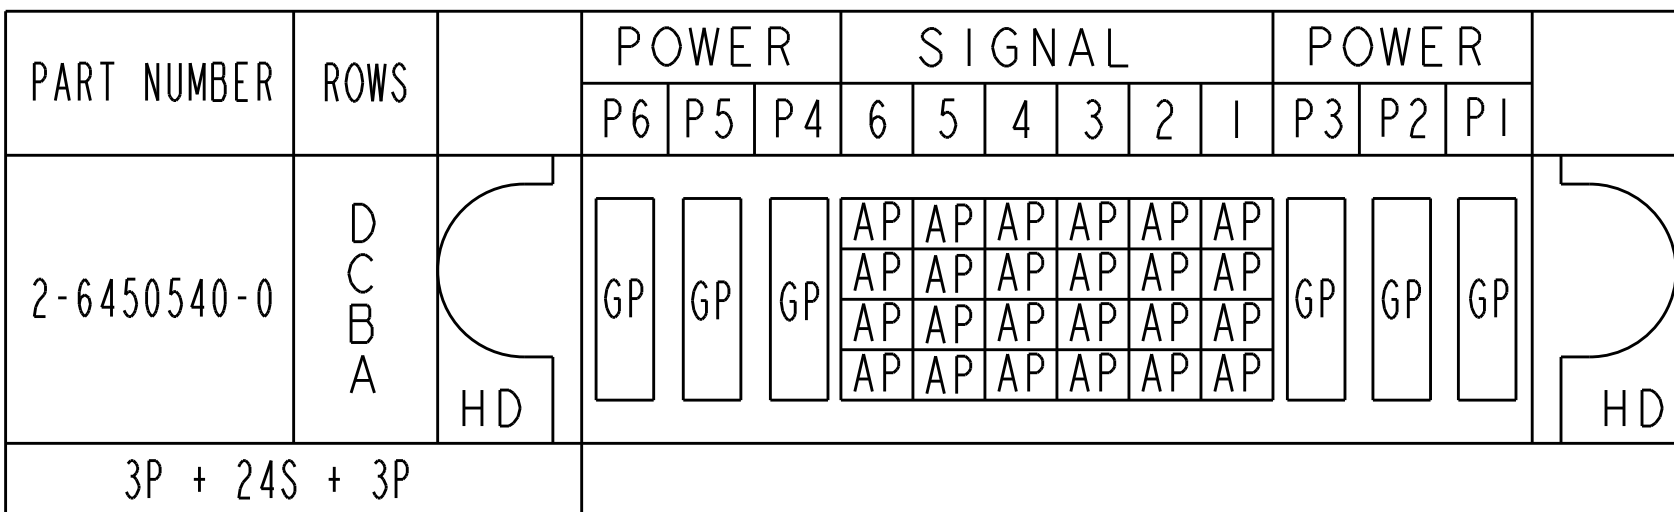


PART NUMBER	ROWS		POWER		SIGNAL					POWER						
			P7	P6	5	4	3	2	1	P5	P4	P3	P2	P1		
4-6450540-3	D C B A	 HD			AP	AP	AP	AP	AP	AP						 HD
5P + 20S + 2P																

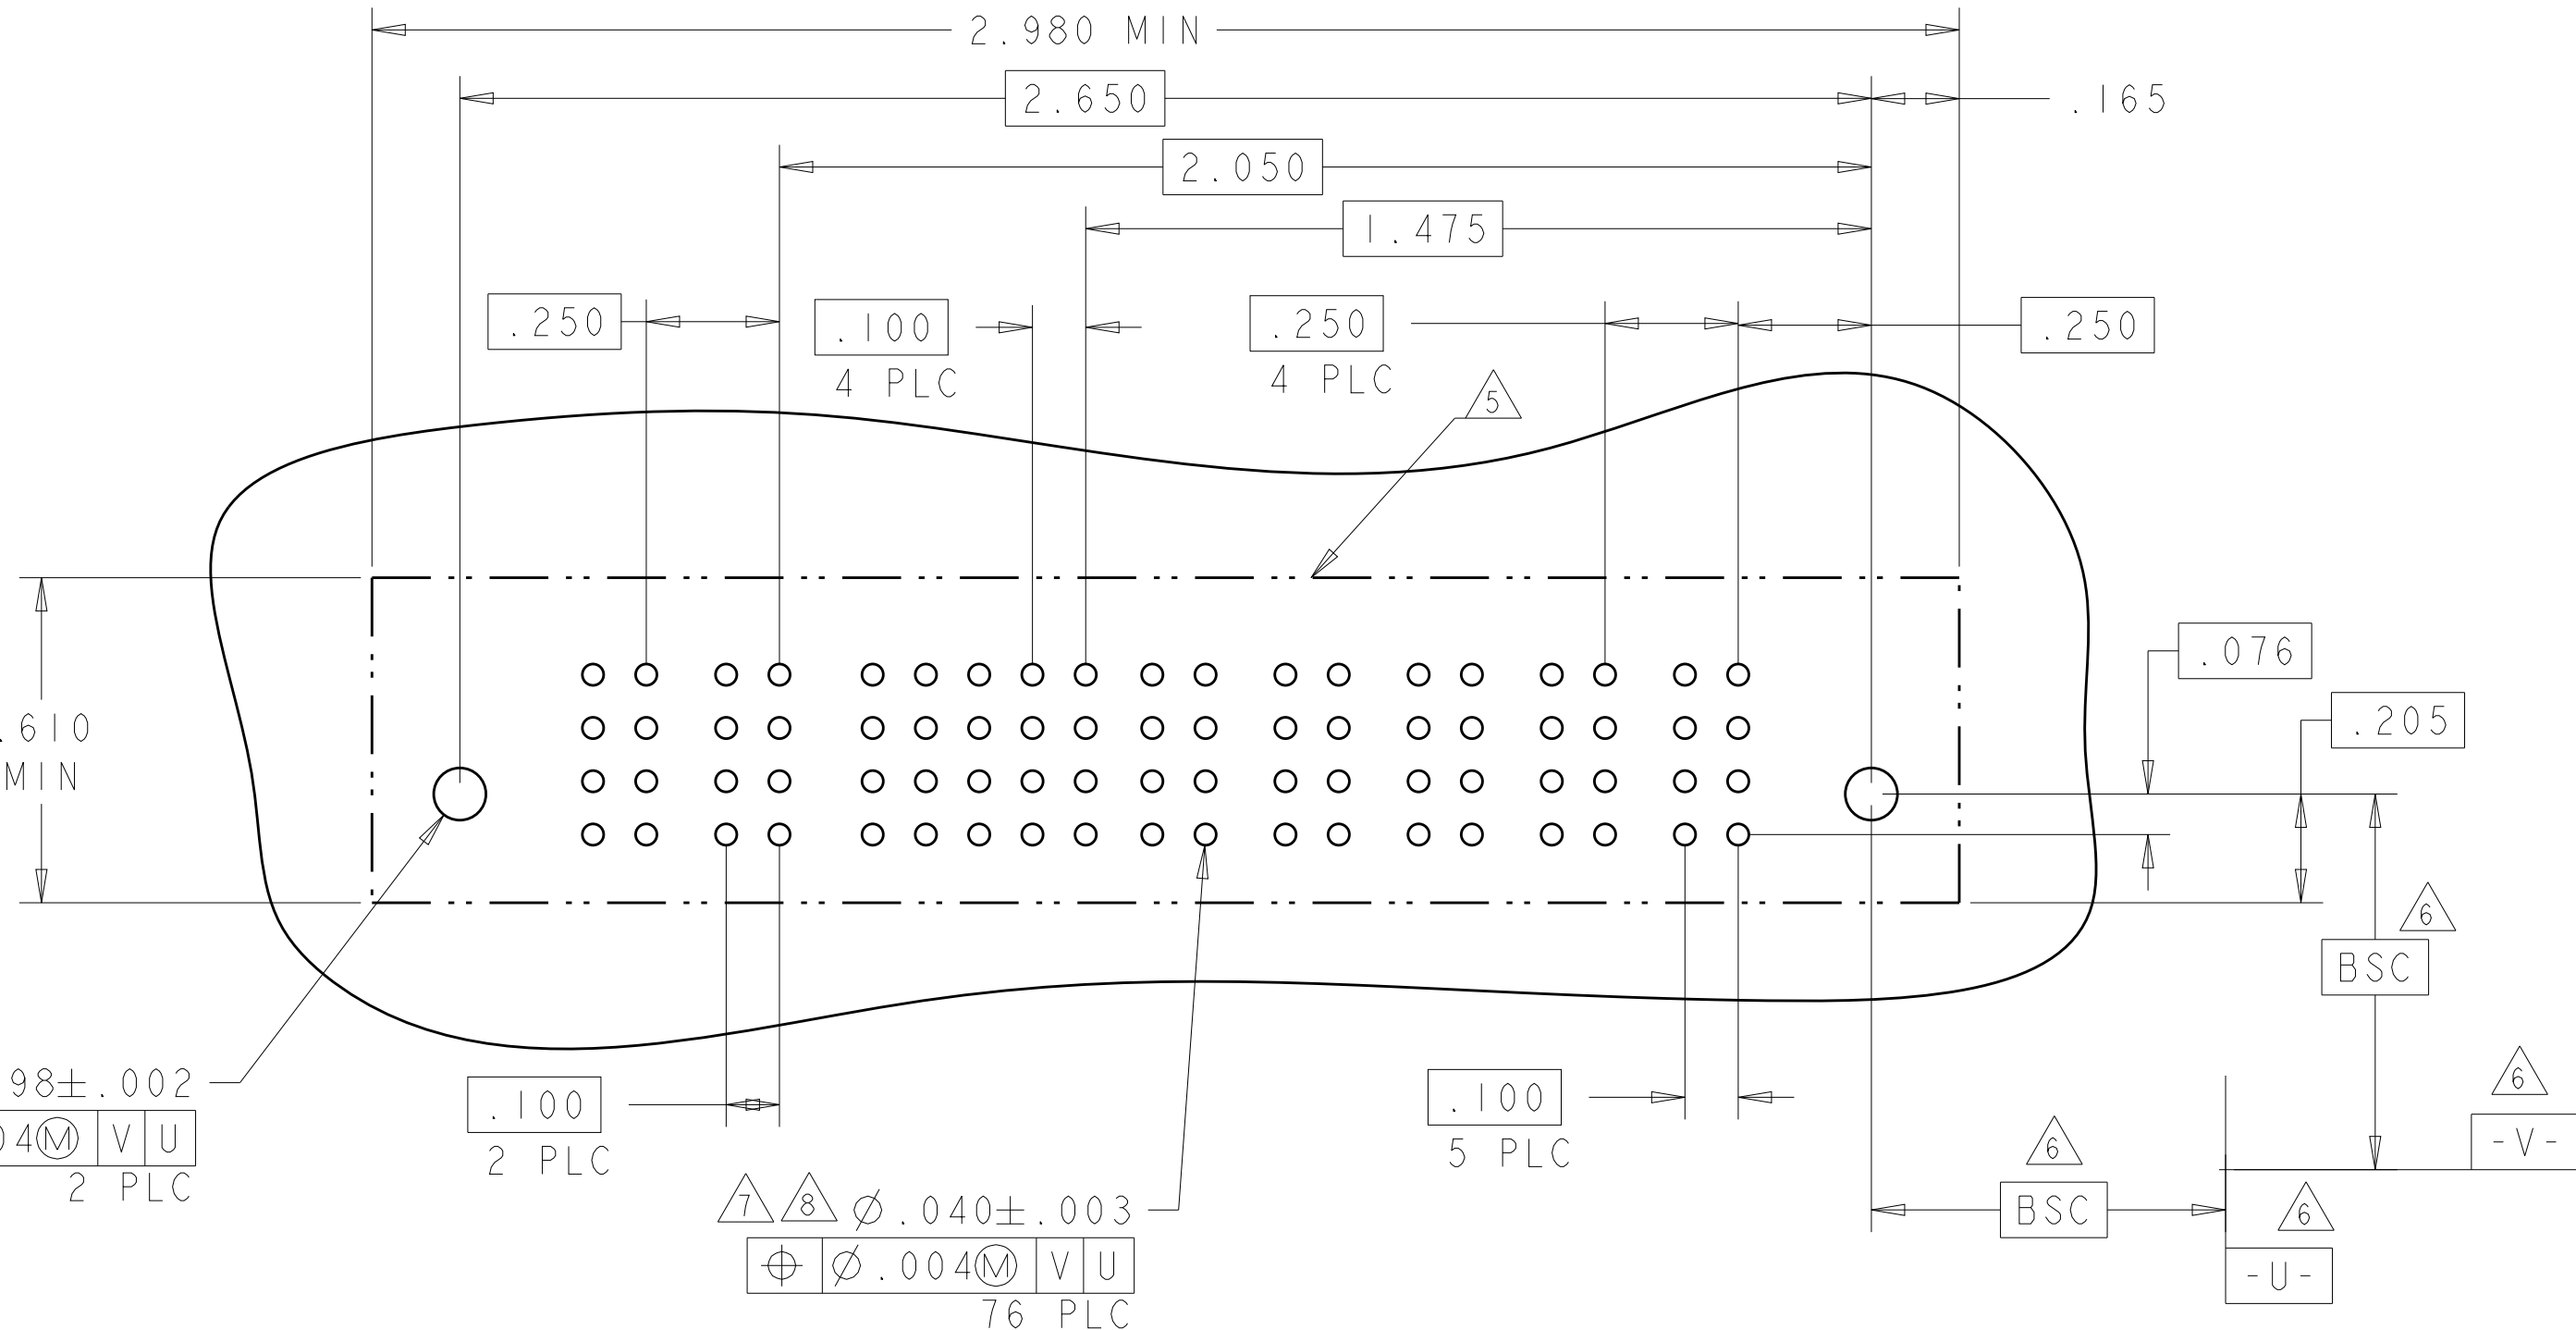


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWA R. GRZYBOWSKI 29APR05		 TE Connectivity	
		CHP M. PERCHERKE 29APR05			
DIMENSIONS: INCHES		TOLERANCES, UNLESS OTHERWISE SPECIFIED:		NAME VERTICAL RECEPACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
		0 PLC ± 2 PLC ± 0.1 4 PLC ± 0.05 4 PLC ± 0.020		PRODUCT SPEC 108-1973	
		ANGLES $\pm 0.2^\circ$		APPLICATION SPEC 114-13038	
		FINISH		SIZE A1	
		MATERIAL		CASE CODE 100779	
		CUSTOMER DRAWING		DRAWING NO 6450540	
		WEIGHT -		RESTRICTED TO -	
		SCALE 2:1		SHEET 8 OF 19	
		REV K9			

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-

PART NUMBER	ROWS		POWER														SIGNAL										POWER															
			P30	P29	P28	P27	P26	P25	P24	P23	P22	P21	P20	P19	P18	P17	P16	10	9	8	7	6	5	4	3	2	1	P15	P14	P13	P12	P11	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1
3-6450540-9	D C B A		GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	AP AP <																									

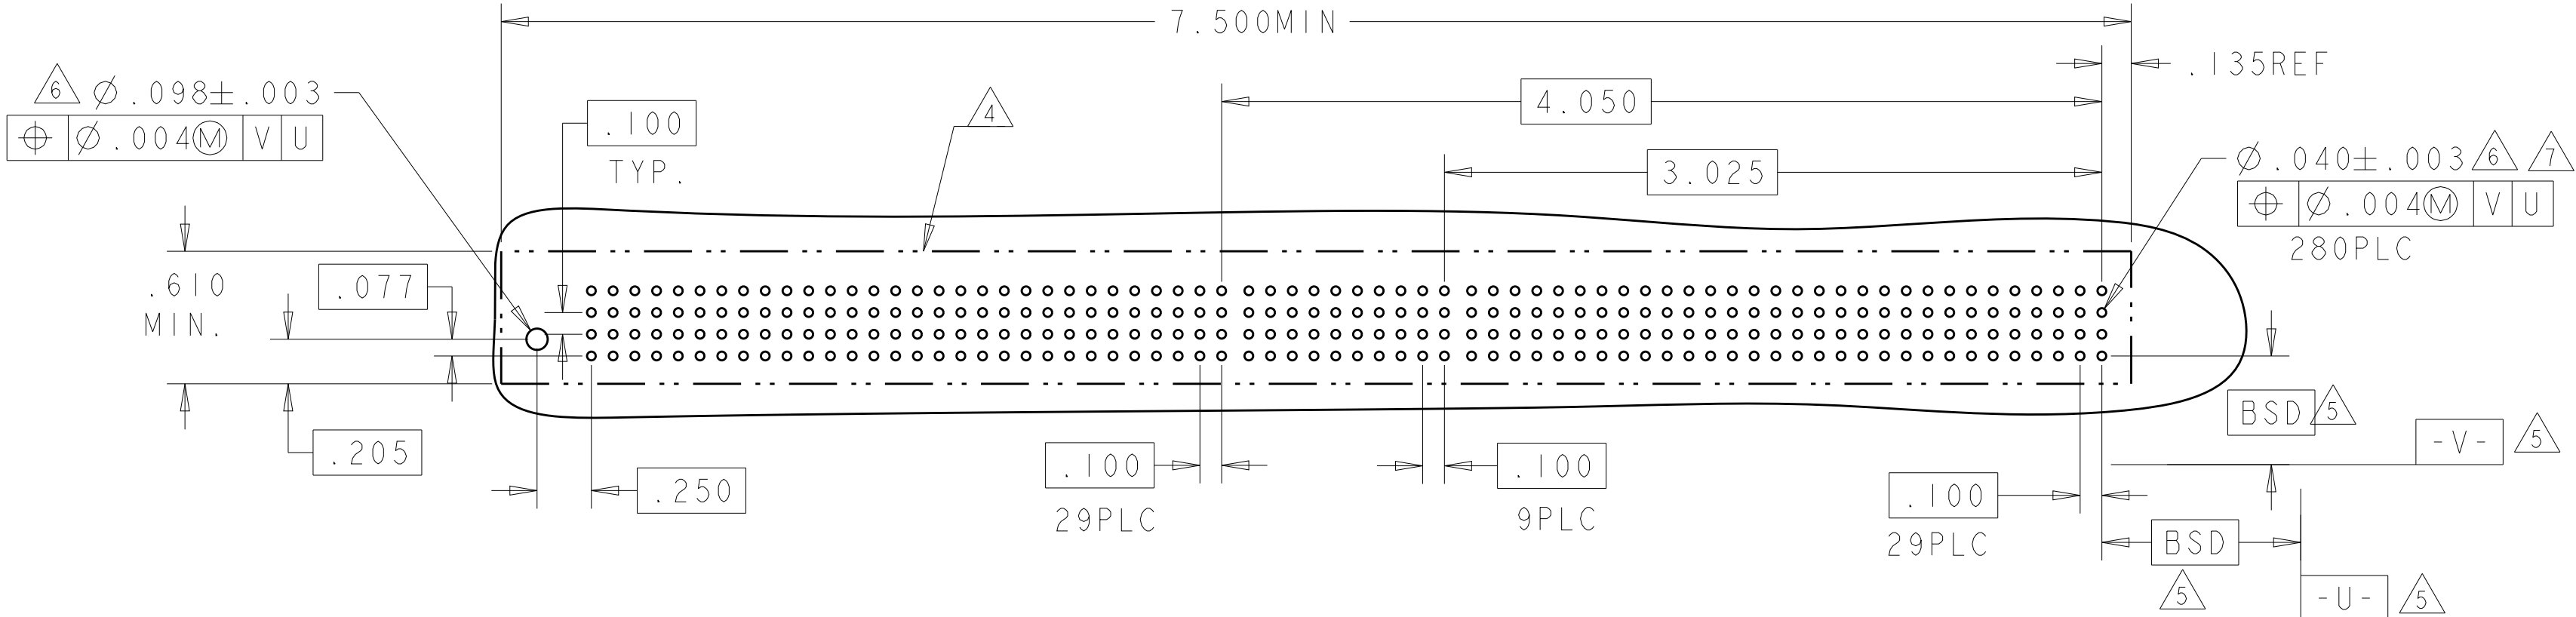


PART NUMBER	ROWS	POWER															SIGNAL										POWER																																																																																																																																																																																																																																																																																																																																																												
		P30	P29	P27	P28	P26	P25	P24	P23	P22	P21	P20	P19	P18	P17	P16	10	9	8	7	6	5	4	3	2	1	P15	P14	P13	P12	P11	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1																																																																																																																																																																																																																																																																																																																																														
4-6450540-0	D C B A																																																																																																																																																																																																																																																																																																																																																																																						

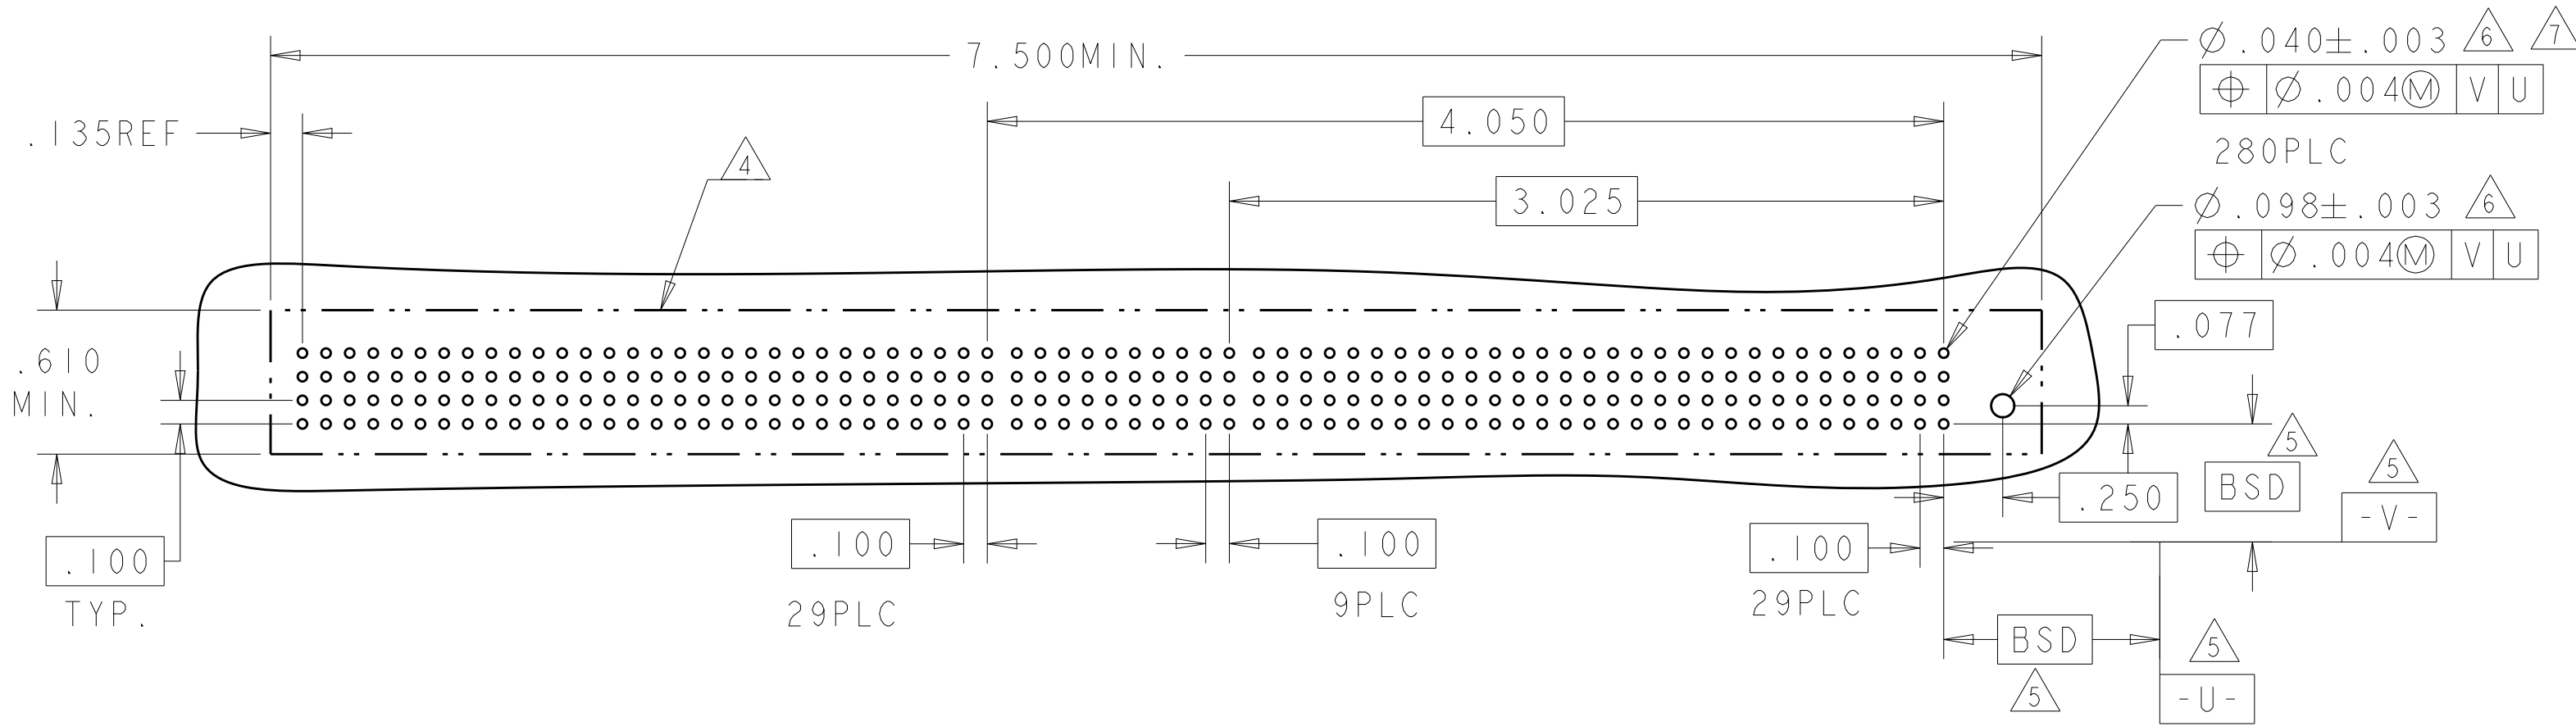


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI	29APR05			NAME VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL	
DIMENSIONS: INCHES		CHK M. PERCHERKE	29APR05				
		APVD M. PERCHERKE	-	PRODUCT SPEC		SIZE	
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		108-1973		CAGE CODE	
		0 PLC ±.01		APPLICATION SPEC		DRAWING NO	
		1 PLC ±.01		114-13038		RESTRICTED TO	
		3 PLC ±.005		WEIGHT		A1	
		4 PLC ±.0020		CUSTOMER DRAWING		SCALE	
		ANGLES ±.0020		2:1		SHEET	
		FINISH		9		OF	
				19		REV	
				K9			


PART NUMBER	ROWS	POWER										
		P11	P10	P9	P8	P7	P6	P5	P3	P2	P1	
4-6450540-2	D C B A	GP	GP	GP	GP	GP	GP	GP	GP	GP	GP	
11HDP												

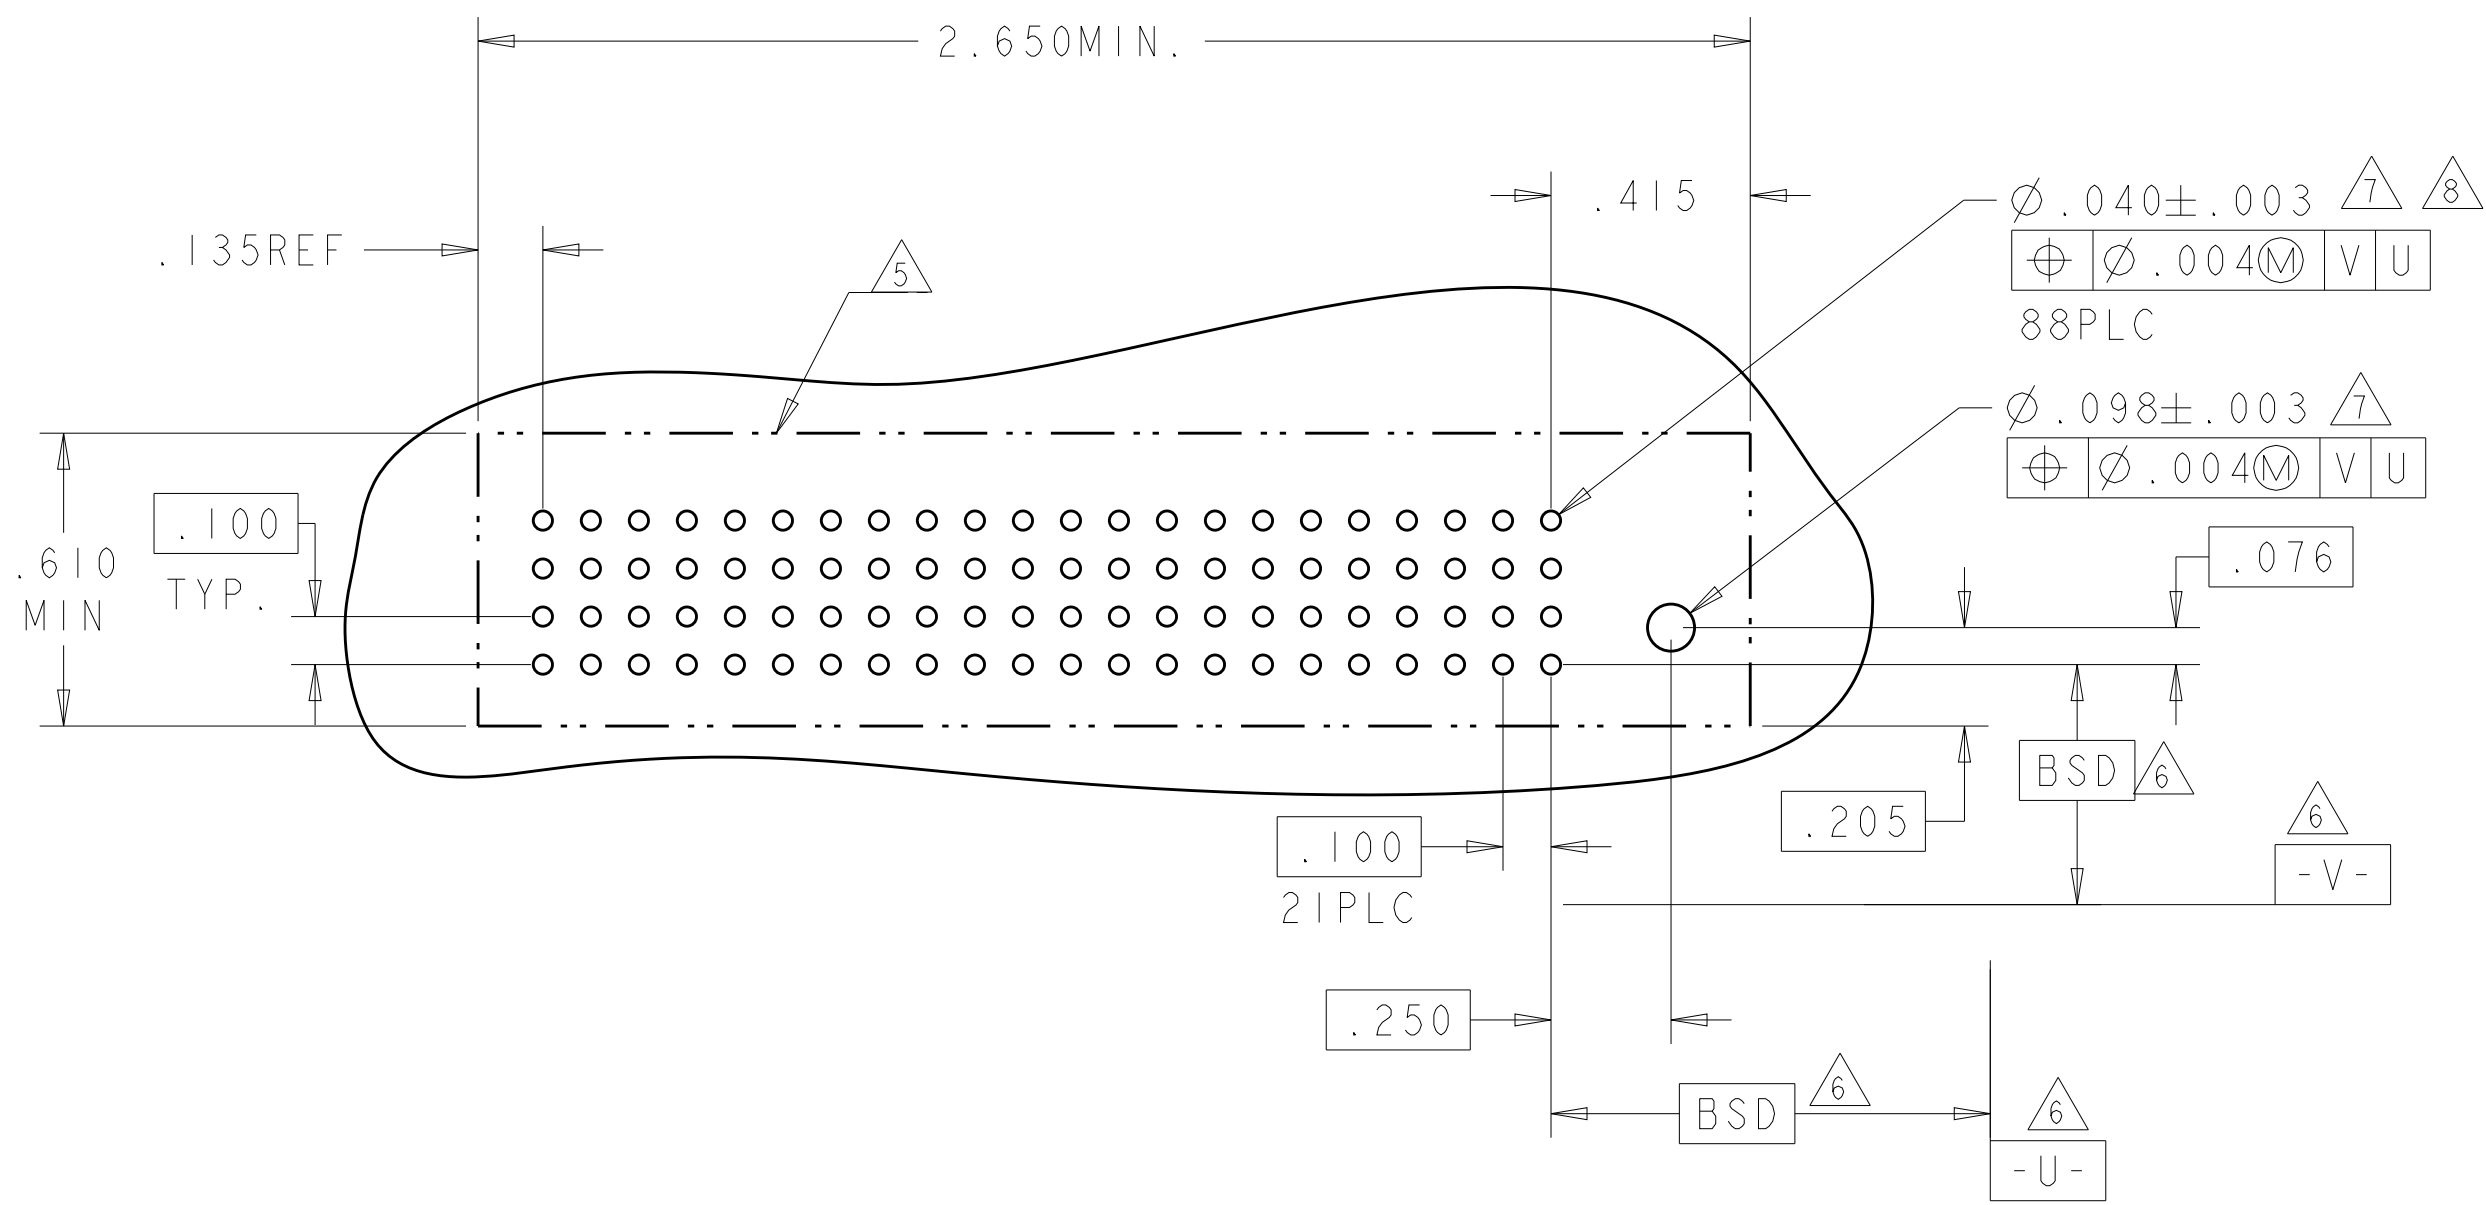4805 (3/11)



PART NUMBER	ROWS	POWER											
		P12	P11	P10	P9	P8	P7	P6	P5	P3	P2		P1
4-6450540-5	DC CB A	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	GS	HD
12HDP													

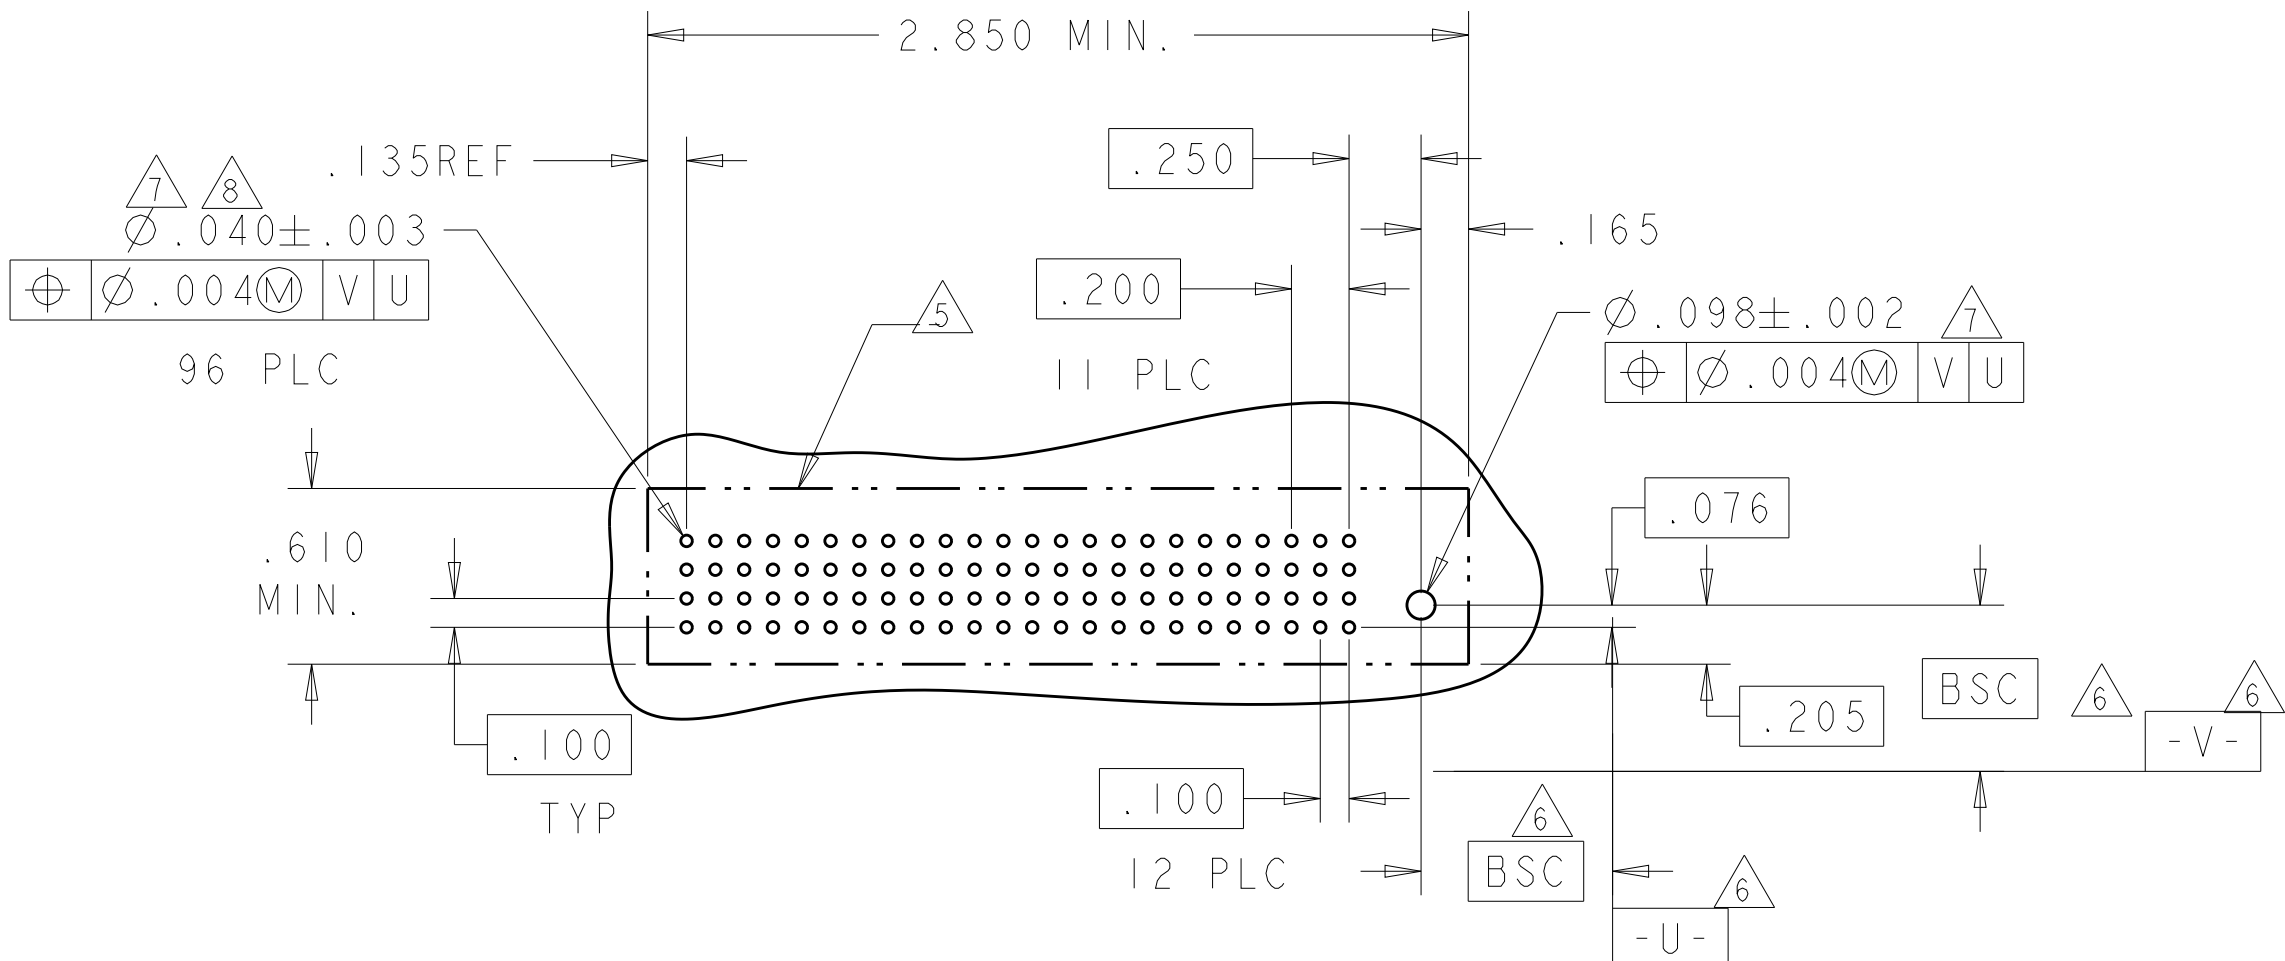




PART NUMBER	ROWS		POWER			SIGNAL			POWER			
			P2			2	1	P1				
4-6450540-6	D C B A											
IP + 8S + IP												

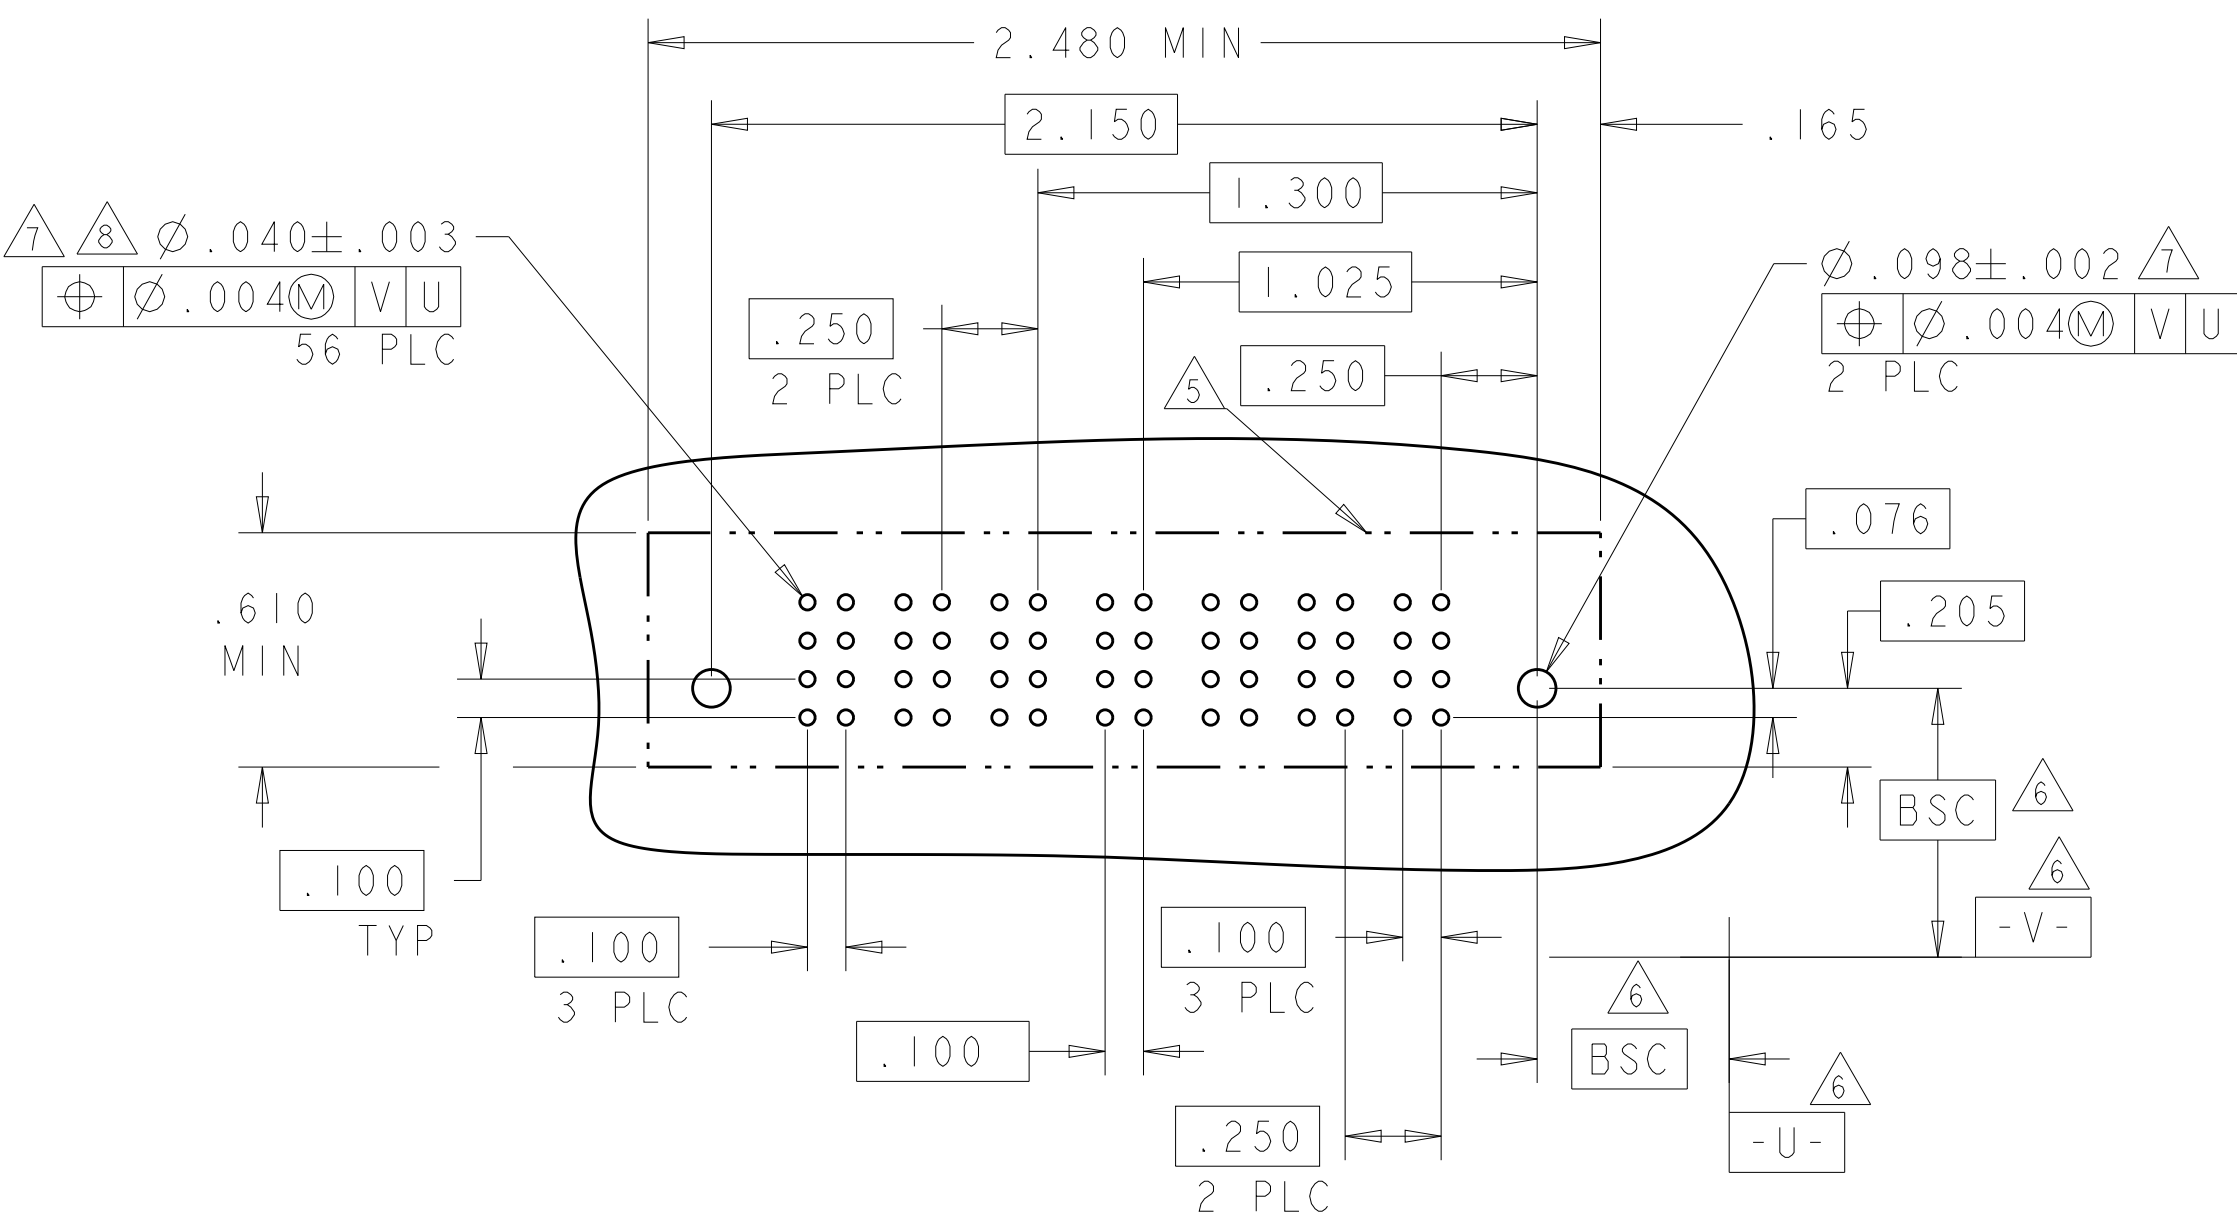4805 (3/11)

LOC		DIST		REVISIONS				
P	LYR	DESCRIPTION			DATE	OWN	APVD	
-	-	SEE SHEET 1			-	-	-	

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P2	4	3	2	1	P1			
4-6450540-8	D C B A		GS	AP	AP	AP	AP	GS			
				AP	AP	AP	AP				
				AP	AP	AP	AP				
				AP	AP	AP	AP				
IP + 16S + 1P											

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P4	P3	4	3	2	1	P2	P1	
5-6450540-1	D C B A				AP	AP	AP	AP			
					AP	AP	AP	AP			
					AP	AP	AP	AP			
					AP	AP	AP	AP			
2P + 16S + 2P											

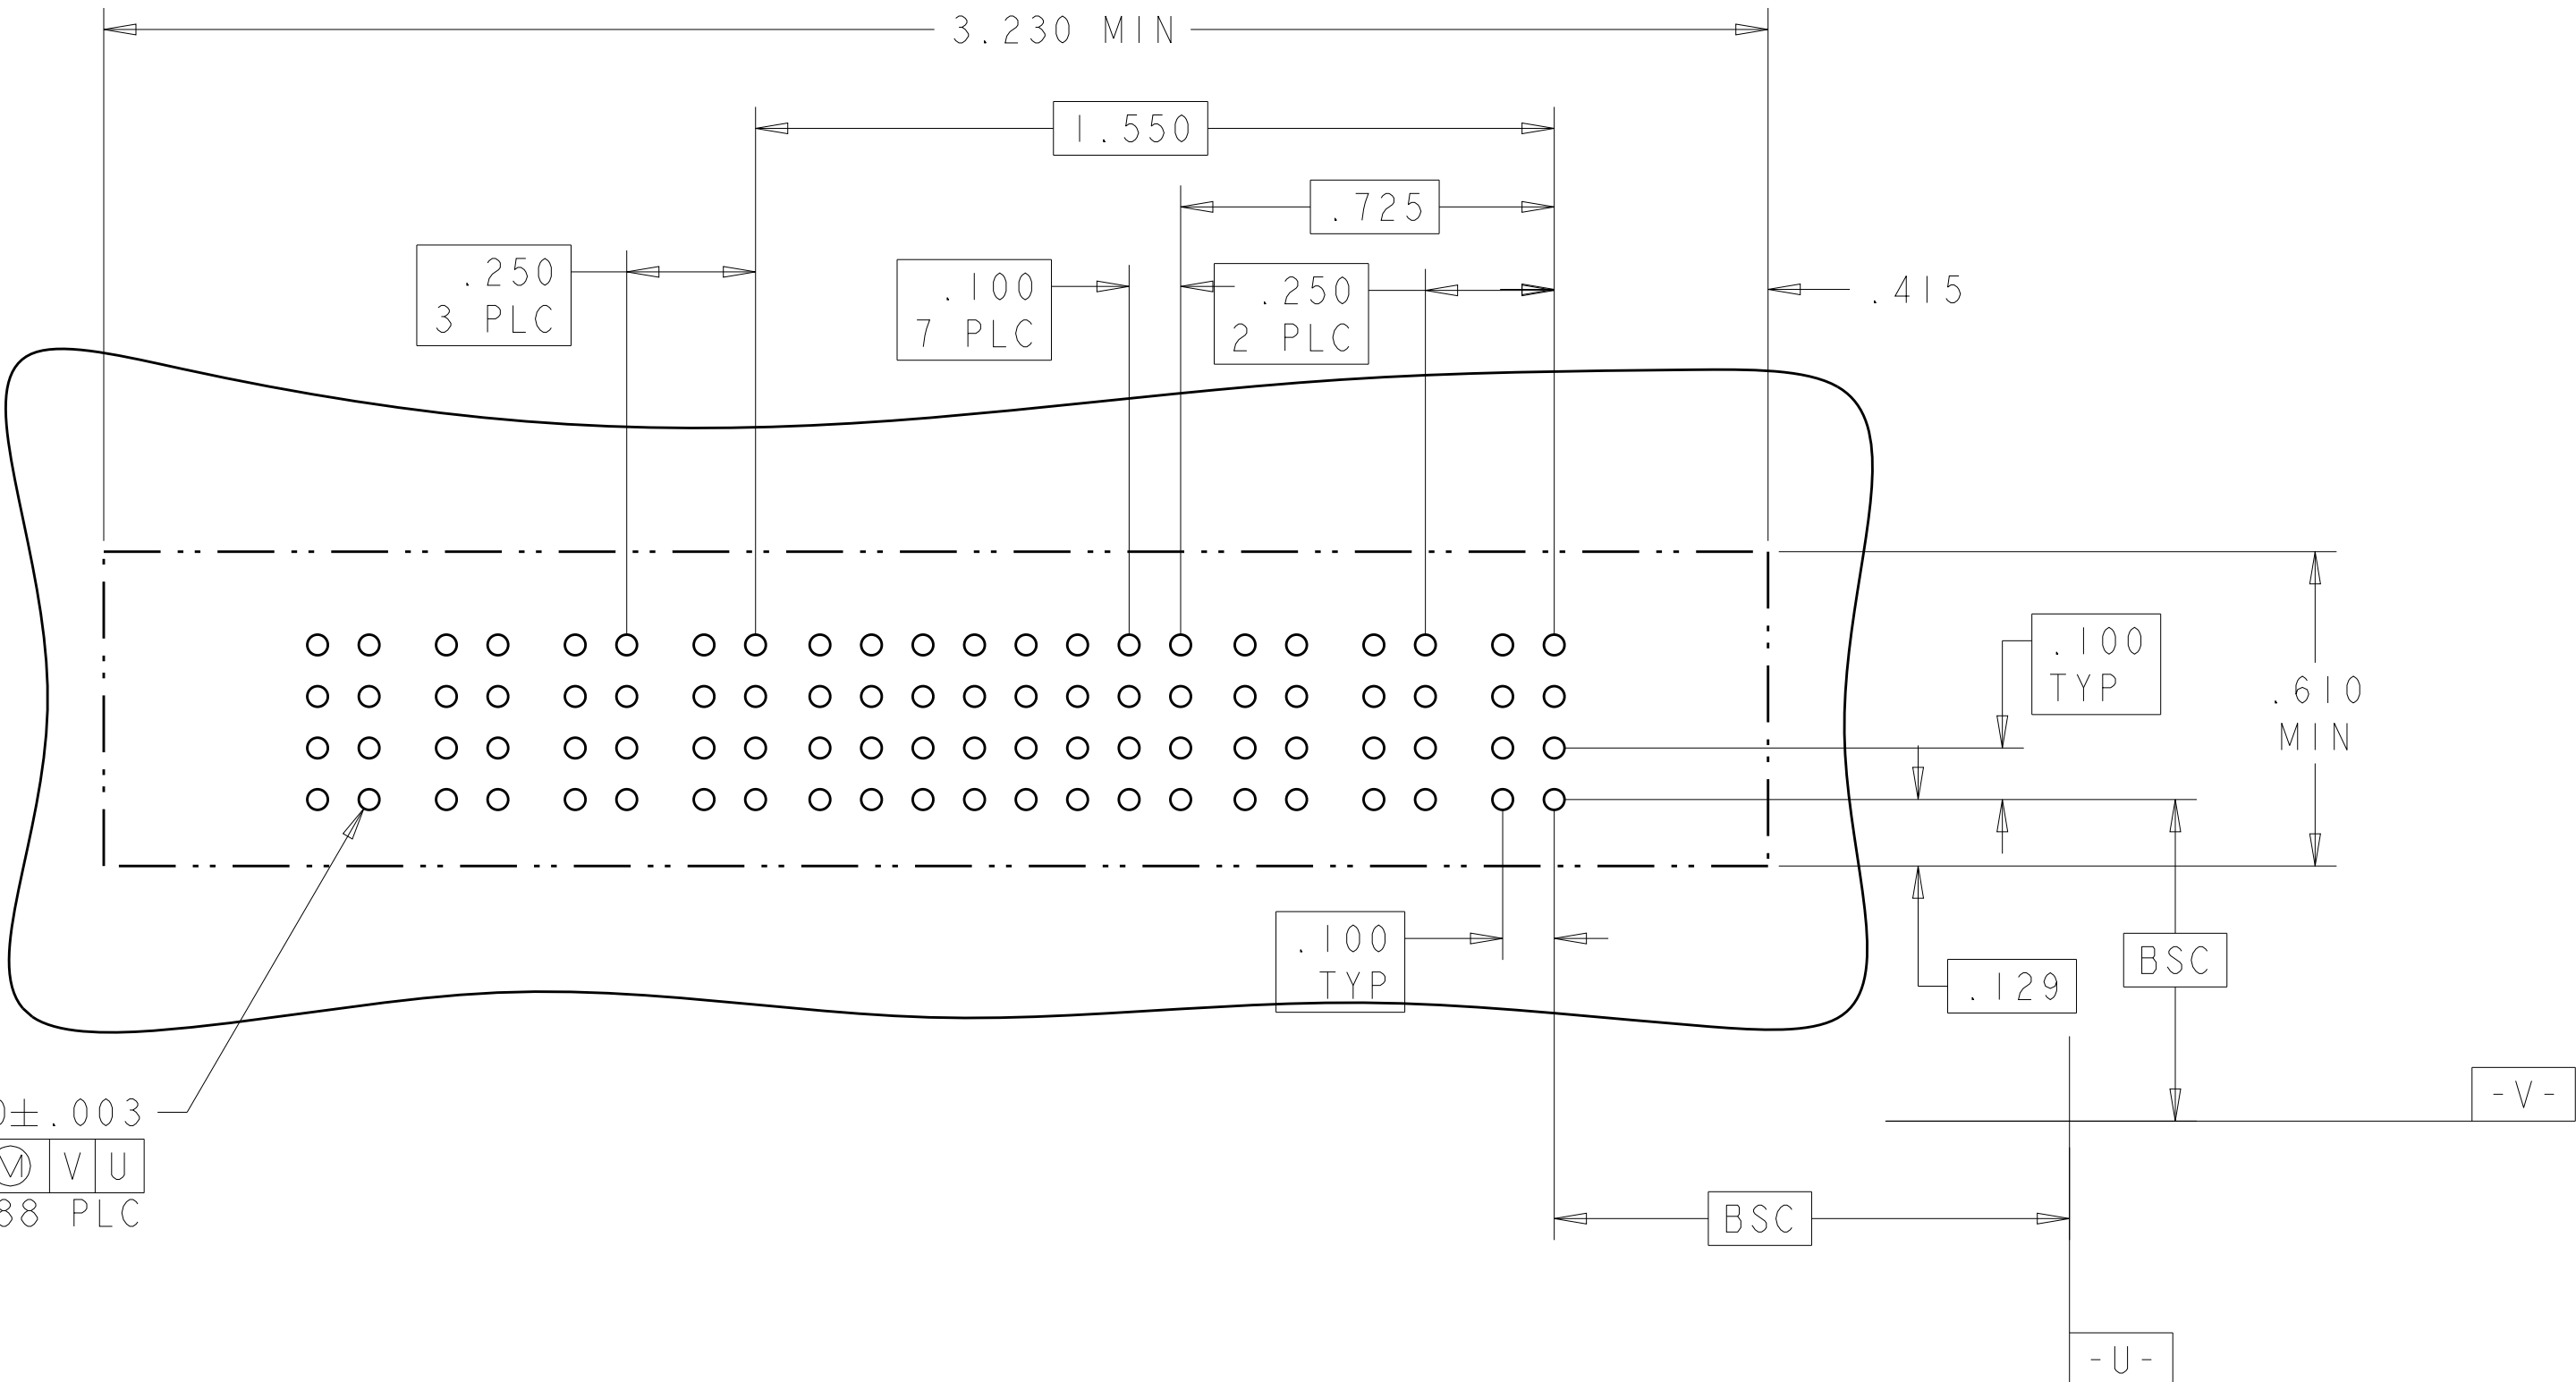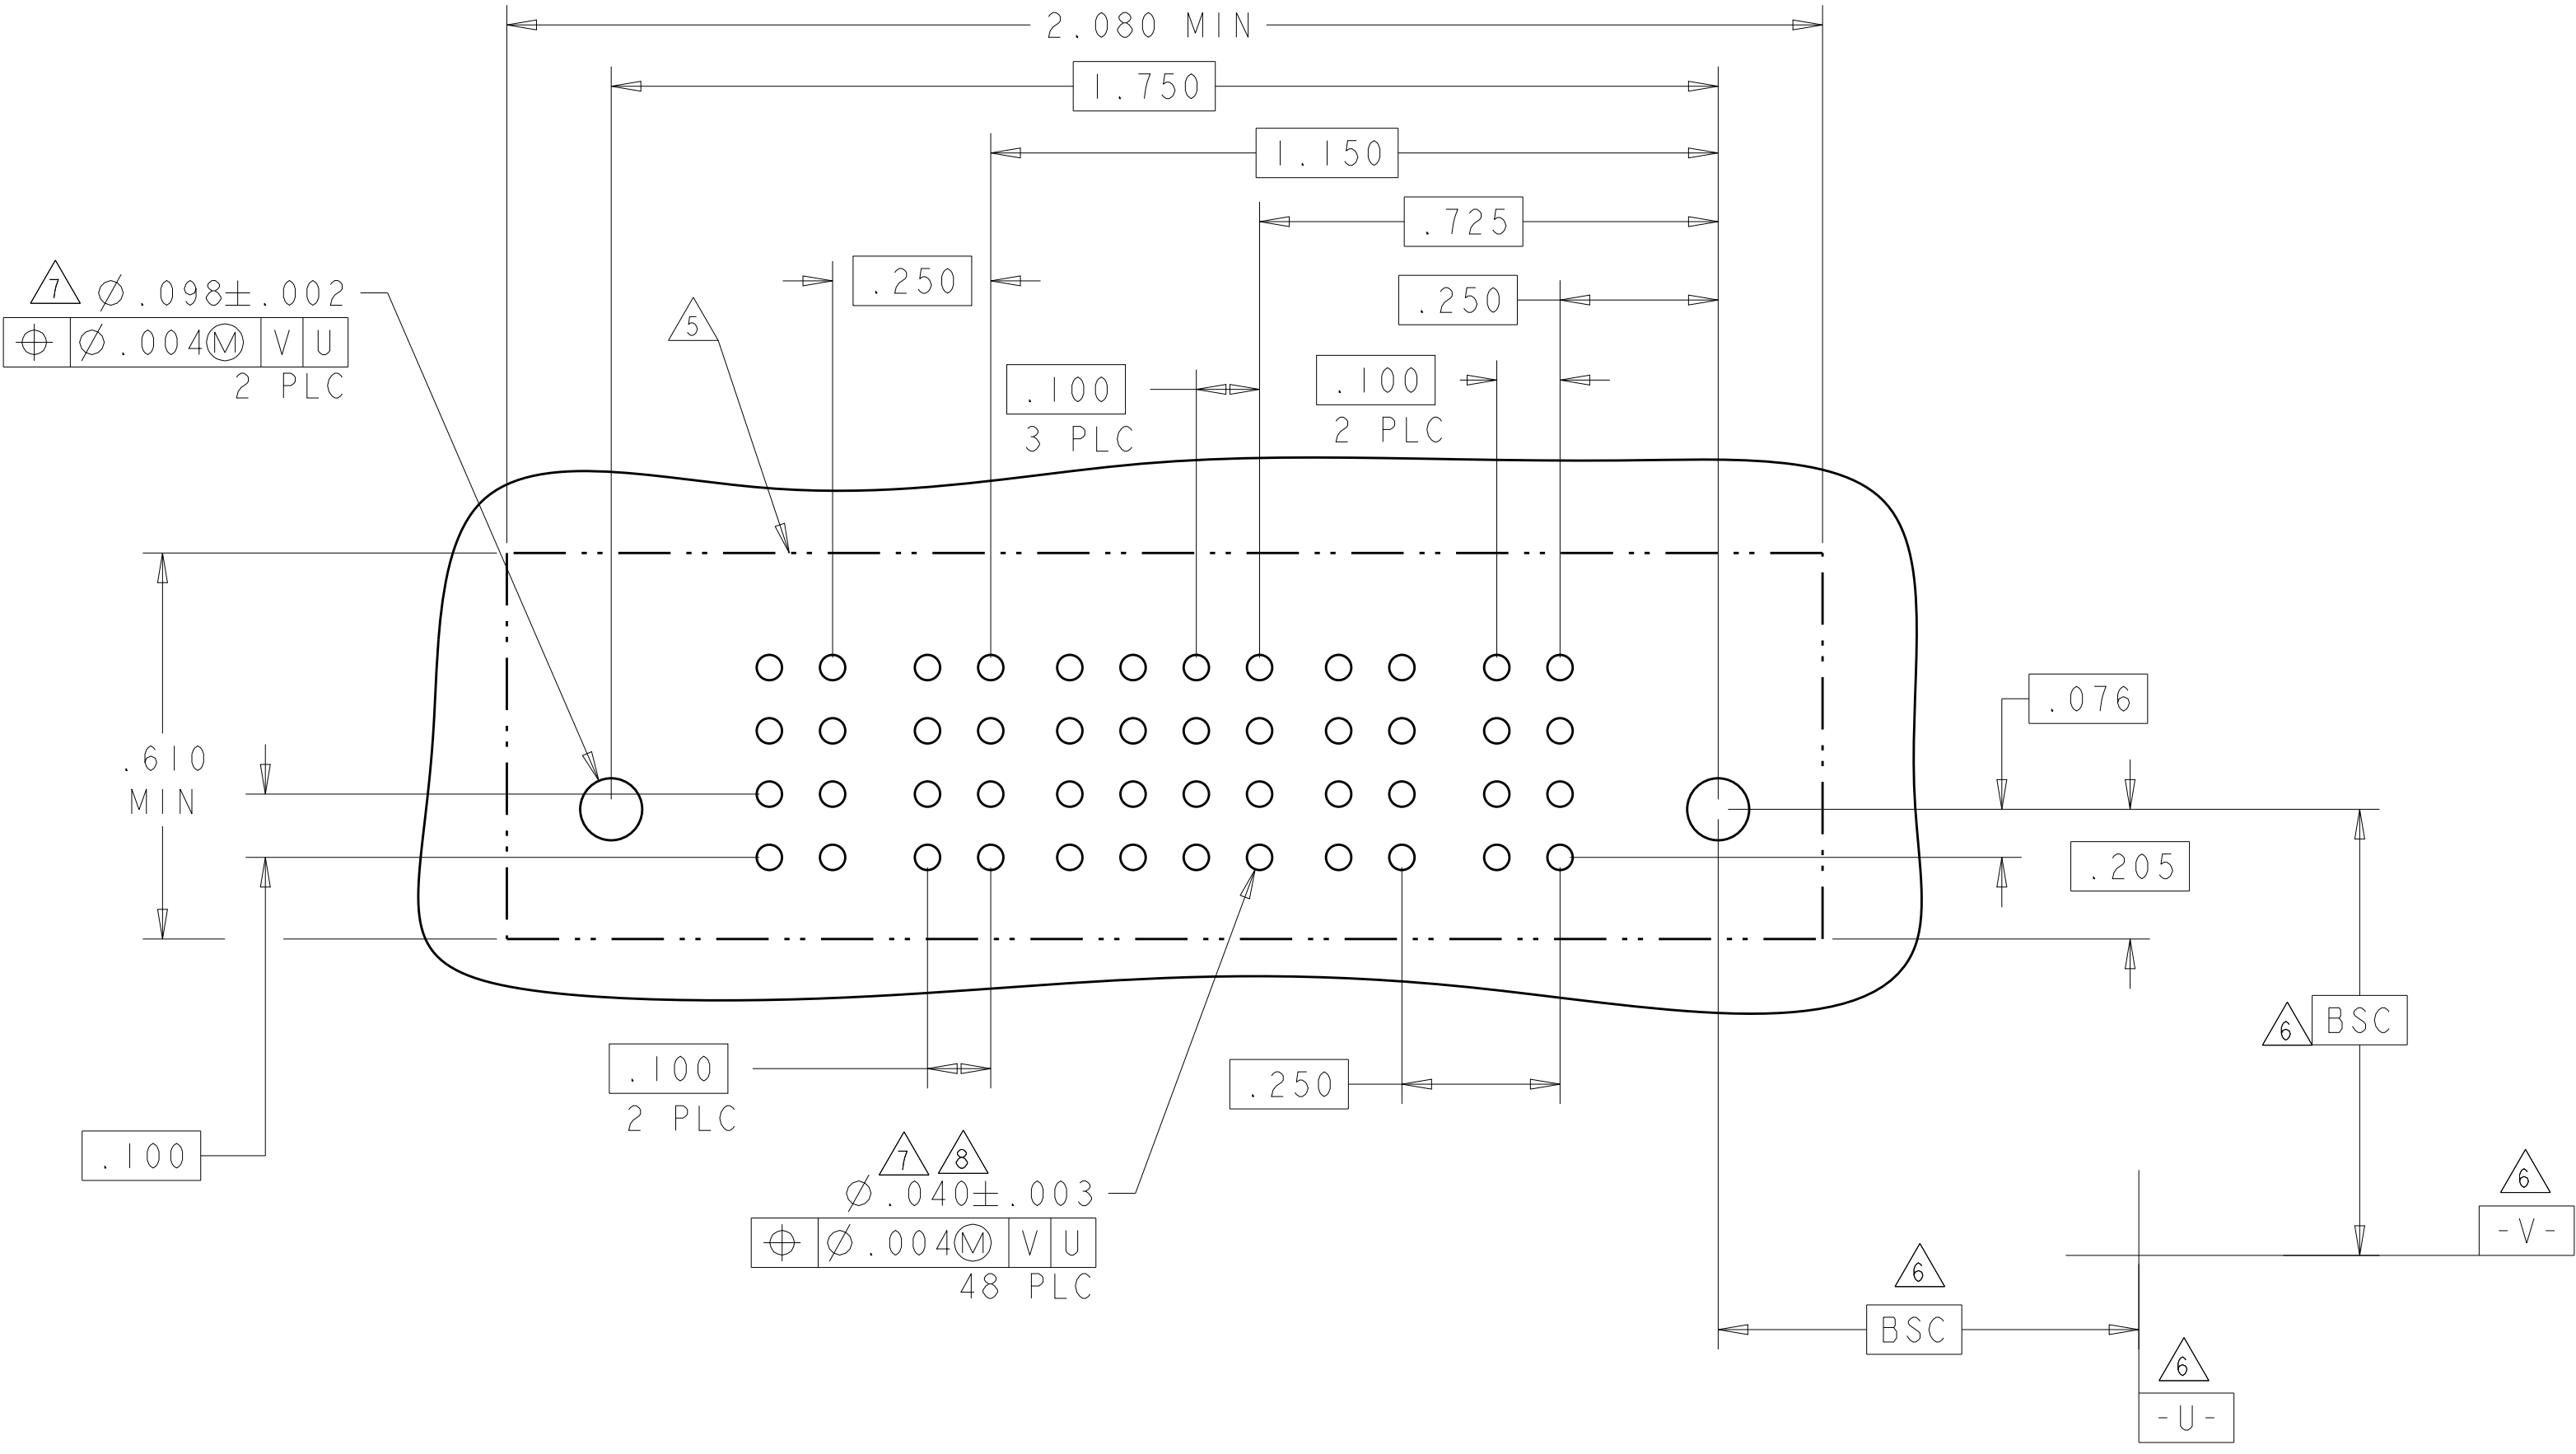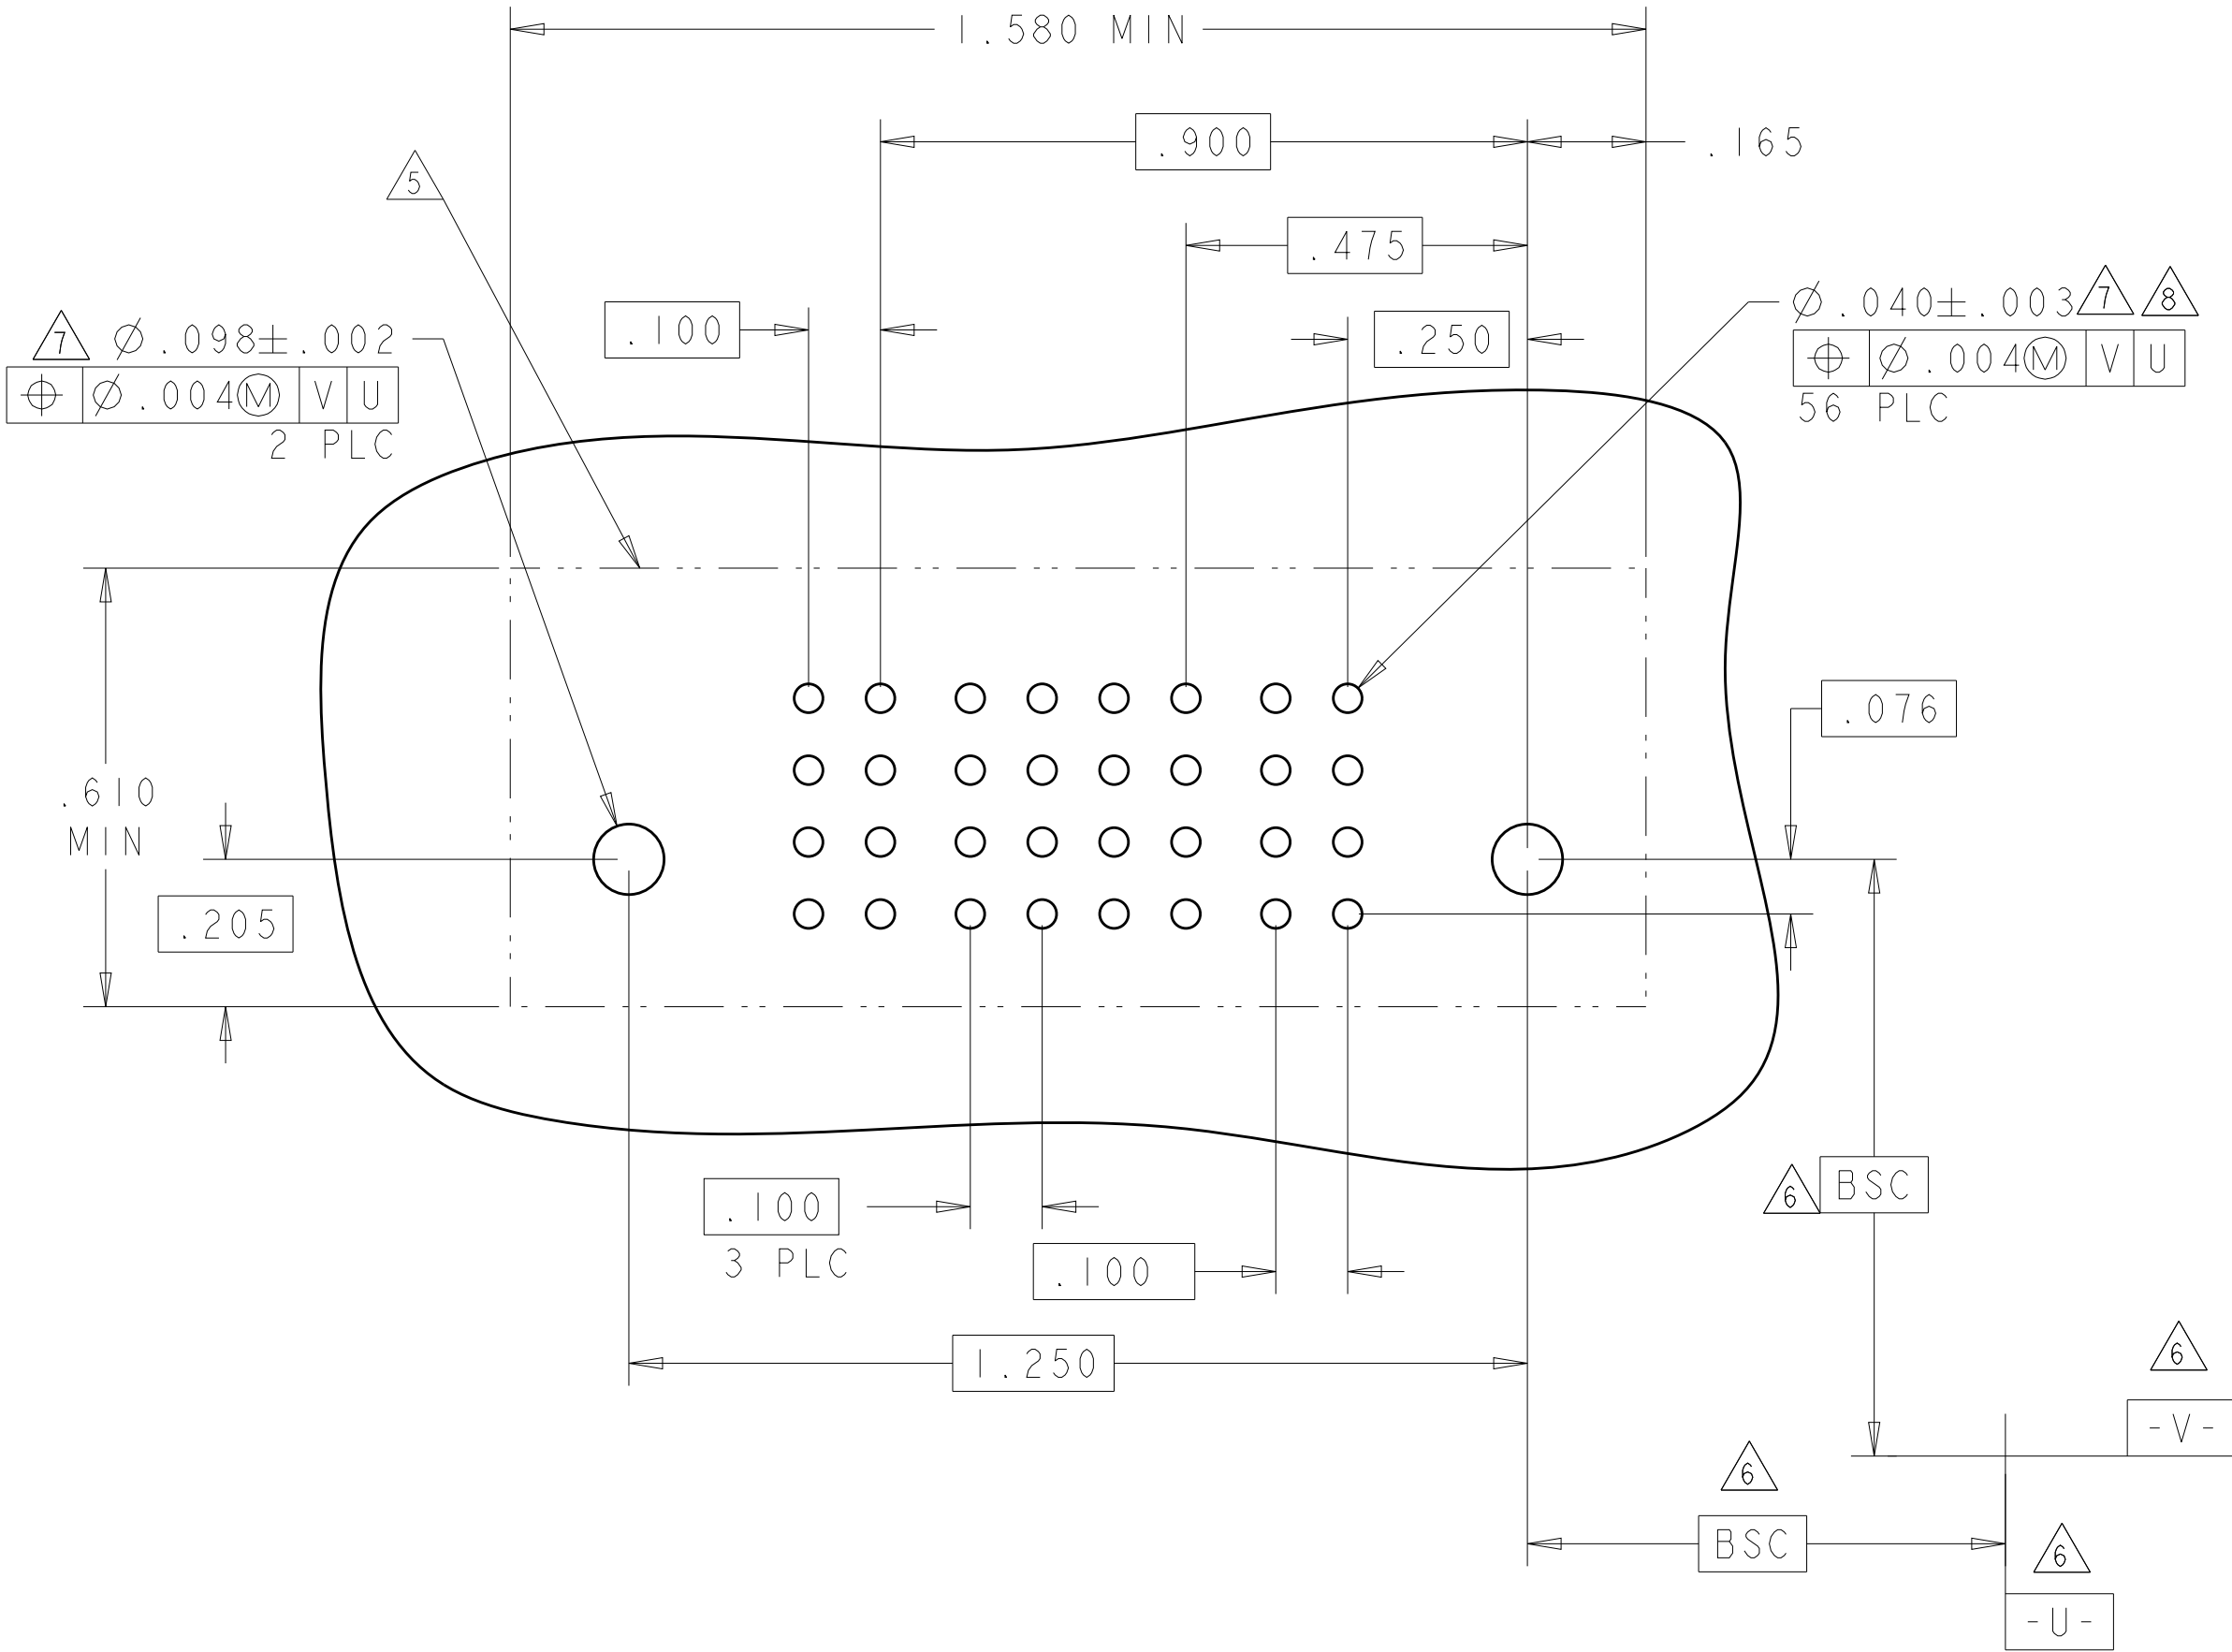

PART NUMBER	ROWS		POWER				SIGNAL								POWER			
			P7	P6	P5	P4	8	7	6	5	4	3	2	1	P3	P2	P1	
1-6450540-1	D C B A						P	P	P	P	P	P	P	P				
							P	P	P	P	P	P	P	P				
							P	P	P	P	P	P	P	P				
							P	P	P	P	P	P	P	P				
3P + 32S + 4P																		

THIS DRAWING IS A CONTROLLED DOCUMENT.

OWN: R. GRZYBOWSKI 29APR05
CHK: M. PERCHERKE 29APR05
APVD: M. PERCHERKE

PRODUCT SPEC: 108-1973
APPLICATION SPEC: 114-13038
WEIGHT: -
CUSTOMER DRAWING

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ±.01
1 PLC ±.01
2 PLC ±.01
3 PLC ±.005
4 PLC ±.0020
ANGLES ±2°
FINISH

NAME: VERTICAL RECEPTACLE ASSEMBLY WITH GUIDES MULTI-BEAM XL


SIZE: A1
CAGE CODE: 100779
DRAWING NO: 6450540



RESTRICTED TO: -
SCALE: 2:1
SHEET: 12 OF 19
REV: K9


TE Connectivity

LOC	DIST	REVISIONS					
ES	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
		-	-	SEE SHEET 1	-	-	-


PART NUMBER	ROWS		POWER										SIGNAL						POWER										
			P20	P19	P18	P17	P16	P15	P14	P13	P12	P11	6	5	4	3	2	1	P10	P9	P8	P7	P6	P5	P4	P3	P2	P1	
5-6450540-0	D C B A											 AP	 AP	 AP	 AP	 AP	 AP												
			 GS	 GS	 GS	 GS	 GS	 GS	 GS	 GS	 GS	 GS	 GS	 AP	 AP	 AP	 AP	 AP	 AP	 GS	 GS	 GS	 GS	 GS	 GS	 GS	 GS		
			 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 GS	 GS	 GS	 GS	 GS	 GS	 GS	 GS		
			 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 AP	 GS	 GS	 GS	 GS	 GS	 GS	 GS	 GS		
10P + 24S + 10P																													

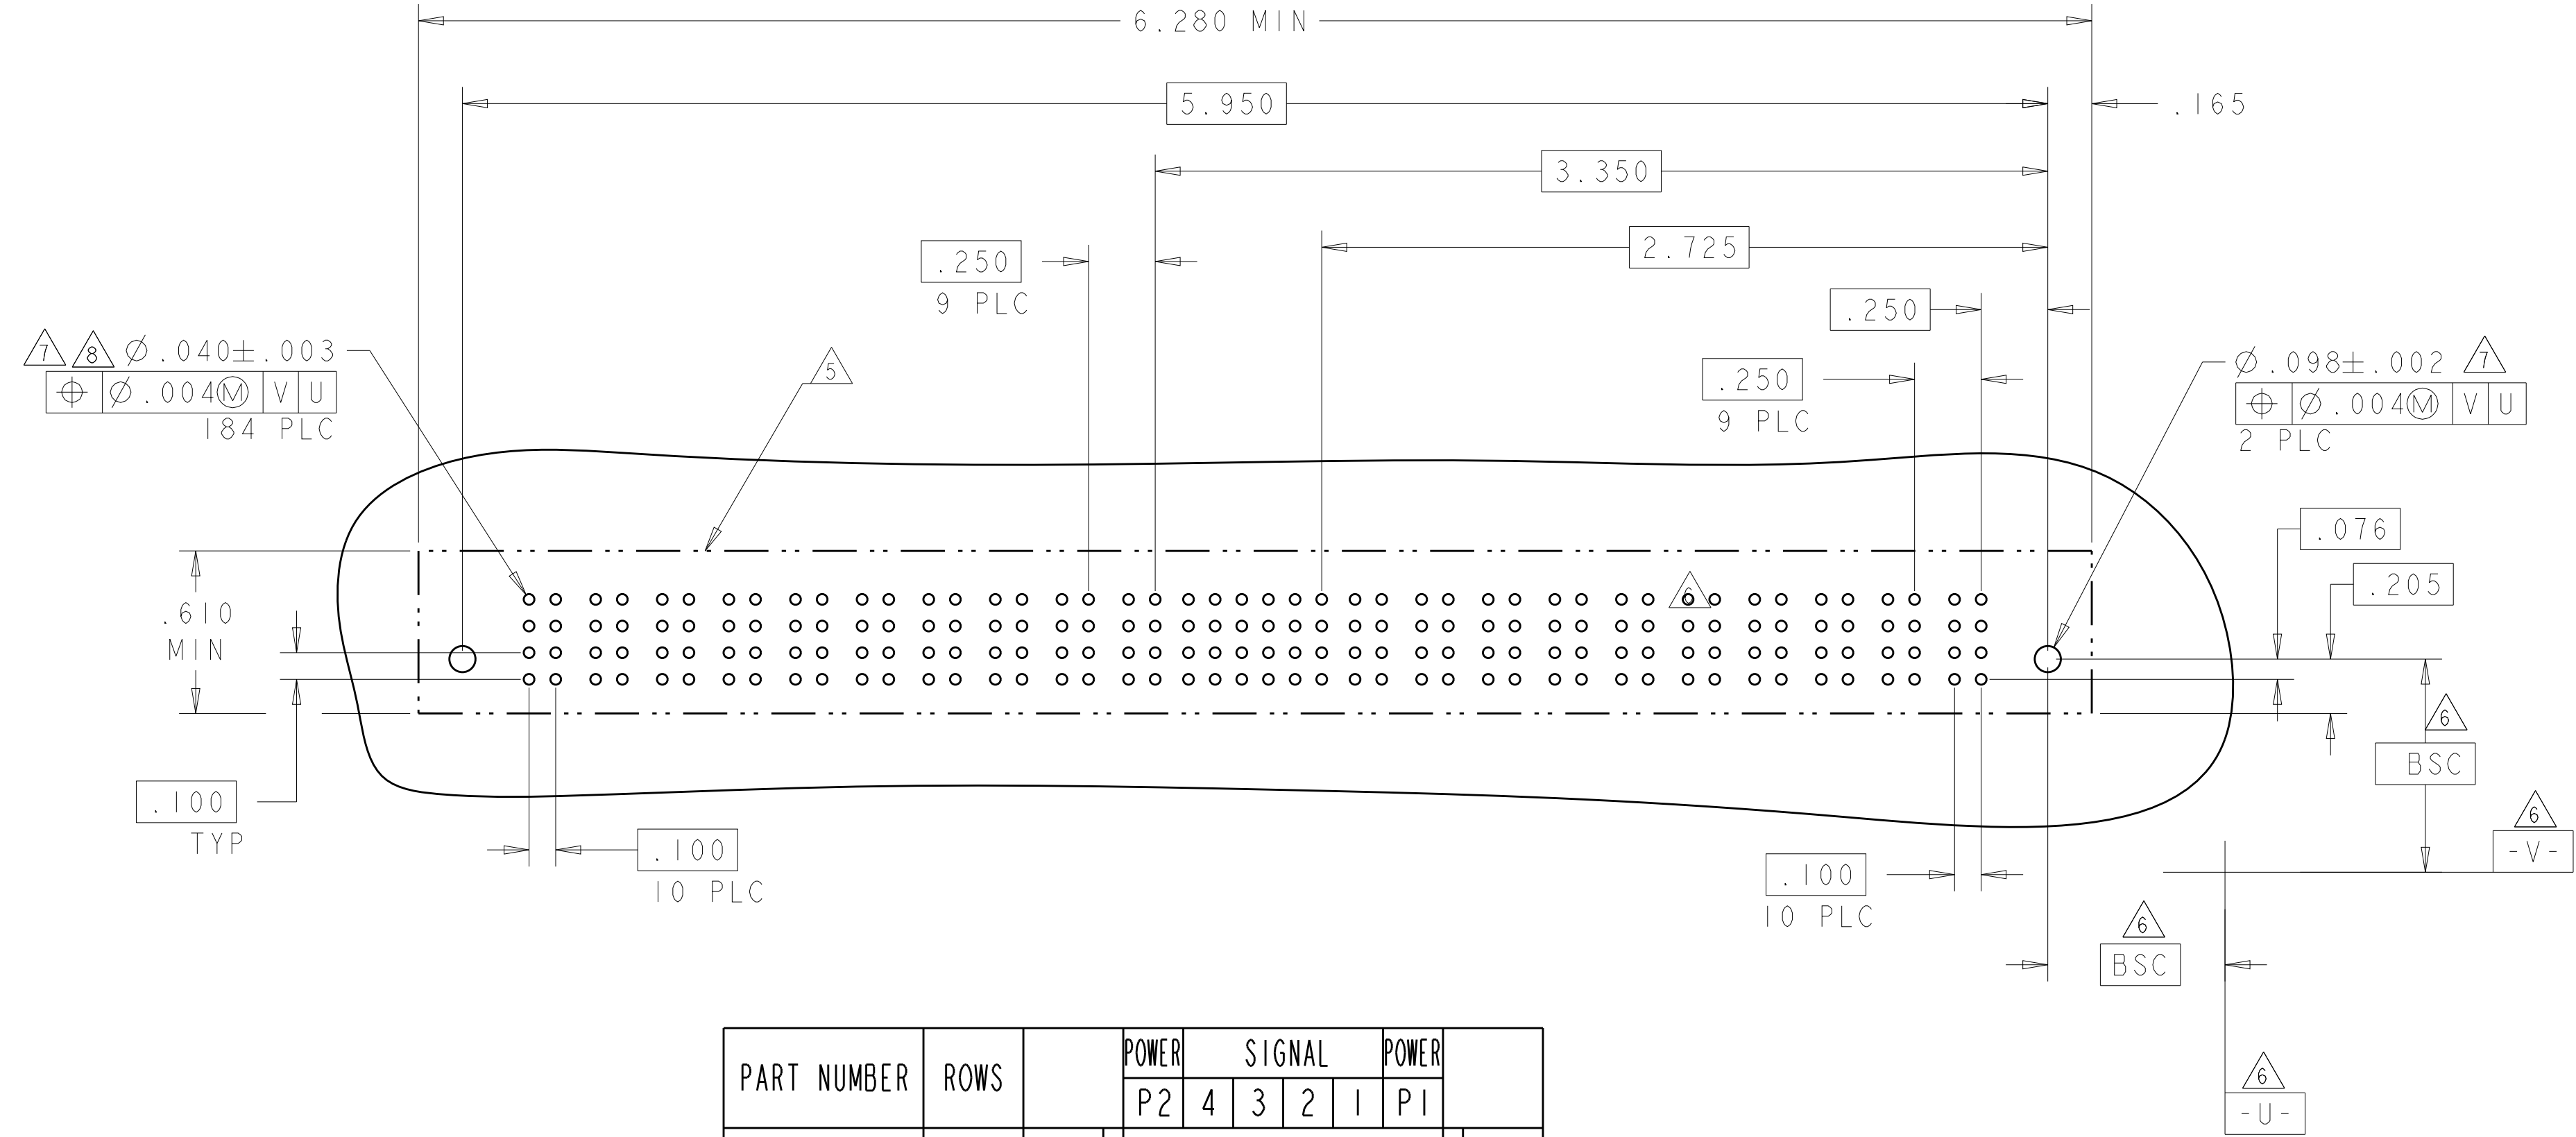

PART NUMBER	ROWS		POWER		SIGNAL				POWER		
			P2	4	3	2	1	P1			
5-6450540-2	D C B A			AP	AP	AP	AP				
				AP	AP	AP	AP				
				AP	AP	AP	AP				
				AP	AP	AP	AP				
				AP	AP	AP	AP				
1P + 16S + 1P											


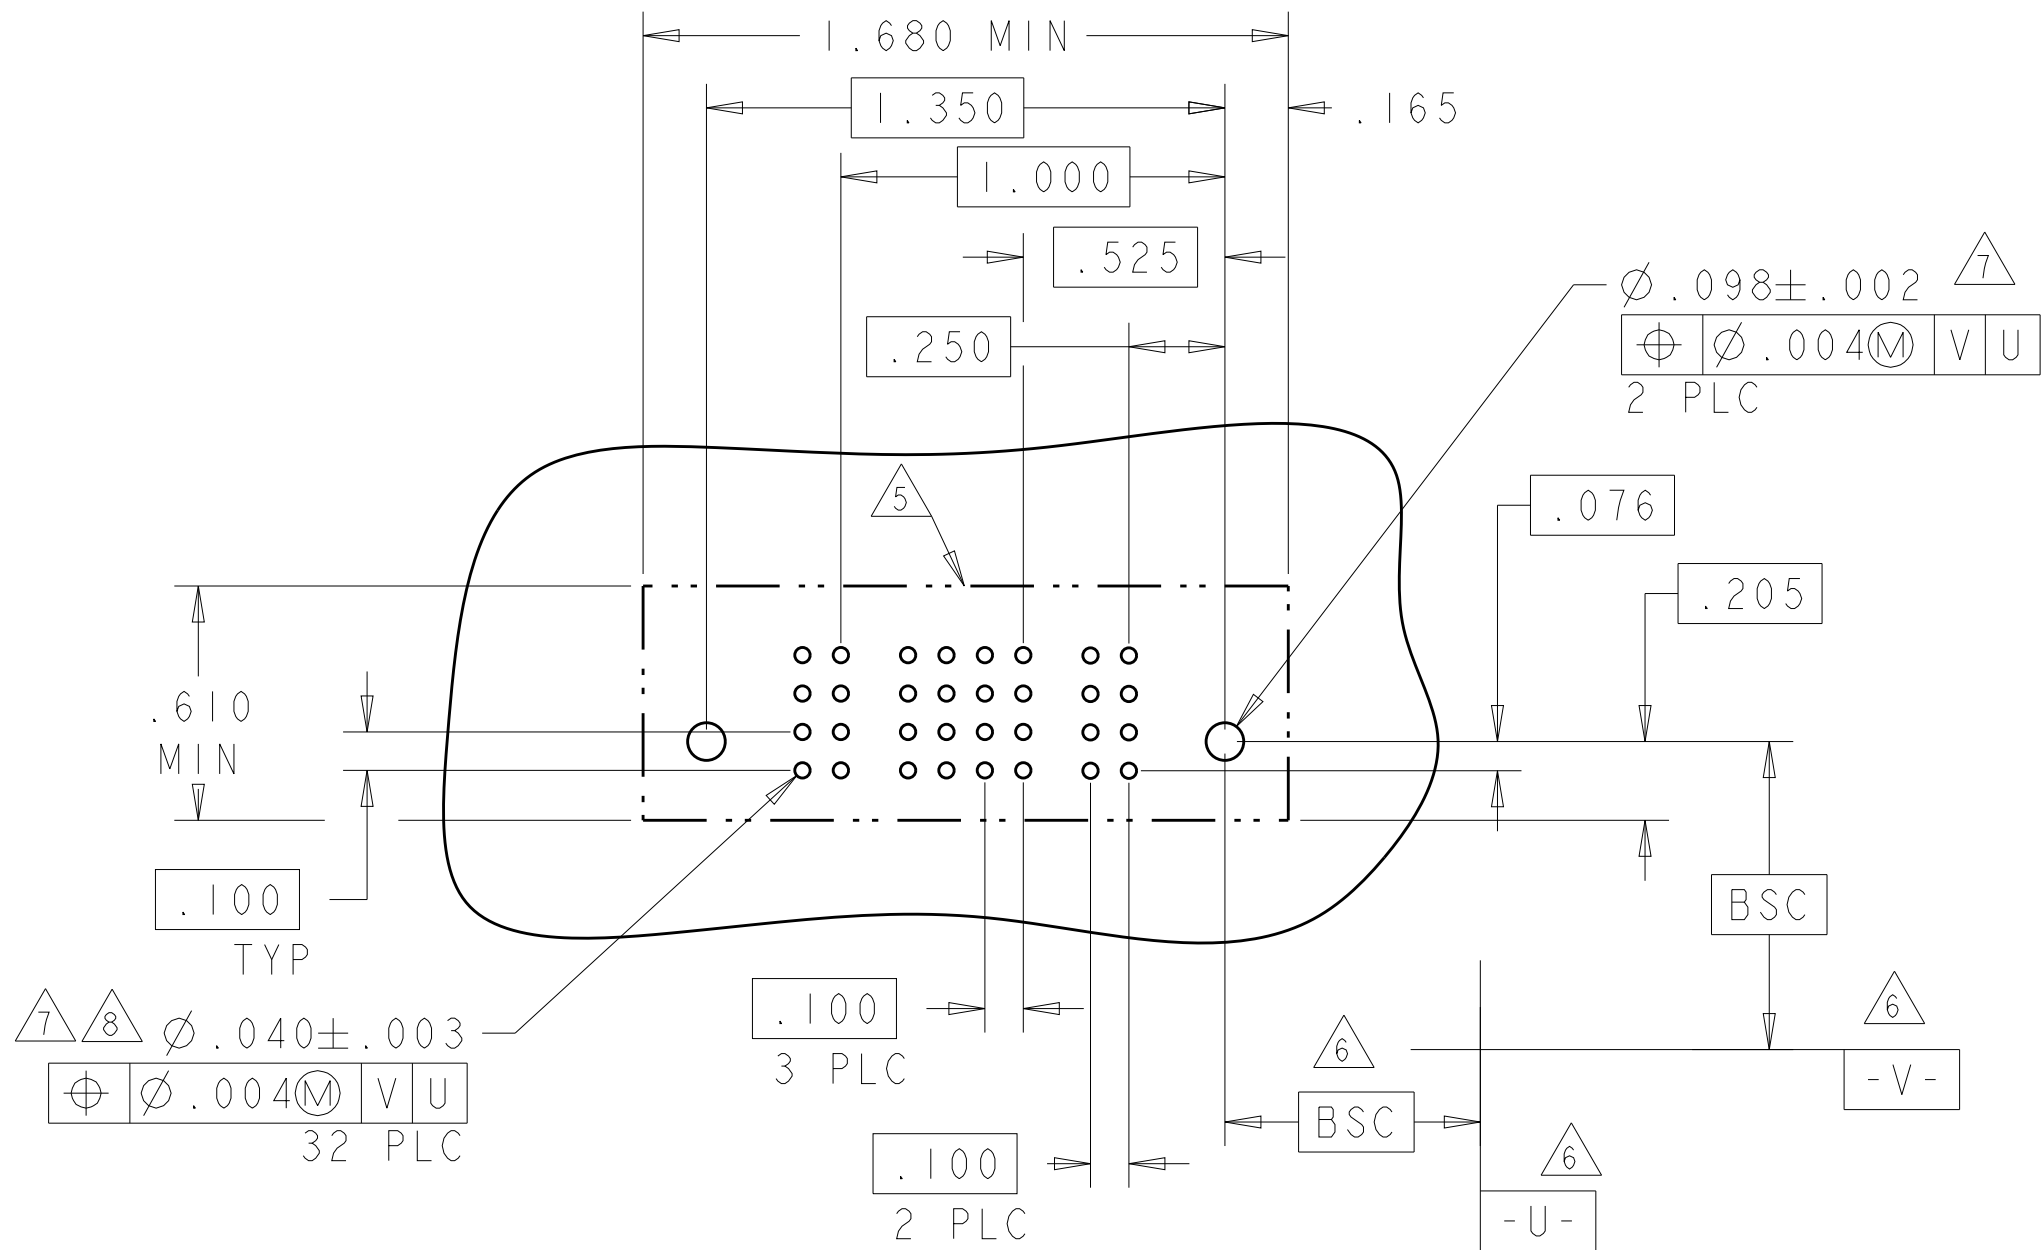


PART NUMBER	ROWS		POWER				SIGNAL						POWER				
			P8	P7	P6	P5	6	5	4	3	2	1	P4	P3	P2	P1	
5-6450540-3	D C B A	 HD	 GS	 GS	 GS	 GS	AP	AP	AP	AP	AP	AP	 GS	 GS	 GS	 GS	 HD
							AP	AP	AP	AP	AP	AP					
							AP	AP	AP	AP	AP	AP					
							AP	AP	AP	AP	AP	AP					
4P + 24S + 4P																	

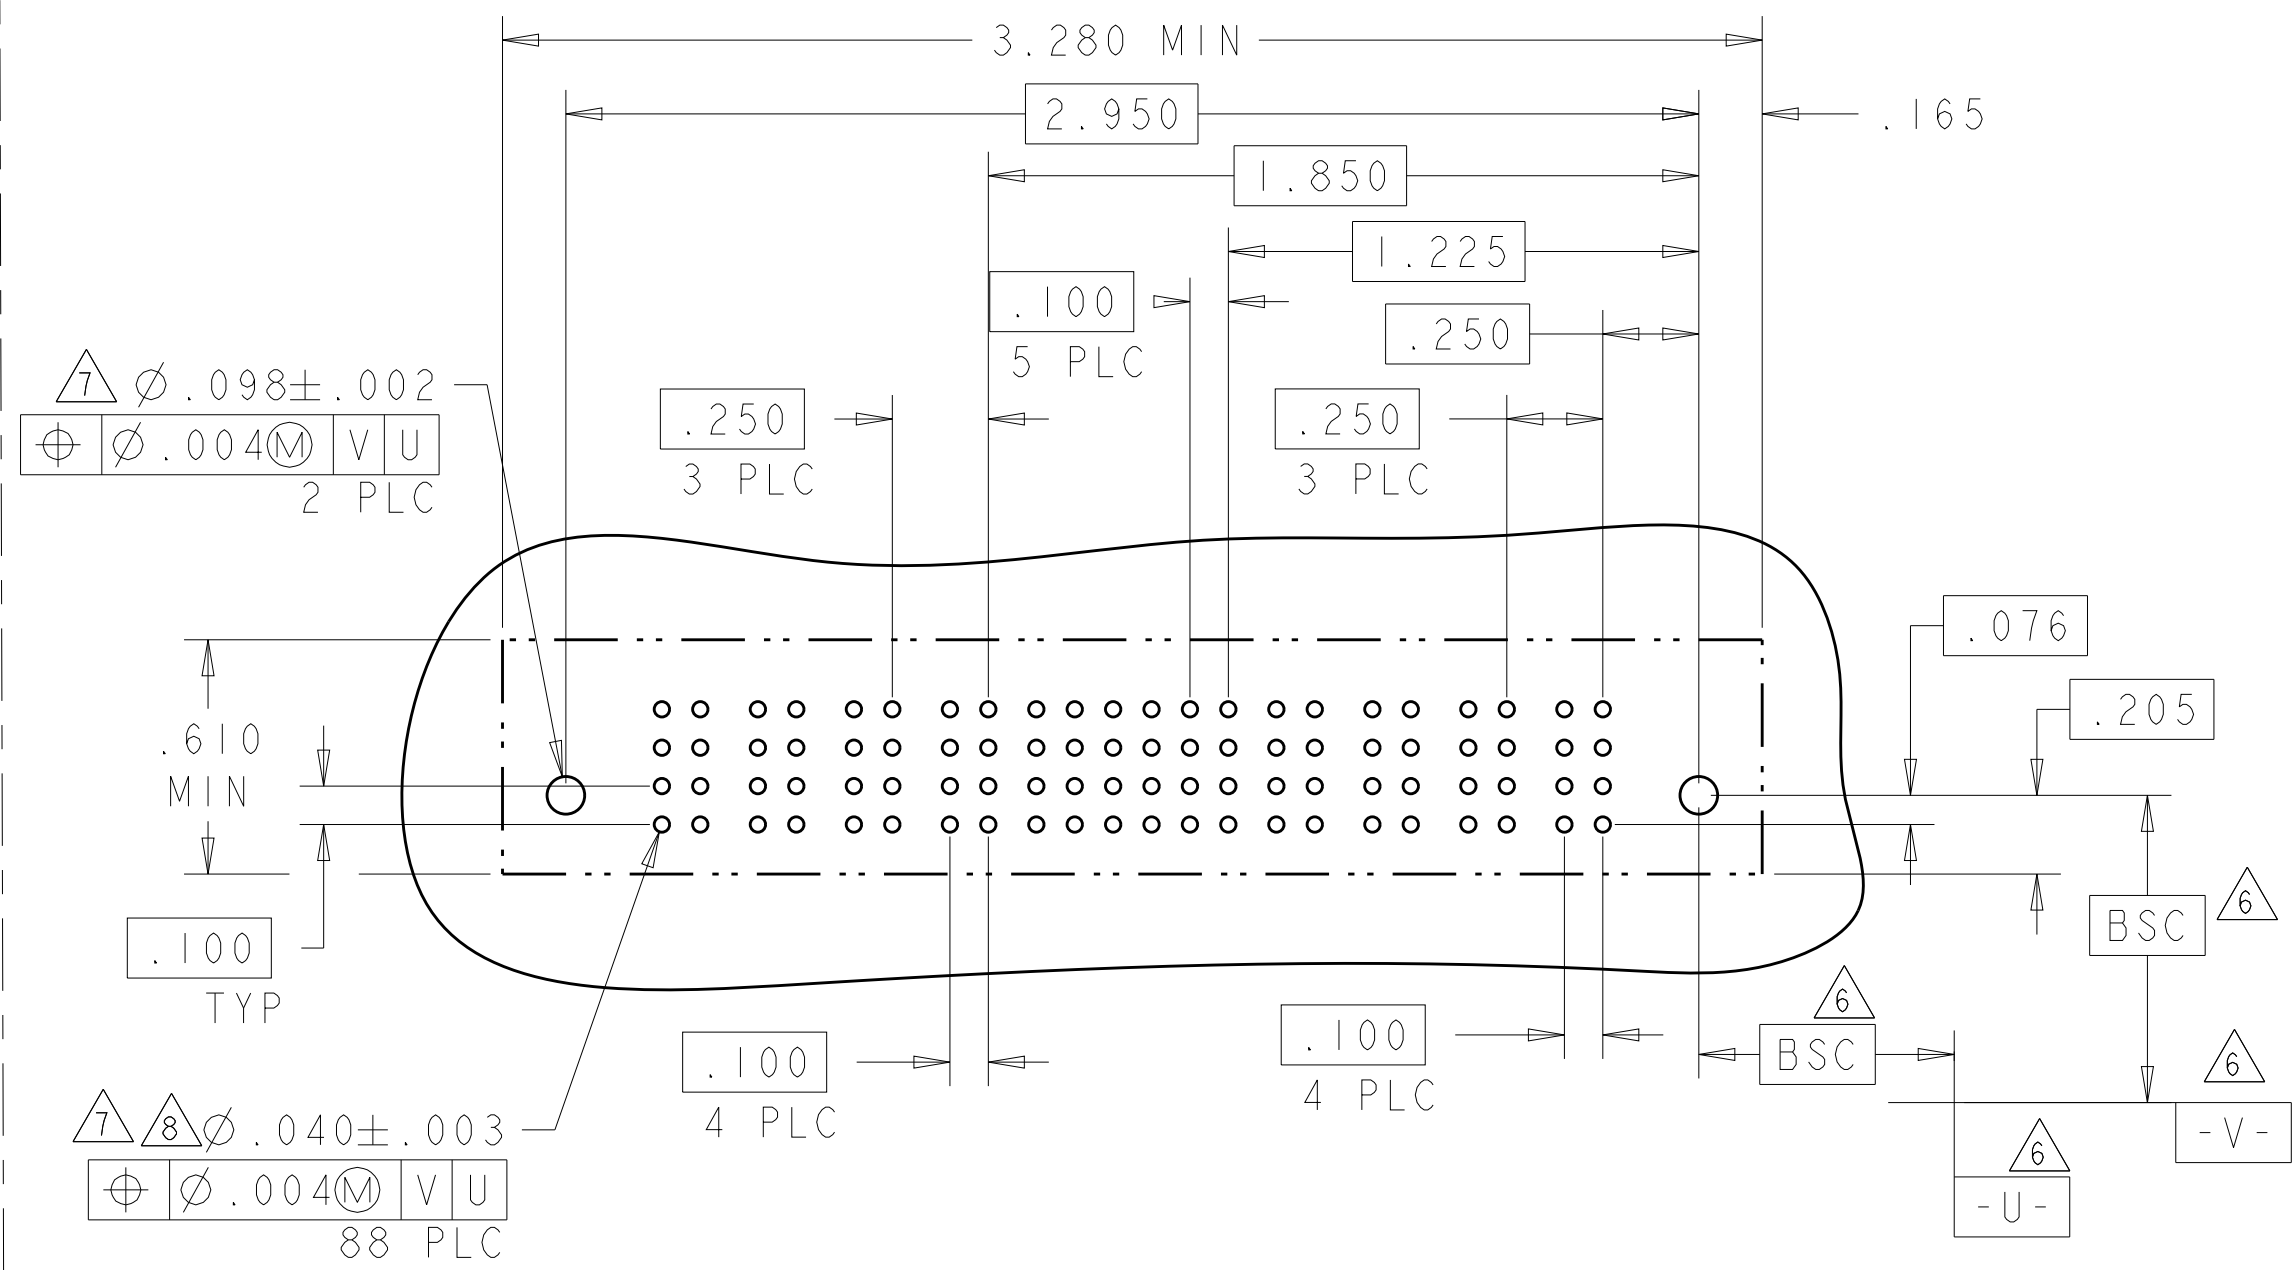

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. GRZYBOWSKI CHK M. PERCHERKE APVD M. PERCHERKE	29APR05 29APR05 -
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
		PRODUCT SPEC	
MATERIAL		APPLICATION SPEC	
		WEIGHT	
		CUSTOMER DRAWING	
		SCALE 2:1	
		SHEET 13 OF 19	
		REV K9	


PART NUMBER	ROWS		POWER			SIGNAL		POWER			
			P6	P5	P4	2	1	P3	P2	P1	
5-6450540-5	D C B A	 				    	    				 
3P + 8S + 3P											

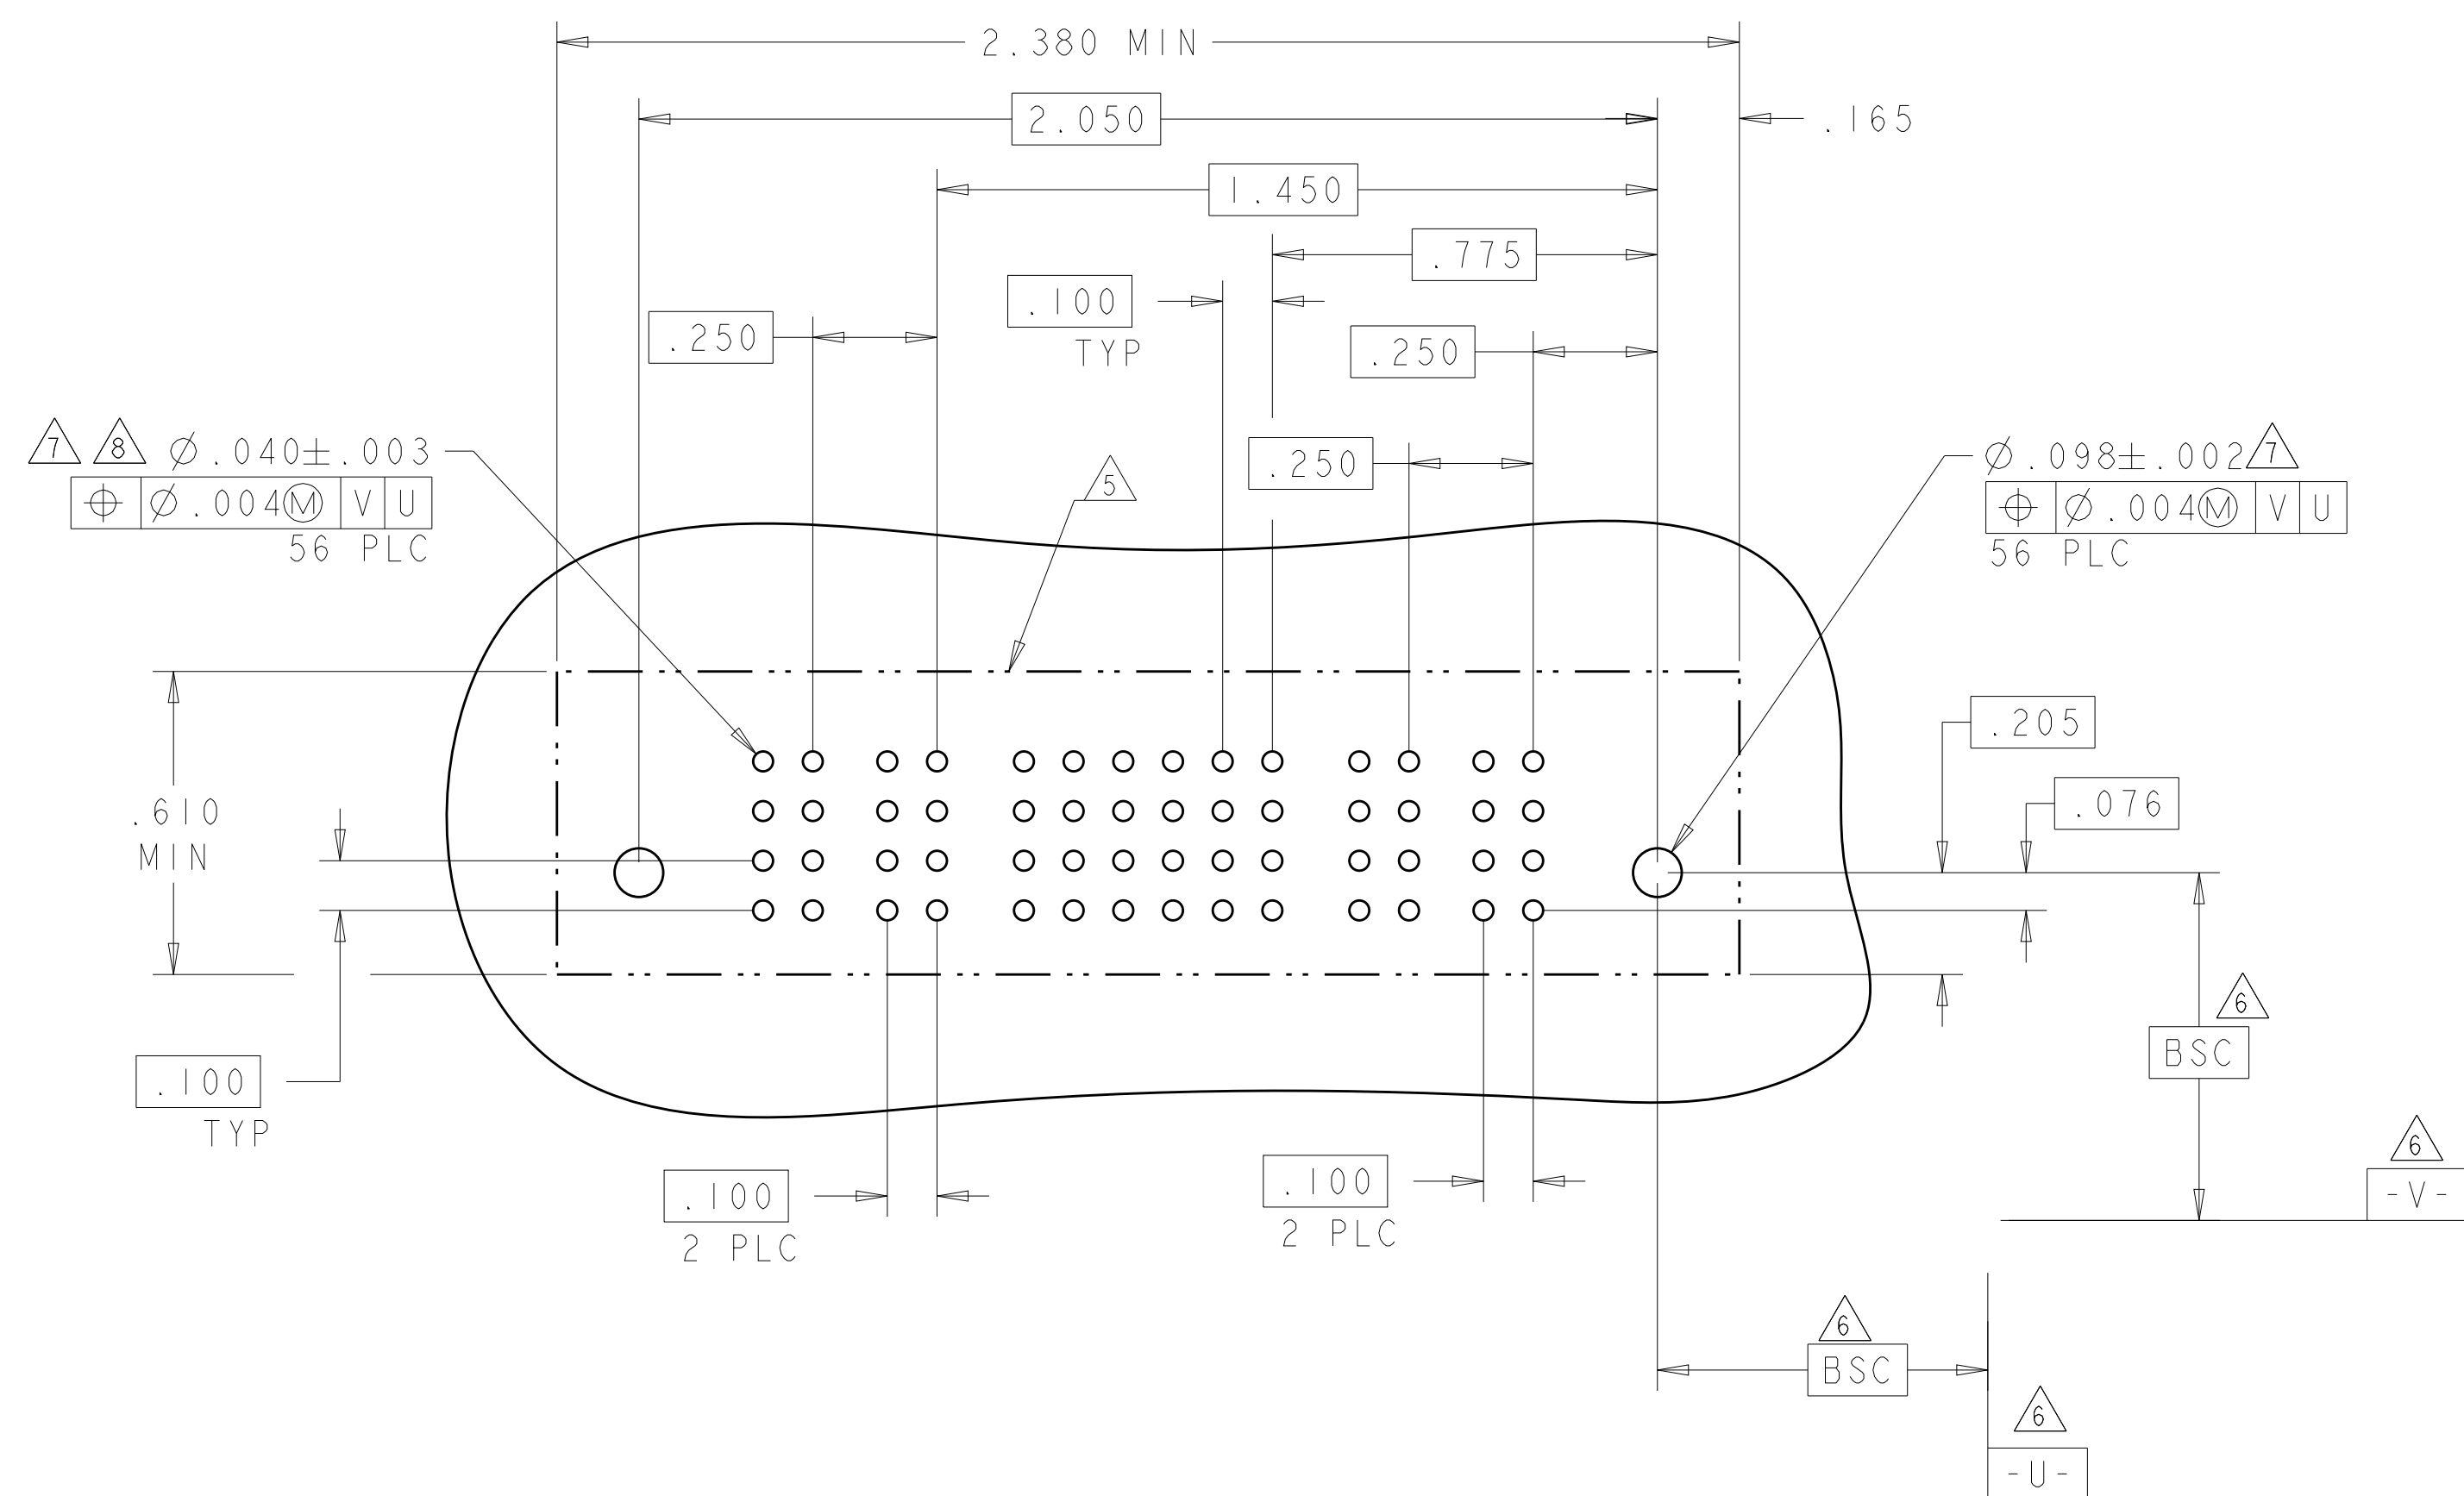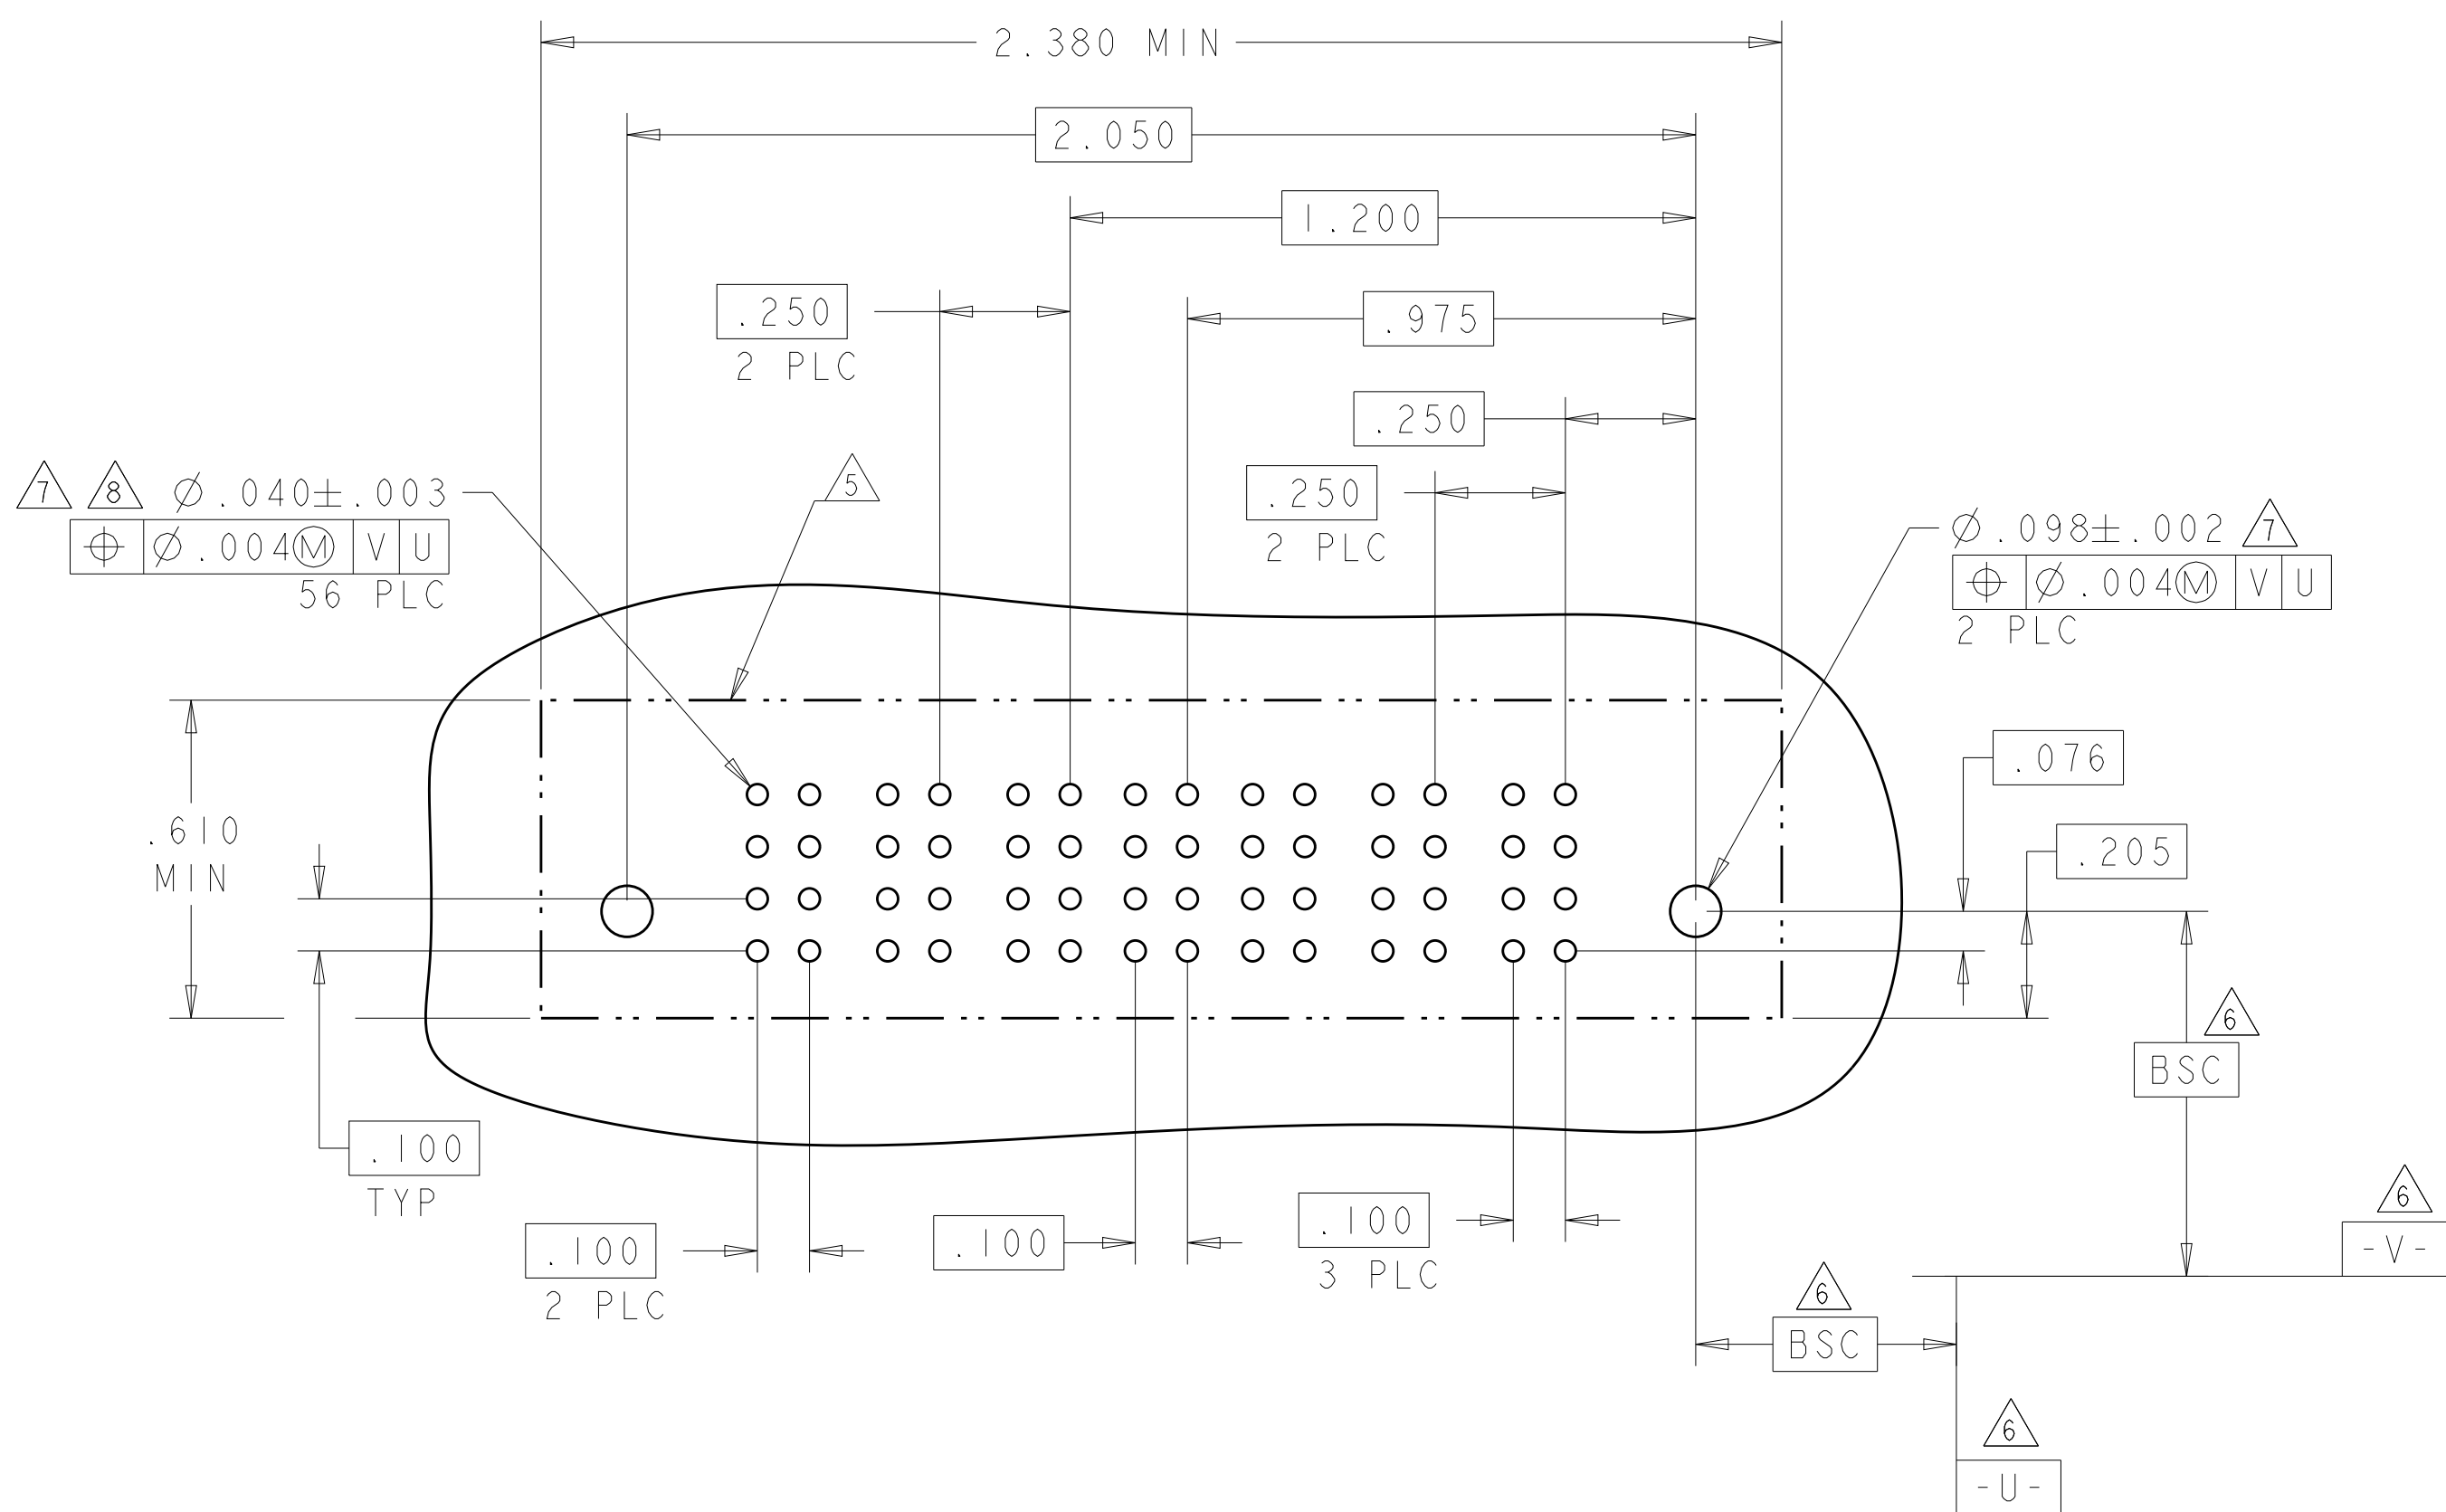[illegible]





THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: GRZYBOWSKI 29APR05 CHK: M. PERCHERKE 29APR05		 TE Connectivity	
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED: DECIMALS: ±. FRACTIONS: ±. HOLE LOCATIONS: ±.01 HOLE DIAMETERS: ±.005 ANGLES: ±°		NAME:	
		PART: M. PERCHERKE PRODUCT SPEC: 108-1973 APPLICATION SPEC: 114-13038 WEIGHT: -		MATERIAL: FINISH: -	
CUSTOMER DRAWING		SIZE: CAGE CODE: DRAWING NO: A100779C6450540		RESTRICTED TO: -	
		SCALE: 2:1		SHEET: 14 OF 19	
				REV: K	


Ⓚ

4805 (3/11)

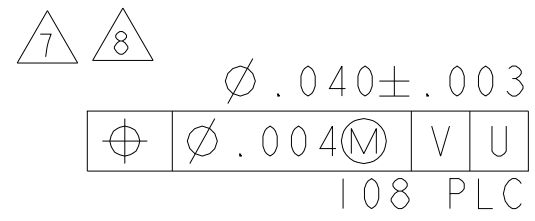
-NO SIGNAL CONTACTS4805 (3/11)

LOC	DIST	REVISIONS				
		P	LTR	DESCRIPTION	DATE	DWN
ES	00	-	-	SEE SHEET 1	-	-


PART NUMBER	ROWS		POWER		SIGNAL						POWER		
			P2	5	4	3	2	1	PI				
6-6450540-2	D C B A	 				AP	AP	AP				 	
						AP	AP	AP					
						AP	AP	AP					
						AP	AP	AP					
				IP + 20S + IP									

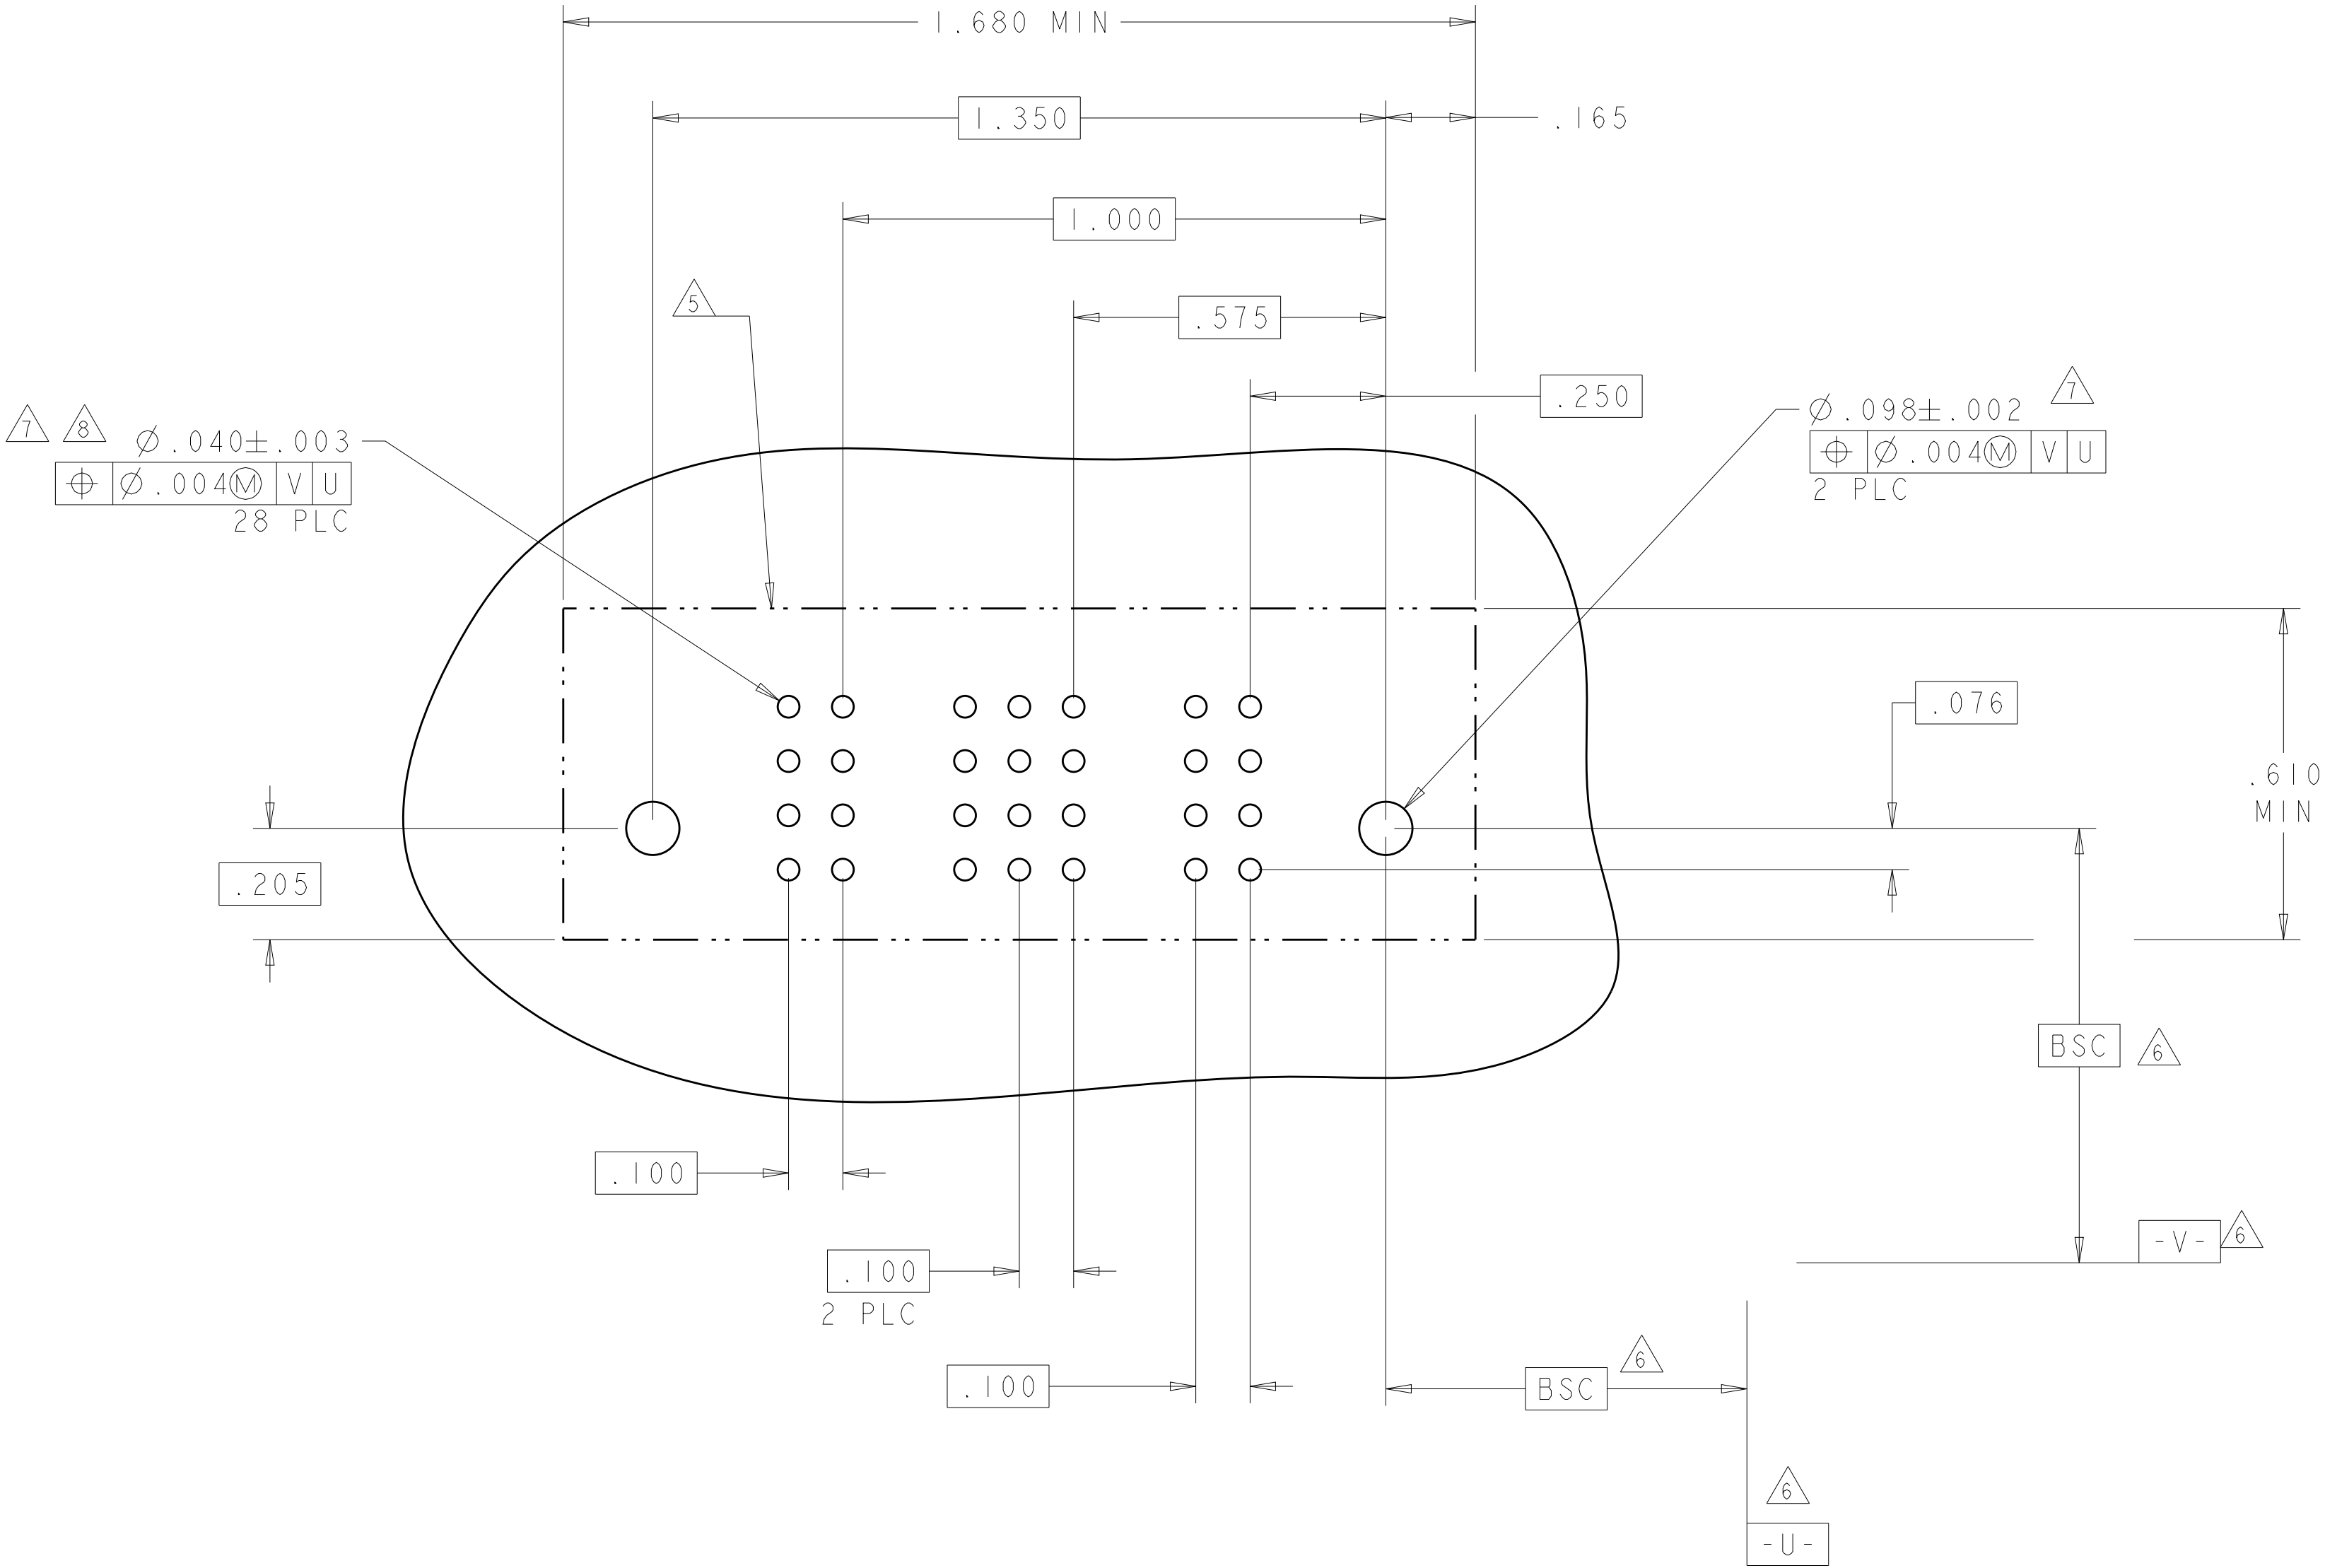

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R.GRZYBOWSKI	29APR05		
		CHK M.PERCHERKE	29APR05		
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME	
		0 PLC	±"	PRODUCT SPEC	
		1 PLC	±.01	108-1973	
		2 PLC	±.01	APPLICATION SPEC	
		3 PLC	±.005	114-13038	
		4 PLC	±.0020	WEIGHT	
		ANGLES	#2°	CUSTOMER DRAWING	
		FINISH		SCALE 2:1	
				SHEET 17 OF 19	
				REV K9	

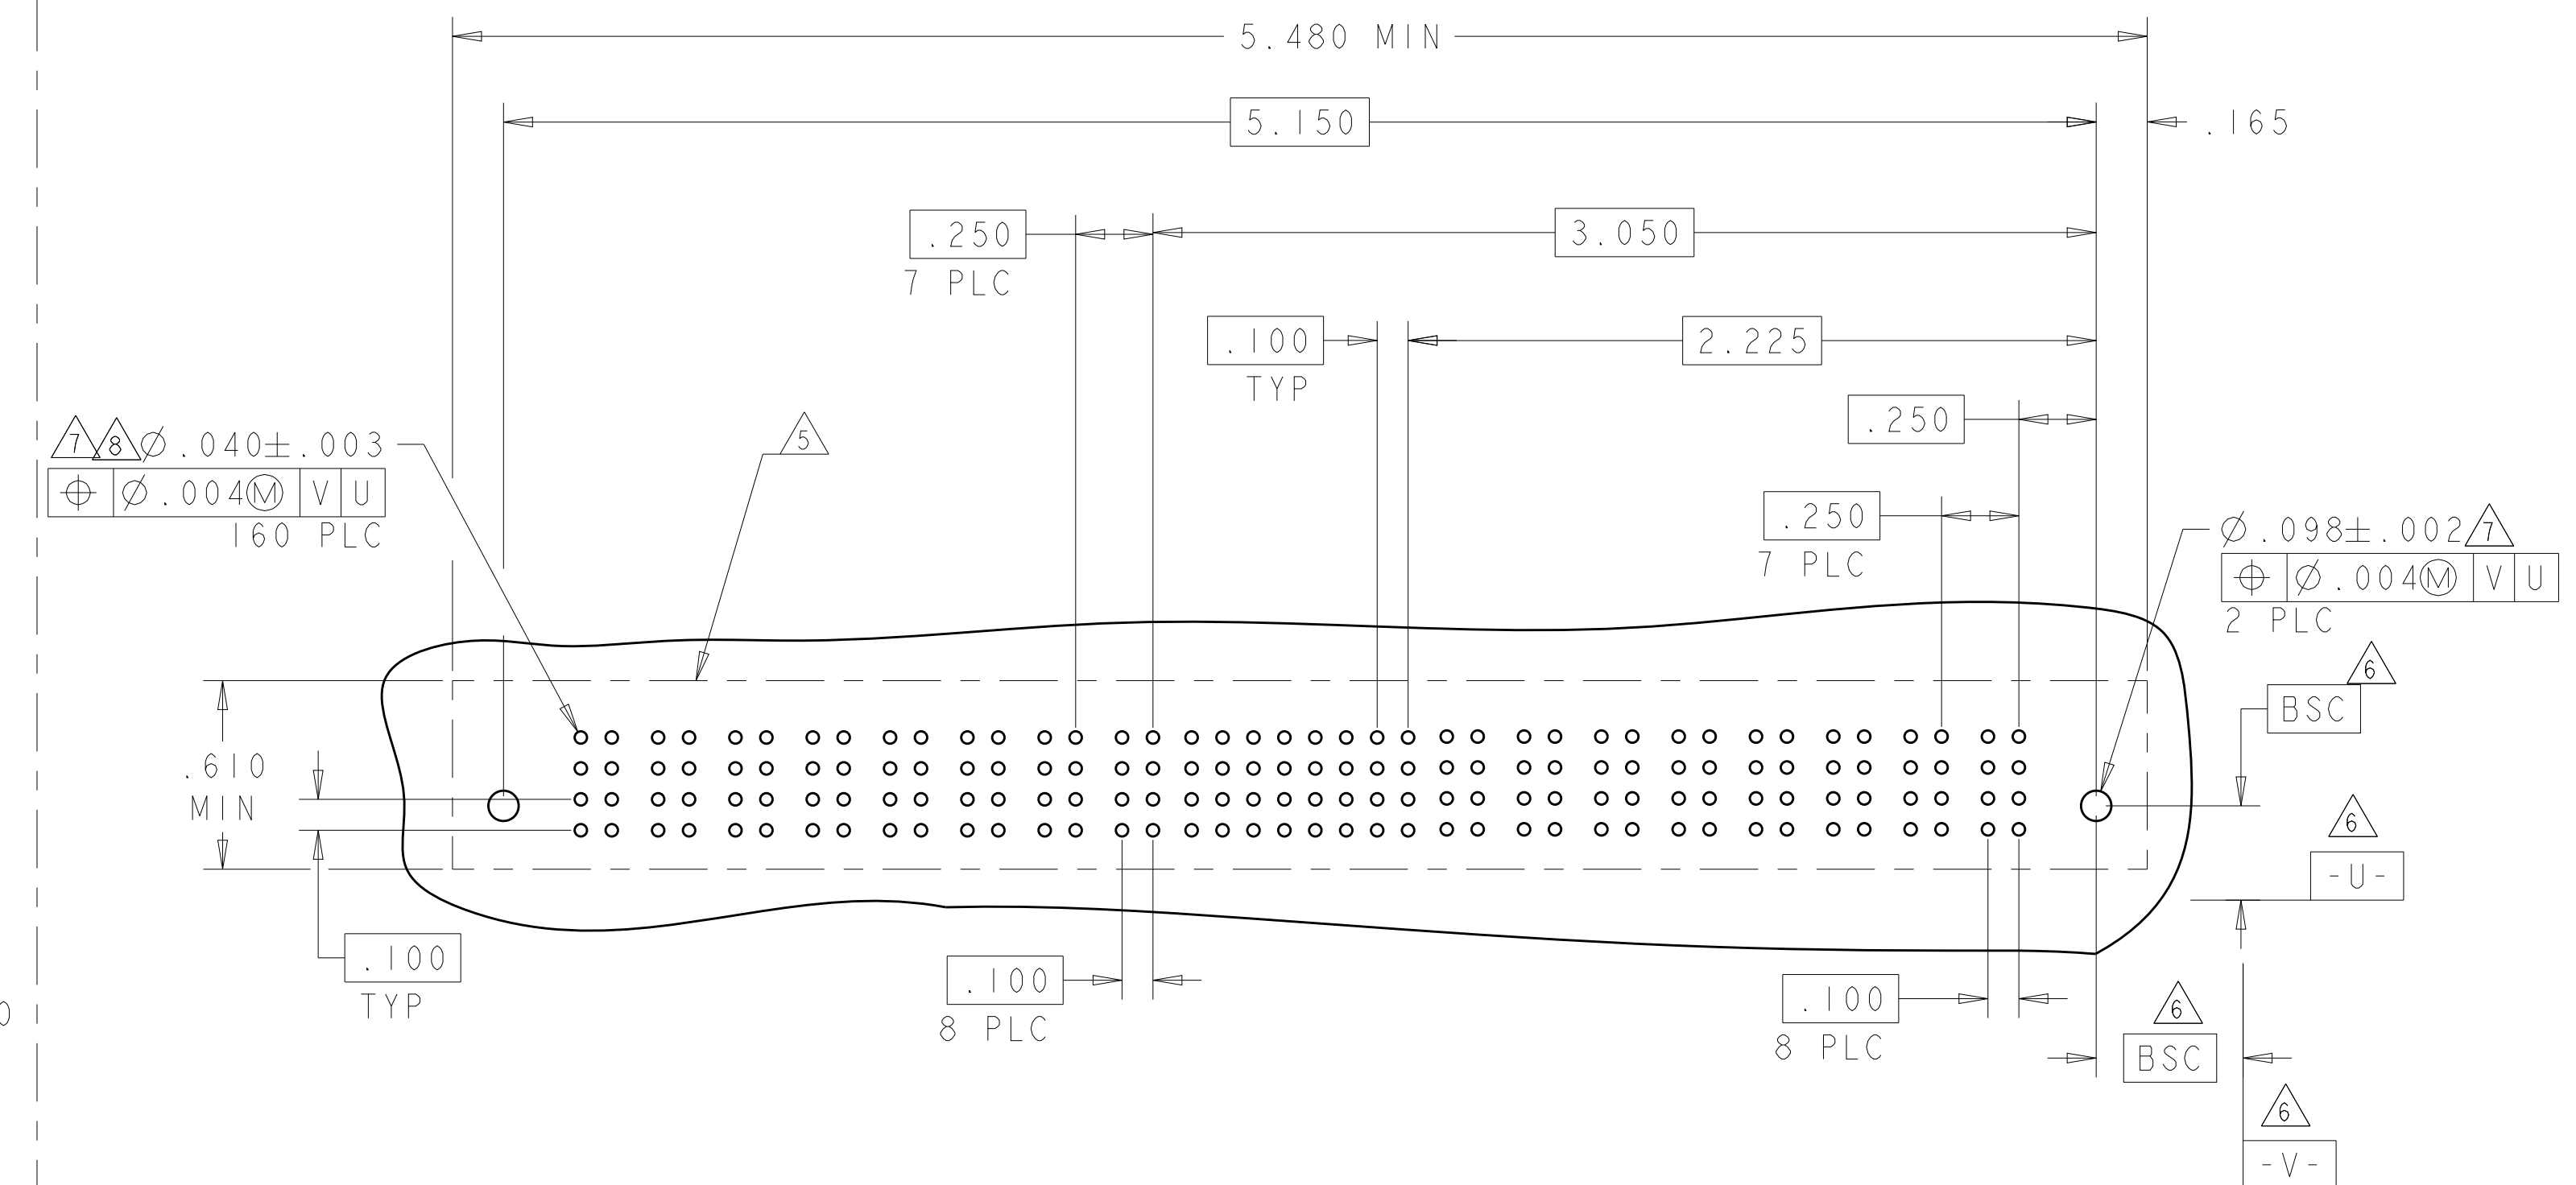[illegible]4805 (3/11)

PART NUMBER	ROWS		POWER	S I G N A L						POWER	
			P2	5	4	3	2	1	P1		
6-6450540-6	D C B A		GS	AP	AP	AP	AP	AP	AP	GS	
IP + 20S + IP											

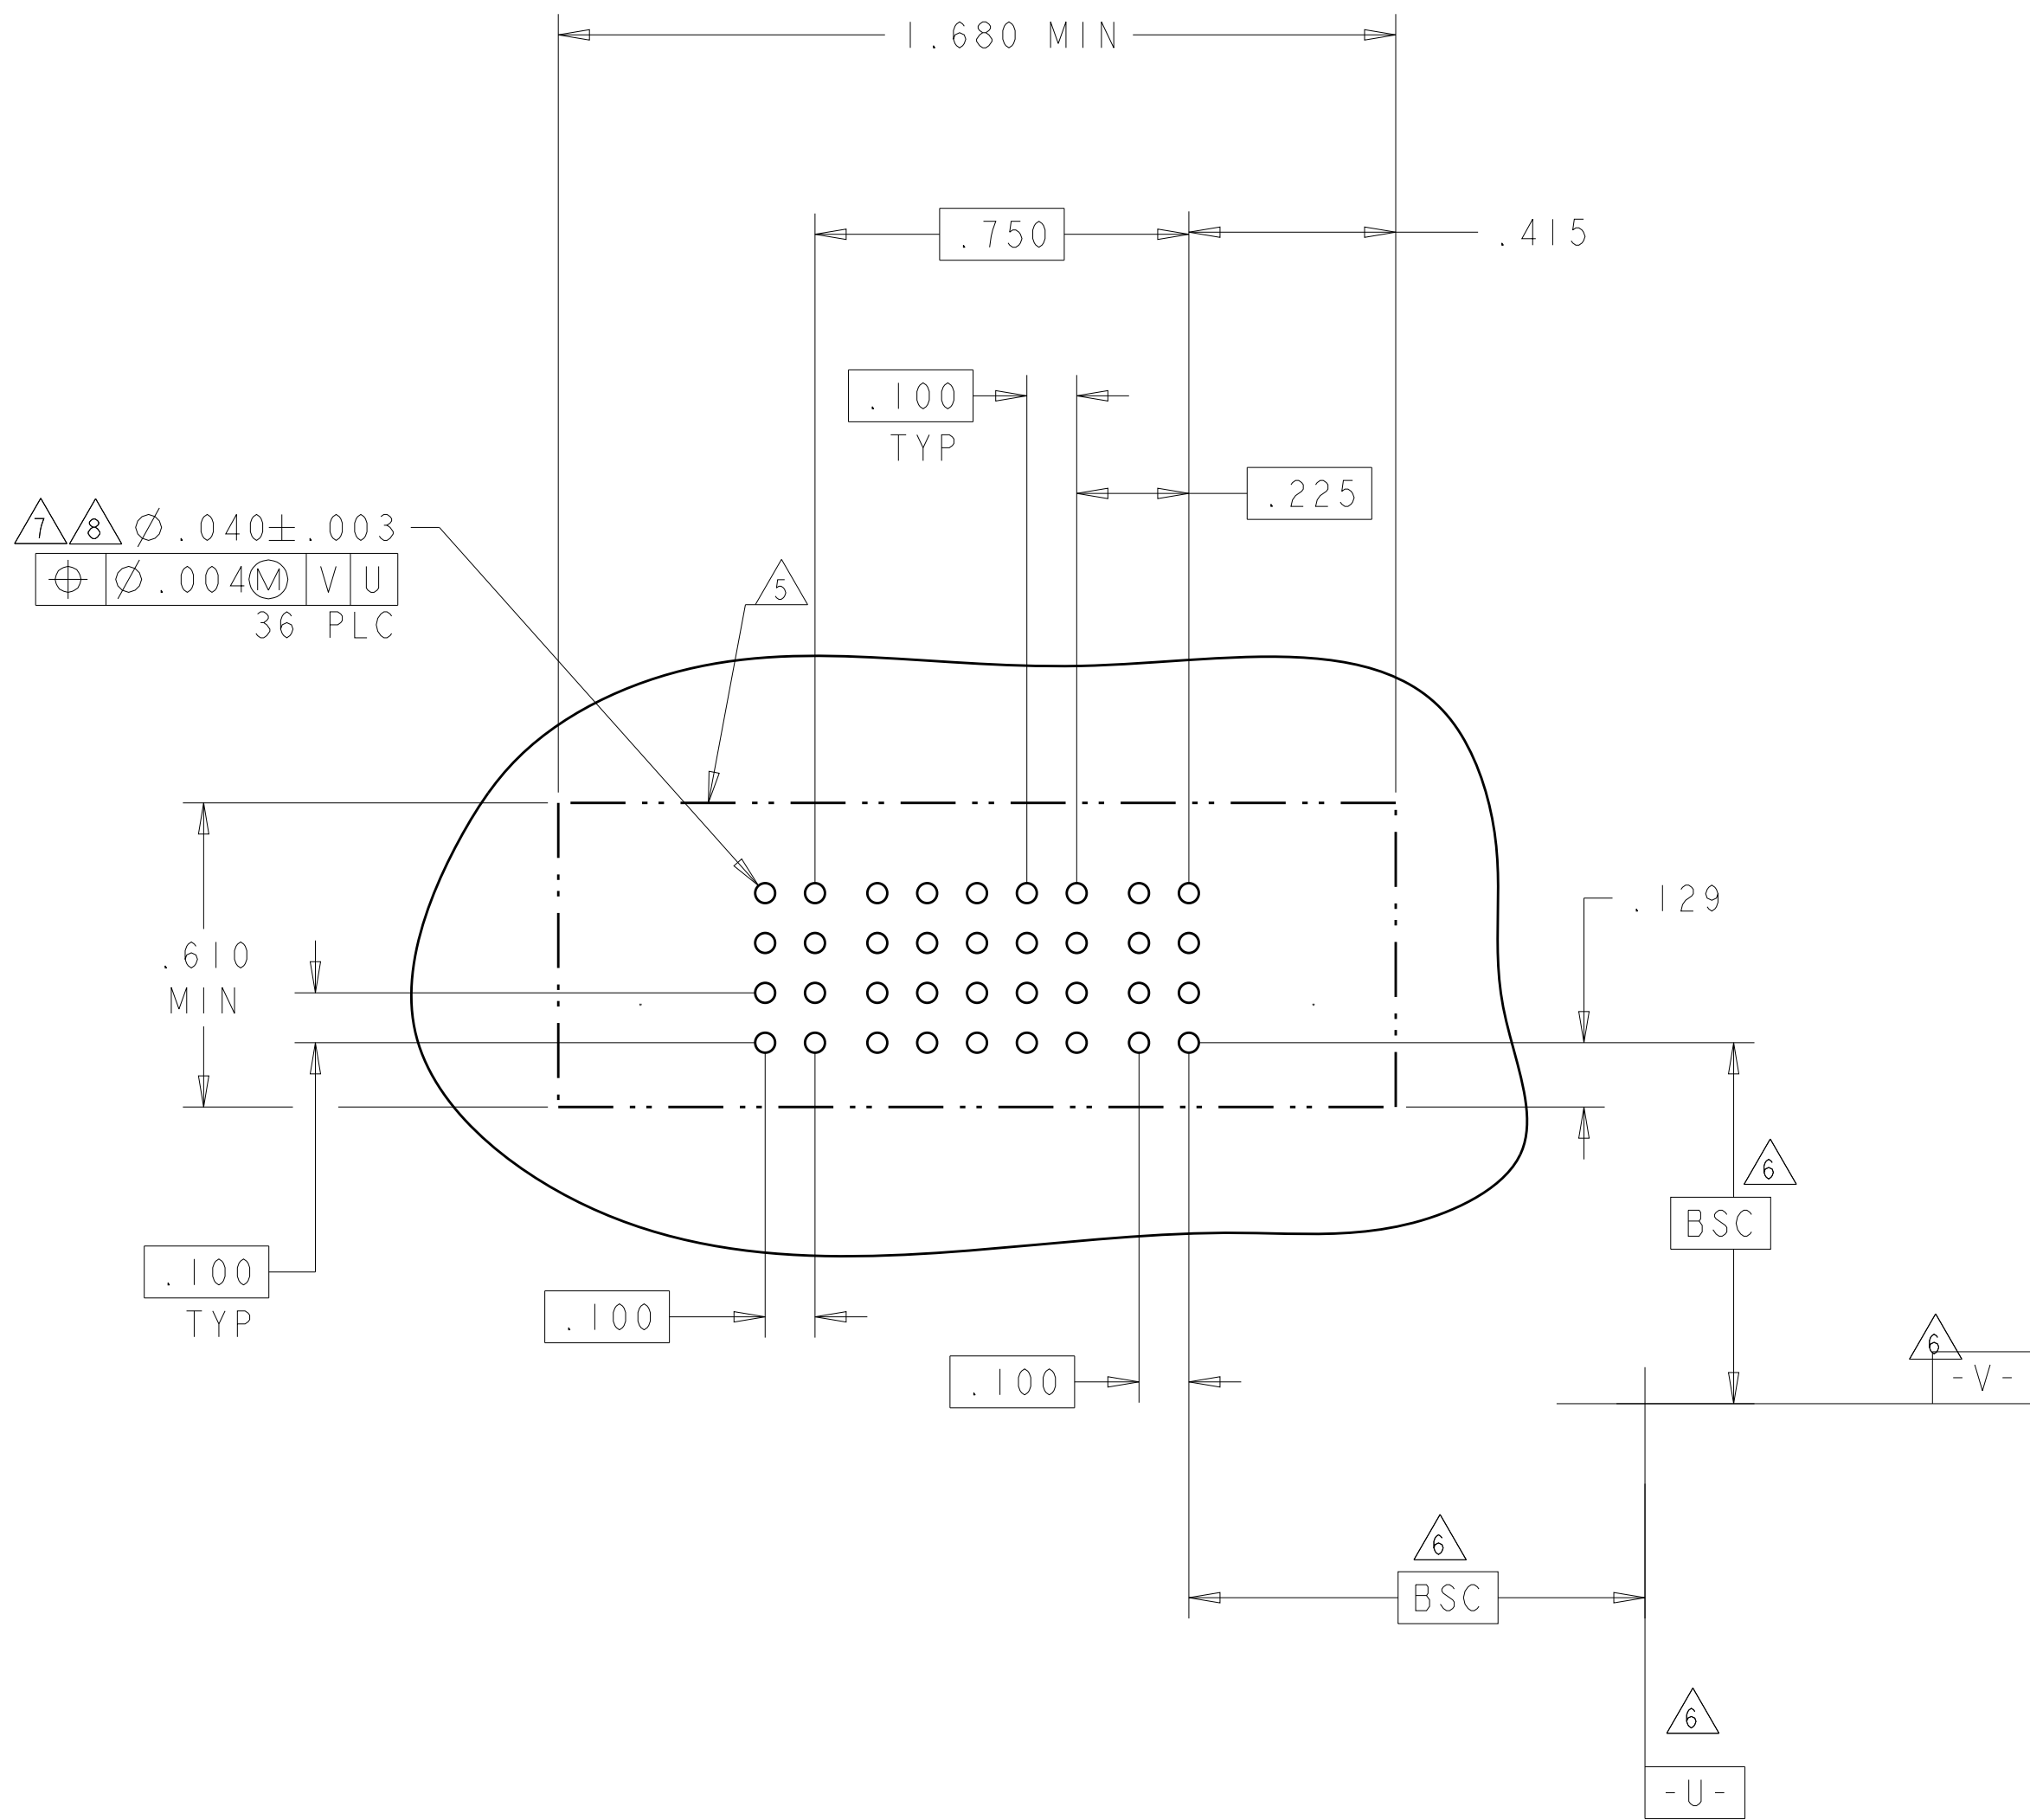4805 (3/11)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9