


### Features:

- Frequency: 1558-1616/2400-2500MHz
- Omni directional radiation
- Low profile
- Size W x L x H (10 x 3.2 x 1.5mm)
- Lead free materials
- Fully SMD compatible
- MSL Level 3
- RoHS Compliant

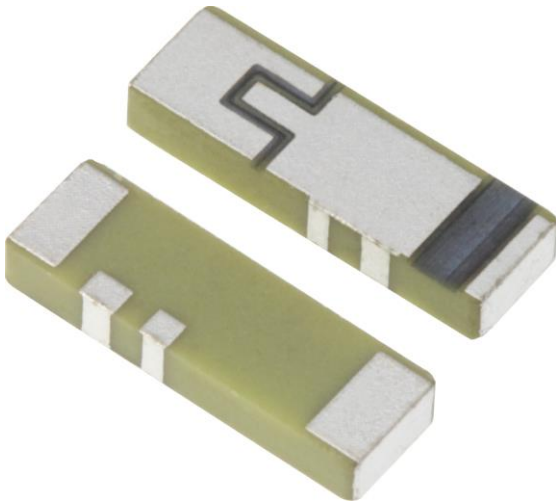

### Applications:

- Combo 2-in-1 Antenna
- Single feed point
- GNSS L1 band
- Bluetooth, WLAN, WiFi (2.4 – 2.5GHz)

All dimensions are in mm / inches

Issue: 1837

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

For more information:

Pulse Worldwide Headquarters  
15255 Innovation Drive #100  
San Diego, CA 92128  
USA  
Tel: 1-858-674-8100

Pulse/Larsen Antennas  
18110 SE 34<sup>th</sup> St Bldg 2 Suite 250  
Vancouver, WA 98683  
USA  
Tel: 1-360-944-7551

Europe Headquarters  
Pulse GmbH & Co, KG  
Zeppelinstrasse 15  
Herrenberg, Germany  
Tel: 49 7032 7806 0

Pulse (Suzhou) Wireless Products Co, Inc.  
99 Huo Ju Road(#29 Bldg, 4<sup>th</sup> Phase  
Suzhou New District  
Jiangsu Province, Suzhou 215009 PR China  
Tel: 86 512 6807 9998



### ELECTRICAL SPECIFICATIONS

Antenna Type	Ceramic Chip
Frequency	1558-1616MHz/2.4-2.5GHz
Nominal Impedance	50 $\Omega$
Return Loss / Max ( BD / GPS / GLONASS / BT)	-4 / -5 / -3 / -7 ( dB )
Radiation Pattern – XY Plane & ZY Plane	Omni
Radiation Pattern – ZX Plane	Directional
Gain / Min ( BD / GPS / GLONASS / BT)	-0.5 / 0.5 / 0 / 2 ( dBi )
Efficiency / Min ( BD / GPS / GLONASS / BT)	35% / 45% / 45% / 65%
Polarization	Linear-Vertical
Power Withstanding	1W


### MECHANICAL SPECIFICATIONS

Overall Length	10mm
Weight	0.24g
Antenna Color	White

### ENVIRONMENTAL SPECIFICATIONS

Operating Temperature	-40 ~ +85° C
Storage Temperature	-40 ~ +85° C
RoHS Compliant	Yes


MECHANICAL DRAWING

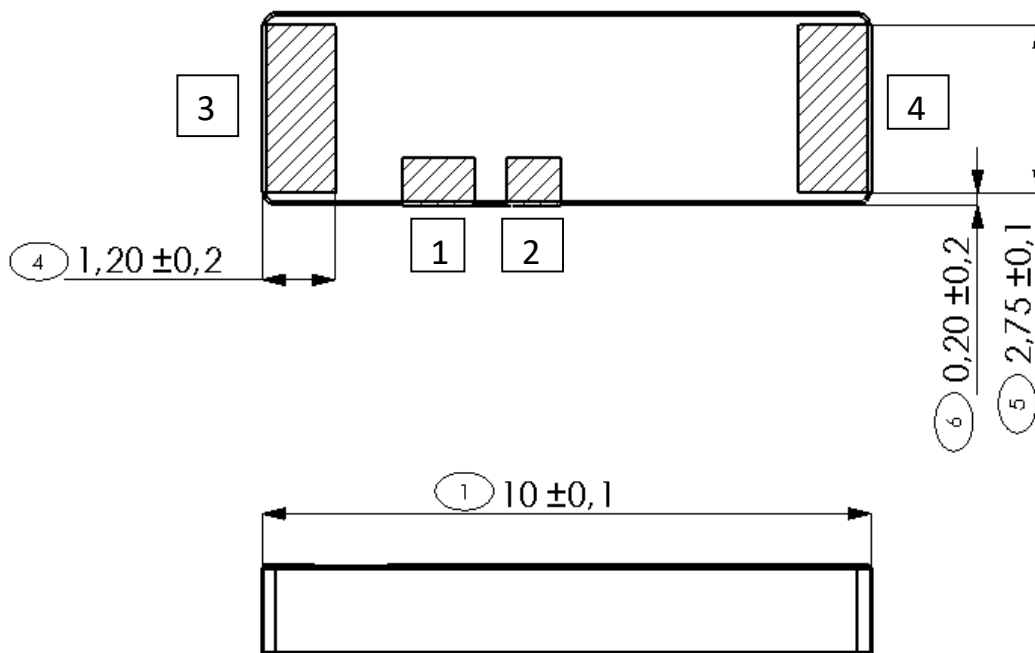

No.	Terminal Name	Terminal Dimensions
1	Feed	1.34 x 0.80 mm
2	GND	1.00 x 0.80 mm
3	GND	2.75 x 1.20 mm
4	GND	2.75 x 1.20 mm

## TEST SETUP

### Test board information

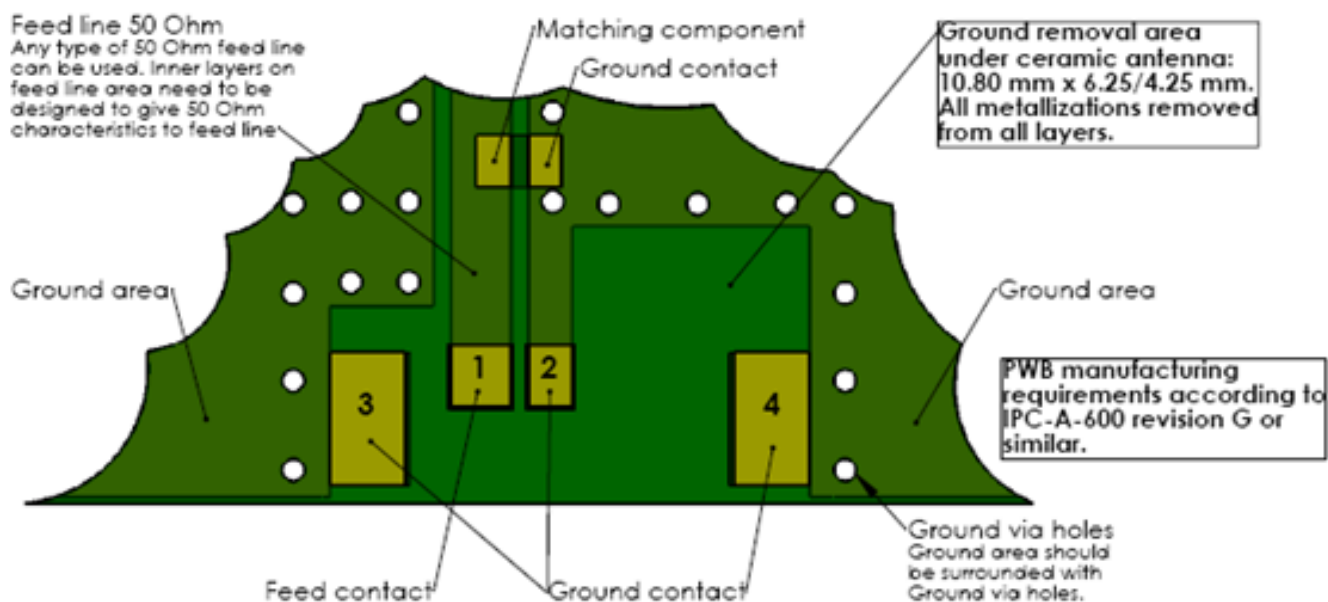

Note: Electrical characteristics are measured on test pwb with matching circuit (2.2 nH shunt matching inductor on feed).

### Recommended Antenna Pad Dimensions on PWB Layout (top surface)

PWB features		
No.	Terminal Name	Terminal Dimensions
1	Feed	1.45 x 1.34 mm
2	GND	1.45 x 1.00 mm
3	GND	3.00 x 1.70 mm
4	GND	3.00 x 1.70 mm


Series: Ceramic Antenna

Description: Ceramic Single Feed GNSS/BT Antenna


PART NUMBER: W3056

## TEST SETUP

*Recommended ground clearance area under antenna on PWB (top surface)*

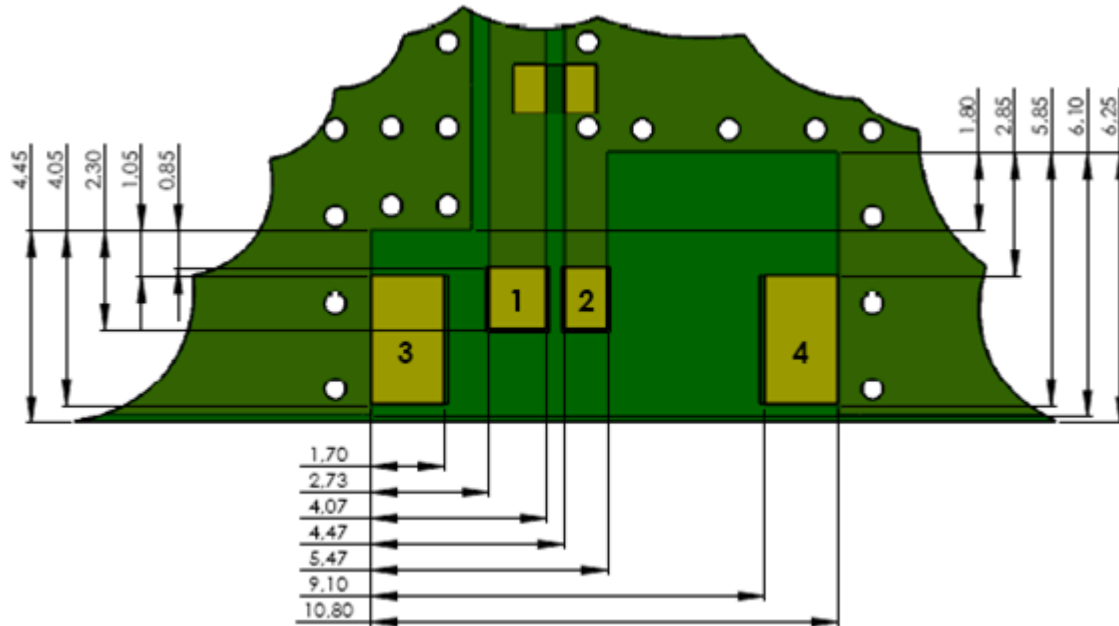

*Recommended ground clearance area under antenna on PWB (bottom surface)*

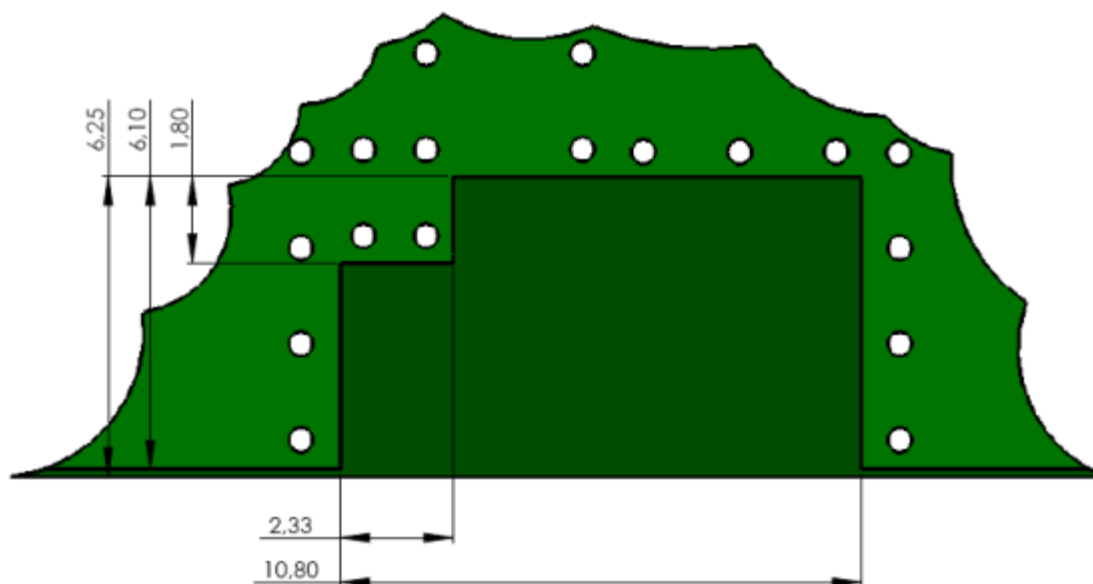

Issue: 1837

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Series: Ceramic Antenna

Description: Ceramic Single Feed GNSS/BT  
Antenna


PART NUMBER: W3056

## CHARTS

### Return Loss/GNSS

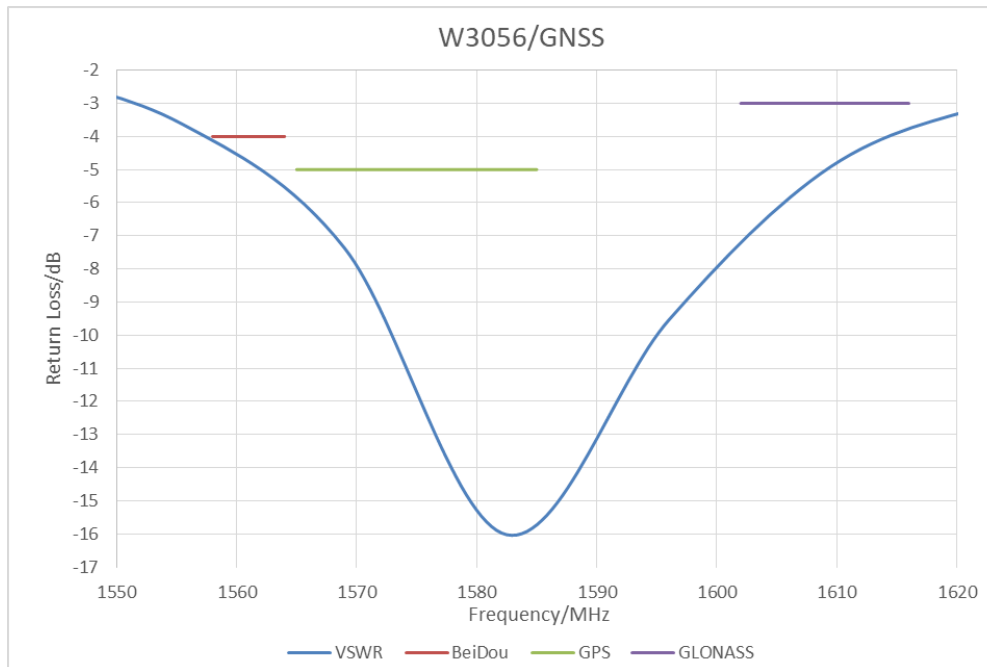

### Return Loss/ BT

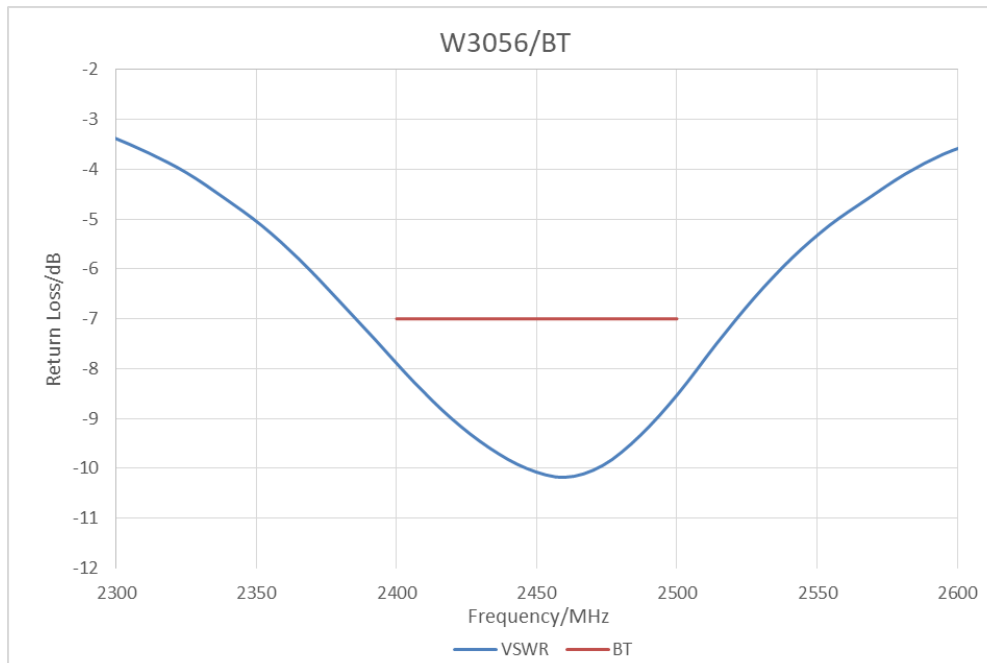

Issue: 1837

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Series: Ceramic Antenna

Description: Ceramic Single Feed GNSS/BT Antenna


PART NUMBER: W3056

## CHARTS

### Peaking Gain/ GNSS

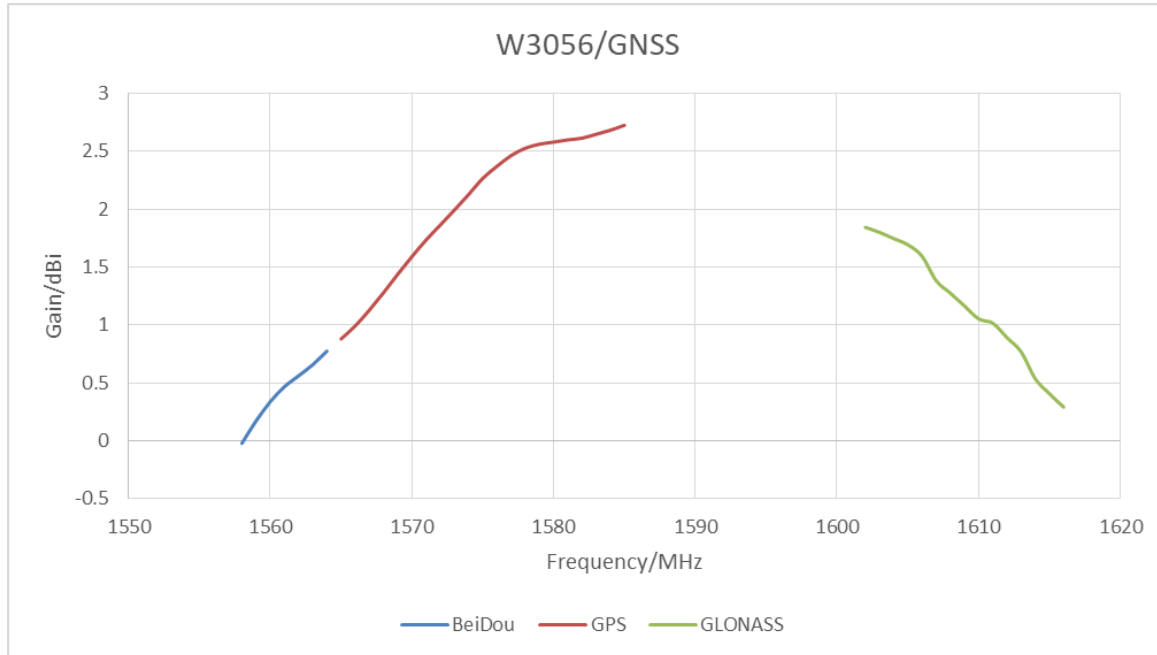

### Rad Efficiency/ GNSS

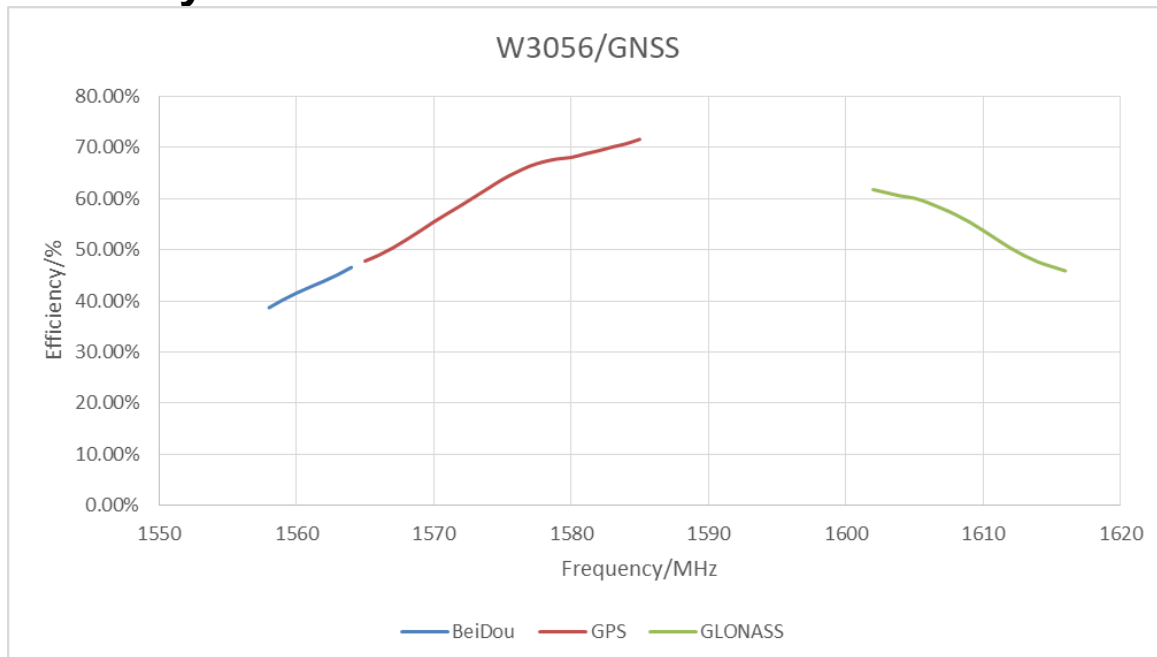

Issue: 1837


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

## CHARTS

### Typical Free Space Radiation Patterns / BeiDou

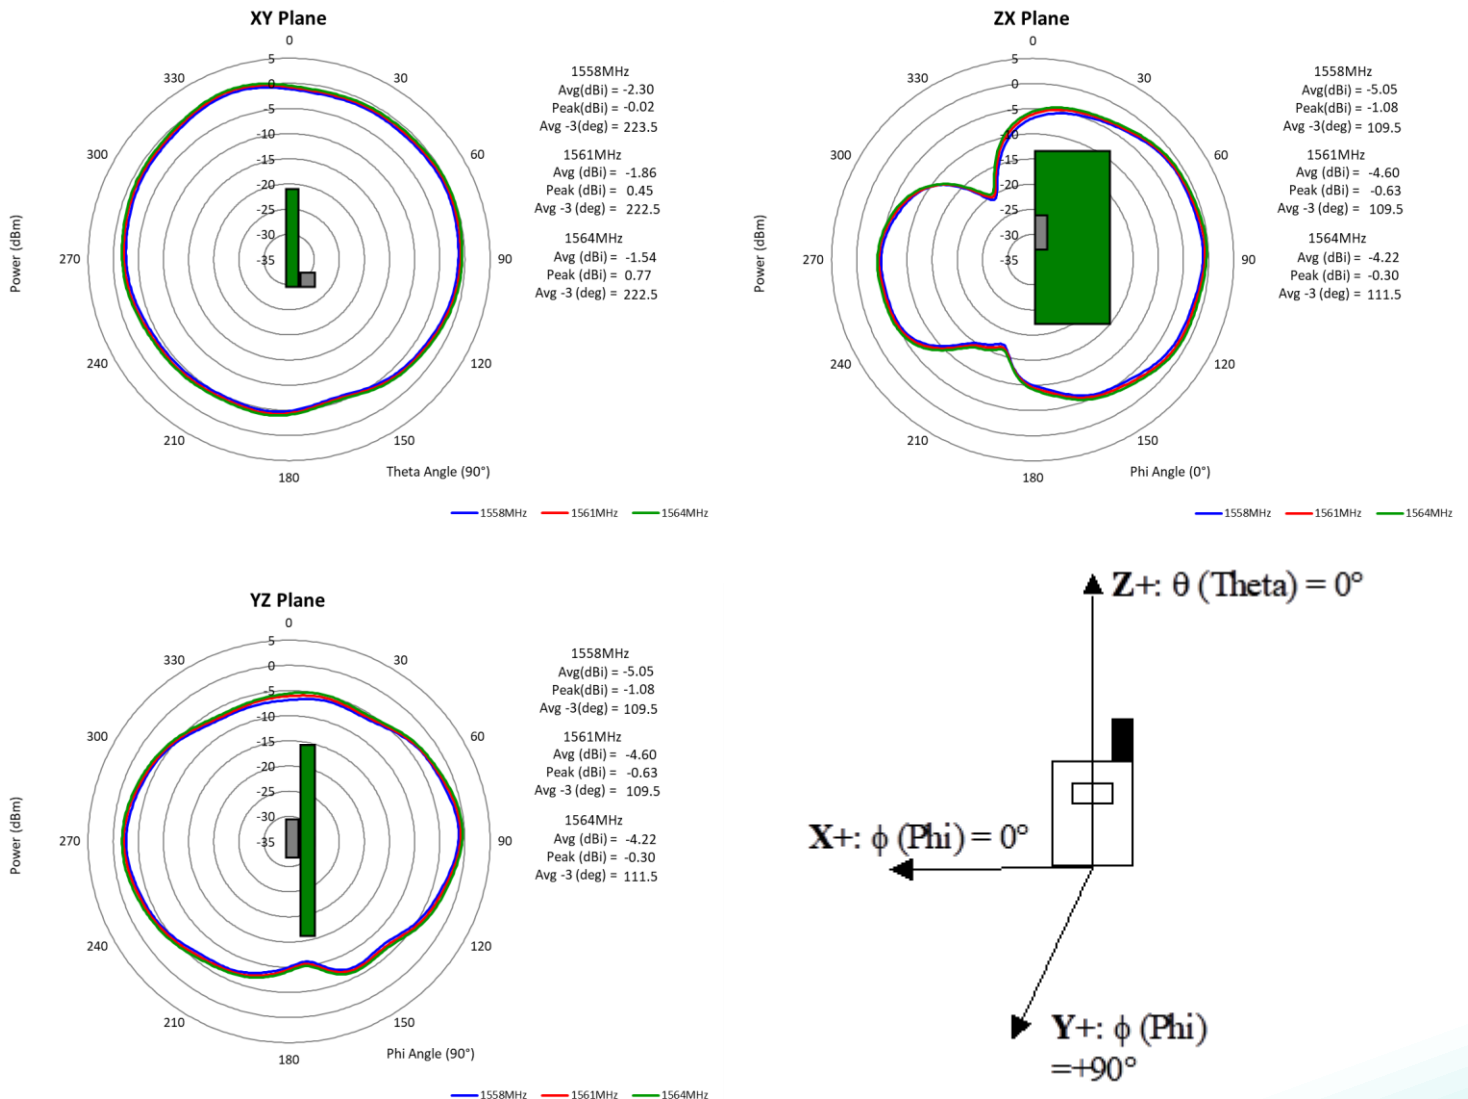

Issue: 1837

In the effort to improve our products, we reserve the right to make changes judged to be necessary.


CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.



## CHARTS

### Typical Free Space Radiation Patterns / GPS

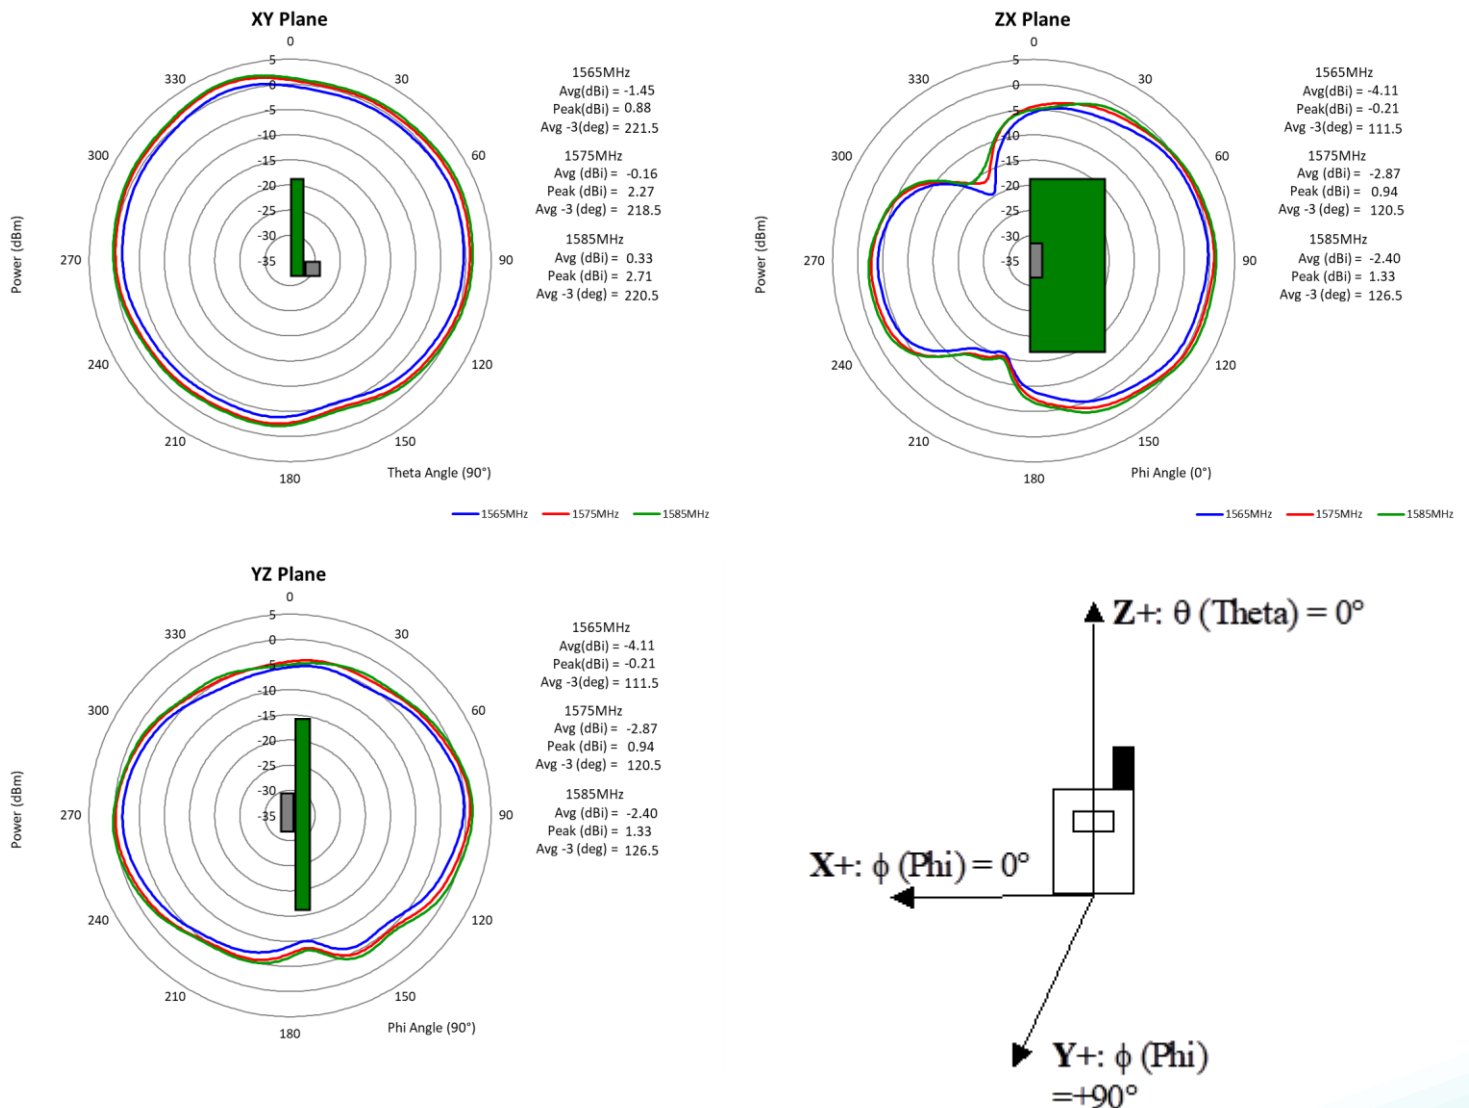

Issue: 1837


In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

## CHARTS

### Typical Free Space Radiation Patterns / GLONASS

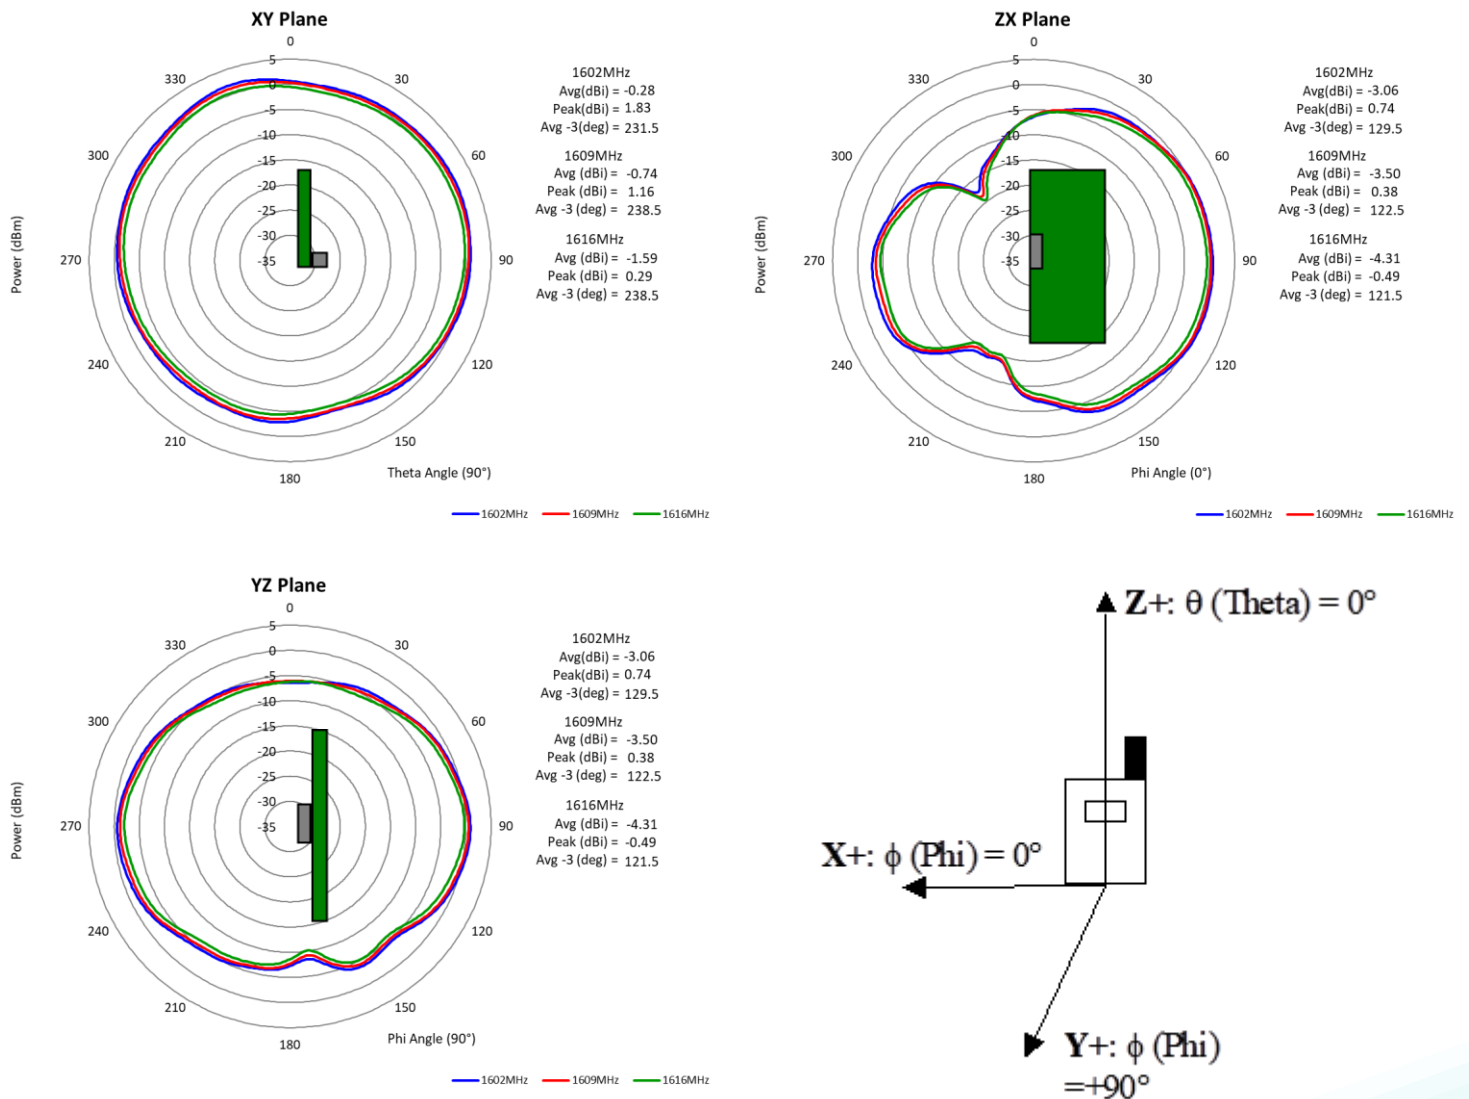

Issue: 1837

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


Series: Ceramic Antenna

Description: Ceramic Single Feed GNSS/BT  
Antenna


PART NUMBER: W3056

## CHARTS

### Peaking Gain/ BT(2.4G-2.5G)

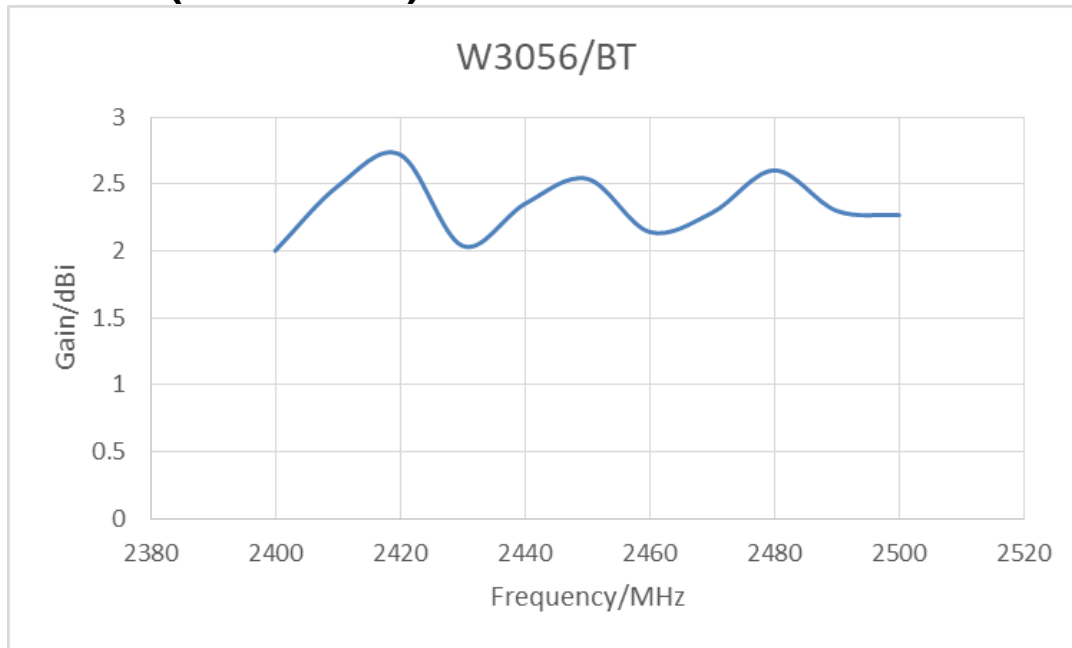

### Rad Efficiency/ BT(2.4G-2.5G)

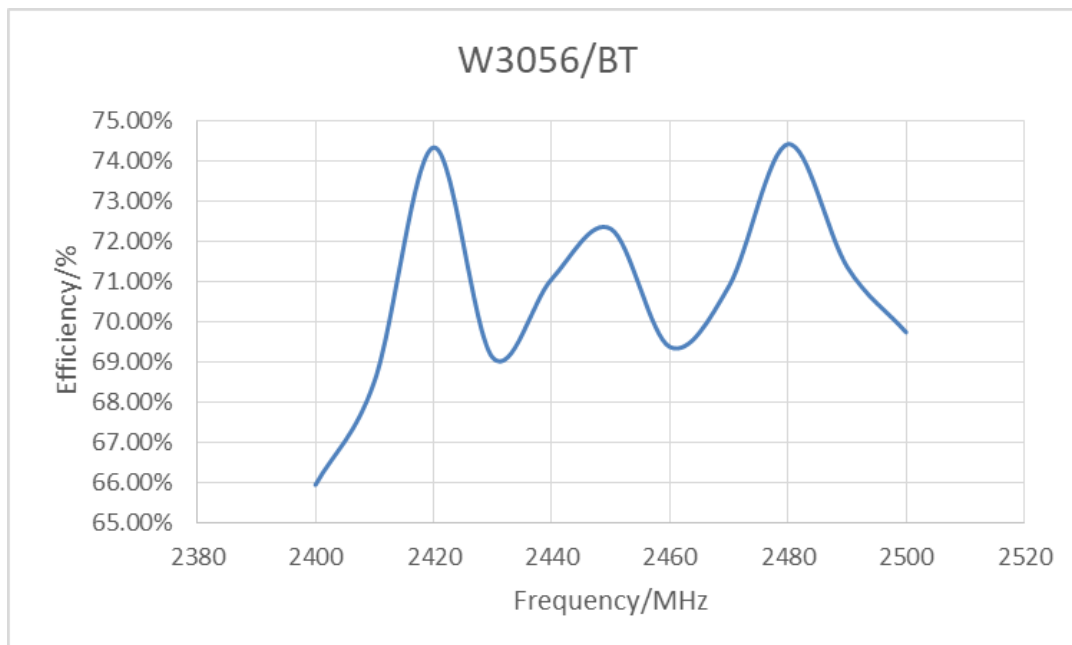

Issue: 1837

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.


# Description: Ceramic Single Feed GNSS/BT Antenna

Series: Ceramic Antenna

PART NUMBER: W3056

## CHARTS

### Typical Free Space Radiation Patterns / BT(2.4G-2.5G)

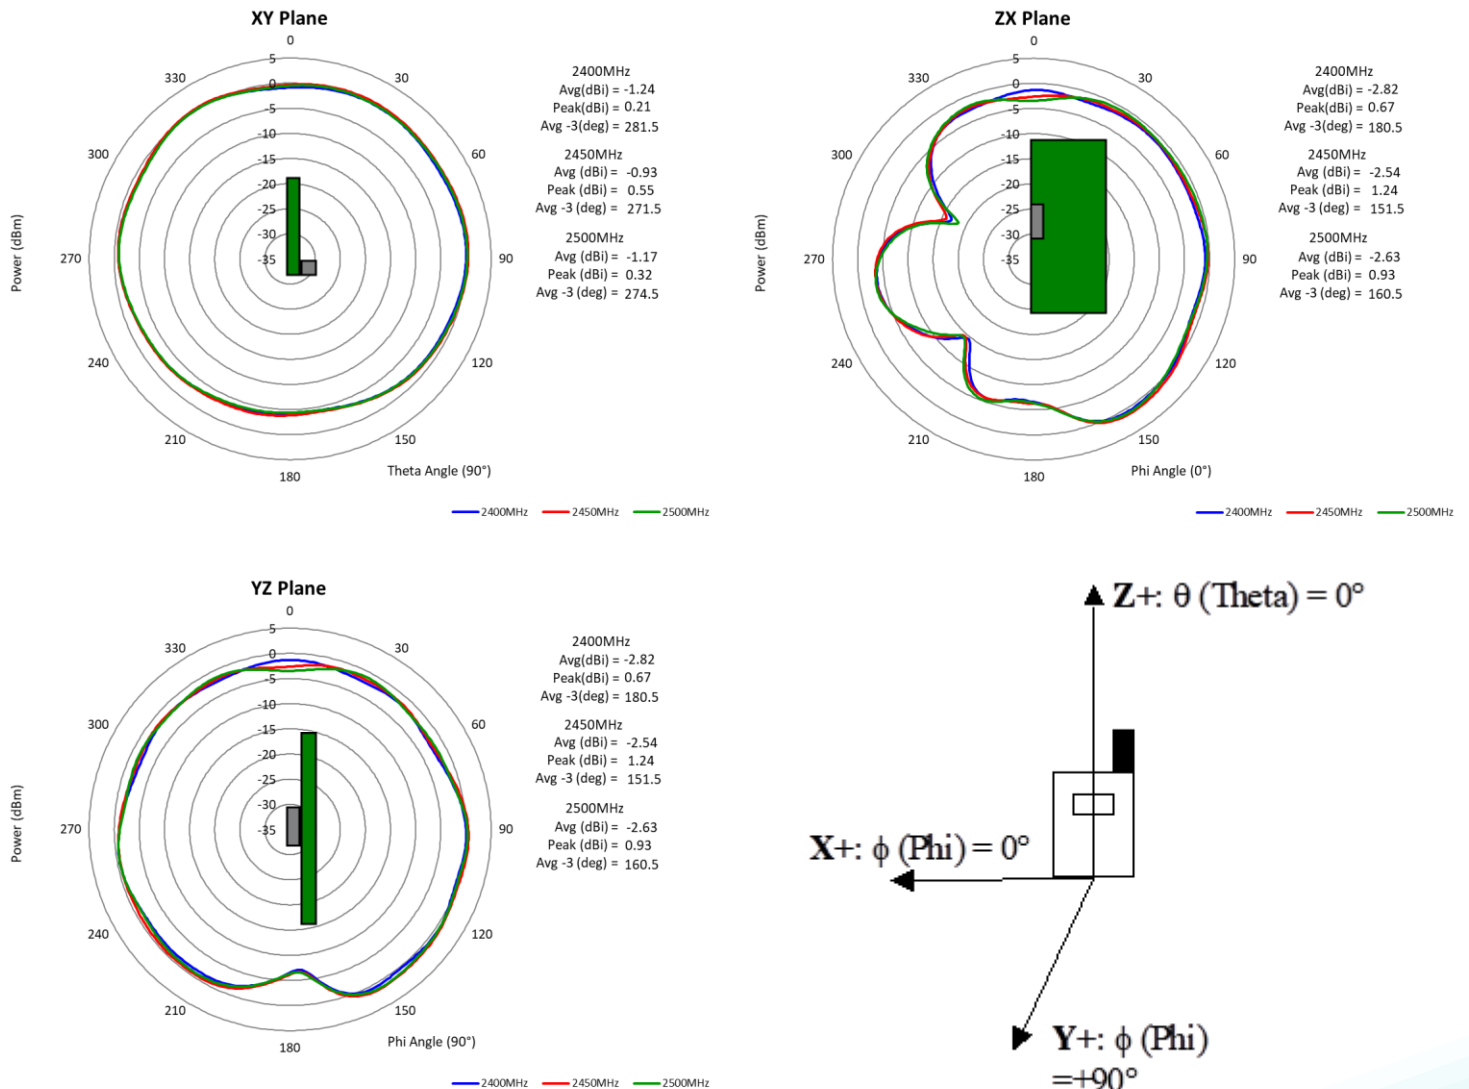

Issue: 1837



In the effort to improve our products, we reserve the right to make changes judged to be necessary.

CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden.

## PACKAGING

1. Tape and reel packing with plastic vacuum bag.  
1000 PCS/ REEL, 4 Reels/ BOX

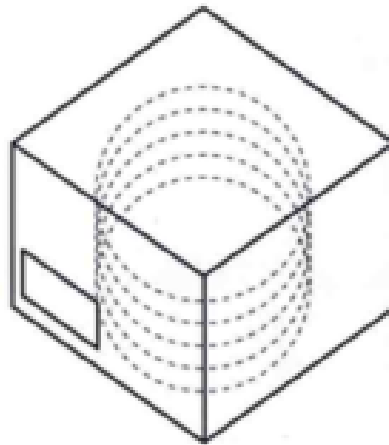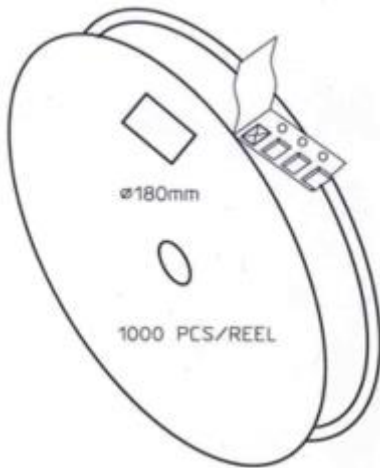

## 2. MSL: Level 3

2.1 Calculated shelf life in sealed bag: 12 months at  $< 30^{\circ}\text{C}$  and 60% relative humidity (RH)

2.2 Peak temperature in reflow:  $260^{\circ}\text{C}$

2.3 After bag is opened, devices that will be subjected to reflow solder or other temperature process must:

- a) Mount within: 168 hours of factory conditions  $\leq 30^{\circ}\text{C}/60\%$
- b) stored at  $< 20\%$  RH

2.4 Devices require bake, before mounting, if:

- a) Humidity Indicator Card is  $> 20\%$  when read at  $23 \pm 5^{\circ}\text{C}$
- b) 3a or 3b not met

2.5 If baking is required, devices may be baked for 24 hours at  $125\sim 130^{\circ}\text{C}$

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9