

Subminiature Fuse, 2.3 x 8 mm, Quick-Acting F, 125 VAC, 125 VDC



125 VAC · 125 VDC · Quick-Acting F

See below:

[Approvals and Compliances](#)

## Description

- High breaking capacity

## References

[Packaging Details](#)

## Weblinks

[pdf data sheet](#), [html datasheet](#), [General Product Information](#), [Packaging details](#), [Distributor-Stock-Check](#), [Detailed request for product](#)

## Technical Data

|                              |                               |
|------------------------------|-------------------------------|
| Rated Voltage                | 32 - 125 VAC, 32 - 125 VDC    |
| Rated current                | 0.063 - 15 A                  |
| Breaking Capacity            | 300 A                         |
| Characteristic               | Quick-Acting F                |
| Admissible Ambient Air Temp. | -55 °C to 85 °C               |
| Climatic Category            | 55/085/56 acc. to IEC 60068-1 |
| Material: Tube               | Ceramics                      |
| Material: Axial Leads        | Tin-Plated Copper             |
| Unit Weight                  | 0.46 g                        |
| Storage Conditions           | 0 °C to 60 °C, max. 70% r.h.  |
| Product Marking              | Rated current                 |

|                              |                                                           |
|------------------------------|-----------------------------------------------------------|
| Soldering Methods            | Wave<br><a href="#">Soldering Profile</a>                 |
| Solderability                | 235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1  |
| Resistance to Soldering Heat | 260 °C / 5 sec acc. to IEC 60068-2-20, Test Tb, method 1A |
| Resistance to Vibration      | acc. to NF C 20-706 / IEC 60068-2-6, test Fc              |
| Shocks                       | acc. to NF C 20-706 / IEC 60068-2-27                      |
| Salt Mist                    | acc. to NF C 20-711 / IEC 60068-2-11                      |

## Approvals and Compliances

Detailed information on product approvals, code requirements, usage instructions and detailed test conditions can be looked up in [Details about Approvals](#)

SCHURTER products are designed for use in industrial environments. They have approvals from independent testing bodies according to national and international standards. Products with specific characteristics and requirements such as required in the automotive sector according to IATF 16949, medical technology according to ISO 13485 or in the aerospace industry can be offered exclusively with customer-specific, individual agreements by SCHURTER.

## Approvals

The approval mark is used by the testing authorities to certify compliance with the safety requirements placed on electronic products.

Approval Reference Type:

| Approval Logo | Certificates | Certification Body | Description |
|---------------|--------------|--------------------|-------------|
| GAM<br>T1     |              |                    |             |

## Product standards

Product standards that are referenced

| Organization                                                                        | Design                | Standard           | Description                                     |
|-------------------------------------------------------------------------------------|-----------------------|--------------------|-------------------------------------------------|
|  | Designed according to | UL 248-14          | Low voltage fuses - Part 14: Additional fuses   |
|  | Designed according to | CSA22.2 No. 248.14 | Low-Voltage Fuses - Part 14: Supplemental Fuses |

Application standards


Application standards where the product can be used


| Organization                                                                     | Design                         | Standard       | Description                                                                                                          |
|----------------------------------------------------------------------------------|--------------------------------|----------------|----------------------------------------------------------------------------------------------------------------------|
|  | Designed for applications acc. | IEC/UL 62368-1 | IEC 62368-1 includes the basic requirements for safety of audio, video, information technology and office equipment. |

Compliances

The product complies with following Guide Lines

| Identification                                                                   | Details                                      | Initiator   | Description                                                                                                                                                                                           |
|----------------------------------------------------------------------------------|----------------------------------------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|  | <a href="#">CE declaration of conformity</a> | SCHURTER AG | The CE marking declares that the product complies with the applicable requirements laid down in the harmonisation of Community legislation on its affixing in accordance with EU Regulation 765/2008. |
|  | RoHS                                         | SCHURTER AG | Directive RoHS 2011/65/EU, Amendment (EU) 2015/863                                                                                                                                                    |
|  | China RoHS                                   | SCHURTER AG | The law SJ / T 11363-2006 (China RoHS) has been in force since 1 March 2007. It is similar to the EU directive RoHS.                                                                                  |
|  | REACH                                        | SCHURTER AG | On 1 June 2007, Regulation (EC) No 1907/2006 on the Registration, Evaluation, Authorization and Restriction of Chemicals 1 (abbreviated as "REACH") entered into force.                               |

Dimension [mm] 




In ≤ 10 A: ØA = 0.62 mm  
In > 10 A: ØA = 0.82 mm

Pre-Arcing Time

| Rated Current In | 1.0 x In min. | 2.0 x In max. | 4.0 x In max. |
|------------------|---------------|---------------|---------------|
| 0.063 A - 10 A   | 4 h           | 5 s           | 30 ms         |
| 12 A - 15 A      | 4 h           | 10 s          | 60 ms         |

## Time-Current-Curves

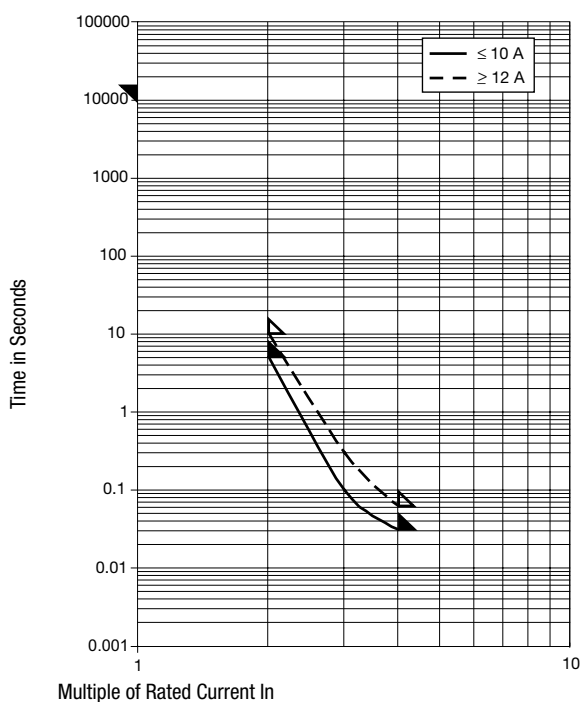

## All Variants

| Rated Current [A] | Rated Voltage [VAC] | Rated Voltage [VDC] | Breaking Capacity | Voltage Drop 1.0 I <sub>n</sub> typ. [mV] | Power Dissipation 1.0 I <sub>n</sub> typ. [mW] | Melting I <sup>2</sup> t 10.0 I <sub>n</sub> typ. [A <sup>2</sup> s] | GAM T1 | Order Number                 |
|-------------------|---------------------|---------------------|-------------------|-------------------------------------------|------------------------------------------------|----------------------------------------------------------------------|--------|------------------------------|
| 0.063             | 125                 | 125                 | 1)                | 570                                       | 36                                             | 0.0014                                                               |        | <a href="#">7010.6300.13</a> |
| 0.063             | 125                 | 125                 | 1)                | 570                                       | 36                                             | 0.0014                                                               |        | <a href="#">7010.6300.37</a> |
| 0.063             | 125                 | 125                 | 1)                | 570                                       | 36                                             | 0.0014                                                               |        | <a href="#">7010.6300.39</a> |
| 0.063             | 125                 | 125                 | 1)                | 570                                       | 36                                             | 0.0014                                                               |        | <a href="#">7010.6300.47</a> |
| 0.063             | 125                 | 125                 | 1)                | 570                                       | 36                                             | 0.0014                                                               |        | <a href="#">7010.6300.49</a> |
| 0.125             | 125                 | 125                 | 1)                | 720                                       | 90                                             | 0.0045                                                               | ●      | <a href="#">7010.6310.13</a> |
| 0.125             | 125                 | 125                 | 1)                | 720                                       | 90                                             | 0.0045                                                               | ●      | <a href="#">7010.6310.37</a> |
| 0.125             | 125                 | 125                 | 1)                | 720                                       | 90                                             | 0.0045                                                               | ●      | <a href="#">7010.6310.39</a> |
| 0.125             | 125                 | 125                 | 1)                | 720                                       | 90                                             | 0.0045                                                               | ●      | <a href="#">7010.6310.47</a> |
| 0.125             | 125                 | 125                 | 1)                | 720                                       | 90                                             | 0.0045                                                               | ●      | <a href="#">7010.6310.49</a> |
| 0.25              | 125                 | 125                 | 1)                | 215                                       | 54                                             | 0.014                                                                | ●      | <a href="#">7010.6320.13</a> |
| 0.25              | 125                 | 125                 | 1)                | 215                                       | 54                                             | 0.014                                                                | ●      | <a href="#">7010.6320.37</a> |
| 0.25              | 125                 | 125                 | 1)                | 215                                       | 54                                             | 0.014                                                                | ●      | <a href="#">7010.6320.39</a> |
| 0.25              | 125                 | 125                 | 1)                | 215                                       | 54                                             | 0.014                                                                | ●      | <a href="#">7010.6320.47</a> |
| 0.25              | 125                 | 125                 | 1)                | 215                                       | 54                                             | 0.014                                                                | ●      | <a href="#">7010.6320.49</a> |
| 0.375             | 125                 | 125                 | 1)                | 185                                       | 70                                             | 0.025                                                                | ●      | <a href="#">7010.6330.13</a> |
| 0.375             | 125                 | 125                 | 1)                | 185                                       | 70                                             | 0.025                                                                | ●      | <a href="#">7010.6330.37</a> |
| 0.375             | 125                 | 125                 | 1)                | 185                                       | 70                                             | 0.025                                                                | ●      | <a href="#">7010.6330.39</a> |
| 0.375             | 125                 | 125                 | 1)                | 185                                       | 70                                             | 0.025                                                                | ●      | <a href="#">7010.6330.47</a> |
| 0.375             | 125                 | 125                 | 1)                | 185                                       | 70                                             | 0.025                                                                | ●      | <a href="#">7010.6330.49</a> |
| 0.5               | 125                 | 125                 | 1)                | 180                                       | 90                                             | 0.1                                                                  | ●      | <a href="#">7010.6340.13</a> |
| 0.5               | 125                 | 125                 | 1)                | 180                                       | 90                                             | 0.1                                                                  | ●      | <a href="#">7010.6340.37</a> |
| 0.5               | 125                 | 125                 | 1)                | 180                                       | 90                                             | 0.1                                                                  | ●      | <a href="#">7010.6340.39</a> |
| 0.5               | 125                 | 125                 | 1)                | 180                                       | 90                                             | 0.1                                                                  | ●      | <a href="#">7010.6340.47</a> |
| 0.5               | 125                 | 125                 | 1)                | 180                                       | 90                                             | 0.1                                                                  | ●      | <a href="#">7010.6340.49</a> |
| 0.75              | 125                 | 125                 | 1)                | 155                                       | 120                                            | 0.28                                                                 | ●      | <a href="#">7010.6350.13</a> |
| 0.75              | 125                 | 125                 | 1)                | 155                                       | 120                                            | 0.28                                                                 | ●      | <a href="#">7010.6350.37</a> |
| 0.75              | 125                 | 125                 | 1)                | 155                                       | 120                                            | 0.28                                                                 | ●      | <a href="#">7010.6350.39</a> |

| Rated Current [A] | Rated Voltage [VAC] | Rated Voltage [VDC] | Breaking Capacity | Voltage Drop 1.0 I <sub>n</sub> typ. [mV] | Power Dissipation 1.0 I <sub>n</sub> typ. [mW] | Melting I <sup>2</sup> t 10.0 I <sub>n</sub> typ. [A <sup>2</sup> s] | GAM T1 | Order Number                 |
|-------------------|---------------------|---------------------|-------------------|-------------------------------------------|------------------------------------------------|----------------------------------------------------------------------|--------|------------------------------|
| 0.75              | 125                 | 125                 | 1)                | 155                                       | 120                                            | 0.28                                                                 | ●      | <a href="#">7010.6350.47</a> |
| 0.75              | 125                 | 125                 | 1)                | 155                                       | 120                                            | 0.28                                                                 | ●      | <a href="#">7010.6350.49</a> |
| 1                 | 125                 | 125                 | 1)                | 160                                       | 160                                            | 0.39                                                                 | ●      | <a href="#">7010.6360.13</a> |
| 1                 | 125                 | 125                 | 1)                | 160                                       | 160                                            | 0.39                                                                 | ●      | <a href="#">7010.6360.37</a> |
| 1                 | 125                 | 125                 | 1)                | 160                                       | 160                                            | 0.39                                                                 | ●      | <a href="#">7010.6360.39</a> |
| 1                 | 125                 | 125                 | 1)                | 160                                       | 160                                            | 0.39                                                                 | ●      | <a href="#">7010.6360.47</a> |
| 1                 | 125                 | 125                 | 1)                | 160                                       | 160                                            | 0.39                                                                 | ●      | <a href="#">7010.6360.49</a> |
| 1.5               | 125                 | 125                 | 1)                | 165                                       | 250                                            | 0.52                                                                 | ●      | <a href="#">7010.6370.13</a> |
| 1.5               | 125                 | 125                 | 1)                | 165                                       | 250                                            | 0.52                                                                 | ●      | <a href="#">7010.6370.37</a> |
| 1.5               | 125                 | 125                 | 1)                | 165                                       | 250                                            | 0.52                                                                 | ●      | <a href="#">7010.6370.39</a> |
| 1.5               | 125                 | 125                 | 1)                | 165                                       | 250                                            | 0.52                                                                 | ●      | <a href="#">7010.6370.47</a> |
| 1.5               | 125                 | 125                 | 1)                | 165                                       | 250                                            | 0.52                                                                 | ●      | <a href="#">7010.6370.49</a> |
| 2                 | 125                 | 125                 | 1)                | 160                                       | 320                                            | 1.3                                                                  | ●      | <a href="#">7010.6380.13</a> |
| 2                 | 125                 | 125                 | 1)                | 160                                       | 320                                            | 1.3                                                                  | ●      | <a href="#">7010.6380.37</a> |
| 2                 | 125                 | 125                 | 1)                | 160                                       | 320                                            | 1.3                                                                  | ●      | <a href="#">7010.6380.39</a> |
| 2                 | 125                 | 125                 | 1)                | 160                                       | 320                                            | 1.3                                                                  | ●      | <a href="#">7010.6380.47</a> |
| 2                 | 125                 | 125                 | 1)                | 160                                       | 320                                            | 1.3                                                                  | ●      | <a href="#">7010.6380.49</a> |
| 2.5               | 125                 | 125                 | 1)                | 145                                       | 365                                            | 1.6                                                                  | ●      | <a href="#">7010.6390.13</a> |
| 2.5               | 125                 | 125                 | 1)                | 145                                       | 365                                            | 1.6                                                                  | ●      | <a href="#">7010.6390.37</a> |
| 2.5               | 125                 | 125                 | 1)                | 145                                       | 365                                            | 1.6                                                                  | ●      | <a href="#">7010.6390.39</a> |
| 2.5               | 125                 | 125                 | 1)                | 145                                       | 365                                            | 1.6                                                                  | ●      | <a href="#">7010.6390.47</a> |
| 2.5               | 125                 | 125                 | 1)                | 145                                       | 365                                            | 1.6                                                                  | ●      | <a href="#">7010.6390.49</a> |
| 3                 | 125                 | 125                 | 1)                | 140                                       | 420                                            | 2.4                                                                  | ●      | <a href="#">7010.6400.13</a> |
| 3                 | 125                 | 125                 | 1)                | 140                                       | 420                                            | 2.4                                                                  | ●      | <a href="#">7010.6400.37</a> |
| 3                 | 125                 | 125                 | 1)                | 140                                       | 420                                            | 2.4                                                                  | ●      | <a href="#">7010.6400.39</a> |
| 3                 | 125                 | 125                 | 1)                | 140                                       | 420                                            | 2.4                                                                  | ●      | <a href="#">7010.6400.47</a> |
| 3                 | 125                 | 125                 | 1)                | 140                                       | 420                                            | 2.4                                                                  | ●      | <a href="#">7010.6400.49</a> |
| 4                 | 125                 | 125                 | 1)                | 125                                       | 500                                            | 5.7                                                                  | ●      | <a href="#">7010.6410.13</a> |
| 4                 | 125                 | 125                 | 1)                | 125                                       | 500                                            | 5.7                                                                  | ●      | <a href="#">7010.6410.37</a> |
| 4                 | 125                 | 125                 | 1)                | 125                                       | 500                                            | 5.7                                                                  | ●      | <a href="#">7010.6410.39</a> |
| 4                 | 125                 | 125                 | 1)                | 125                                       | 500                                            | 5.7                                                                  | ●      | <a href="#">7010.6410.47</a> |
| 4                 | 125                 | 125                 | 1)                | 125                                       | 500                                            | 5.7                                                                  | ●      | <a href="#">7010.6410.49</a> |
| 5                 | 125                 | 125                 | 1)                | 120                                       | 600                                            | 8.7                                                                  | ●      | <a href="#">7010.6420.13</a> |
| 5                 | 125                 | 125                 | 1)                | 120                                       | 600                                            | 8.7                                                                  | ●      | <a href="#">7010.6420.37</a> |
| 5                 | 125                 | 125                 | 1)                | 120                                       | 600                                            | 8.7                                                                  | ●      | <a href="#">7010.6420.39</a> |
| 5                 | 125                 | 125                 | 1)                | 120                                       | 600                                            | 8.7                                                                  | ●      | <a href="#">7010.6420.47</a> |
| 5                 | 125                 | 125                 | 1)                | 120                                       | 600                                            | 8.7                                                                  | ●      | <a href="#">7010.6420.49</a> |
| 7                 | 125                 | 125                 | 1)                | 110                                       | 770                                            | 15                                                                   | ●      | <a href="#">7010.6440.13</a> |
| 7                 | 125                 | 125                 | 1)                | 110                                       | 770                                            | 15                                                                   | ●      | <a href="#">7010.6440.37</a> |
| 7                 | 125                 | 125                 | 1)                | 110                                       | 770                                            | 15                                                                   | ●      | <a href="#">7010.6440.39</a> |
| 7                 | 125                 | 125                 | 1)                | 110                                       | 770                                            | 15                                                                   | ●      | <a href="#">7010.6440.47</a> |
| 7                 | 125                 | 125                 | 1)                | 110                                       | 770                                            | 15                                                                   | ●      | <a href="#">7010.6440.49</a> |
| 10                | 125                 | 125                 | 1)                | 110                                       | 1100                                           | 46                                                                   | ●      | <a href="#">7010.6470.13</a> |
| 10                | 125                 | 125                 | 1)                | 110                                       | 1100                                           | 46                                                                   | ●      | <a href="#">7010.6470.37</a> |
| 10                | 125                 | 125                 | 1)                | 110                                       | 1100                                           | 46                                                                   | ●      | <a href="#">7010.6470.39</a> |
| 10                | 125                 | 125                 | 1)                | 110                                       | 1100                                           | 46                                                                   | ●      | <a href="#">7010.6470.47</a> |
| 10                | 125                 | 125                 | 1)                | 110                                       | 1100                                           | 46                                                                   | ●      | <a href="#">7010.6470.49</a> |
| 12                | 32                  | 32                  | 2)                | 120                                       | 1450                                           | 57                                                                   | ●      | <a href="#">7010.6480.13</a> |
| 12                | 32                  | 32                  | 2)                | 120                                       | 1450                                           | 57                                                                   | ●      | <a href="#">7010.6480.37</a> |
| 12                | 32                  | 32                  | 2)                | 120                                       | 1450                                           | 57                                                                   | ●      | <a href="#">7010.6480.39</a> |
| 12                | 32                  | 32                  | 2)                | 120                                       | 1450                                           | 57                                                                   | ●      | <a href="#">7010.6480.47</a> |
| 12                | 32                  | 32                  | 2)                | 120                                       | 1450                                           | 57                                                                   | ●      | <a href="#">7010.6480.49</a> |
| 15                | 32                  | 32                  | 2)                | 110                                       | 1650                                           | 98                                                                   | ●      | <a href="#">7010.6490.13</a> |
| 15                | 32                  | 32                  | 2)                | 110                                       | 1650                                           | 98                                                                   | ●      | <a href="#">7010.6490.37</a> |

| Rated Current [A] | Rated Voltage [VAC] | Rated Voltage [VDC] | Breaking Capacity | Voltage Drop<br>1.0 I <sub>n</sub> typ.<br>[mV] | Power Dissipation<br>1.0 I <sub>n</sub> typ.<br>[mW] | Melting I <sup>2</sup> t<br>10.0 I <sub>n</sub> typ.<br>[A <sup>2</sup> s] | GAM<br>T1 | Order Number |
|-------------------|---------------------|---------------------|-------------------|-------------------------------------------------|------------------------------------------------------|----------------------------------------------------------------------------|-----------|--------------|
| 15                | 32                  | 32                  | 2)                | 110                                             | 1650                                                 | 98                                                                         | ●         | 7010.6490.39 |
| 15                | 32                  | 32                  | 2)                | 110                                             | 1650                                                 | 98                                                                         | ●         | 7010.6490.47 |
| 15                | 32                  | 32                  | 2)                | 110                                             | 1650                                                 | 98                                                                         | ●         | 7010.6490.49 |

Most Popular.

Availability for all products can be searched real-time: <https://www.schurter.com/en/Stock-Check/Stock-Check-SCHURTER>

1) 300 A @ 125 VAC/DC

2) 300 A @ 32 VAC/DC

#### Packaging Unit

|           |                                                 |
|-----------|-------------------------------------------------|
| .xx = .13 | Plastic Bag, Fuse Length 86 mm (100 pcs.)       |
| .xx = .37 | Taped 19 cm Reel, Fuse Length 65 mm (1500 pcs.) |
| .xx = .39 | Taped 19 cm Reel, Fuse Length 65 mm (5000 pcs.) |
| .xx = .47 | Taped 19 cm Reel, Fuse Length 86 mm (1500 pcs.) |
| .xx = .49 | Taped 19 cm Reel, Fuse Length 85 mm (5000 pcs.) |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9