



## 512K X 16 BIT SUPER LOW POWER CMOS SRAM

**FEATURES**

- Fast access time : 55ns
- Low power consumption:  
Operating current : 30/20mA (TYP.)  
Standby current : 6μA (TYP.) LL-version
- Single 2.7V ~ 5.5V power supply
- All inputs and outputs TTL compatible
- Fully static operation
- Tri-state output
- Data byte control : LB# (DQ0 ~ DQ7)  
UB# (DQ8 ~ DQ15)
- Data retention voltage : 2.0V (MIN.)
- **Lead free and green package available**
- Package : 44-pin 400 mil TSOP-II  
48-ball 6mm x 8mm TFBGA

**GENERAL DESCRIPTION**

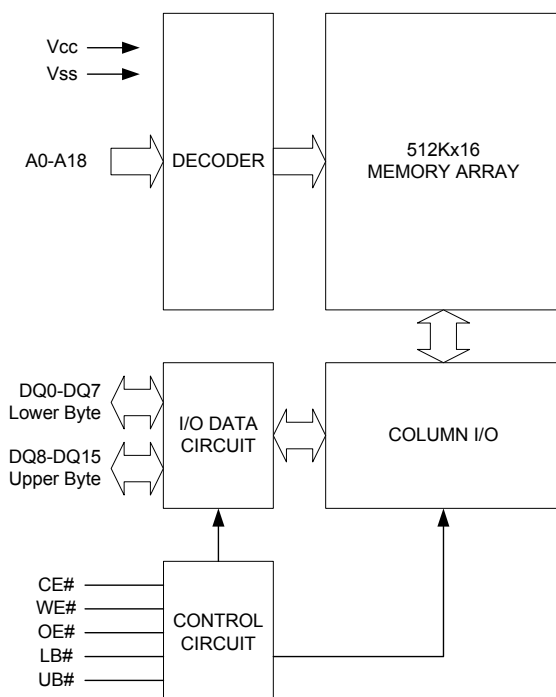
The AS6C8016 is a 8,388,608-bit low power CMOS static random access memory organized as 524,288 words by 16 bits. It is fabricated using very high performance, high reliability CMOS technology. Its standby current is stable within the range of operating temperature.

The AS6C8016 is well designed for low power application, and particularly well suited for battery back-up nonvolatile memory application.

The AS6C8016 operates from a single power supply of 2.7V ~ 5.5V and all inputs and outputs are fully TTL compatible

**PRODUCT FAMILY**

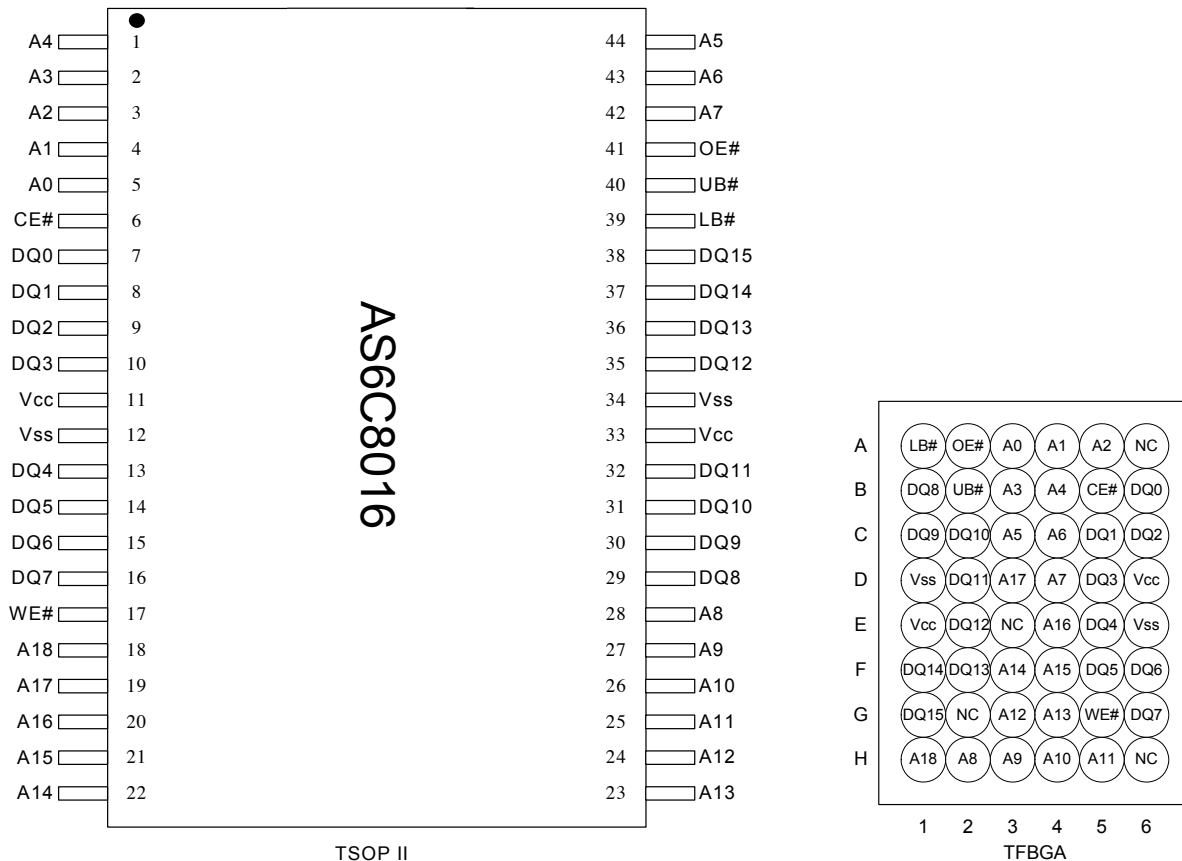
| Product Family | Operating Temperature | Vcc Range  | Speed | Power Dissipation               |                                  |
|----------------|-----------------------|------------|-------|---------------------------------|----------------------------------|
|                |                       |            |       | Standby(I <sub>SB1</sub> ,TYP.) | Operating(I <sub>CC</sub> ,TYP.) |
| AS6C8016(I)    | -40 ~ 85°C            | 2.7 ~ 5.5V | 55ns  | 6μA(LL)                         | 45/30mA                          |

**FUNCTIONAL BLOCK DIAGRAM****PIN DESCRIPTION**

| SYMBOL     | DESCRIPTION         |
|------------|---------------------|
| A0 - A18   | Address Inputs      |
| DQ0 – DQ15 | Data Inputs/Outputs |
| CE#        | Chip Enable Input   |
| WE#        | Write Enable Input  |
| OE#        | Output Enable Input |
| LB#        | Lower Byte Control  |
| UB#        | Upper Byte Control  |
| Vcc        | Power Supply        |
| Vss        | Ground              |



## 512K X 16 BIT SUPER LOW POWER CMOS SRAM

**PIN CONFIGURATION****ABSOLUTE MAXIMUM RATINGS\***

| PARAMETER                                | SYMBOL              | RATING             | UNIT |
|------------------------------------------|---------------------|--------------------|------|
| Voltage on Vcc relative to Vss           | V <sub>T1</sub>     | -0.5 to 6.5        | V    |
| Voltage on any other pin relative to Vss | V <sub>T2</sub>     | -0.5 to Vcc+0.5    | V    |
| Operating Temperature                    | T <sub>A</sub>      | -40 to 85(I grade) | °C   |
| Storage Temperature                      | T <sub>STG</sub>    | -65 to 150         | °C   |
| Power Dissipation                        | P <sub>D</sub>      | 1                  | W    |
| DC Output Current                        | I <sub>OUT</sub>    | 50                 | mA   |
| Soldering Temperature (under 10 sec)     | T <sub>SOLDER</sub> | 260                | °C   |

\*Stresses greater than those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device or any other conditions above those indicated in the operational sections of this specification is not implied. Exposure to the absolute maximum rating conditions for extended period may affect device reliability.



## 512K X 16 BIT SUPER LOW POWER CMOS SRAM

**TRUTH TABLE**

| MODE           | CE# | OE# | WE# | LB# | UB# | I/O OPERATION    |                  | SUPPLY CURRENT                     |
|----------------|-----|-----|-----|-----|-----|------------------|------------------|------------------------------------|
|                |     |     |     |     |     | DQ0-DQ7          | DQ8-DQ15         |                                    |
| Standby        | H   | X   | X   | X   | X   | High – Z         | High – Z         | I <sub>SB1</sub>                   |
|                | X   | X   | X   | H   | H   | High – Z         | High – Z         |                                    |
| Output Disable | L   | H   | H   | L   | X   | High – Z         | High – Z         | I <sub>CC</sub> , I <sub>CC1</sub> |
|                | L   | H   | H   | X   | L   | High – Z         | High – Z         |                                    |
| Read           | L   | L   | H   | L   | H   | D <sub>OUT</sub> | High – Z         | I <sub>CC</sub> , I <sub>CC1</sub> |
|                | L   | L   | H   | H   | L   | High – Z         | D <sub>OUT</sub> |                                    |
|                | L   | L   | H   | L   | L   | D <sub>OUT</sub> | D <sub>OUT</sub> |                                    |
| Write          | L   | X   | L   | L   | H   | D <sub>IN</sub>  | High – Z         | I <sub>CC</sub> , I <sub>CC1</sub> |
|                | L   | X   | L   | H   | L   | High – Z         | D <sub>IN</sub>  |                                    |
|                | L   | X   | L   | L   | L   | D <sub>IN</sub>  | D <sub>IN</sub>  |                                    |

Note: H = V<sub>IH</sub>, L = V<sub>IL</sub>, X = Don't care.

**DC ELECTRICAL CHARACTERISTICS**

| PARAMETER                              | SYMBOL                       | TEST CONDITION                                                                                                             | MIN.  | TYP. <sup>4</sup> | MAX.                 | UNIT |
|----------------------------------------|------------------------------|----------------------------------------------------------------------------------------------------------------------------|-------|-------------------|----------------------|------|
| Supply Voltage                         | V <sub>CC</sub>              |                                                                                                                            | 2.7   | 3.0               | 5.5                  | V    |
| Input High Voltage                     | V <sub>IH</sub> <sup>1</sup> |                                                                                                                            | 2.4   | -                 | V <sub>CC</sub> +0.3 | V    |
| Input Low Voltage                      | V <sub>IL</sub> <sup>2</sup> |                                                                                                                            | - 0.2 | -                 | 0.6                  | V    |
| Input Leakage Current                  | I <sub>LI</sub>              | V <sub>CC</sub> ≥ V <sub>IN</sub> ≥ V <sub>SS</sub>                                                                        | - 1   | -                 | 1                    | μA   |
| Output Leakage Current                 | I <sub>LO</sub>              | V <sub>CC</sub> ≥ V <sub>OUT</sub> ≥ V <sub>SS</sub><br>Output Disabled                                                    | - 1   | -                 | 1                    | μA   |
| Output High Voltage                    | V <sub>OH</sub>              | I <sub>OH</sub> = -1mA                                                                                                     | 2.4   | 2.7               | -                    | V    |
| Output Low Voltage                     | V <sub>OL</sub>              | I <sub>OL</sub> = 2mA                                                                                                      | -     | -                 | 0.4                  | V    |
| Average Operating Power supply Current | I <sub>CC</sub>              | Cycle time = Min.<br>CE# = V <sub>IL</sub> ,<br>I <sub>I/O</sub> = 0mA<br>Other pins at V <sub>IL</sub> or V <sub>IH</sub> | - 55  | -                 | 30                   | mA   |
|                                        | I <sub>CC1</sub>             | Cycle time = 1μs<br>CE# ≤ 0.2V, I <sub>I/O</sub> = 0mA<br>Other pins at 0.2V or V <sub>CC</sub> -0.2V                      | -     | -                 | 4                    | mA   |
| Standby Power Supply Current           | I <sub>SB1</sub>             | CE# ≥ V <sub>CC</sub> -0.2V<br>Other pins at 0.2V or V <sub>CC</sub> -0.2V                                                 | -     | 6                 | 80                   | μA   |

Notes:

1. V<sub>IH</sub>(max) = V<sub>CC</sub> + 3.0V for pulse width less than 10ns.
2. V<sub>IL</sub>(min) = V<sub>SS</sub> - 3.0V for pulse width less than 10ns.
3. Over/Undershoot specifications are characterized, not 100% tested.
4. Typical values are included for reference only and are not guaranteed or tested.  
Typical values are measured at V<sub>CC</sub> = V<sub>CC</sub>(TYP.) and T<sub>A</sub> = 25°C

**CAPACITANCE (T<sub>A</sub> = 25°C, f = 1.0MHz)**

| PARAMETER                | SYMBOL           | MIN. | MAX | UNIT |
|--------------------------|------------------|------|-----|------|
| Input Capacitance        | C <sub>IN</sub>  | -    | 6   | pF   |
| Input/Output Capacitance | C <sub>I/O</sub> | -    | 8   | pF   |

Note : These parameters are guaranteed by device characterization, but not production tested.



## 512K X 16 BIT SUPER LOW POWER CMOS SRAM

**AC TEST CONDITIONS**

|                                          |                                                  |
|------------------------------------------|--------------------------------------------------|
| Input Pulse Levels                       | 0.2V to $V_{CC} - 0.2V$                          |
| Input Rise and Fall Times                | 3ns                                              |
| Input and Output Timing Reference Levels | 1.5V                                             |
| Output Load                              | $C_L = 30pF + 1TTL$ , $I_{OH}/I_{OL} = -1mA/2mA$ |

**AC ELECTRICAL CHARACTERISTICS****(1) READ CYCLE**

| PARAMETER                          | SYM.        | AS6C8016-55 |      | UNIT |
|------------------------------------|-------------|-------------|------|------|
|                                    |             | MIN.        | MAX. |      |
| Read Cycle Time                    | $t_{RC}$    | 55          | -    | ns   |
| Address Access Time                | $t_{AA}$    | -           | 55   | ns   |
| Chip Enable Access Time            | $t_{ACE}$   | -           | 55   | ns   |
| Output Enable Access Time          | $t_{OE}$    | -           | 30   | ns   |
| Chip Enable to Output in Low-Z     | $t_{CLZ}^*$ | 10          | -    | ns   |
| Output Enable to Output in Low-Z   | $t_{OLZ}^*$ | 5           | -    | ns   |
| Chip Disable to Output in High-Z   | $t_{CHZ}^*$ | -           | 20   | ns   |
| Output Disable to Output in High-Z | $t_{OHZ}^*$ | -           | 20   | ns   |
| Output Hold from Address Change    | $t_{OH}$    | 10          | -    | ns   |
| LB#, UB# Access Time               | $t_{BA}$    | -           | 55   | ns   |
| LB#, UB# to High-Z Output          | $t_{BHZ}^*$ | -           | 25   | ns   |
| LB#, UB# to Low-Z Output           | $t_{BLZ}^*$ | 10          | -    | ns   |

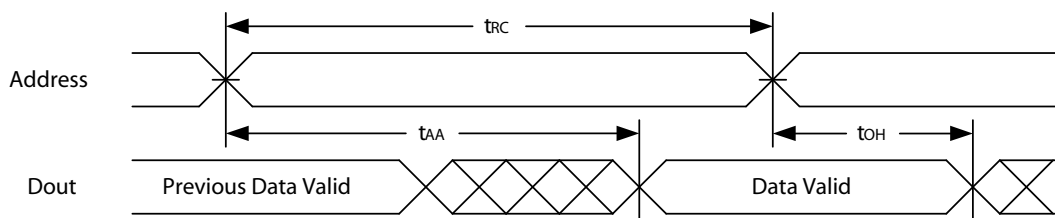
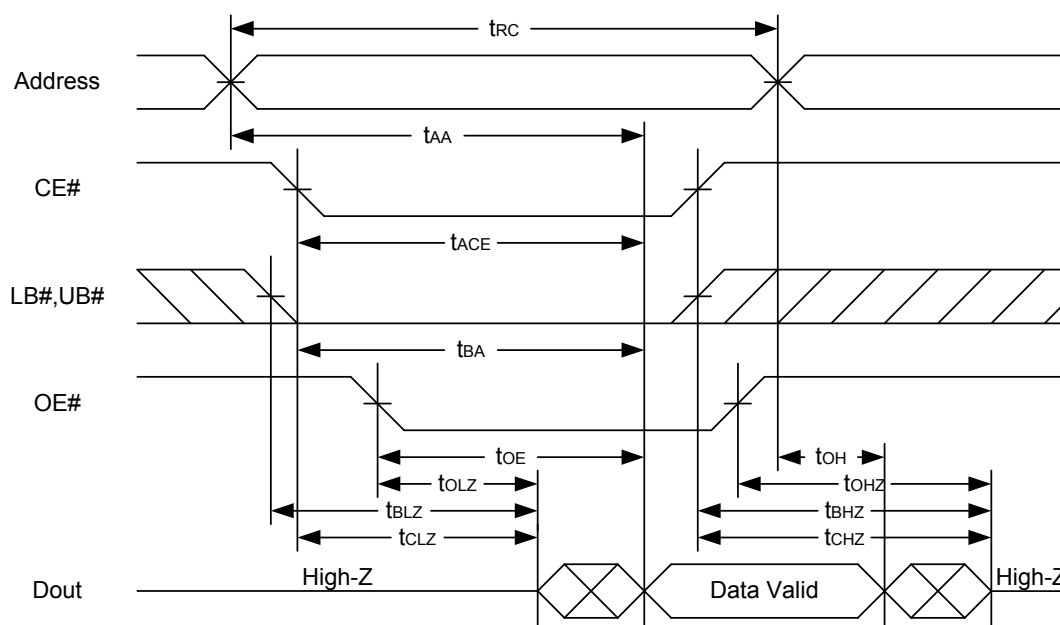
**(2) WRITE CYCLE**

| PARAMETER                        | SYM.        | AS6C8016-55 |      | UNIT |
|----------------------------------|-------------|-------------|------|------|
|                                  |             | MIN.        | MAX. |      |
| Write Cycle Time                 | $t_{WC}$    | 55          | -    | ns   |
| Address Valid to End of Write    | $t_{AW}$    | 50          | -    | ns   |
| Chip Enable to End of Write      | $t_{CW}$    | 50          | -    | ns   |
| Address Set-up Time              | $t_{AS}$    | 0           | -    | ns   |
| Write Pulse Width                | $t_{WP}$    | 45          | -    | ns   |
| Write Recovery Time              | $t_{WR}$    | 0           | -    | ns   |
| Data to Write Time Overlap       | $t_{DW}$    | 25          | -    | ns   |
| Data Hold from End of Write Time | $t_{DH}$    | 0           | -    | ns   |
| Output Active from End of Write  | $t_{OW}^*$  | 5           | -    | ns   |
| Write to Output in High-Z        | $t_{WHZ}^*$ | -           | 20   | ns   |
| LB#, UB# Valid to End of Write   | $t_{BW}$    | 45          | -    | ns   |

\*These parameters are guaranteed by device characterization, but not production tested.



## 512K X 16 BIT SUPER LOW POWER CMOS SRAM

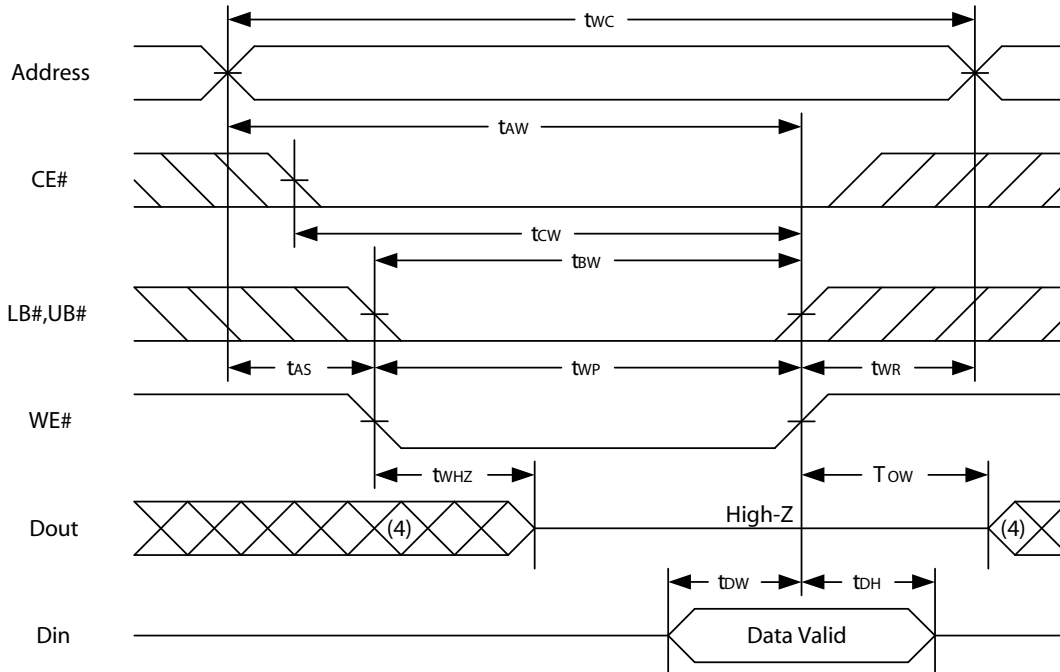
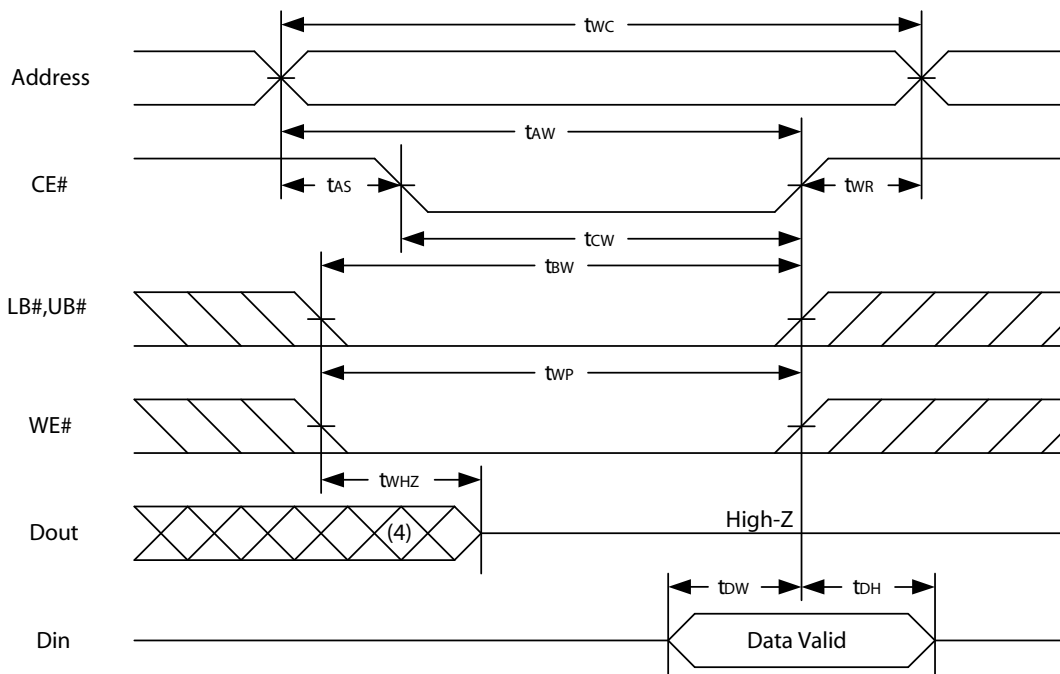
**TIMING WAVEFORMS****READ CYCLE 1 (Address Controlled) (1,2)****READ CYCLE 2 (CE# and OE# Controlled) (1,3,4,5)**

## Notes :

1. WE# is high for read cycle.
2. Device is continuously selected OE# = low, CE# = low, LB# or UB# = low.
3. Address must be valid prior to or coincident with CE# = low, LB# or UB# = low transition; otherwise tAA is the limiting parameter.
4. tCLZ, tBLZ, tOLZ, tCHZ, tBHZ and tOHZ are specified with CL = 5pF. Transition is measured  $\pm 500\text{mV}$  from steady state.
5. At any given temperature and voltage condition, tCHZ is less than tCLZ, tBHZ is less than tBLZ, tOHZ is less than tOLZ.

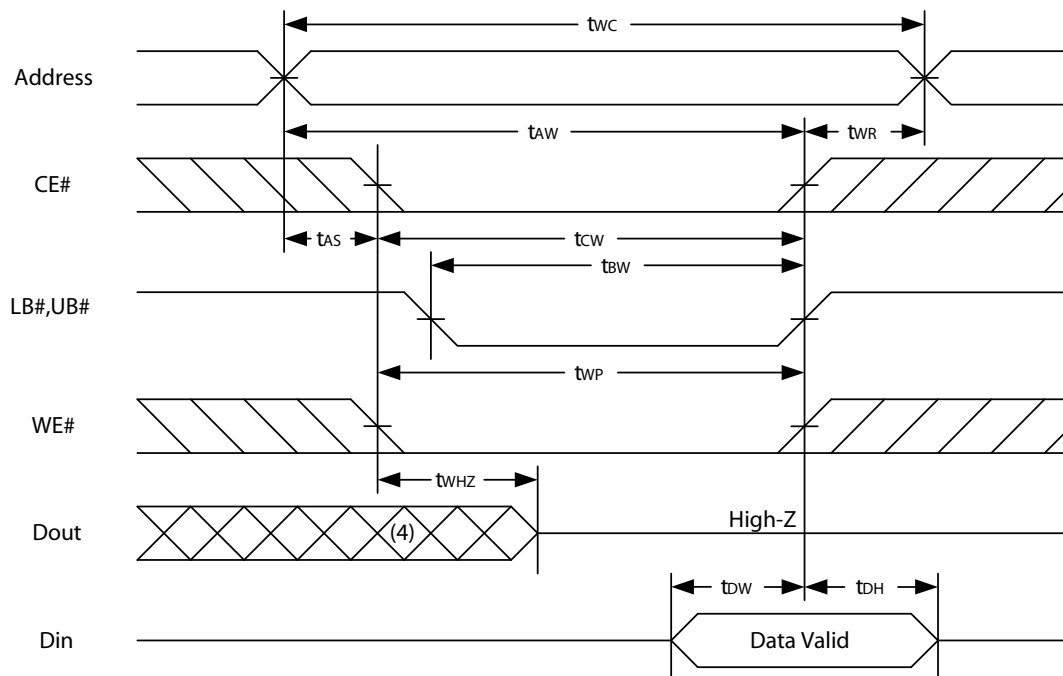


## 512K X 16 BIT SUPER LOW POWER CMOS SRAM

**WRITE CYCLE 1 (WE# Controlled) (1,2,3,5,6)****WRITE CYCLE 2 (CE# Controlled) (1,2,5,6)**



## 512K X 16 BIT SUPER LOW POWER CMOS SRAM

**WRITE CYCLE 3** (LB#,UB# Controlled) (1,2,5,6)

## Notes :

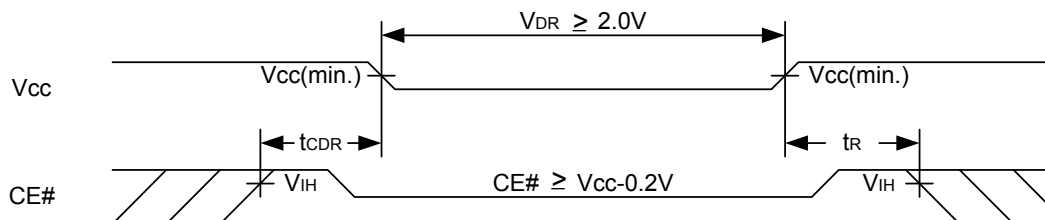
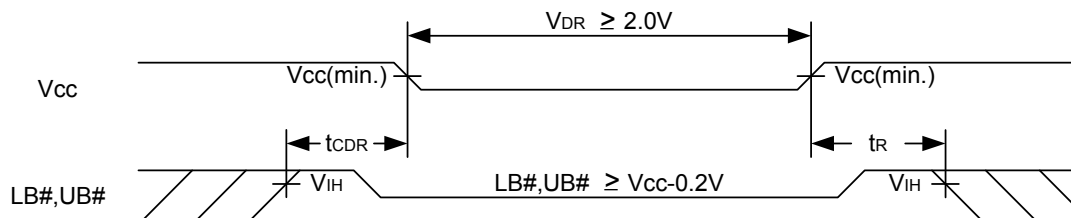
1. WE#, CE#, LB#, UB# must be high during all address transitions.
2. A write occurs during the overlap of a low CE#, low WE#, LB# or UB# = low.
3. During a WE# controlled write cycle with OE# low, tWP must be greater than tWHZ + tDW to allow the drivers to turn off and data to be placed on the bus.
4. During this period, I/O pins are in the output state, and input signals must not be applied.
5. If the CE#, LB#, UB# low transition occurs simultaneously with or after WE# low transition, the outputs remain in a high impedance state.
6. tDW and tWHZ are specified with CL = 5pF. Transition is measured ±500mV from steady state.



## 512K X 16 BIT SUPER LOW POWER CMOS SRAM

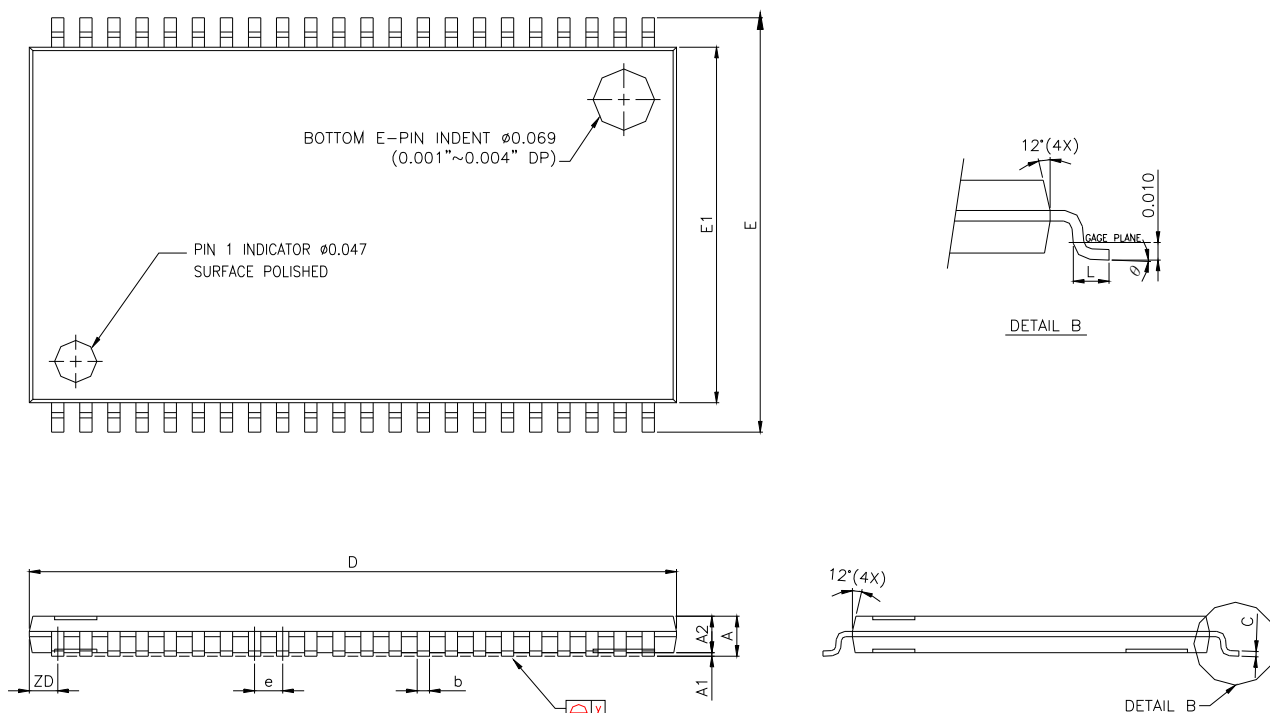
**DATA RETENTION CHARACTERISTICS**

| PARAMETER                           | SYMBOL           | TEST CONDITION                                                                                       | MIN.              | TYP. | MAX. | UNIT |
|-------------------------------------|------------------|------------------------------------------------------------------------------------------------------|-------------------|------|------|------|
| V <sub>CC</sub> for Data Retention  | V <sub>DR</sub>  | CE# ≥ V <sub>CC</sub> - 0.2V                                                                         | 2.0               | -    | 5.5  | V    |
| Data Retention Current              | I <sub>DR</sub>  | V <sub>CC</sub> = 2.0V<br>CE# ≥ V <sub>CC</sub> -0.2V<br>Other pins at 0.2V or V <sub>CC</sub> -0.2V | -I                | -    | 5    | 50   |
| Chip Disable to Data Retention Time | t <sub>CDR</sub> | See Data Retention Waveforms (below)                                                                 | 0                 | -    | -    | ns   |
| Recovery Time                       | t <sub>R</sub>   |                                                                                                      | t <sub>RC</sub> * | -    | -    | ns   |

t<sub>RC</sub>\* = Read Cycle Time**DATA RETENTION WAVEFORM****Low V<sub>CC</sub> Data Retention Waveform (1)** (CE# controlled)**Low V<sub>CC</sub> Data Retention Waveform (2)** (LB#, UB# controlled)



## 512K X 16 BIT SUPER LOW POWER CMOS SRAM

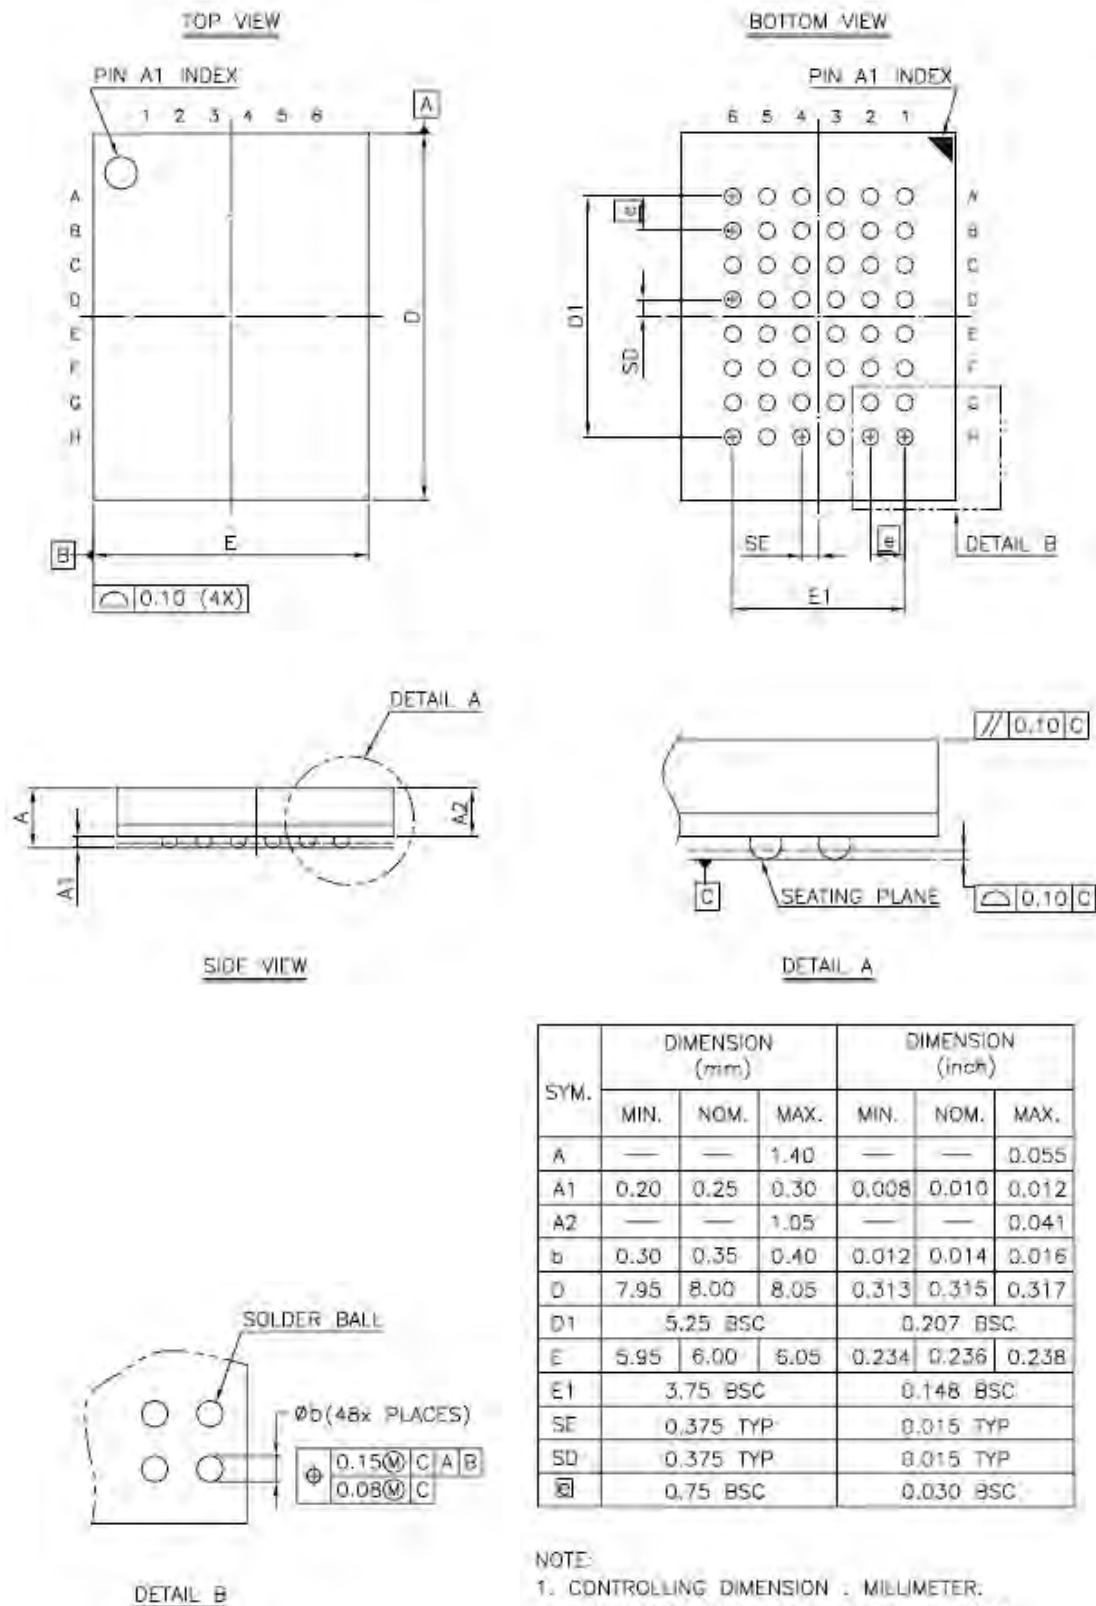
**PACKAGE OUTLINE DIMENSION****44-pin 400mil TSOP-II Package Outline Dimension**

| SYMBOLS  | DIMENSIONS IN MILLIMETERS |        |        | DIMENSIONS IN MILS |      |      |
|----------|---------------------------|--------|--------|--------------------|------|------|
|          | MIN.                      | NOM.   | MAX.   | MIN.               | NOM. | MAX. |
| A        | -                         | -      | 1.20   | -                  | -    | 47.2 |
| A1       | 0.05                      | 0.10   | 0.15   | 2.0                | 3.9  | 5.9  |
| A2       | 0.95                      | 1.00   | 1.05   | 37.4               | 39.4 | 41.3 |
| b        | 0.30                      | -      | 0.45   | 11.8               | -    | 17.7 |
| c        | 0.12                      | -      | 0.21   | 4.7                | -    | 8.3  |
| D        | 18.212                    | 18.415 | 18.618 | 717                | 725  | 733  |
| E        | 11.506                    | 11.760 | 12.014 | 453                | 463  | 473  |
| E1       | 9.957                     | 10.160 | 10.363 | 392                | 400  | 408  |
| e        | -                         | 0.800  | -      | -                  | 31.5 | -    |
| L        | 0.40                      | 0.50   | 0.60   | 15.7               | 19.7 | 23.6 |
| ZD       | -                         | 0.805  | -      | -                  | 31.7 | -    |
| y        | -                         | -      | 0.076  | -                  | -    | 3    |
| $\theta$ | 0°                        | 3°     | 6°     | 0°                 | 3°   | 6°   |



## 512K X 16 BIT SUPER LOW POWER CMOS SRAM

## 48-ball 6mm x 8mm TFBGA Package Outline Dimension





## 512K X 16 BIT SUPER LOW POWER CMOS SRAM

**ORDERING INFORMATION**

| Alliance        | Organization | VCC Range  | Package       | Operating Temp            | Speed ns |
|-----------------|--------------|------------|---------------|---------------------------|----------|
| AS6C8016 -55ZIN | 512K x 16    | 2.7 - 5.5V | 44pin TSOP II | Industrial ~ -40 F - 85 F | 55       |
| AS6C8016 -55BIN | 512K x 16    | 2.7 - 5.5V | 48ball TBGA   | Industrial ~ -40 F - 85 F | 55       |

**PART NUMBERING SYSTEM**

| AS6C                     | 8016                                  | -55            | X                                                    | X                                                      | N                                       |
|--------------------------|---------------------------------------|----------------|------------------------------------------------------|--------------------------------------------------------|-----------------------------------------|
| low power<br>SRAM prefix | Device Number<br>380 = 8M<br>16 = x16 | Access<br>Time | Package Option<br>Z - 44pin TSOP<br>B = 48ball TFBGA | Temperature Range<br>I = Industrial<br>(-40 to + 85 C) | N = Lead Free<br>RoHS<br>compliant part |

512K X 16 BIT LOW POWER CMOS SRAM

---



Alliance Memory, Inc.  
511 Taylor Way,  
San Carlos, CA 94070, USA  
Phone: 650-610-6800  
Fax: 650-620-9211

[www.alliancememory.com](http://www.alliancememory.com)

Copyright © Alliance Memory  
All Rights Reserved

© Copyright 2007 Alliance Memory, Inc. All rights reserved. Our three-point logo, our name and Intelliwatt are trademarks or registered trademarks of Alliance. All other brand and product names may be the trademarks of their respective companies. Alliance reserves the right to make changes to this document and its products at any time without notice. Alliance assumes no responsibility for any errors that may appear in this document. The data contained herein represents Alliance's best data and/or estimates at the time of issuance. Alliance reserves the right to change or correct this data at anytime, without notice. If the product described herein is under development, significant changes to these specifications are possible. The information in this product data sheet is intended to be general descriptive information for potential customers and users, and is not intended to operate as, or provide, any guarantee or warranty to any user or customer. Alliance does not assume any responsibility or liability arising out of the application or use of any product described herein, and disclaims any express or implied warranties related to the sale and/or use of Alliance products including liability or warranties related to fitness for a particular purpose, merchantability, or infringement of any intellectual property rights, except as express agreed to in Alliance's Terms and Conditions of Sale (which are available from Alliance). All sales of Alliance products are made exclusively according to Alliance's Terms and Conditions of Sale. The purchase of products from Alliance does not convey a license under any patent rights, copyrights; mask works rights, trademarks, or any other intellectual property rights of Alliance or third parties. Alliance does not authorize its products for use as critical components in life-supporting systems where a malfunction or failure may reasonably be expected to result in significant injury to the user, and the inclusion of Alliance products in such life-supporting systems implies that the manufacturer assumes all risk of such use and agrees to indemnify Alliance against all claims arising from such use.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9