

APPLICATIONS

- OEM MEDICAL EQUIPMENT
- FOOD & BEVERAGE PROCESSING
- PRESSURE TRANSDUCERS
- 'SMART' VALVES
- SOLID STATE PRESSURE SWITCHES
- PRESSURE TRANSMITTERS

MODEL BX • OEM PRESSURE SENSOR

The Model BX pressure capsule is intended for OEM's needing a small, high performance pressure sensor. The unique sensor module design eliminates the need for oil filled capsules and corrugated diaphragms providing a true, robust sensing surface for long life and superior performance. Constructed of a brazed assembly of 300 series stainless steel, the BX can tolerate a wide variety of corrosive media without risk of leaking silicon oil. The small, flush mount diaphragm is ideal for medical, beverage and food processing applications where stringent sanitation requirements are necessary.

Unlike other low cost sensors, the BX's output is compensated for temperature changes, greatly improving system performance at no extra cost.



BX SERIES
OEM PRESSURE SENSOR


FEATURES

- Small size, low cost
- Oil free isolated sensor
- Flush mount, non-corrugated diaphragm
- High impedance device
- Constant current

BENEFIT

- Ideal for portable equipment
- Eliminates risk of leaking & contamination
- Satisfies sanitary requirements
- Low current draw, can be run on batteries
- Works with readily available 4-20 mA amplifier ICs

HOW TO ORDER

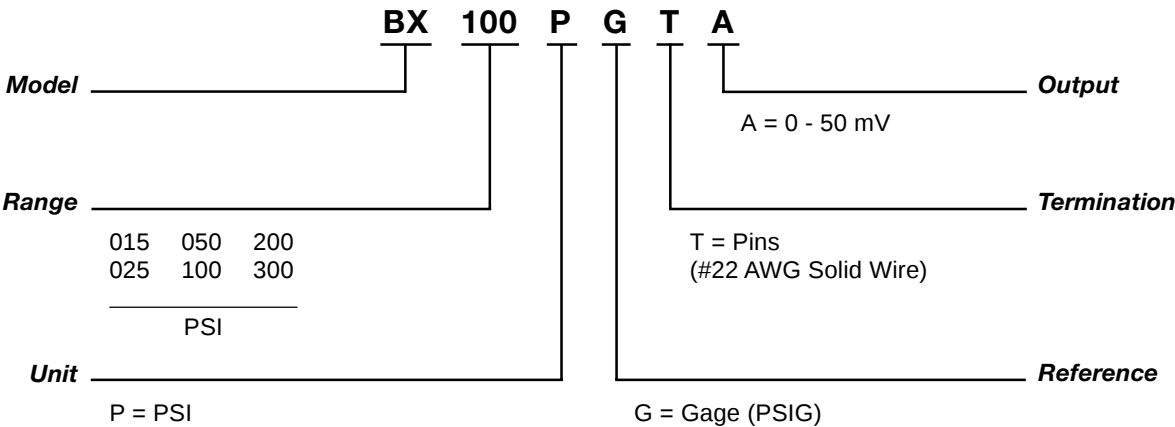

Note: Not all combinations are available. Minimum quantity orders apply. Contact the factory for more details.

TECHNICAL SPECIFICATIONS**RANGE**

15, 25, 50, 100, 200, 300 psig
(1, 2, 3, 7, 14, 20 bar g)
(bar values are approximate)

PHYSICAL

Proof Pressure	2 x rated range
Burst Pressure	10 x rated range
Material in Contact With Media	Brazed assembly of 300 series SS parts
Shock	50 g's peak (5 milliseconds)
Vibration	Meets MIL-STD-810-C, Figure 514.2-5, Curve AP, 46.3 g rms minimum
Weight	Less than 0.5 oz (approx 13 gm)

ELECTRICAL

Full Scale Output	50 mV $\pm$ 1 mVdc at rated excitation @ 25° C
Zero Output	0 mVdc $\pm$ 5% FSO @ 25° C
Excitation	4 mA @ 5.0 Vdc maximum
Input Impedance	900 W (nominal)
Output Impedance	5500 W (nominal)
Insulation Resistance	1000 M W @ 250 Vdc maximum
Electrical Connection	Four #22 AWG solid wires


PERFORMANCE

Accuracy	$\pm$ 1% FSO BFSL including effects of nonlinearity, hysteresis and nonrepeatability
Operating Temperature Range	-40° to 212° F (-40° to 100° C)
Compensated Temperature Range	50° to 130° F (0° to 80° C)
Thermal Effect on Zero	$\pm$ 1% FSO for any 55° C (100° F) change within the compensated range
Thermal Effect on Full Scale Output	$\pm$ 1% for any 55° C (100° F) change within the compensated range

NOTE: All specifications are measured at 25° C and rated excitation unless otherwise specified.

DIMENSIONS

xx.xx = inches
(xx.x) = mm

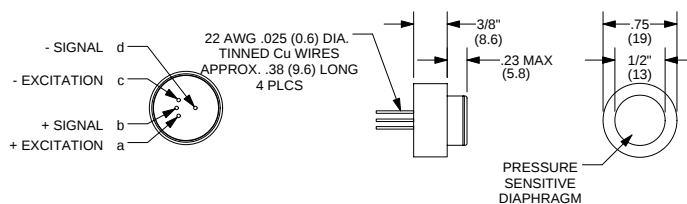**WARRANTY/REMEDY**

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Contact your local sales office for warranty information. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace without charge those items it finds defective. The foregoing is Buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Item # 1119000 M.G. 3/01

Honeywell

Sensing and Control
Honeywell
100 Discovery Way
Acton, MA 01720 USA

Tel: (877) 384-1300; Fax: (978) 263-0630

www.honeywell.com/sensing/

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9