

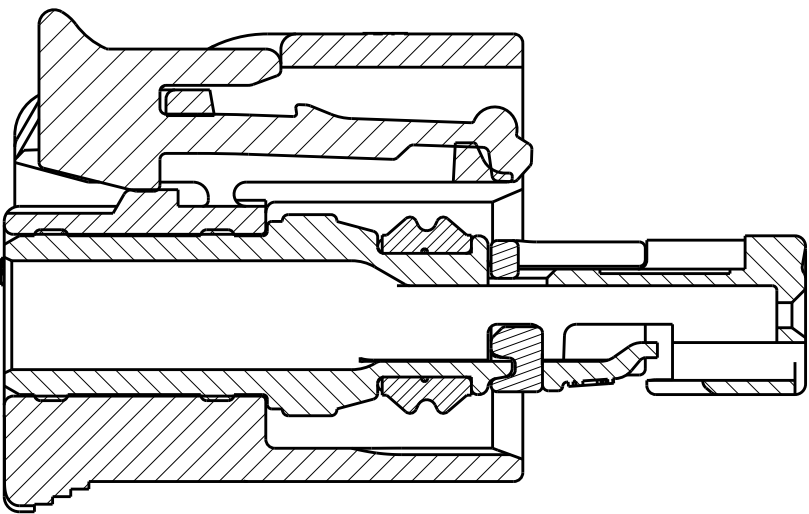



1. PART NUMBER 1-1924067-9 SHOWN ON DRAWING.
2. TPA AND CPA (WHEN APPLICABLE) ARE SHIPPED IN THEIR PRE-LATCHED POSITIONS. SEE INSTRUCTION SHEET 408-8968 FOR DIRECTIONS ON MOVING THE CPA AND TPA TO THE PRE-LATCHED POSITION, IF NECESSARY.
3. TERMINALS SOLD SEPARATELY. FOR USE WITH TE MCON 1.2mm CLEAN BODY CONTACT WITH WIRE SEAL. SEE TE MCON 1.2-CB (CLEAN BODY) TABLE FOR APPLICABLE PART NUMBERS.
4. APPLICABLE HEADER INTERFACE DRAWING 114-18679-3 IS AVAILABLE UPON REQUEST. A COPY OF THIS DRAWING CAN BE OBTAINED FROM THE TYCO ELECTRONICS PRODUCT MANAGER, VIA YOUR TE CONNECTIVITY SALES REPRESENTATIVE OR CUSTOMER SERVICE.
5. MINIMUM FEED THROUGH CONDITION WITH 1.0mm CLEARANCE ALL AROUND.
6. TRACEABILITY PRINTED IN THIS LOCATION AT ASSEMBLY.
7. NOTE LEFT BLANK INTENTIONALLY.
8. PART NUMBERS 1924067-7, -8, 1-7, 1-8 INNER HOUSING ARE ASSEMBLED 180°.
9. PROTOTYPE ASSEMBLIES USE GERMAN OUTER HOUSING P/N: 1718648-1, CPA P/N: 1670193-1 AND SEAL P/N: 1718650-1.
10. NOTE DELETED
11. TPA ENGAGE FORCE: PRESET TO FULL ≥ 2 N AND ≤ 60 N.
12. TPA DISENGAGE FORCE: DISENGAGE FROM FULL TO PRESET ≥ 2 N AND ≤ 60 N.
13. CPA ENGAGE FORCE: PRESET TO FULL WITHOUT CONNECTORS MATED ≥ 40 N.
14. CPA ENGAGE FORCE: PRESET TO FULL WITH CONNECTORS MATED < 30 N.
15. POLARIZATION FEATURE EFFECTIVENESS:
CONNECTOR MATED TURNED 180° NO MATING > 125 N.
WRONG KEYING NO MATING > 125 N.
16. VALIDATED UP TO USCAR TEMPERATURE CLASS III.
17. SEE INSTRUCTION SHEET 408-8928.
18. REFERENCE SHEET 2 FOR ISOMETRIC VIEWS.
19. TERMINAL 1670146-x REPLACES 1418847-x

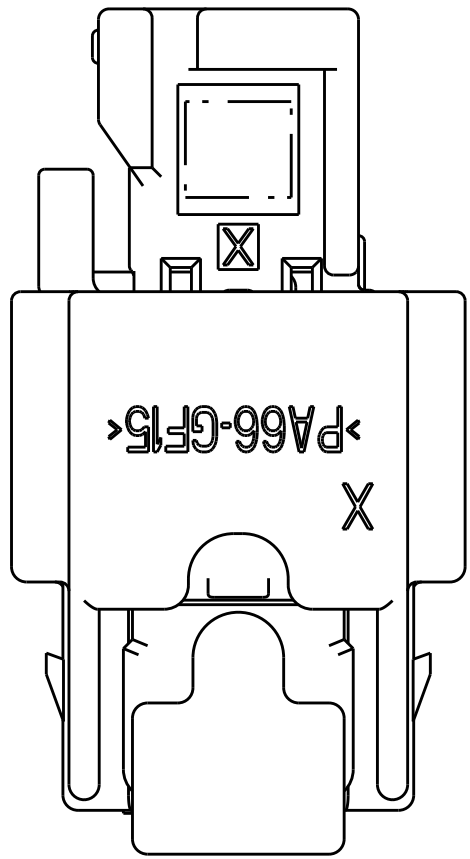

SECTION B-B
SHOWN WITH CPA (WHEN APPLICABLE)
IN IT'S LATCHED POSITION
FOR REFERENCE ONLY



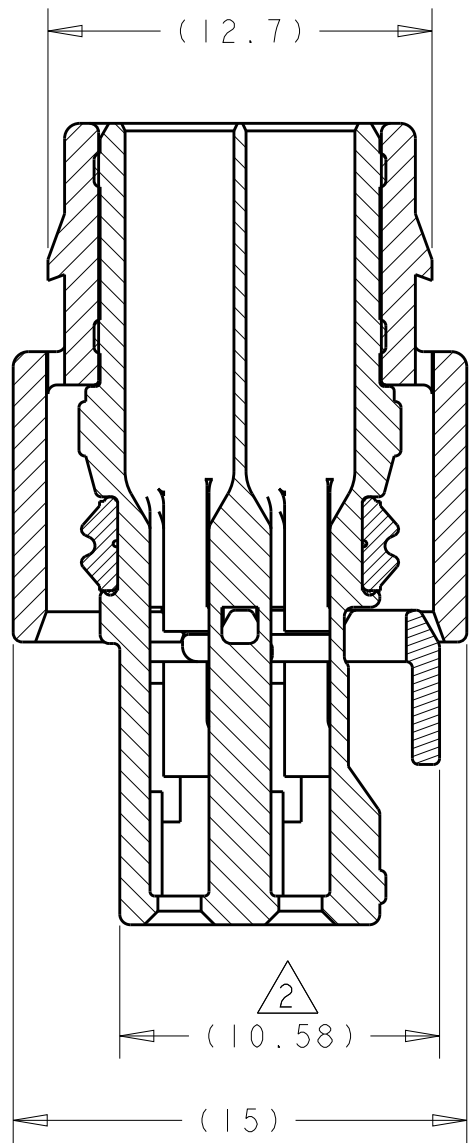


SECTION A-A
SHOWN WITH TPA
IN IT'S LATCHED POSITION
FOR REFERENCE ONLY

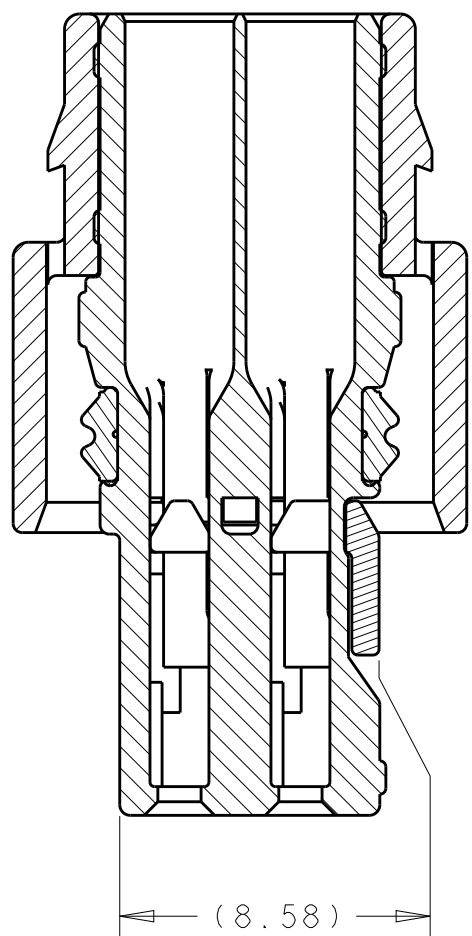


SECTION A-A
SHOWN WITH TPA
IN IT'S LATCHED POSITION
FOR REFERENCE ONLY

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
B5		REVISED PER ECO-12-019932	13NOV2012	DLD	SLM
B6		REVISED PER ECO-14-014610	26SEP2014	DLD	SLM

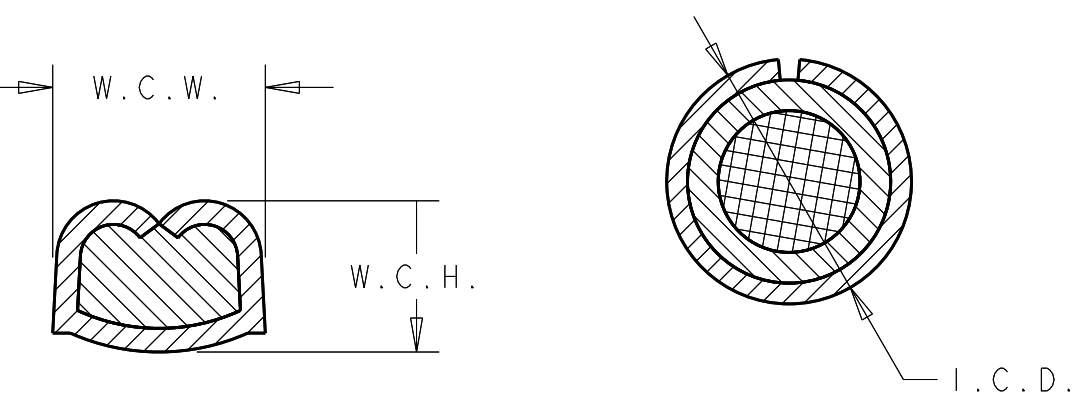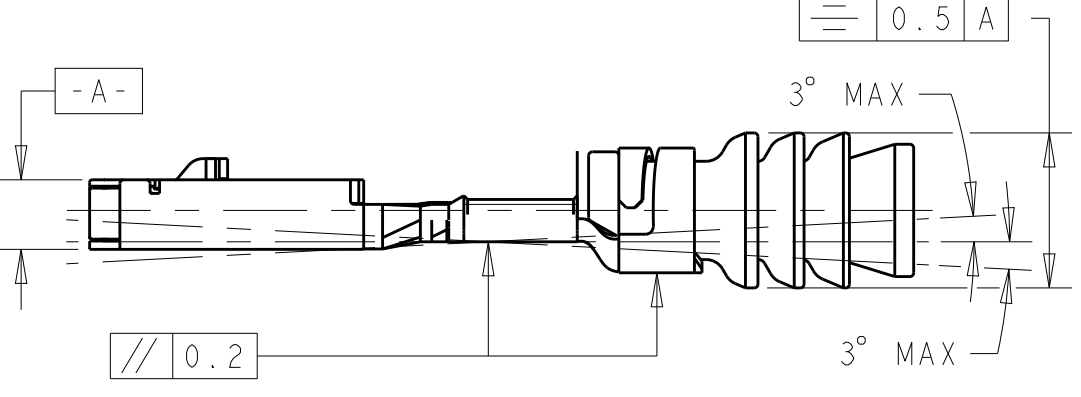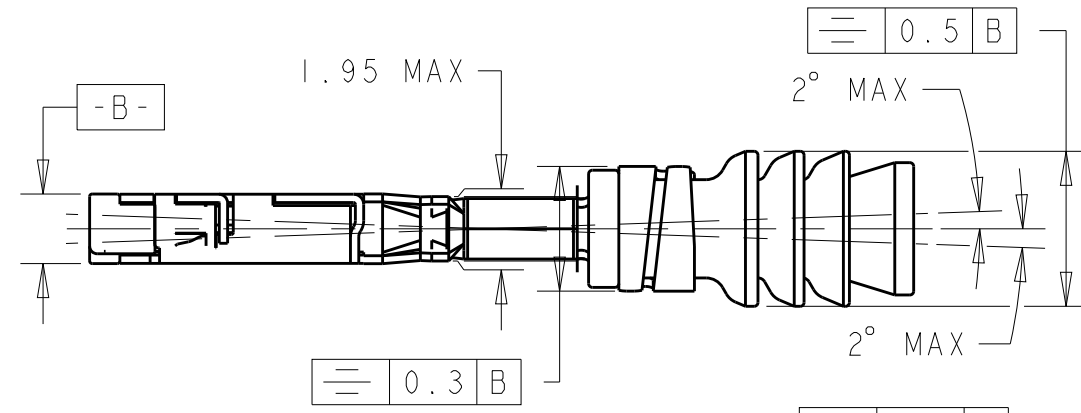


WIRE CRIMP
DIMENSIONS


INSULATION CRIMP
DIMENSIONS

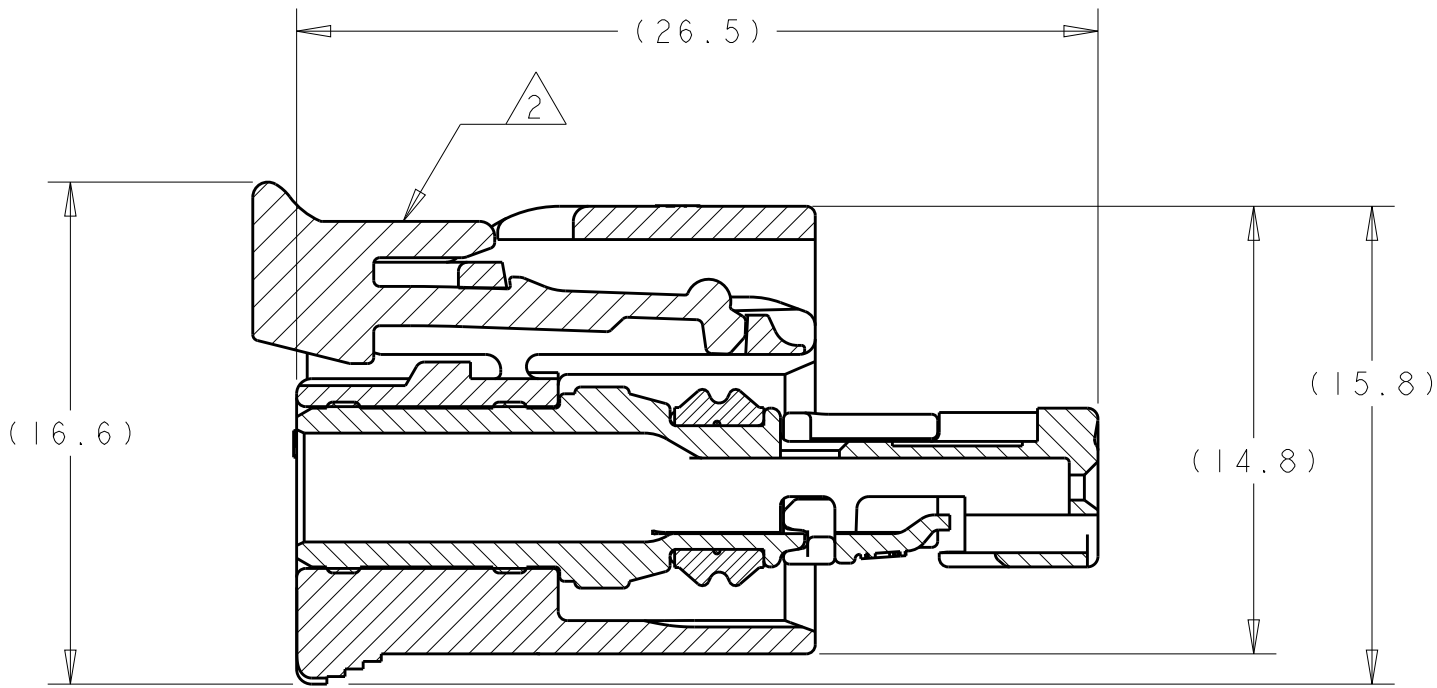

SECTION B-B
SHOWN WITH TPA
IN IT'S LATCHED POSITION
FOR REFERENCE ONLY

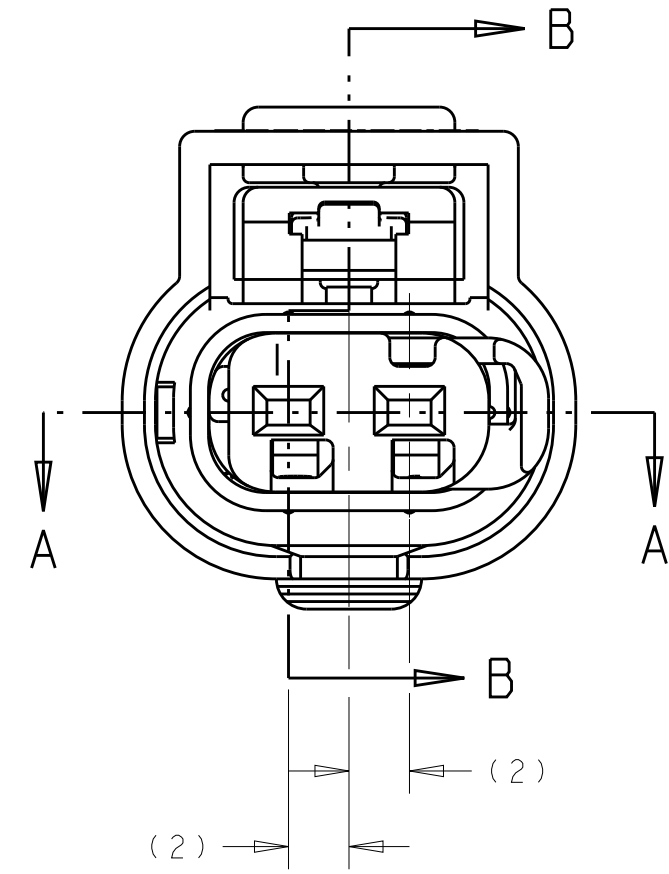


KEYING CONFIGURATIONS

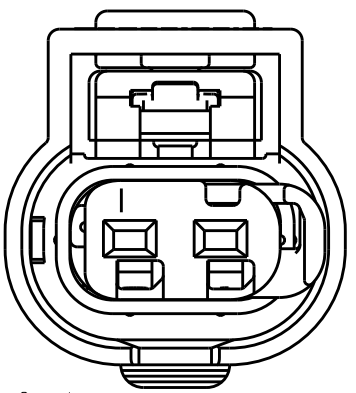


SCALE 3:1

KEYING OPTION A

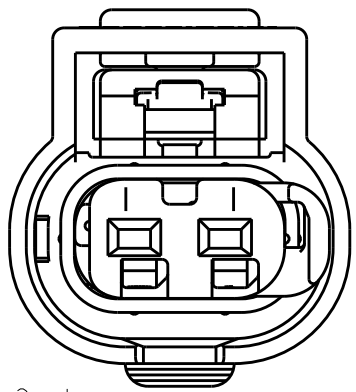




SCALE 3:1

KEYING OPTION B

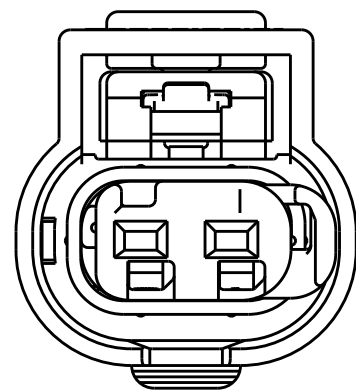

SCALE 3:1

KEYING OPTION C

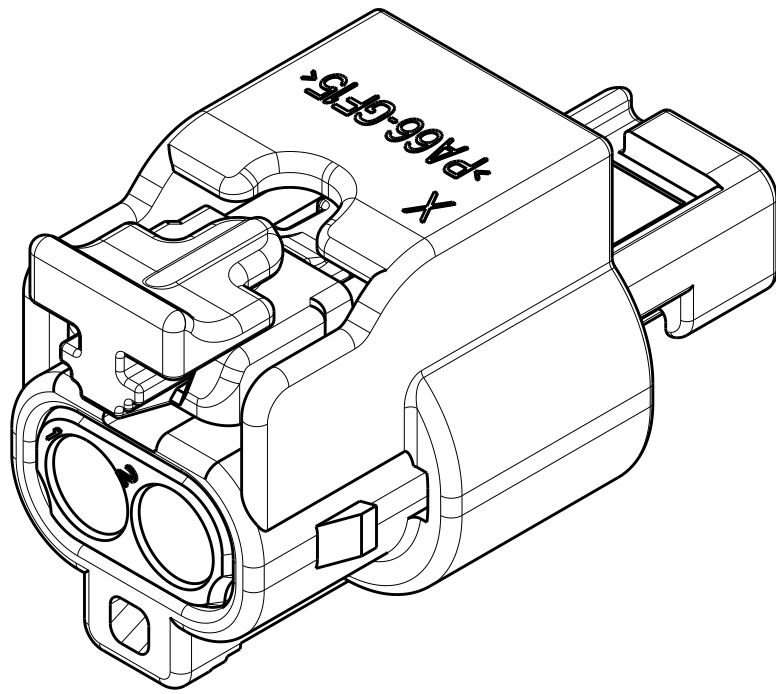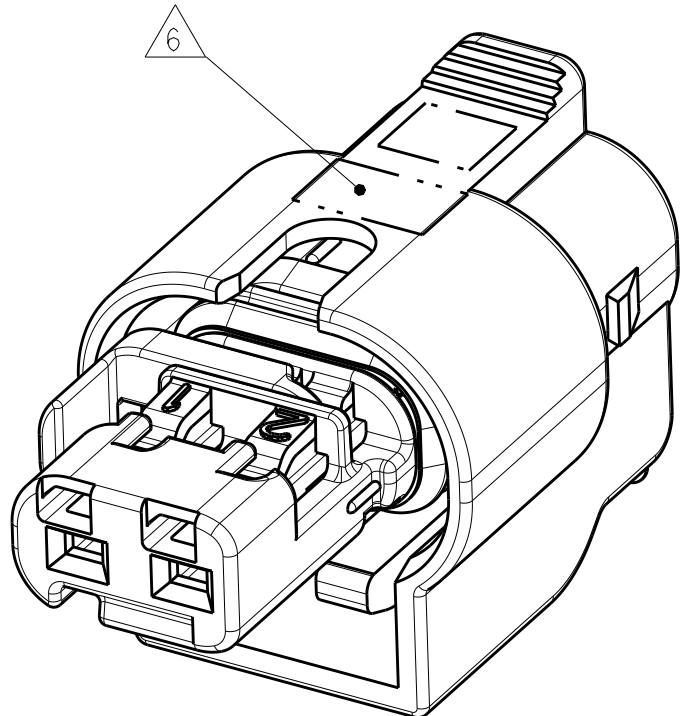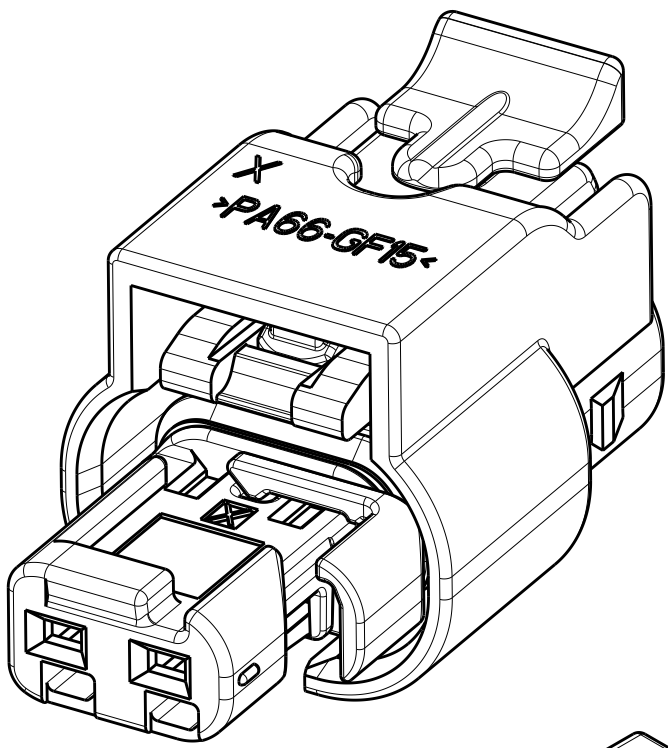

ISOMETRIC VIEWS
1-1924067-9





TE MCON 1.2-CB (CLEAN BODY)									
9	1670146-3	SILVER	3.6 ±0.3	20	1.4 TO 1.9	0.84 ±0.03	1.57 ±0.05	3.25±0.05	967067-1
	1670146-2	GOLD							
	1670146-1	TIN							
	1418850-3	SILVER	3.6 ±0.3	18 16 18 16 18 16	1.9 TO 2.4	1.11 ±0.05 1.31 ±0.05 1.11 ±0.05 1.31 ±0.05 1.11 ±0.05 1.31 ±0.05	1.78 ±0.05	3.35±0.05	964972-1
	1418850-2	GOLD							
	1418850-1	TIN							
	PART NUMBER	PLATING	WIRE STRIP LENGTH	AWG	INSL. RANGE	W.C.H.	W.C.W.	I.C.D.	WIRE SEAL PART NUMBER

RELEASED	RED	2138907-1	BLUE	C	4-1924067-3
RELEASED	RED	2138907-1	NATURAL	B	4-1924067-2
RELEASED	RED	2138907-1	BLACK	A	4-1924067-1
RELEASED	VIOLET	1989913-2	BLUE	C	2-1924067-1
RELEASED	VIOLET	1989913-2	NATURAL	B	2-1924067-0
RELEASED	VIOLET	1989913-2	BLACK	A	1-1924067-9
RELEASED	RED	1488787-1	BLACK	A	1-1924067-8
RELEASED	-	-	BLACK	A	1-1924067-7
RELEASED	RED	1488787-1	BLUE	C	1-1924067-6
RELEASED	RED	1488787-1	NATURAL	B	1-1924067-5
RELEASED	RED	1488787-1	BLACK	A	1-1924067-4
RELEASED	-	-	BLUE	C	1-1924067-3
RELEASED	-	-	NATURAL	B	1-1924067-2
RELEASED	-	-	BLACK	A	1-1924067-1

9 OBSOLETE					1924067-8
					1924067-7
					1924067-6
9 OBSOLETE					1924067-5
					1924067-4
					1924067-3
9 OBSOLETE					1924067-2
					1924067-1

STATUS	COLOR	PART NO	COLOR	KEY	PART NUMBER
	CPA	INNER HOUSING			

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN M. FORISKA 25SEP2006		 TE Connectivity					
				CHK G. MARTIN 25SEP2006							
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:				NAME		CONNECTOR ASSEMBLY, FEMALE, 2 POSITION SEALED, 1.2mm STANDARD LATCH VERSION			
mm		0 PLC ±0.3 1 PLC ±0.10 2 PLC ±0.10 3 PLC ±0.3 4 PLC ±0.3 ANGLES ±1°									
						PRODUCT SPEC		SIZE CAGE CODE DRAWING NO			
						APPLICATION SPEC					
MATERIAL		FINISH		WEIGHT		A100779C		1924067		RESTRICTED TO	
SEE TABLE		-		2.07g		CUSTOMER DRAWING		SCALE 4:1		SHEET 1 OF 2 REV B	

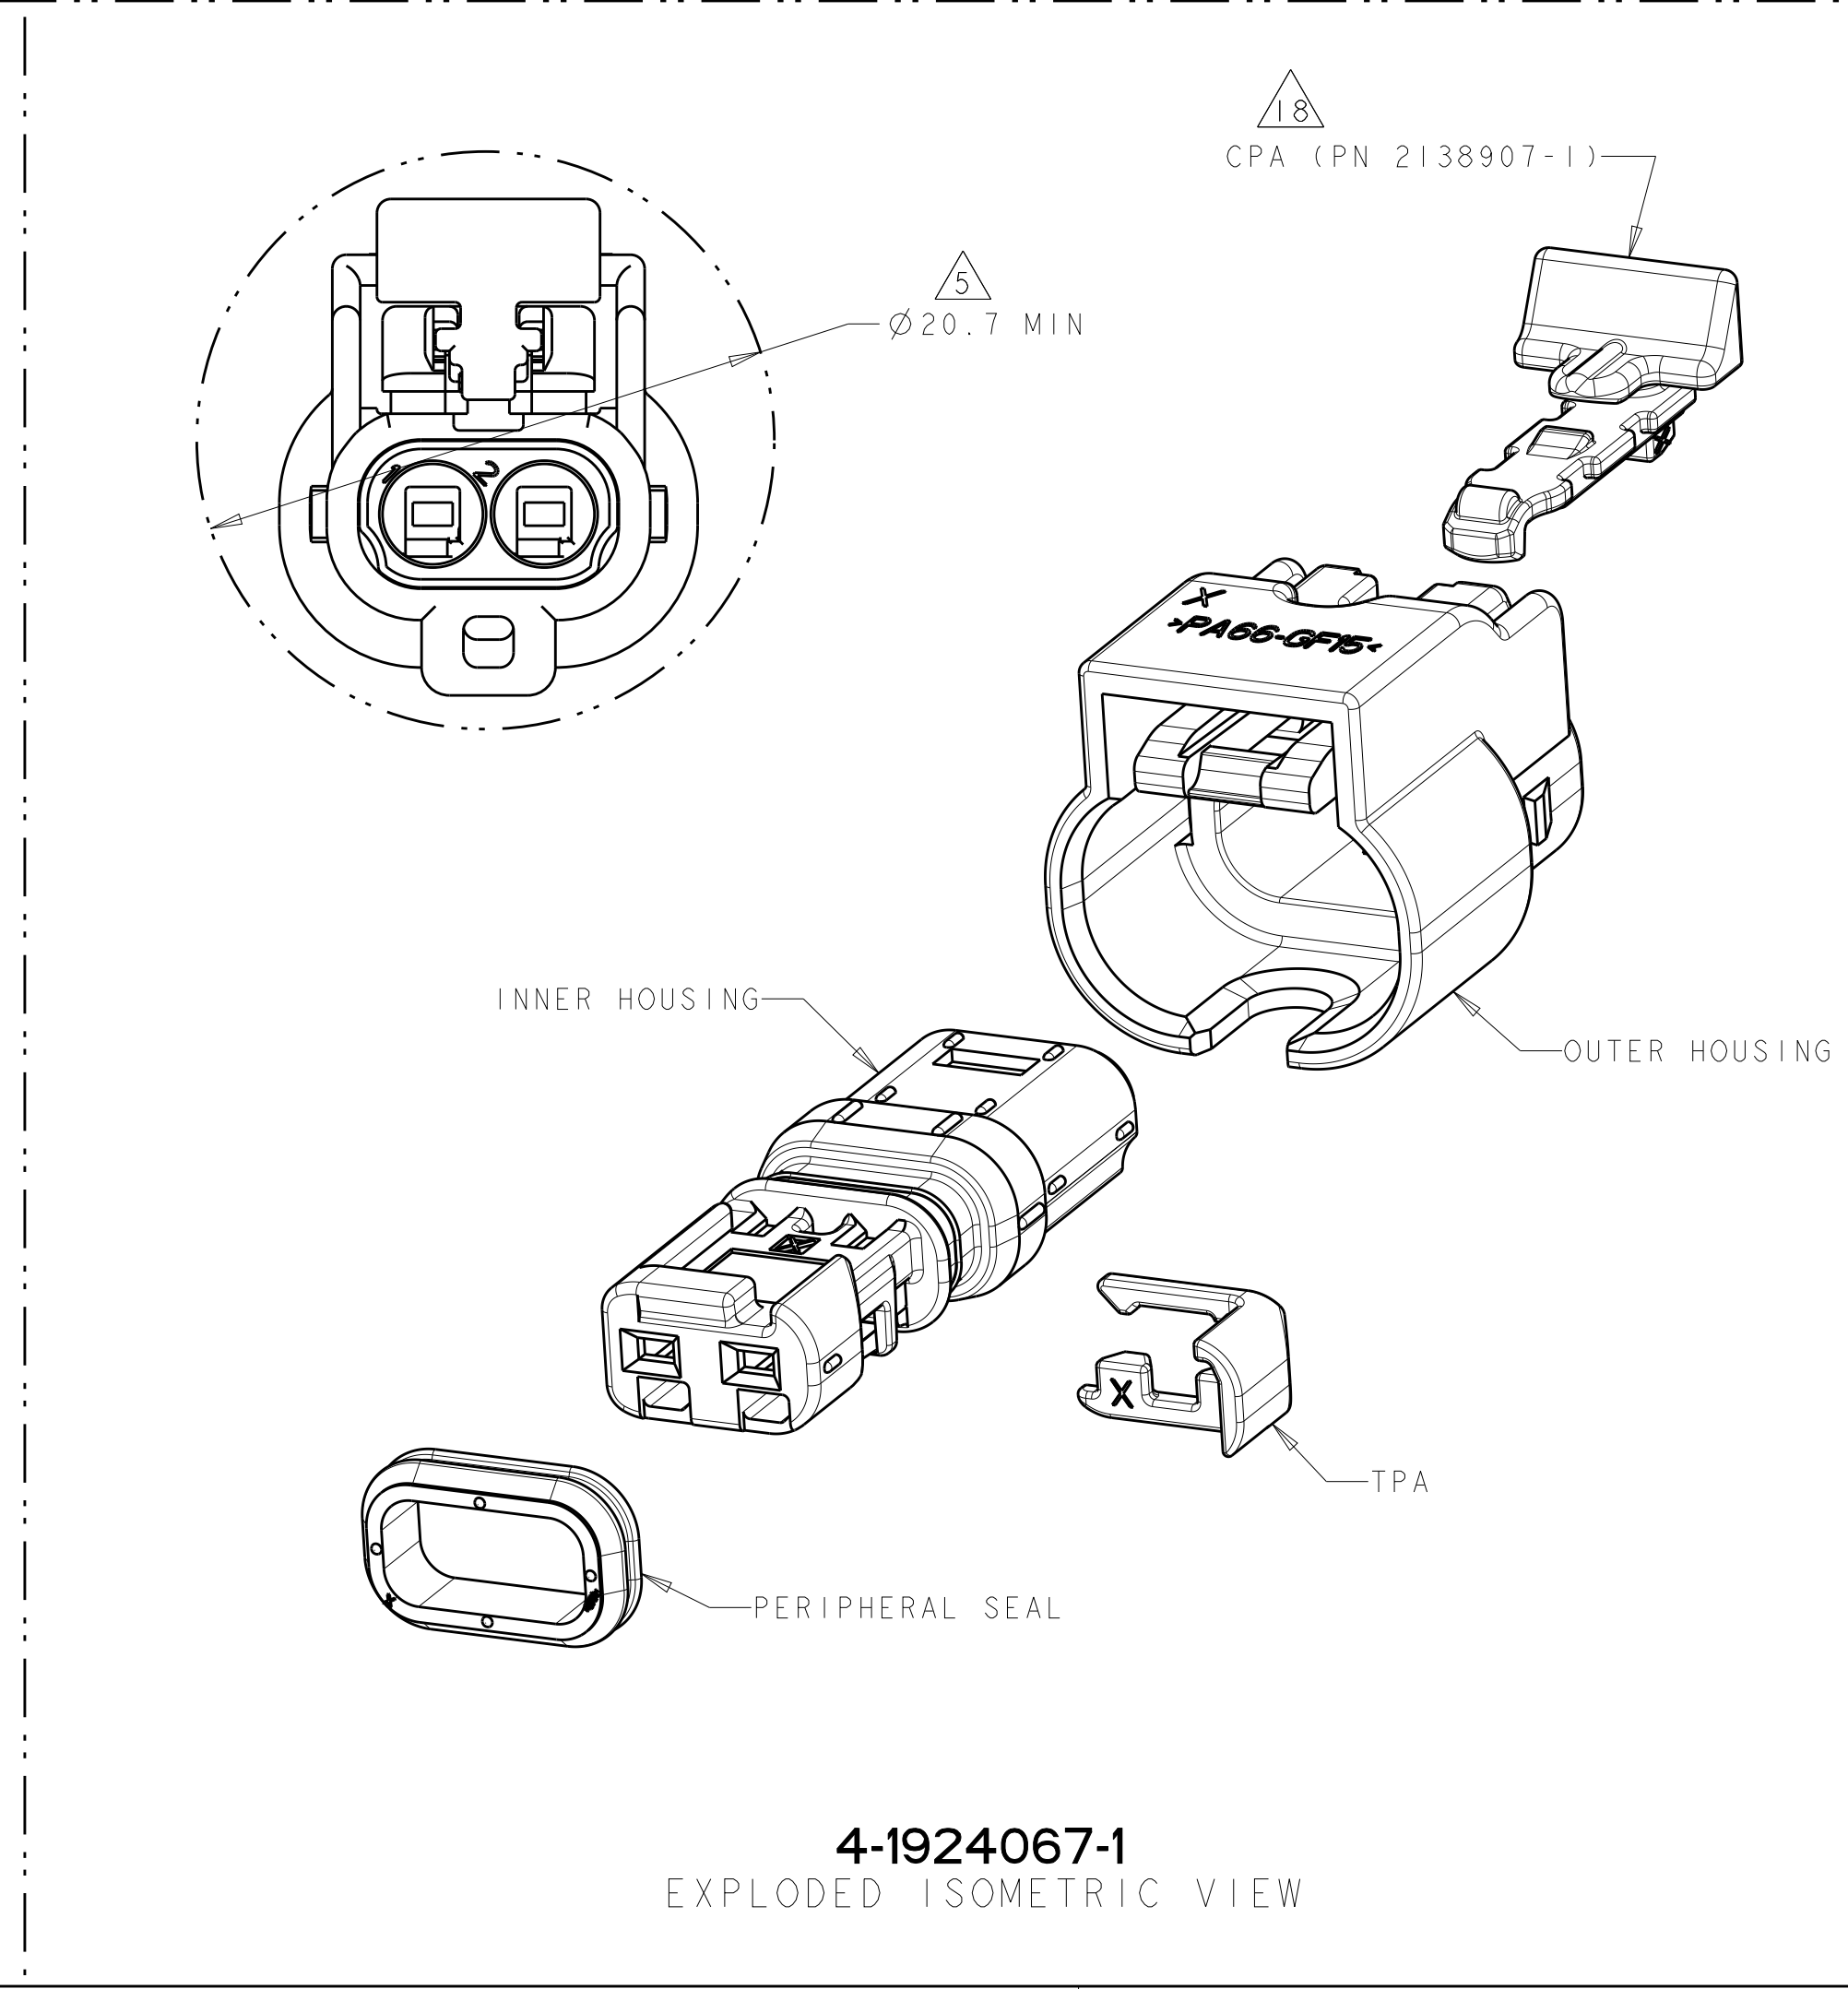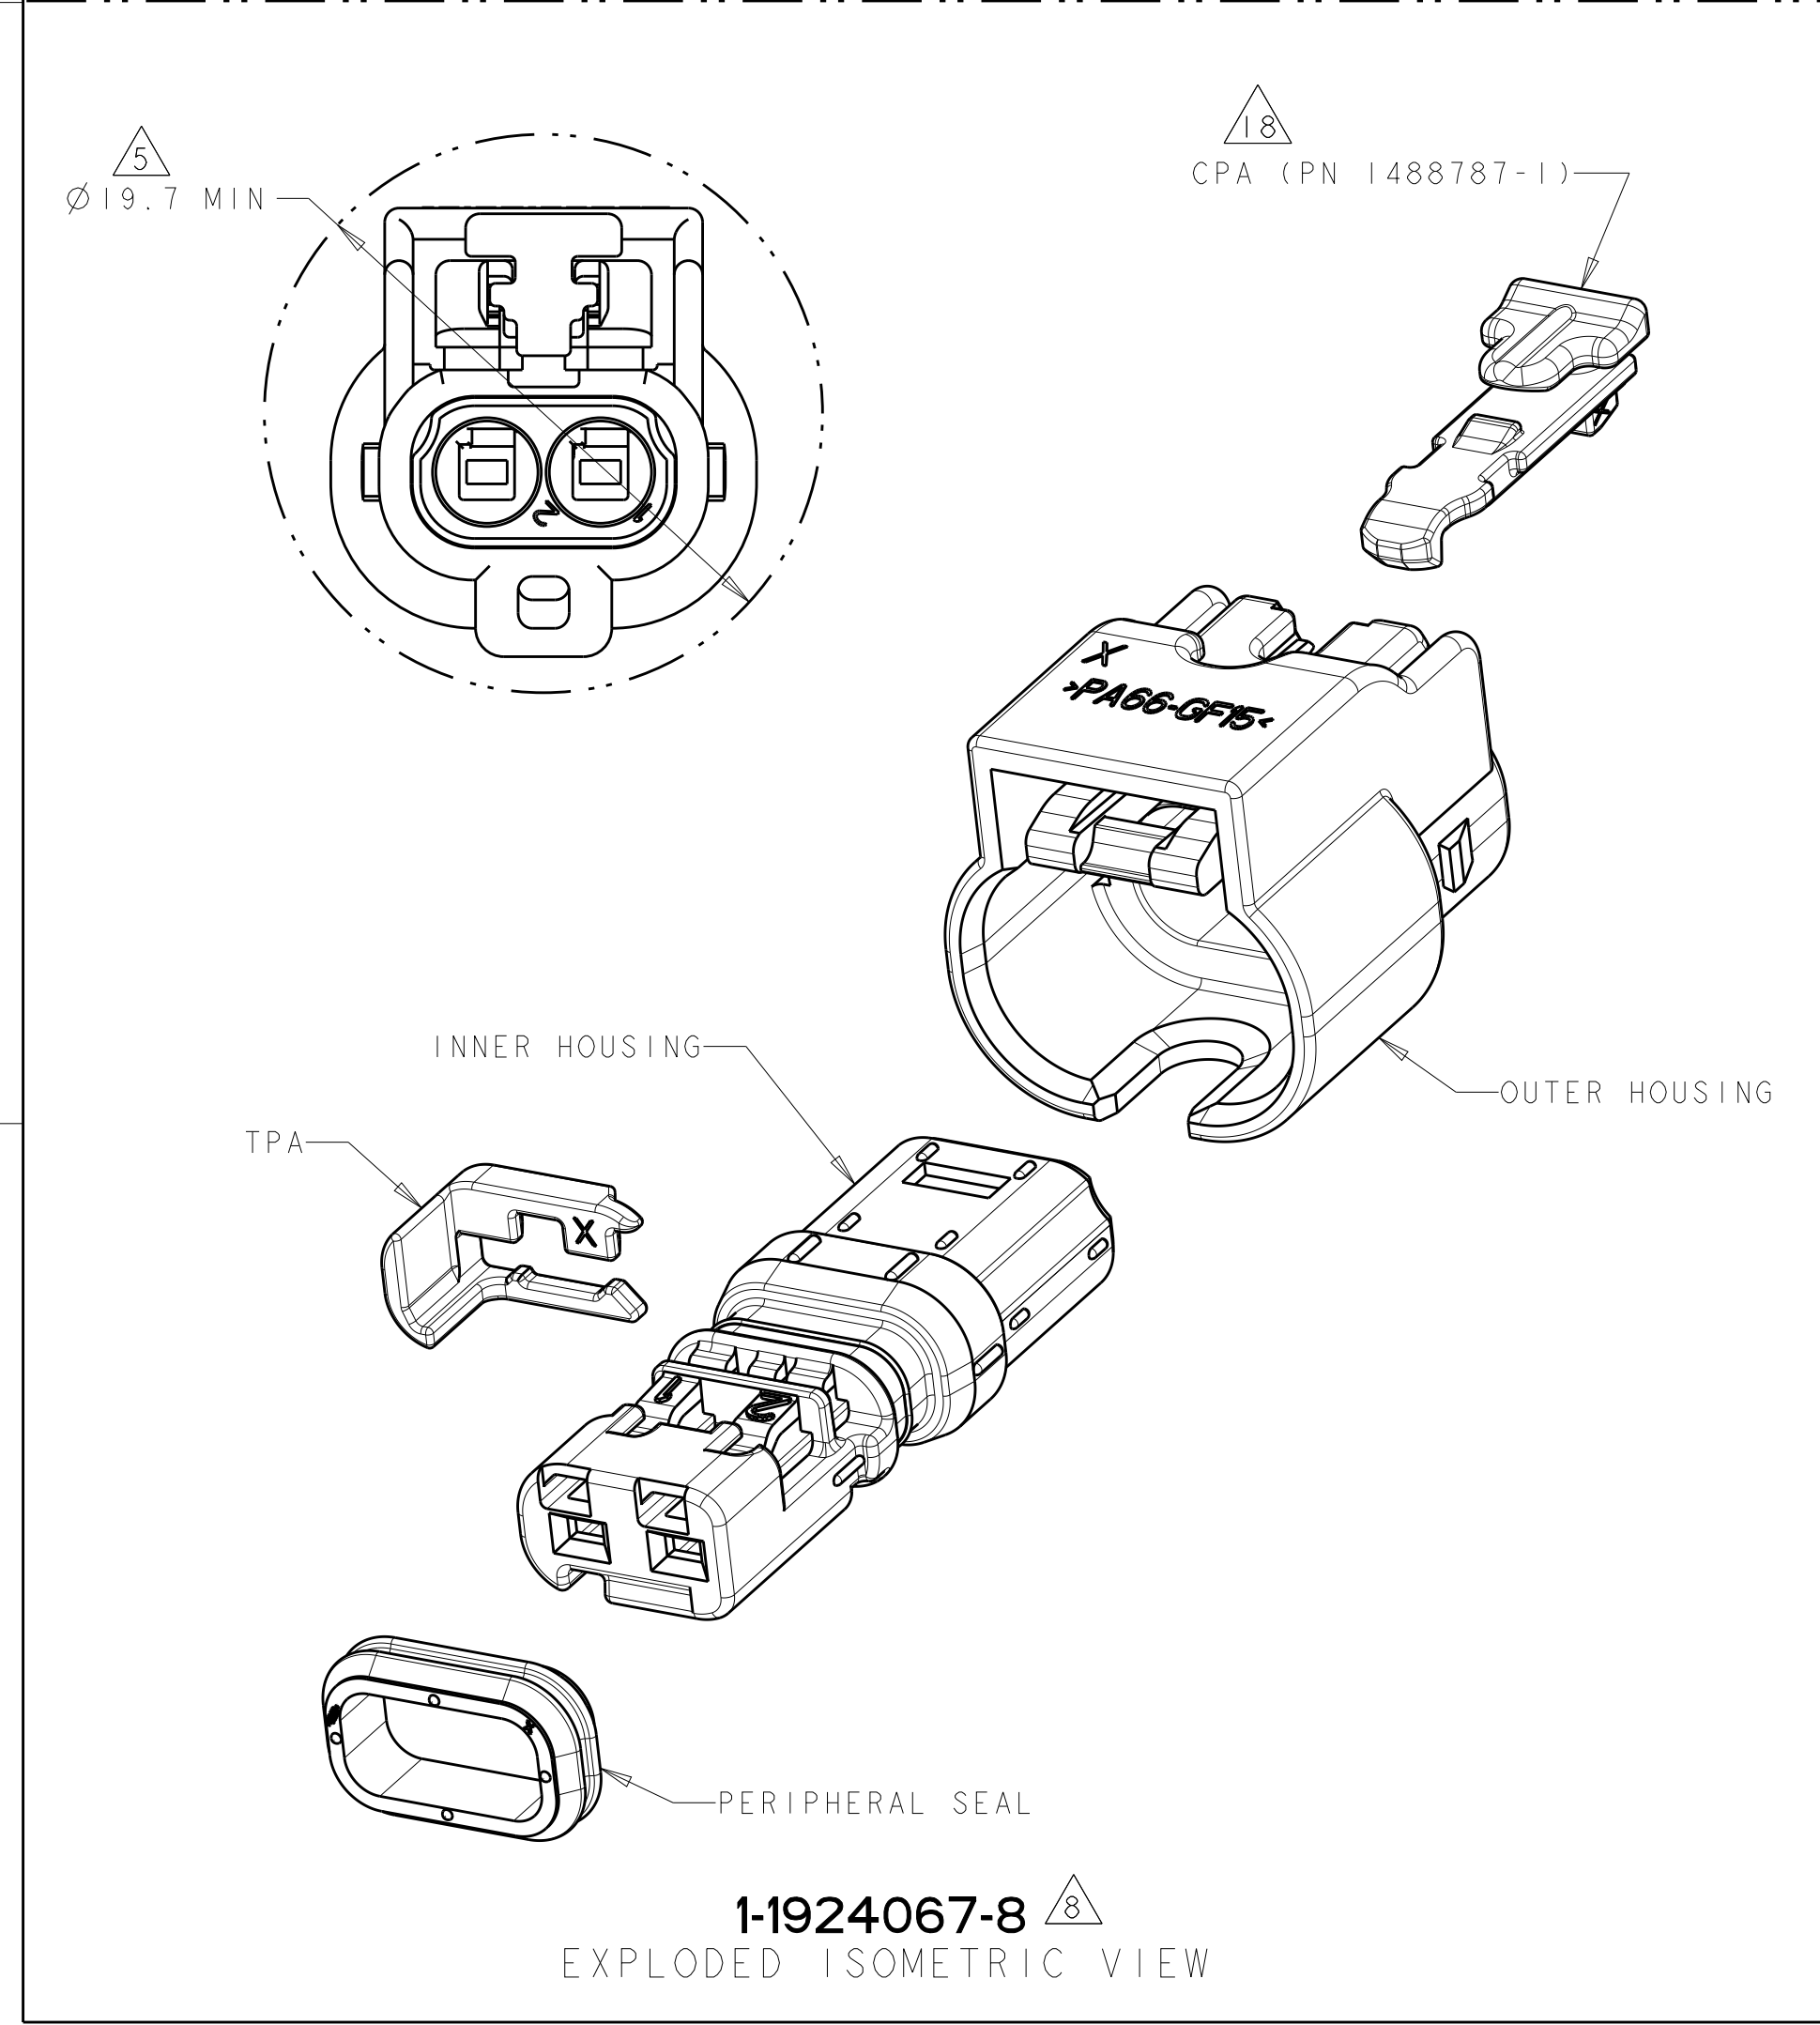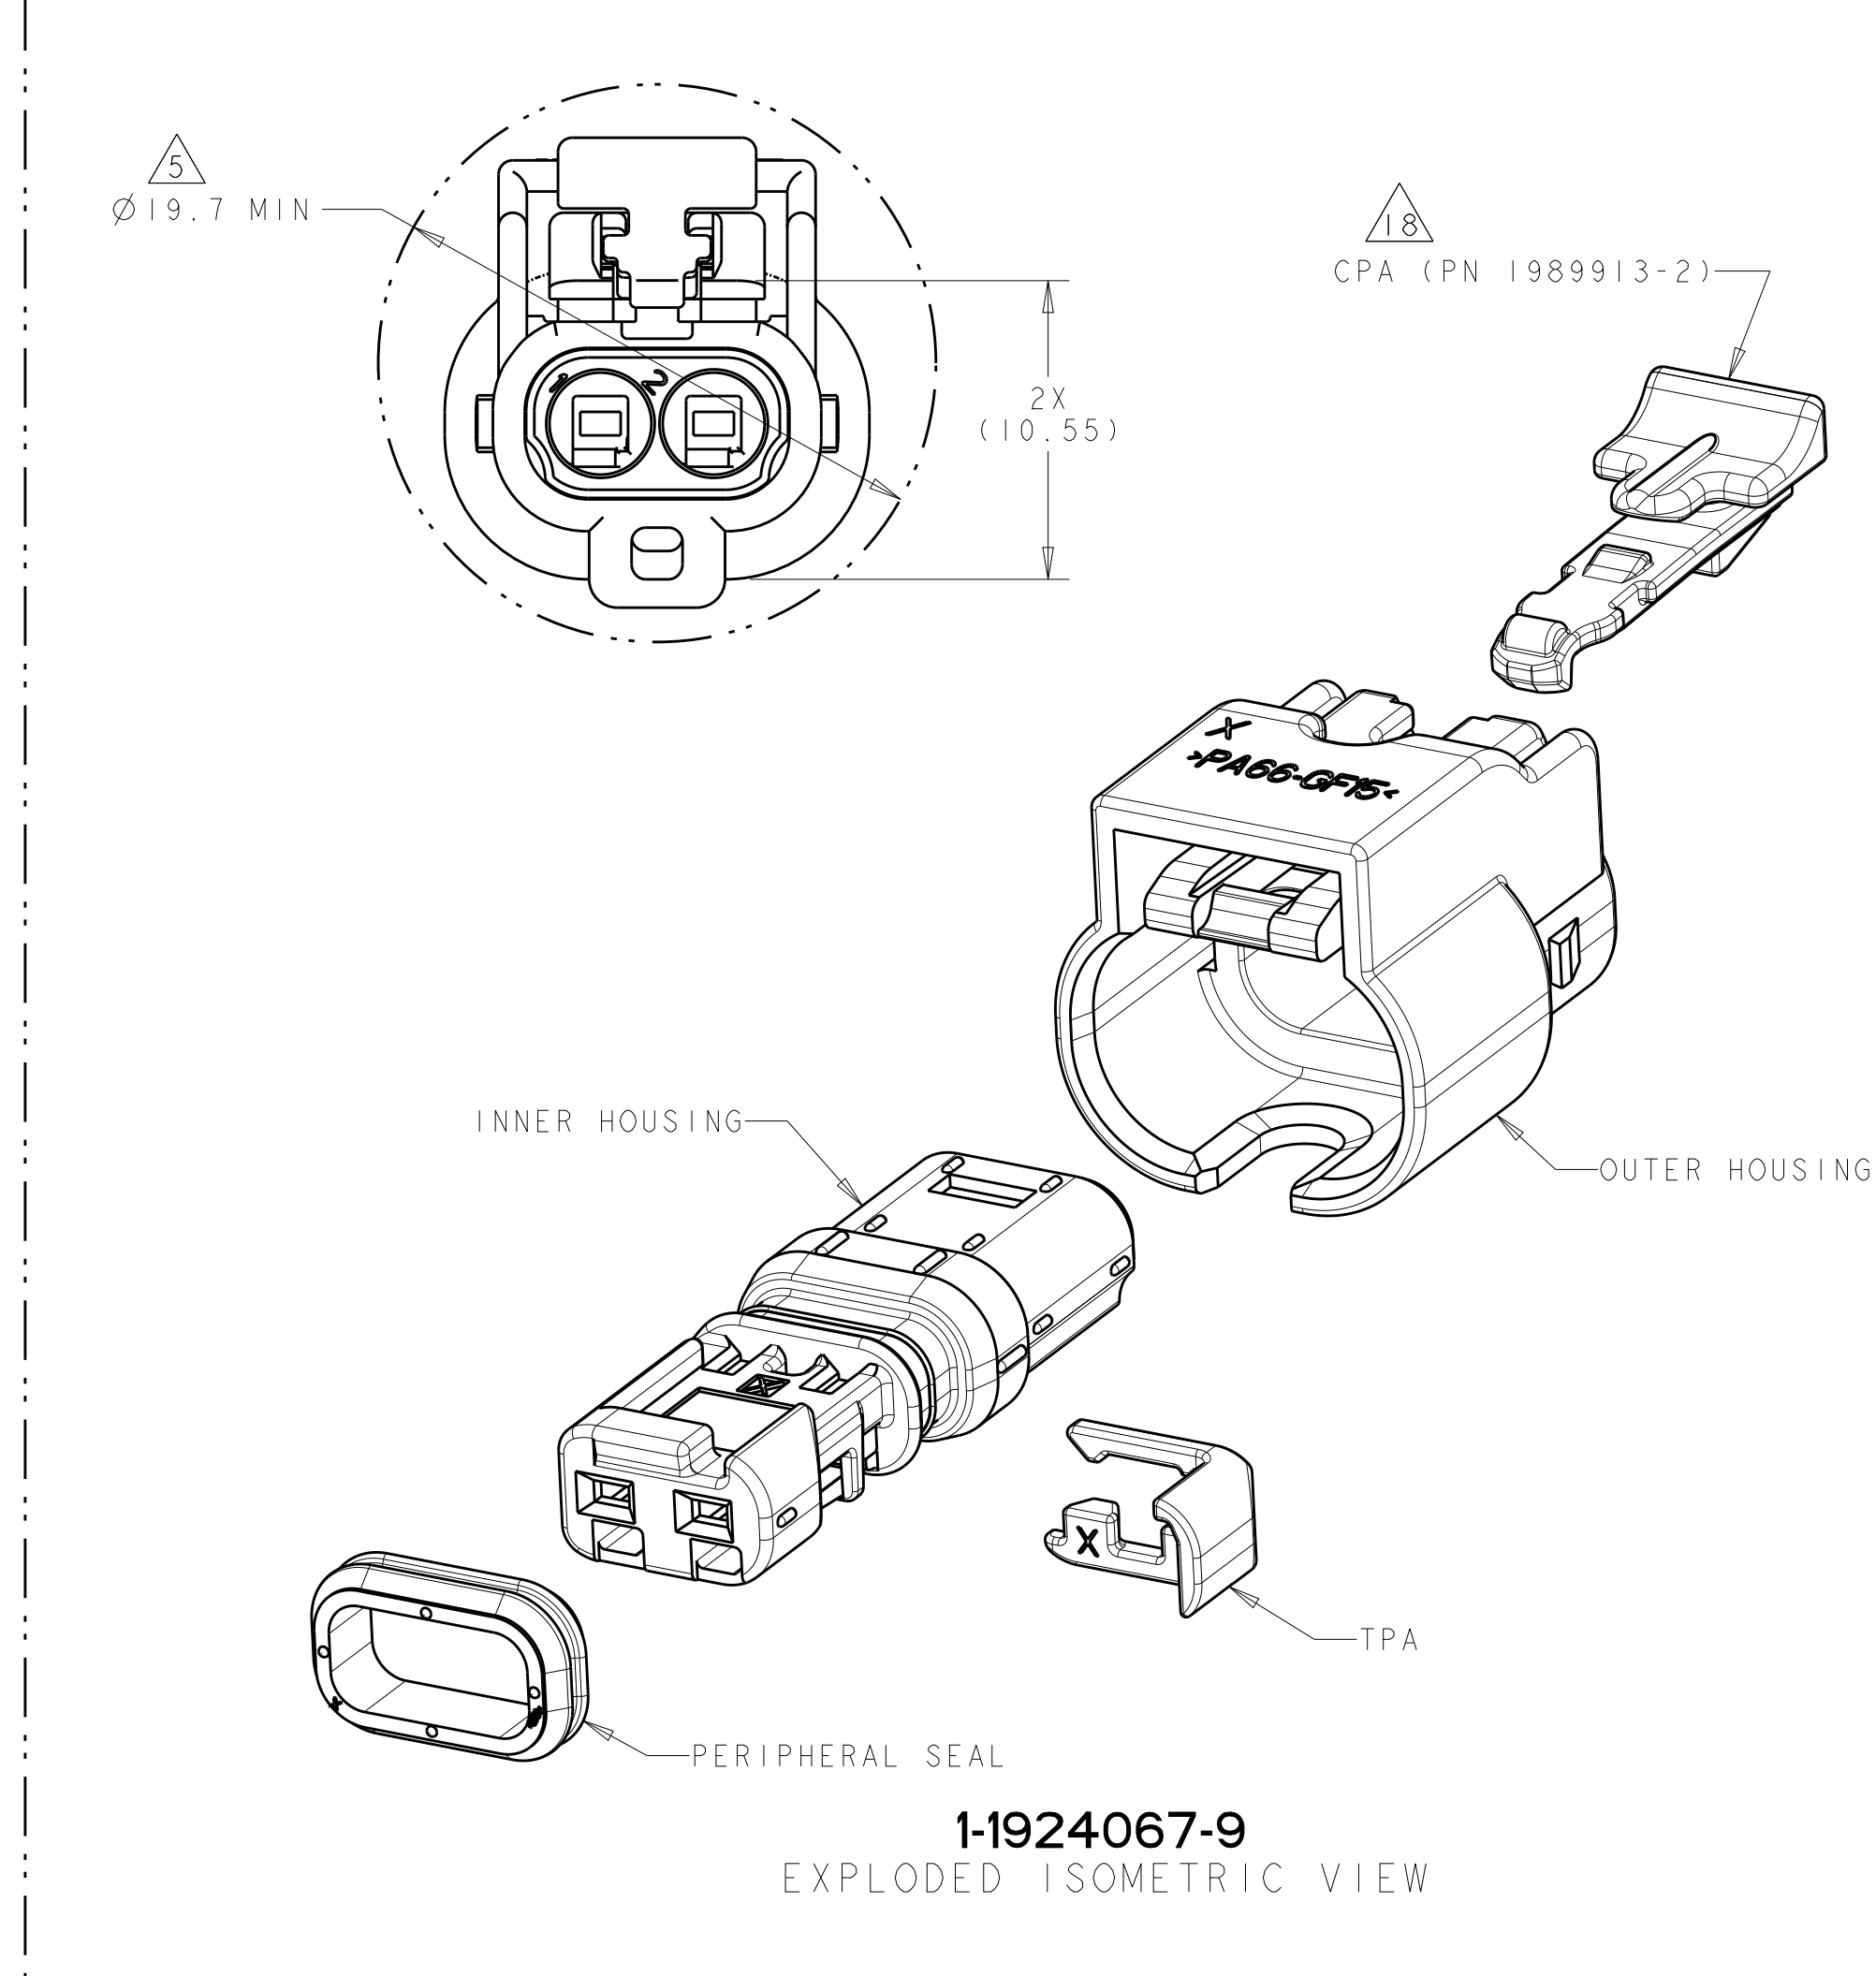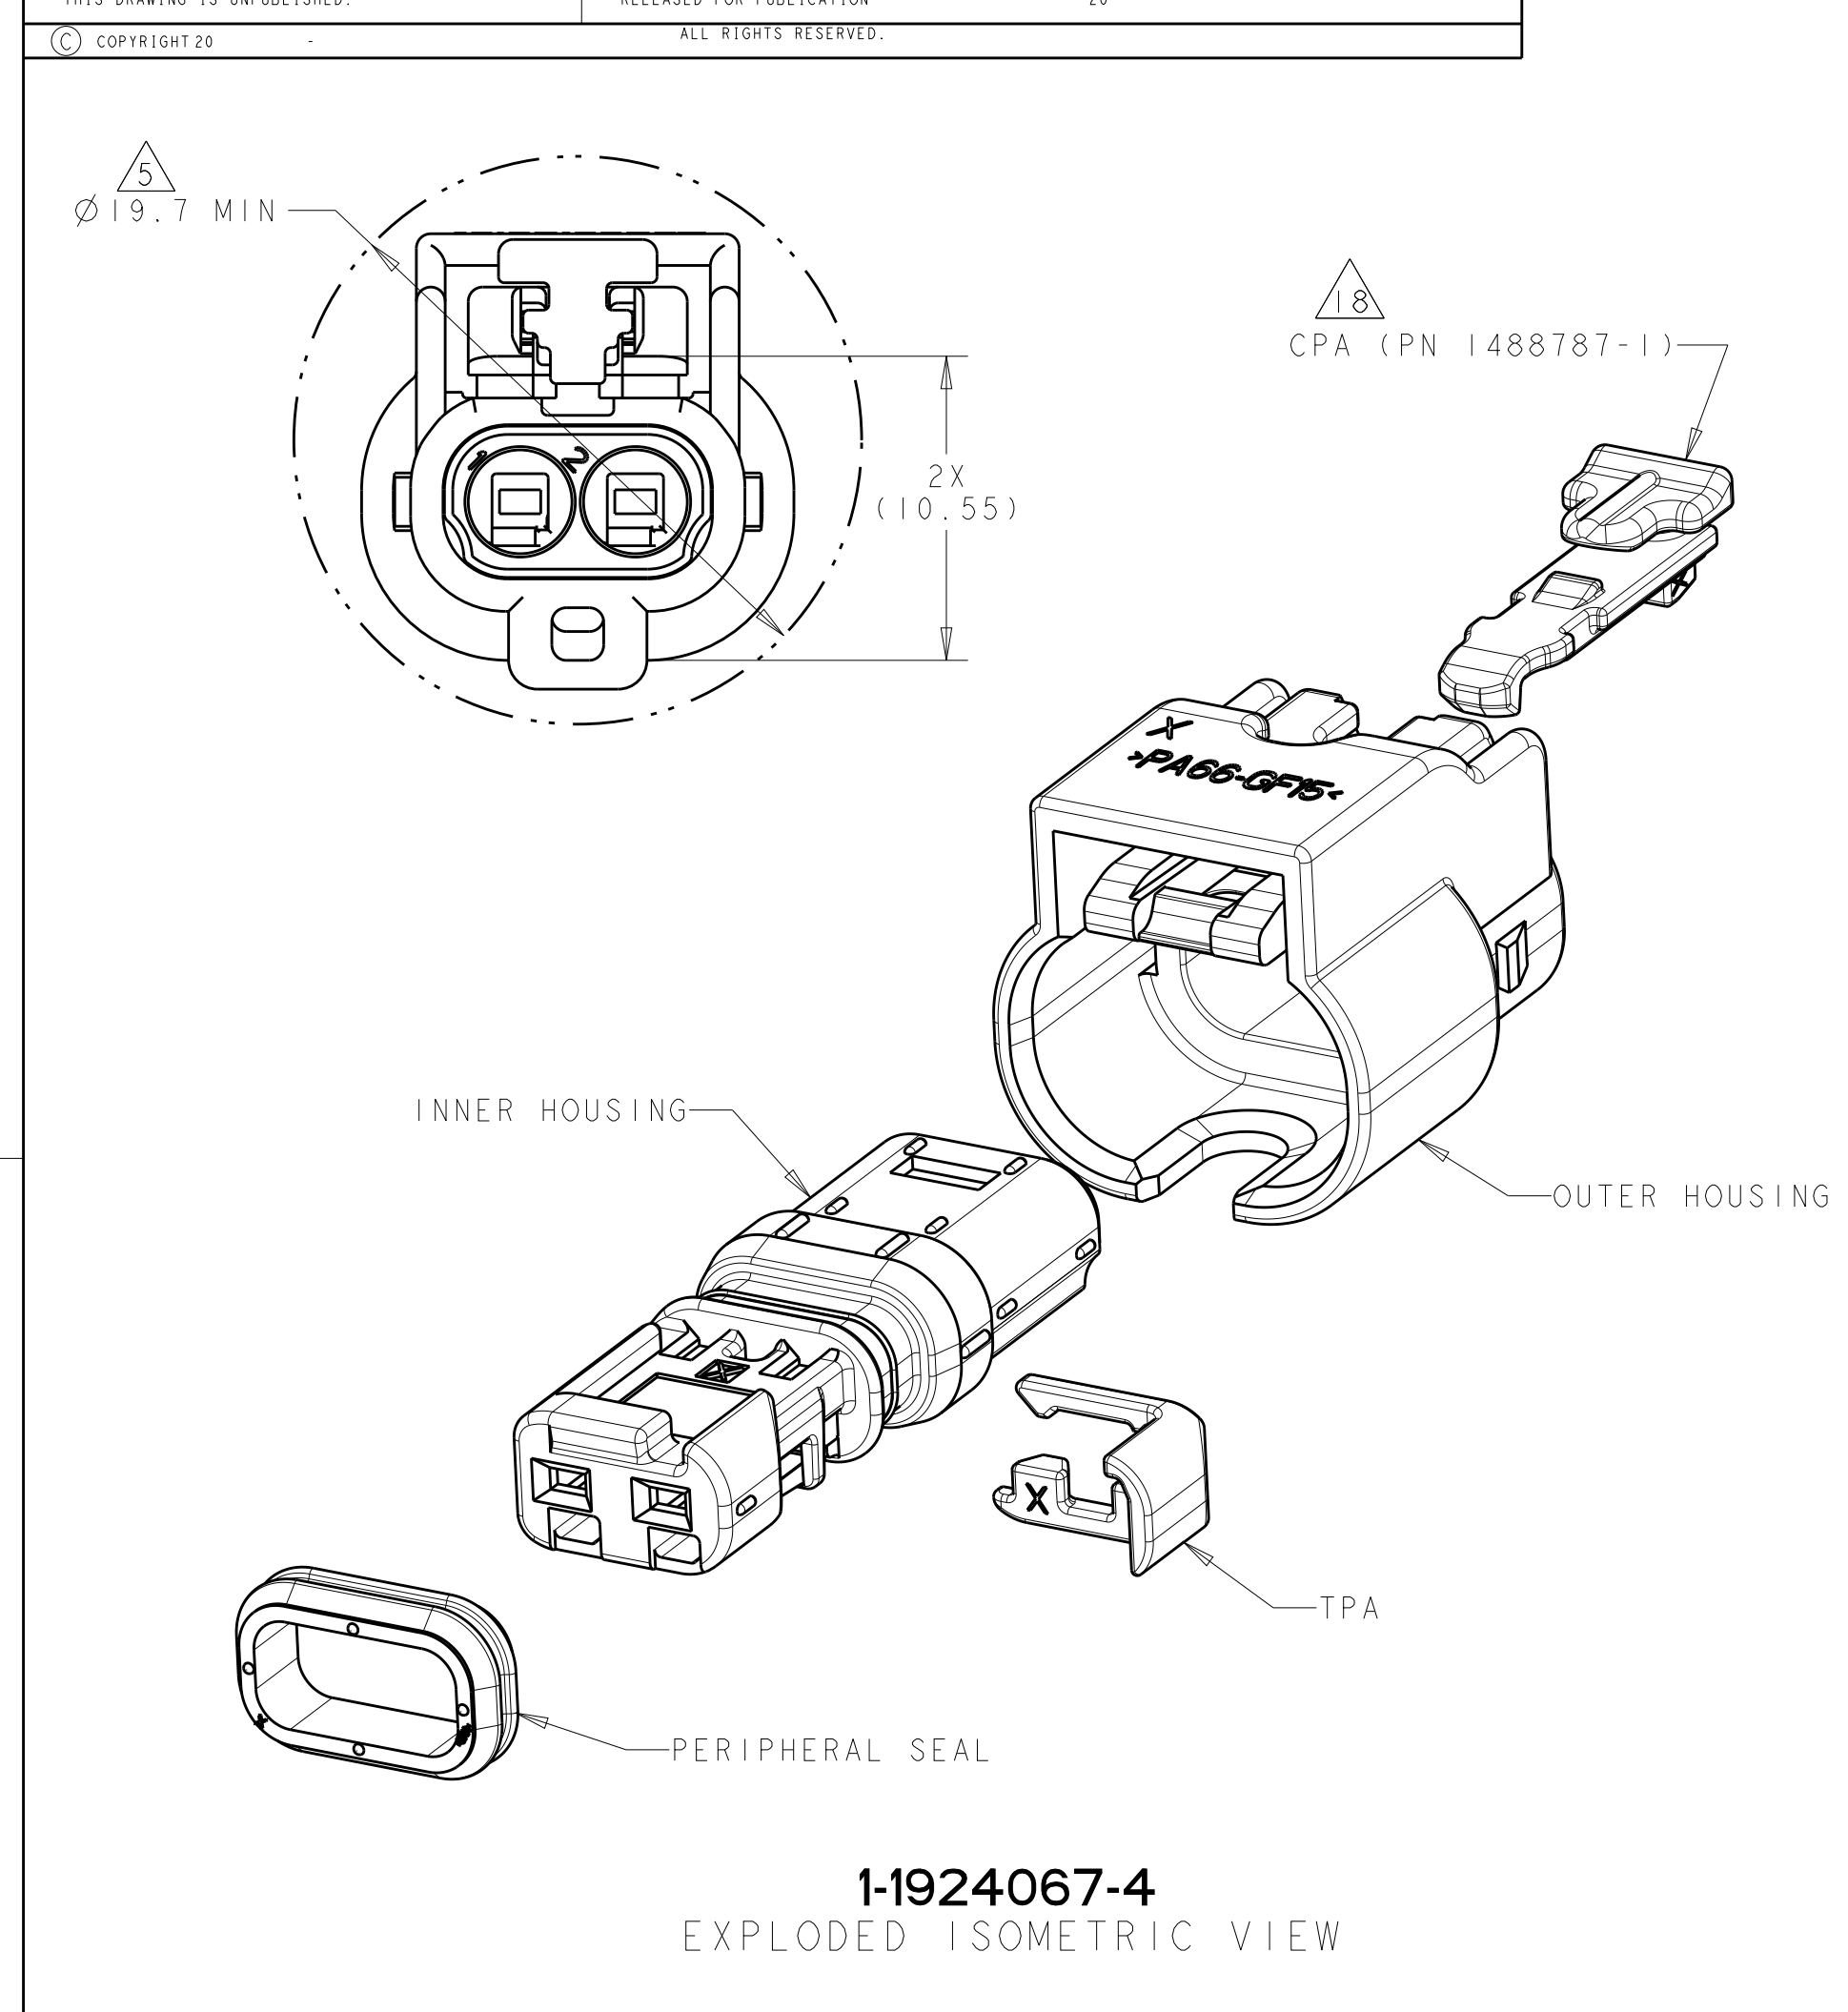

REVISIONS					
P.	LTR.	DESCRIPTION	DATE	DWN.	APVD.
-	-	SEE SHEET 1	-	-	-

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN M. FORISKA 25SEP2006	TE Connectivity CONNECTOR ASSEMBLY, FEMALE, 2 POSITION SEALED, 1.2mm STANDARD LATCH VERSION				
DIMENSIONS: mm		CHK G. MARTIN 25SEP2006					
		APVD G. MARTIN 25SEP2006					
		PRODUCT SPEC -					
	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APPLICATION SPEC -	NAME	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO -
		0 PLC ±					
		1 PLC ±0.3					
MATERIAL	FINISH	2 PLC ±0.10	WEIGHT 2.07g	A100779C=1924067	SCALE	SHEET	OF
		3 PLC ±					
		4 PLC ±					
SEE TABLE	-	ANGLES ±1°	CUSTOMER DRAWING	REV	B6		

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9