

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION - , - .
© COPYRIGHT - By -	ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION		DATE	APVD
—	—		D9	REVISED PER ECO-12-012202		03JUL12	MS

PHYSICAL PROPERTIES:
HOUSING MATERIAL: PBT
FLAMMABILITY: UL94V-0
COLOR: BLACK

TERMINAL:
TERMINALS: BRASS, TIN PLATED
SCREWS: 6-32, STEEL, NICKEL PLATED

MECHANICAL:
PITCH (TERMINAL SPACING): 9.50mm (.374")
WIRE RANGE: 12-22 AWG
RECOMMENDED TIGHTENING TORQUE: 12IN-LBS MAX.

ELECTRICAL PROPERTIES:
MAXIMUM CURRENT: 20A
OPERATING VOLTAGE: 300V

ENVIRONMENTAL PROPERTIES:
OPERATING TEMP RANGE: -40°C TO 120°C

- 1

SCREWS ON ONE SIDE IN WIRE READY POSITION.
- 2

SEE FIGURE.
- 3

WHITE INK STAMP.
- 4

NICKEL PLATED BRASS SCREWS.
- 5


PRELIMINARY PART NUMBER.
- 6

TE CONNECTIVITY LOGO LOCATED APPROXIMATE AREA SHOWN.



52	104.7	112.2	—	—	10	4-1546307-7
52	104.7	112.2	—	—	10	4-1546307-6
54	104.7	112.2	—	—	10	4-1546307-5
521	104.7	112.2	—	—	10	3-1546307-3
	104.7	112.2	—	—	10	1-1546307-0
5321	95.2	102.7	—	9	9	5-1546307-0
5321	95.2	102.7	4	9	9	4-1546307-9
321	95.2	102.7	4	9	9	4-1546307-8
	95.2	102.7	—	—	9	1546307-9
	85.7	93.2	—	—	8	1546307-8
	76.2	83.7	—	—	7	1546307-7
54	66.7	74.2	—	—	6	4-1546307-4
	66.7	74.2	—	—	6	1546307-6
52	57.2	64.7	—	—	5	4-1546307-3
52	57.2	64.7	—	—	5	4-1546307-2
52	57.2	64.7	—	—	5	4-1546307-1
52	57.2	64.7	—	—	5	4-1546307-0
54	57.2	64.7	—	—	5	3-1546307-9
	57.2	64.7	—	—	5	1546307-5
521	47.7	55.2	—	—	4	3-1546307-2
	47.7	55.2	—	—	4	1546307-4
52	38.2	45.7	—	—	3	3-1546307-8
52	38.2	45.7	—	—	3	3-1546307-7
52	38.2	45.7	—	—	3	3-1546307-6
52	38.2	45.7	—	—	3	3-1546307-5
54	38.2	45.7	—	—	3	3-1546307-4
	38.2	45.7	—	—	3	1546307-3
	28.7	36.2	—	—	2	1546307-2
	DIM B	DIM A	QC TAB .187 45° ②	QC TAB .187 FLAT ①	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL 20AUG2002	STE TE Connectivity			
		CHK C RICHARD 8/20/02				
DIMENSIONS: mm		APVD C RICHARD 8/20/02	NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/ WASHER			
	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.3 2 PLC ± 0.25 3 PLC ± - 4 PLC ± - ANGLES ± 2°	PRODUCT SPEC				
		APPLICATION SPEC				
MATERIAL -	FINISH -	WEIGHT -	SIZE A3	CAGE CODE 00779	DRAWING NO C-1546307	RESTRICTED TO -
CUSTOMER DRAWING				SCALE 1:1	SHEET 1 OF 3	REV D9



LOC —	DIST —	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—





3-1546307-1




3-1546307-2




3-1546307-3

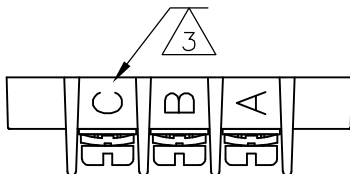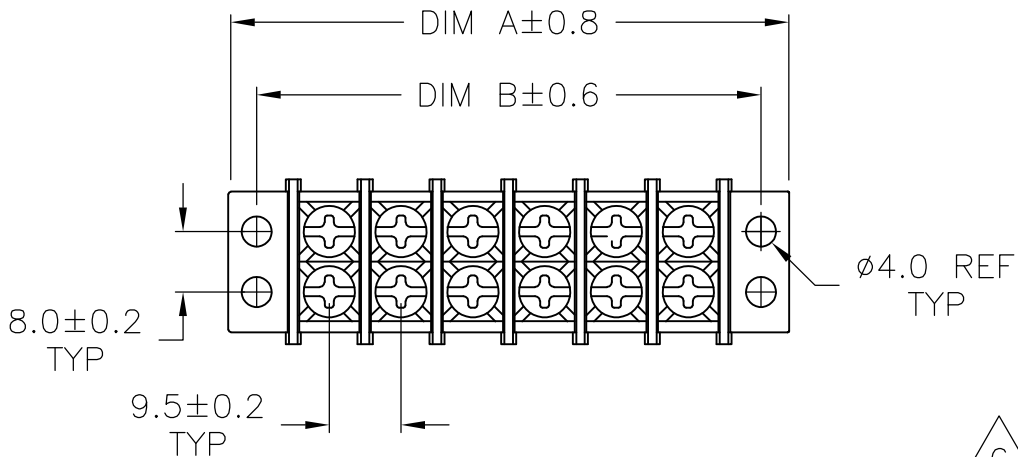



3-1546307-7




3-1546307-8




3-1546307-6

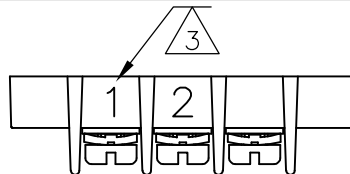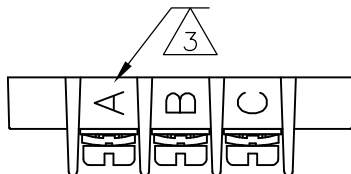

3-1546307-5

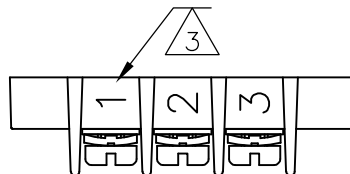

294.7	302.2	—	—	30	3-1546307-0
285.2	292.7	—	—	29	2-1546307-9
275.7	283.2	—	—	28	2-1546307-8
266.2	273.7	—	—	27	2-1546307-7
256.7	264.2	—	—	26	2-1546307-6
247.2	254.7	—	—	25	2-1546307-5
237.7	245.2	—	—	24	2-1546307-4
228.2	235.7	—	—	23	2-1546307-3
218.7	226.2	—	—	22	2-1546307-2
209.2	216.7	—	—	21	2-1546307-1
199.7	207.2	—	—	20	3-1546307-1
199.7	207.2	—	—	20	2-1546307-0
190.2	197.7	—	—	19	1-1546307-9
180.7	188.2	—	—	18	1-1546307-8
171.2	178.7	—	—	17	1-1546307-7
161.7	169.2	—	—	16	1-1546307-6
152.2	159.7	—	—	15	1-1546307-5
142.7	150.2	—	—	14	1-1546307-4
133.2	140.7	—	—	13	1-1546307-3
123.7	131.2	—	—	12	1-1546307-2
114.2	121.7	—	—	11	1-1546307-1
DIM B	DIM A	QC TAB .187 45° ②	QC TAB .187 FLAT ①	NO OF POSN	PART NUMBER

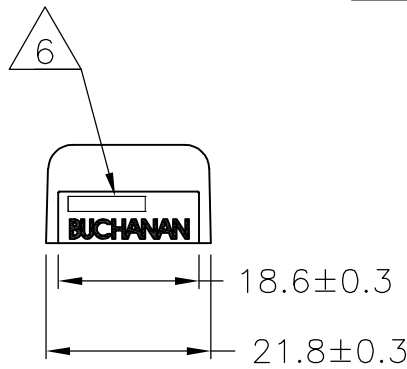

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

MATERIAL
—

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± —
1 PLC ± 0.3
2 PLC ± 0.25
3 PLC ± —
4 PLC ± —
ANGLES ± 2°
FINISH —

DWN S SCHLEGEL 20AUG2002
CHK C RICHARD 8/20/02
APVD C RICHARD 8/20/02
PRODUCT SPEC
APPLICATION SPEC
WEIGHT —

9.50MM (.374) DBL ROW BARRIER STRIP
W/ WASHER

SIZE A3
CAGE CODE 00779
DRAWING NO C-1546307


CUSTOMER DRAWING

TE Connectivity


RESTRICTED TO —

SCALE 1:1
SHEET 2 OF 3
REV D9


THIS DRAWING IS UNPUBLISHED.		RELEASED FOR PUBLICATION		LOC		DIST		REVISIONS						
© COPYRIGHT - By -		ALL RIGHTS RESERVED.		-		-		P	LTR	DESCRIPTION		DATE	DWN	APVD
									-	SEE SHEET 1		-	-	-

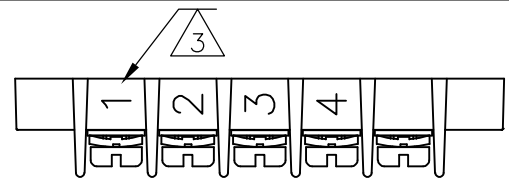


4-1546307-2

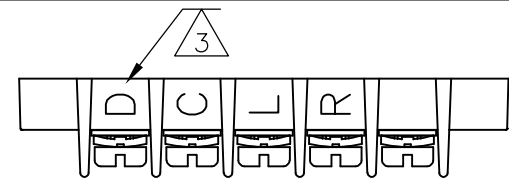


4-1546307-3

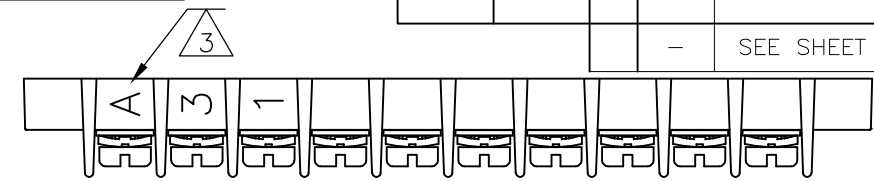


4-1546307-7

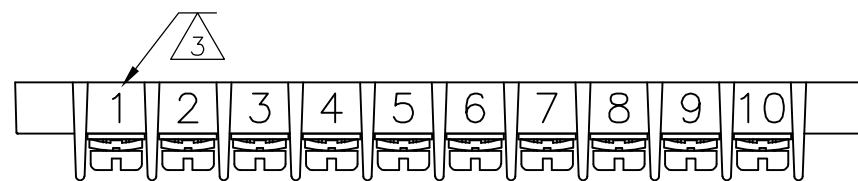



4-1546307-6

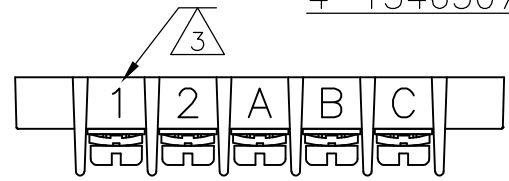


4-1546307-0

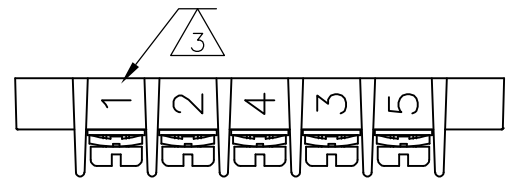


4-1546307-1

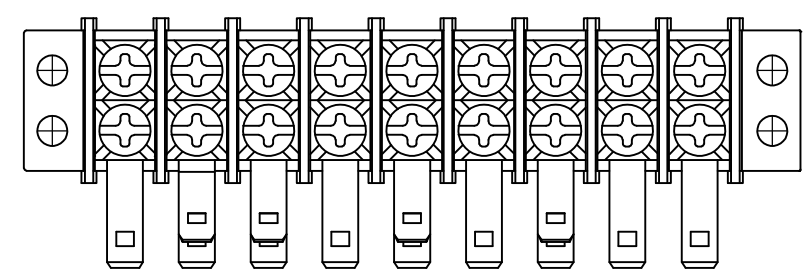


4-1546307-8

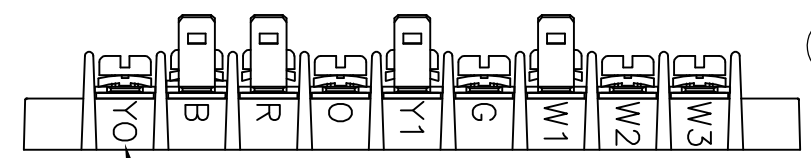




MARK BOTH SIDES

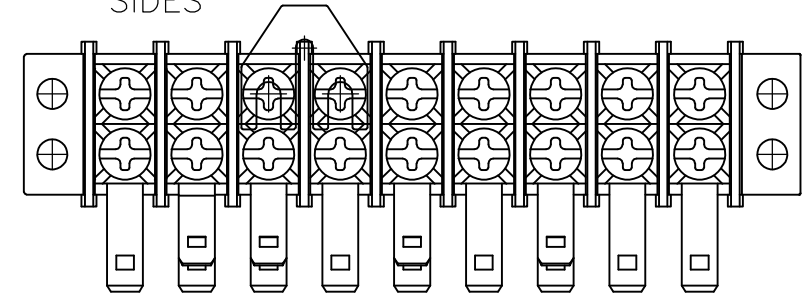


4-1546307-9

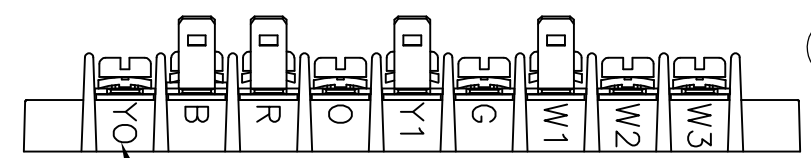


MARK BOTH SIDES

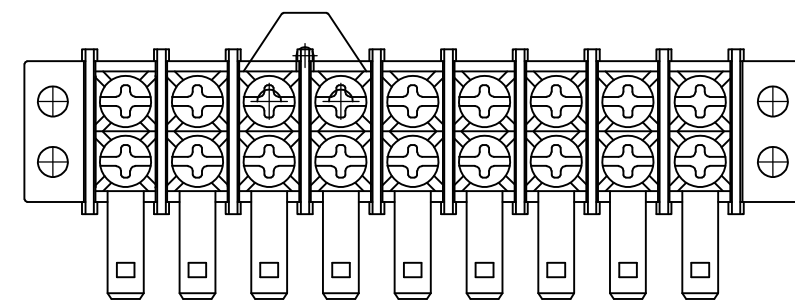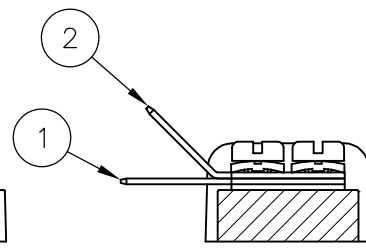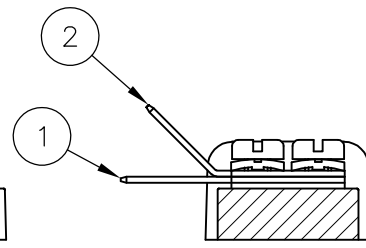


5-1546307-0



MARK BOTH SIDES

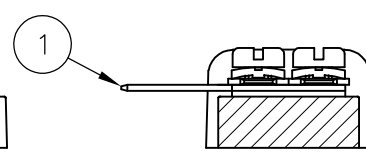

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN S SCHLEGEL CHK C RICHARD APVD C RICHARD PRODUCT SPEC — APPLICATION SPEC — WEIGHT —		20AUG2002 8/20/02 8/20/02		TE Connectivity NAME 9.50MM (.374) DBL ROW BARRIER STRIP W/ WASHER					
DIMENSIONS: mm		0 PLC ± — 1 PLC ± 0.3 2 PLC ± 0.25 3 PLC ± — 4 PLC ± — ANGLES ± 2'		SIZE A3		CAGE CODE 00779		DRAWING NO C-1546307		RESTRICTED TO —	
				SCALE 1:1		SHEET 3 OF 3		REV D9			
MATERIAL —		FINISH —		CUSTOMER DRAWING							

DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:	
		0 PLC	± -
		1 PLC	± 0.3
		2 PLC	± 0.25
		3 PLC	± -
		4 PLC	± -
		ANGLES	± 2°
MATERIAL		FINISH	-

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9