

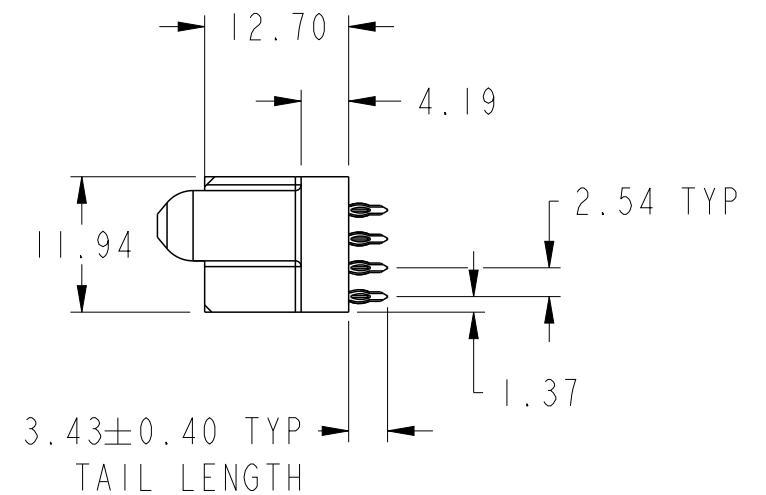
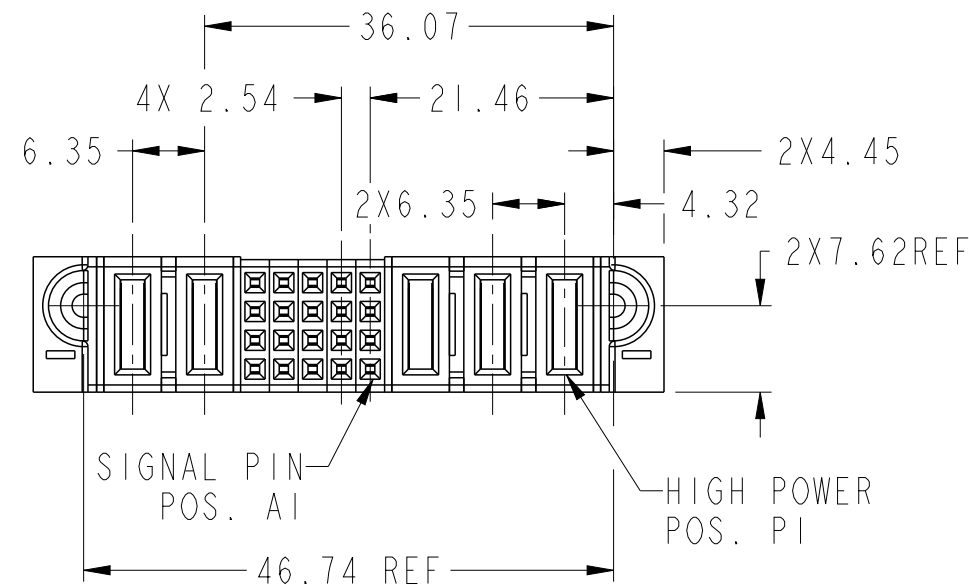


PRODUCT NUMBER SEE SHEET 2

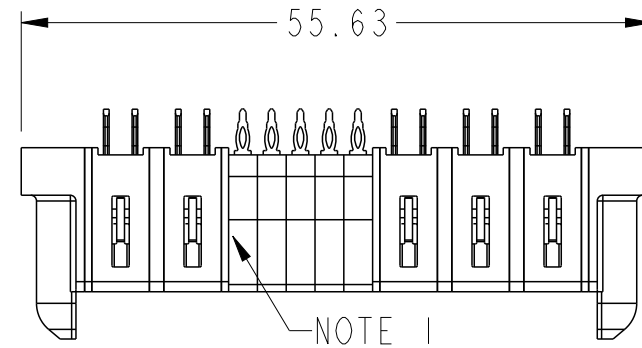


spec ref		dr		Xie Bob	2013/11/05	projection	MM	size	A3	scale	3:2					
tolerance std	TOLERANCES UNLESS OTHERWISE SPECIFIED				eng			Xie Bob	2014/02/17	ecn no						
ASME Y14.5					chr			Li- He	2014/02/16							
					appr			Pei-Ming Zheng	2014/02/17	product family			PowerBlade+	rel level		Released
surface	linear	0.X	±0.50		title				3HP+20S+2HP				dwg no	10106131-5005002		rev
		0.XX	±0.25													
		0.XXX	±0.10													
ASME Y14.5	angular	0°	±2°	www.fci.com	cat. no.		Product - Customer Drw				sheet 1 of 3					

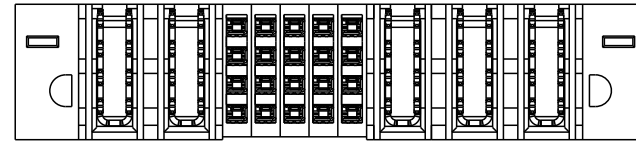

PRODUCT NO.	ROWS		HP			SIGNAL				HP			
		E1	P5	P4	5	4	3	2	1	P3	P2	P1	E2
10106131-5005002LF	D C B A		 HG	 HG	 F	 F	 F	 F	 F	 HD	 HG	 HG	


CODE	DESCRIPTION
F	STD SIGNAL CONTACT
HD	MFBL HIGH POWER CONTACT (3.43)
HG	STD HIGH POWER CONTACT (3.43)

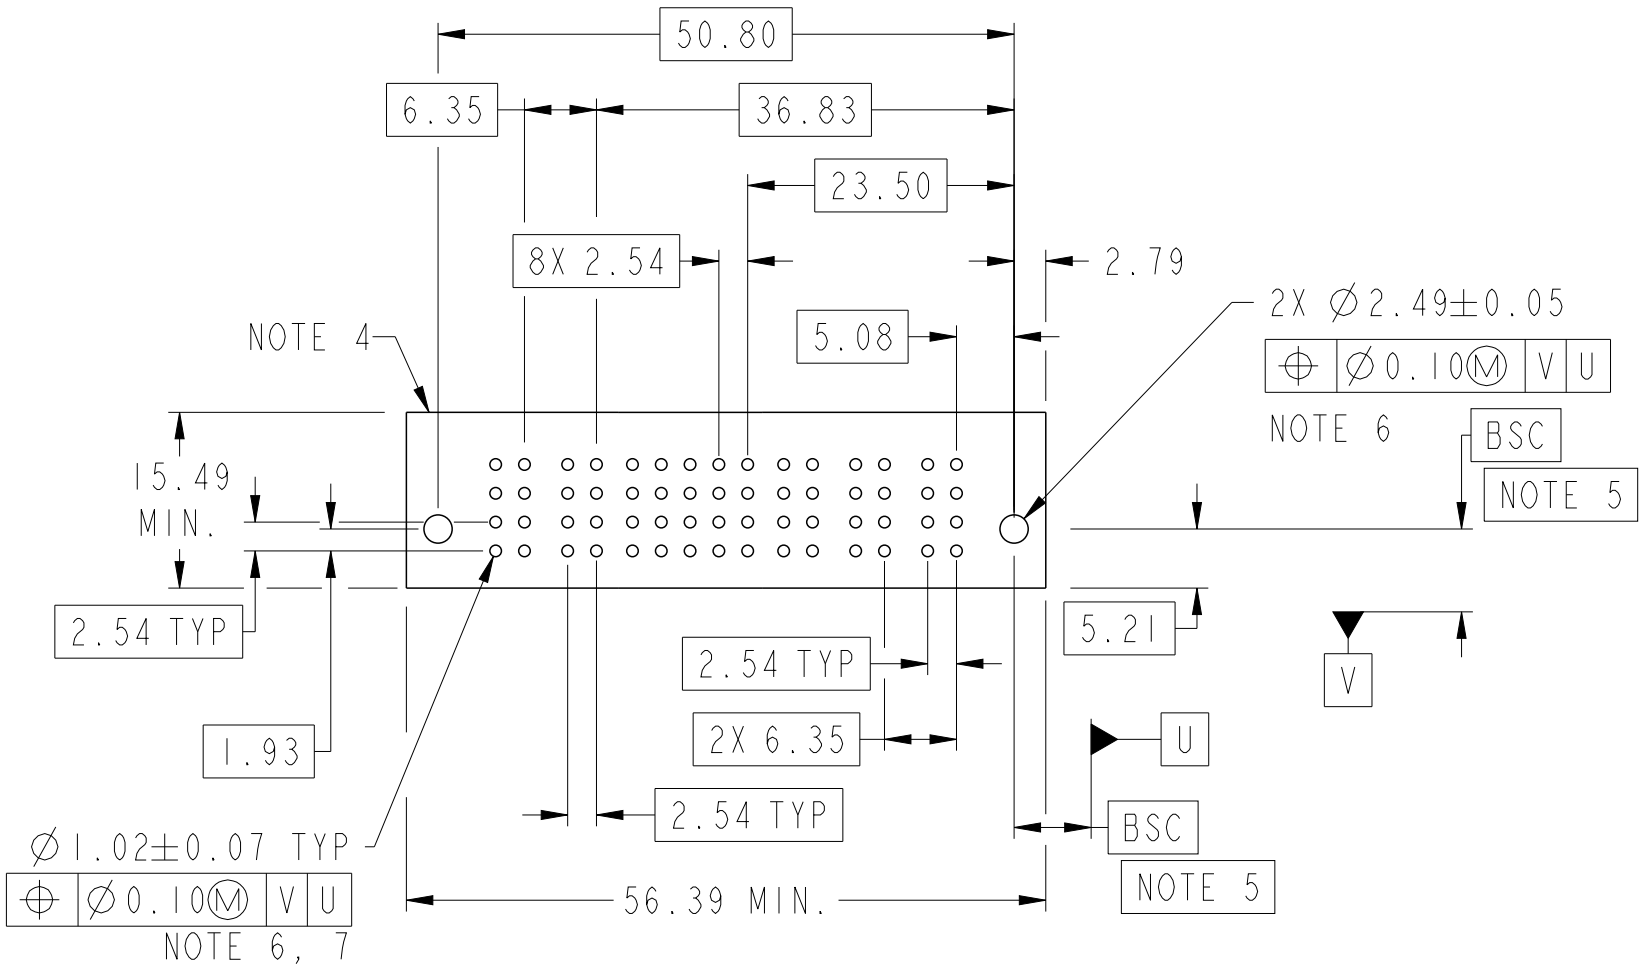

dr	Xie Bob	2013/11/05	projection	MM	size	A3	scale	3:2			
eng	Xie Bob	2014/02/17			ecn no	-					
chr	Li- He	2014/02/16			rel level	Released					
appr	Pei-Ming Zheng	2014/02/17	product family		PowerBlade+						
			title			3HP+20S+2HP		dwg no	10106131-5005002	rev	A
www.fci.com			VT PF RECEPTACLE								
cat. no.			Product - Customer Drw				sheet 2 of 3				

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:
 - HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.
 - SIGNAL CONTACT - COPPER ALLOY.
 - POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7) 1.15 ± 0.025 MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A 1.02 ± 0.07 MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.
- 9) THE VOID CORING IN BETWEEN POWER MODULES, SIGNAL
MODULES AND END MODULES ARE OPTIONAL AND THE SHAPE
MAY BE DIFFERENT FOR OPTIMIZE THE MOLDING PROCESS. THE
VOID CORING WILL NOT EFFECT TO PRODUCT FUNCTION.

dr	Xie Bob	2013/11/05	projection 	MM 	size	scale
eng	Xie Bob	2014/02/17			A3	1:1
chr	Li- He	2014/02/16			ecn no	-
appr	Pei-Ming Zheng	2014/02/17	product family	PowerBlade+	rel level	Released
 www.fci.com		3HP+20S+2HP VT PF RECEPTACLE			dwg no	rev
					10106131-5005002	A
		cat. no.	Product - Customer Drw			sheet 3 of 3



Copyright FCI.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9