



## Features

- Ultra-tight tolerance
- Wide resistance range
- RoHS compliant\*
- Four package sizes available

## Applications

- Current sense
- Precision circuits
- Medical equipment\*\*
- Printers
- Automation equipment
- Navigation equipment

# CRT Series - Thin Film Precision Chip Resistors

## Electrical Characteristics

| Characteristic                              | Model CRT0402                                         | Model CRT0603 | Model CRT0805 | Model CRT1206 |
|---------------------------------------------|-------------------------------------------------------|---------------|---------------|---------------|
| Power Rating @ 70 °C                        | 1/16 watt                                             | 1/16 watt     | 1/10 watt     | 1/8 watt      |
| Operating Temperature Range                 | -55 to +155 °C                                        |               |               |               |
| Derated to Zero Load at                     | +155 °C                                               |               |               |               |
| Maximum Working Voltage                     | 25 V                                                  | 50 V          | 100 V         | 150 V         |
| Maximum Overload Voltage                    | 50 V                                                  | 100 V         | 200 V         | 300 V         |
| Resistance Range (E-96 + E-24 Values)       | (See Standard Values Table)                           |               |               |               |
| Temperature Coefficient of Resistance (TCR) | 5 to 50 PPM/°C (See Value - TCR Table on Pages 2 & 3) |               |               |               |

## Environmental Characteristics

| Specification                | Test (MIL STD 202)                         | Limit ( $\Delta R$ ) (Tol. $\leq 0.05\%$ ) | Limit ( $\Delta R$ ) (Tol. $> 0.05\%$ ) |
|------------------------------|--------------------------------------------|--------------------------------------------|-----------------------------------------|
| Short Time Overload          | 2.5 x Max. Operating Voltage for 5 seconds | $\pm 0.05\%$                               | $\pm 0.2\%$                             |
| Load Life                    | 1000 Hours at Rated Power                  | $\pm 0.05\%$                               | $\pm 0.5\%$                             |
| Humidity (Steady State)      | Method 103B                                | $\pm 0.05\%$                               | $\pm 0.3\%$                             |
| Thermal Shock                | Method 107                                 | $\pm 0.05\%$                               | $\pm 0.3\%$                             |
| Solderability                | Method 208H                                |                                            |                                         |
| Resistance to Soldering Heat | Method 210E                                | $\pm 0.05\%$                               | $\pm 0.2\%$                             |

## How to Order

### CRT 0603 - C V - 1003 E LF

Model \_\_\_\_\_  
(CRT = Thin Film Precision Chip Resistor)

Size \_\_\_\_\_

- 0402
- 0603
- 0805
- 1206

Resistance Tolerance \_\_\_\_\_

F =  $\pm 1\%$     B =  $\pm 0.1\%$   
D =  $\pm 0.5\%$     A =  $\pm 0.05\%$   
C =  $\pm 0.25\%$     P =  $\pm 0.01\%$

TCR (PPM/°C) \_\_\_\_\_

Z =  $\pm 50$     W =  $\pm 10$   
Y =  $\pm 25$     V =  $\pm 5$   
X =  $\pm 15$

Resistance Value \_\_\_\_\_

<100 ohms: "R" represents decimal point  
(example: 24R3 = 24.3 ohms)  
≥100 ohms: First three digits are significant, fourth digit represents number of zeroes to follow  
(example: 8252 = 82.5K ohms)


Packaging \_\_\_\_\_

G = Paper tape (10K pcs.) on 7" plastic reel (CRT0402)  
E = Paper tape (5K pcs.) on 7" plastic reel (CRT0603, CRT0805, CRT1206)

Termination \_\_\_\_\_

LF = Tin-plated (RoHS compliant)

## Derating Curve

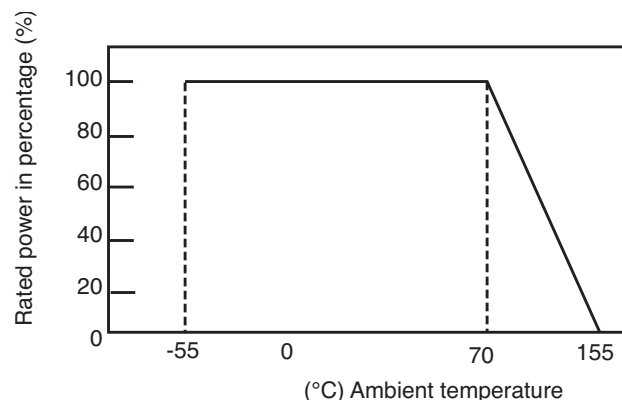

\* RoHS Directive 2002/95/EC Jan. 27, 2003 including annex and RoHS Recast 2011/65/EU June 8, 2011.

\*\*Bourns® products have not been specifically designed and tested for FDA Class III applications and their use in such applications is neither recommended nor supported. Specifications are subject to change without notice.

The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time. Users should verify actual device performance in their specific applications.

# CRT Series - Thin Film Precision Chip Resistors

**BOURNS®**

Value - TCR Table

| Part Number | TR Range (Ohms) | TR Tolerance | TCR (PPM/°C) |
|-------------|-----------------|--------------|--------------|
| CRT0402-AV  | 49.9 to 5K      | 0.05 %       | 5            |
| CRT0402-AW  | 49.9 to 12K     | 0.05 %       | 10           |
| CRT0402-AX  | 49.9 to 12K     | 0.05 %       | 15           |
| CRT0402-AY  | 49.9 to 12K     | 0.05 %       | 25           |
| CRT0402-AZ  | 49.9 to 12K     | 0.05 %       | 50           |
| CRT0402-BV  | 49.9 to 5K      | 0.10 %       | 5            |
| CRT0402-BW  | 49.9 to 12K     | 0.10 %       | 10           |
| CRT0402-BX  | 49.9 to 70K     | 0.10 %       | 15           |
| CRT0402-BY  | 10 to 205K      | 0.10 %       | 25           |
| CRT0402-BZ  | 10 to 205K      | 0.10 %       | 50           |
| CRT0402-CV  | 49.9 to 5K      | 0.25 %       | 5            |
| CRT0402-CW  | 49.9 to 12K     | 0.25 %       | 10           |
| CRT0402-CX  | 49.9 to 70K     | 0.25 %       | 15           |
| CRT0402-CY  | 10 to 205K      | 0.25 %       | 25           |
| CRT0402-CZ  | 10 to 205K      | 0.25 %       | 50           |
| CRT0402-DV  | 49.9 to 5K      | 0.50 %       | 5            |
| CRT0402-DW  | 49.9 to 12K     | 0.50 %       | 10           |
| CRT0402-DX  | 49.9 to 70K     | 0.50 %       | 15           |
| CRT0402-DY  | 10 to 205K      | 0.50 %       | 25           |
| CRT0402-DZ  | 1 to 205K       | 0.50 %       | 50           |
| CRT0402-FV  | 49.9 to 5K      | 1.00 %       | 5            |
| CRT0402-FW  | 49.9 to 12K     | 1.00 %       | 10           |
| CRT0402-FX  | 49.9 to 70K     | 1.00 %       | 15           |
| CRT0402-FY  | 10 to 205K      | 1.00 %       | 25           |
| CRT0402-FZ  | 1 to 205K       | 1.00 %       | 50           |
| CRT0402-PV  | 49.9 to 5K      | 0.01 %       | 5            |
| CRT0402-PW  | 49.9 to 12K     | 0.01 %       | 10           |
| CRT0402-PX  | 49.9 to 12K     | 0.01 %       | 15           |
| CRT0402-PY  | 49.9 to 12K     | 0.01 %       | 25           |
| CRT0402-PZ  | 49.9 to 12K     | 0.01 %       | 50           |
| CRT0603-AV  | 24.9 to 15K     | 0.05 %       | 5            |
| CRT0603-AW  | 4.7 to 332K     | 0.05 %       | 10           |
| CRT0603-AX  | 4.7 to 332K     | 0.05 %       | 15           |
| CRT0603-AY  | 4.7 to 332K     | 0.05 %       | 25           |
| CRT0603-AZ  | 4.7 to 332K     | 0.05 %       | 50           |
| CRT0603-BV  | 24.9 to 15K     | 0.10 %       | 5            |
| CRT0603-BW  | 4.7 to 33K      | 0.10 %       | 10           |
| CRT0603-BX  | 4.7 to 33K      | 0.10 %       | 15           |
| CRT0603-BY  | 4.7 to 1 meg    | 0.10 %       | 25           |
| CRT0603-BZ  | 4.7 to 1 meg    | 0.10 %       | 50           |
| CRT0603-CV  | 24.9 to 15K     | 0.25 %       | 5            |
| CRT0603-CW  | 4.7 to 33K      | 0.25 %       | 10           |
| CRT0603-CX  | 4.7 to 33K      | 0.25 %       | 15           |
| CRT0603-CY  | 2 to 1 meg      | 0.25 %       | 25           |
| CRT0603-CZ  | 1 to 1 meg      | 0.25 %       | 50           |
| CRT0603-DV  | 24.9 to 15K     | 0.50 %       | 5            |
| CRT0603-DW  | 4.7 to 33K      | 0.50 %       | 10           |
| CRT0603-DX  | 4.7 to 33K      | 0.50 %       | 15           |
| CRT0603-DY  | 2 to 1 meg      | 0.50 %       | 25           |
| CRT0603-DZ  | 1 to 1 meg      | 0.50 %       | 50           |
| CRT0603-FV  | 24.9 to 15K     | 1.00 %       | 5            |
| CRT0603-FW  | 4.7 to 33K      | 1.00 %       | 10           |

| Part Number | TR Range (Ohms) | TR Tolerance | TCR (PPM/°C) |
|-------------|-----------------|--------------|--------------|
| CRT0603-FX  | 4.7 to 33K      | 1.00 %       | 15           |
| CRT0603-FY  | 2 to 1 meg      | 1.00 %       | 25           |
| CRT0603-FZ  | 1 to 1 meg      | 1.00 %       | 50           |
| CRT0603-PV  | 24.9 to 15K     | 0.01 %       | 5            |
| CRT0603-PW  | 24.9 to 100K    | 0.01 %       | 10           |
| CRT0603-PX  | 24.9 to 100K    | 0.01 %       | 15           |
| CRT0603-PY  | 24.9 to 100K    | 0.01 %       | 25           |
| CRT0603-PZ  | 24.9 to 100K    | 0.01 %       | 50           |
| CRT0805-AV  | 24.9 to 30K     | 0.05 %       | 5            |
| CRT0805-AW  | 4.7 to 511K     | 0.05 %       | 10           |
| CRT0805-AX  | 4.7 to 511K     | 0.05 %       | 15           |
| CRT0805-AY  | 4.7 to 511K     | 0.05 %       | 25           |
| CRT0805-AZ  | 4.7 to 511K     | 0.05 %       | 50           |
| CRT0805-BV  | 24.9 to 30K     | 0.10 %       | 5            |
| CRT0805-BW  | 4.7 to 511K     | 0.10 %       | 10           |
| CRT0805-BX  | 4.7 to 511K     | 0.10 %       | 15           |
| CRT0805-BY  | 4.7 to 2 meg    | 0.10 %       | 25           |
| CRT0805-BZ  | 4.7 to 2 meg    | 0.10 %       | 50           |
| CRT0805-CV  | 24.9 to 30K     | 0.25 %       | 5            |
| CRT0805-CW  | 4.7 to 511K     | 0.25 %       | 10           |
| CRT0805-CX  | 4.7 to 511K     | 0.25 %       | 15           |
| CRT0805-CY  | 1 to 2 meg      | 0.25 %       | 25           |
| CRT0805-CZ  | 1 to 2 meg      | 0.25 %       | 50           |
| CRT0805-DV  | 24.9 to 30K     | 0.50 %       | 5            |
| CRT0805-DW  | 4.7 to 511K     | 0.50 %       | 10           |
| CRT0805-DX  | 4.7 to 511K     | 0.50 %       | 15           |
| CRT0805-DY  | 1 to 2 meg      | 0.50 %       | 25           |
| CRT0805-DZ  | 1 to 2 meg      | 0.50 %       | 50           |
| CRT0805-FV  | 24.9 to 30K     | 1.00 %       | 5            |
| CRT0805-FW  | 4.7 to 511K     | 1.00 %       | 10           |
| CRT0805-FX  | 4.7 to 511K     | 1.00 %       | 15           |
| CRT0805-FY  | 1 to 2 meg      | 1.00 %       | 25           |
| CRT0805-FZ  | 1 to 2 meg      | 1.00 %       | 50           |
| CRT0805-PV  | 24.9 to 30K     | 0.01 %       | 5            |
| CRT0805-PW  | 24.9 to 200K    | 0.01 %       | 10           |
| CRT0805-PX  | 24.9 to 200K    | 0.01 %       | 15           |
| CRT0805-PY  | 24.9 to 200K    | 0.01 %       | 25           |
| CRT0805-PZ  | 24.9 to 20K     | 0.01 %       | 50           |
| CRT1206-AV  | 24.9 to 50K     | 0.05 %       | 5            |
| CRT1206-AW  | 4.7 to 1 meg    | 0.05 %       | 10           |
| CRT1206-AX  | 4.7 to 1 meg    | 0.05 %       | 15           |
| CRT1206-AY  | 4.7 to 1 meg    | 0.05 %       | 25           |
| CRT1206-AZ  | 4.7 to 1 meg    | 0.05 %       | 50           |
| CRT1206-BV  | 24.9 to 50K     | 0.10 %       | 5            |
| CRT1206-BW  | 4.7 to 1 meg    | 0.10 %       | 10           |
| CRT1206-BX  | 4.7 to 1 meg    | 0.10 %       | 15           |
| CRT1206-BY  | 4.7 to 2.5 meg  | 0.10 %       | 25           |
| CRT1206-BZ  | 4.7 to 2.5 meg  | 0.10 %       | 50           |
| CRT1206-CV  | 24.9 to 50 K    | 0.25 %       | 5            |
| CRT1206-CW  | 4.7 to 1 meg    | 0.25 %       | 10           |
| CRT1206-CX  | 4.7 to 1 meg    | 0.25 %       | 15           |
| CRT1206-CY  | 1 to 2.5 meg    | 0.25 %       | 25           |

Specifications are subject to change without notice.  
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
Users should verify actual device performance in their specific applications.

# CRT Series - Thin Film Precision Chip Resistors

**BOURNS®**

Value - TCR Table (Continued)


| Part Number | TR Range (Ohms) | TR Tolerance | TCR (PPM/°C) |
|-------------|-----------------|--------------|--------------|
| CRT1206-CZ  | 1 to 2.5 meg    | 0.25 %       | 50           |
| CRT1206-DV  | 24.9 to 50K     | 0.50 %       | 5            |
| CRT1206-DW  | 4.7 to 1 meg    | 0.50 %       | 10           |
| CRT1206-DX  | 4.7 to 1 meg    | 0.50 %       | 15           |
| CRT1206-DY  | 1 to 2.5 meg    | 0.50 %       | 25           |
| CRT1206-DZ  | 1 to 2.5 meg    | 0.50 %       | 50           |
| CRT1206-FV  | 24.9 to 50K     | 1.00 %       | 5            |
| CRT1206-FW  | 4.7 to 1 meg    | 1.00 %       | 10           |
| CRT1206-FX  | 4.7 to 1 meg    | 1.00 %       | 15           |
| CRT1206-FY  | 1 to 2.5 meg    | 1.00 %       | 25           |
| CRT1206-FZ  | 1 to 2.5 meg    | 1.00 %       | 50           |
| CRT1206-PV  | 24.9 to 50K     | 0.01 %       | 5            |
| CRT1206-PW  | 24.9 to 500K    | 0.01 %       | 10           |
| CRT1206-PX  | 24.9 to 500K    | 0.01 %       | 15           |
| CRT1206-PY  | 24.9 to 500K    | 0.01 %       | 25           |
| CRT1206-PZ  | 24.9 to 500K    | 0.01 %       | 50           |

Soldering Profile



Chip Dimensions


| Dimension | Model CRT0402                             | Model CRT0603                             | Model CRT0805                             | Model CRT1206                             |
|-----------|-------------------------------------------|-------------------------------------------|-------------------------------------------|-------------------------------------------|
| L         | $\frac{1.00 \pm 0.10}{(0.040 \pm 0.004)}$ | $\frac{1.55 \pm 0.10}{(0.061 \pm 0.004)}$ | $\frac{2.00 \pm 0.15}{(0.079 \pm 0.006)}$ | $\frac{3.05 \pm 0.15}{(0.120 \pm 0.006)}$ |
| W         | $\frac{0.50 \pm 0.05}{(0.020 \pm 0.002)}$ | $\frac{0.80 \pm 0.10}{(0.031 \pm 0.004)}$ | $\frac{1.25 \pm 0.15}{(0.049 \pm 0.006)}$ | $\frac{1.55 \pm 0.15}{(0.061 \pm 0.006)}$ |
| H         | $\frac{0.30 \pm 0.05}{(0.012 \pm 0.002)}$ | $\frac{0.45 \pm 0.15}{(0.018 \pm 0.006)}$ | $\frac{0.55 \pm 0.10}{(0.022 \pm 0.004)}$ | $\frac{0.55 \pm 0.10}{(0.022 \pm 0.004)}$ |
| $l_1$     | $\frac{0.20 \pm 0.10}{(0.008 \pm 0.004)}$ | $\frac{0.30 \pm 0.20}{(0.012 \pm 0.008)}$ | $\frac{0.30 \pm 0.20}{(0.012 \pm 0.008)}$ | $\frac{0.42 \pm 0.20}{(0.017 \pm 0.008)}$ |
| $l_2$     | $\frac{0.20 \pm 0.10}{(0.008 \pm 0.004)}$ | $\frac{0.30 \pm 0.20}{(0.012 \pm 0.008)}$ | $\frac{0.40 \pm 0.25}{(0.016 \pm 0.010)}$ | $\frac{0.35 \pm 0.25}{(0.020 \pm 0.014)}$ |

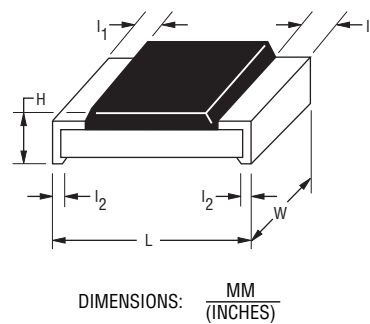

DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

Recommended Land Pattern

| Dimension | Model CRT0402                             | Model CRT0603                             | Model CRT0805                             | Model CRT1206                             |
|-----------|-------------------------------------------|-------------------------------------------|-------------------------------------------|-------------------------------------------|
| A         | $\frac{0.50}{(0.020)}$                    | $\frac{0.80}{(0.031)}$                    | $\frac{1.00}{(0.039)}$                    | $\frac{2.00}{(0.079)}$                    |
| B         | $\frac{0.50}{(0.020)}$                    | $\frac{1.00}{(0.039)}$                    | $\frac{1.00}{(0.039)}$                    | $\frac{1.15}{(0.045)}$                    |
| C         | $\frac{0.60 \pm 0.20}{(0.024 \pm 0.008)}$ | $\frac{0.90 \pm 0.20}{(0.035 \pm 0.008)}$ | $\frac{1.35 \pm 0.20}{(0.053 \pm 0.008)}$ | $\frac{1.70 \pm 0.20}{(0.067 \pm 0.008)}$ |



DIMENSIONS:  $\frac{\text{MM}}{(\text{INCHES})}$

Specifications are subject to change without notice.  
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
Users should verify actual device performance in their specific applications.

# CRT Series - Thin Film Precision Chip Resistors

**BOURNS®**

## Packaging Dimensions - Tape

| Dimension | Model<br>CRT0402                          | Model<br>CRT0603                          | Model<br>CRT0805                          | Model<br>CRT1206                          |
|-----------|-------------------------------------------|-------------------------------------------|-------------------------------------------|-------------------------------------------|
| A         | $\frac{1.16 \pm 0.05}{(0.046 \pm 0.002)}$ | $\frac{1.90 \pm 0.05}{(0.075 \pm 0.002)}$ | $\frac{2.37 \pm 0.05}{(0.094 \pm 0.002)}$ | $\frac{3.55 \pm 0.05}{(0.140 \pm 0.002)}$ |
| B         | $\frac{0.70 \pm 0.05}{(0.028 \pm 0.002)}$ | $\frac{1.10 \pm 0.05}{(0.043 \pm 0.002)}$ | $\frac{1.60 \pm 0.05}{(0.063 \pm 0.002)}$ | $\frac{2.00 \pm 0.05}{(0.079 \pm 0.002)}$ |
| C         | $\frac{2.00 \pm 0.05}{(0.079 \pm 0.002)}$ | $\frac{4.00 \pm 0.10}{(0.157 \pm 0.004)}$ | $\frac{4.00 \pm 0.10}{(0.157 \pm 0.004)}$ | $\frac{4.00 \pm 0.10}{(0.157 \pm 0.004)}$ |



REV. 02/13

Specifications are subject to change without notice.  
The device characteristics and parameters in this data sheet can and do vary in different applications and actual device performance may vary over time.  
Users should verify actual device performance in their specific applications.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9