

# DATA SHEET

## TRANSIENT VOLTAGE SUPPRESSORS

### AC/DC POWER SUPPLY

1.5KE series

RoHS compliant & Halogen free



Product specification— April 29, 2019 V.0



## Transient Voltage Suppressors (TVS) Data Sheet

### Features

- Glass passivated junction
- Low zener impedance
- Excellent clamping capability
- 1500W peak pulse power capability at 10/1000μs waveform, repetition rate (duty cycle): 0.01%
- Fast response time
- Typical  $I_R$  less than 1μA above 12V.
- High Temperature soldering guaranteed: 265°C/10 seconds/.375", (9.5mm) lead length, 5lbs (2.3kg) tension
- Plastic package has underwriters laboratory flammability 94V-0
- Meets MSL level 1, per J-STD-020.
- Safety certification: UL: E244458



### Mechanical Data

- Case: JEDEC DO-201 Moulded plastic
- Terminal: Axial leads, solderable per MIL-STD-750, Method 2026
- Polarity: Color band denotes cathode except bi-directional models
- Mounting Position: Any
- Weight: 0.97g

### Applications

- I/O interface
- AC/DC power supply
- Low frequency signal transmission line (RS232, RS485, etc.)

### Maximum Ratings and Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

| Rating                                                                                                            | Symbol          | Value        | Units |
|-------------------------------------------------------------------------------------------------------------------|-----------------|--------------|-------|
| Peak pulse power dissipation at 10/1000μs waveform (Note1, Fig.1)                                                 | $P_{PPM}$       | Minimum 1500 | Watts |
| Peak pulse current of at 10/1000μs waveform (Note 1, Fig.3)                                                       | $I_{PPM}$       | See Table    | Amps  |
| Steady state power dissipation at $T_L=75^\circ\text{C}$ (Fig.5)                                                  | $P_{M(AV)}$     | 6.5          | Watts |
| Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load, (JEDEC Method) (Note2, Fig.6) | $I_{FSM}$       | 200          | Amps  |
| Operating junction and Storage Temperature Range.                                                                 | $T_J, T_{STG}$  | -55 to +175  | °C    |
| Typical thermal resistance junction to lead                                                                       | $R_{\theta JL}$ | 15           | °C/W  |
| Typical thermal resistance junction to ambient                                                                    | $R_{\theta JA}$ | 75           | °C/W  |


Notes: 1. Non-repetitive current pulse, per Fig.3 and derated above  $T_A=25^\circ\text{C}$  per Fig.2.

2. 8.3ms single half sine-wave, or equivalent square wave, duty cycle=4 pulses per minutes maximum.

## Dimensions (DO-201)

| Symbol | Millimeters |      | Inches |       |
|--------|-------------|------|--------|-------|
|        | Min.        | Max. | Min.   | Max.  |
| L      | 25.40       | -    | 1.000  | -     |
| T      | 7.20        | 9.50 | 0.285  | 0.375 |
| d      | 4.80        | 5.30 | 0.190  | 0.210 |
| s      | 0.96        | 1.07 | 0.038  | 0.042 |

## Part Number Code

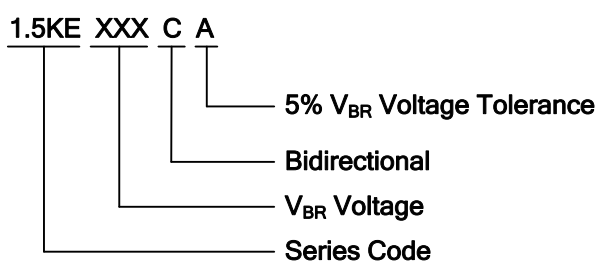

## Ordering Code for different package

Box package: Add suffix "/B" at the end of the part number, such as 1.5KE100CA/B

Reel package: Add suffix "/TR13" at the end of the part number, such as 1.5KE75A/TR13

## Electrical Characteristics ( $T_A=25^{\circ}\text{C}$ )

| Part Number    |               | Reverse Stand-Off Voltage | Breakdown Voltage @ $I_T$ | Test Current | Maximum Clamping Voltage @ $I_{PP}$ | Peak Pulse Current | Reverse Leakage @ $V_{RWM}$ |
|----------------|---------------|---------------------------|---------------------------|--------------|-------------------------------------|--------------------|-----------------------------|
| Unidirectional | Bidirectional | $V_{RWM}(V)$              | $V_{BR}(V)$               | $I_T(mA)$    | $V_C(V)$                            | $I_{PP}(A)$        | $I_R(\mu A)$                |
| 1.5KE6.8A      | 1.5KE6.8CA    | 5.80                      | 6.45~7.14                 | 10           | 10.5                                | 144.8              | 1000                        |
| 1.5KE7.5A      | 1.5KE7.5CA    | 6.40                      | 7.13~7.88                 | 10           | 11.3                                | 134.5              | 500                         |
| 1.5KE8.2A      | 1.5KE8.2CA    | 7.02                      | 7.79~8.61                 | 10           | 12.1                                | 125.6              | 200                         |
| 1.5KE9.1A      | 1.5KE9.1CA    | 7.78                      | 8.65~9.55                 | 1            | 13.4                                | 113.4              | 50                          |
| 1.5KE10A       | 1.5KE10CA     | 8.55                      | 9.50~10.50                | 1            | 14.5                                | 104.8              | 10                          |
| 1.5KE11A       | 1.5KE11CA     | 9.40                      | 10.50~11.60               | 1            | 15.6                                | 97.4               | 5                           |
| 1.5KE12A       | 1.5KE12CA     | 10.20                     | 11.40~12.60               | 1            | 16.7                                | 91.0               | 5                           |
| 1.5KE13A       | 1.5KE13CA     | 11.10                     | 12.40~13.70               | 1            | 18.2                                | 83.5               | 1                           |
| 1.5KE15A       | 1.5KE15CA     | 12.80                     | 14.30~15.80               | 1            | 21.2                                | 71.7               | 1                           |
| 1.5KE16A       | 1.5KE16CA     | 13.60                     | 15.20~16.80               | 1            | 22.5                                | 67.6               | 1                           |
| 1.5KE18A       | 1.5KE18CA     | 15.30                     | 17.10~18.90               | 1            | 25.2                                | 60.3               | 1                           |

Electrical Characteristics (T<sub>A</sub>=25°C)

| Part Number    |               | Reverse Stand-Off Voltage | Breakdown Voltage @I <sub>T</sub> | Test Current        | Maximum Clamping Voltage @I <sub>PP</sub> | Peak Pulse Current  | Reverse Leakage @V <sub>RWM</sub> |
|----------------|---------------|---------------------------|-----------------------------------|---------------------|-------------------------------------------|---------------------|-----------------------------------|
| Unidirectional | Bidirectional | V <sub>RWM</sub> (V)      | V <sub>BR</sub> (V)               | I <sub>T</sub> (mA) | V <sub>C</sub> (V)                        | I <sub>PP</sub> (A) | I <sub>R</sub> (μA)               |
| 1.5KE20A       | 1.5KE20CA     | 17.10                     | 19.00~21.00                       | 1                   | 27.7                                      | 54.9                | 1                                 |
| 1.5KE22A       | 1.5KE22CA     | 18.80                     | 20.90~23.10                       | 1                   | 30.6                                      | 49.7                | 1                                 |
| 1.5KE24A       | 1.5KE24CA     | 20.50                     | 22.80~25.20                       | 1                   | 33.2                                      | 45.8                | 1                                 |
| 1.5KE27A       | 1.5KE27CA     | 23.10                     | 25.70~28.40                       | 1                   | 37.5                                      | 40.5                | 1                                 |
| 1.5KE30A       | 1.5KE30CA     | 25.60                     | 28.50~31.50                       | 1                   | 41.4                                      | 36.7                | 1                                 |
| 1.5KE33A       | 1.5KE33CA     | 28.20                     | 31.40~34.70                       | 1                   | 45.7                                      | 33.3                | 1                                 |
| 1.5KE36A       | 1.5KE36CA     | 30.80                     | 34.20~37.80                       | 1                   | 49.9                                      | 30.5                | 1                                 |
| 1.5KE39A       | 1.5KE39CA     | 33.30                     | 37.10~41.00                       | 1                   | 53.9                                      | 28.2                | 1                                 |

Electrical Characteristics (T<sub>A</sub>=25°C)

| Part Number    |               | Reverse Stand-Off Voltage | Breakdown Voltage @I <sub>T</sub> | Test Current        | Maximum Clamping Voltage @I <sub>PP</sub> | Peak Pulse Current  | Reverse Leakage @V <sub>RWM</sub> |
|----------------|---------------|---------------------------|-----------------------------------|---------------------|-------------------------------------------|---------------------|-----------------------------------|
| Unidirectional | Bidirectional | V <sub>RWM</sub> (V)      | V <sub>BR</sub> (V)               | I <sub>T</sub> (mA) | V <sub>C</sub> (V)                        | I <sub>PP</sub> (A) | I <sub>R</sub> (μA)               |
| 1.5KE43A       | 1.5KE43CA     | 36.80                     | 40.90~45.20                       | 1                   | 59.3                                      | 25.6                | 1                                 |
| 1.5KE47A       | 1.5KE47CA     | 40.20                     | 44.70~49.40                       | 1                   | 64.8                                      | 23.5                | 1                                 |
| 1.5KE51A       | 1.5KE51CA     | 43.60                     | 48.50~53.60                       | 1                   | 70.1                                      | 21.7                | 1                                 |
| 1.5KE56A       | 1.5KE56CA     | 47.80                     | 53.20~58.80                       | 1                   | 77.0                                      | 19.7                | 1                                 |
| 1.5KE62A       | 1.5KE62CA     | 53.00                     | 58.90~65.10                       | 1                   | 85.0                                      | 17.9                | 1                                 |
| 1.5KE68A       | 1.5KE68CA     | 58.10                     | 64.60~71.40                       | 1                   | 92.0                                      | 16.5                | 1                                 |
| 1.5KE75A       | 1.5KE75CA     | 64.10                     | 71.30~78.80                       | 1                   | 103.0                                     | 14.8                | 1                                 |
| 1.5KE82A       | 1.5KE82CA     | 70.10                     | 77.90~86.10                       | 1                   | 113.0                                     | 13.5                | 1                                 |
| 1.5KE91A       | 1.5KE91CA     | 77.80                     | 86.50~95.50                       | 1                   | 125.0                                     | 12.2                | 1                                 |
| 1.5KE100A      | 1.5KE100CA    | 85.50                     | 95.00~105.00                      | 1                   | 137.0                                     | 11.1                | 1                                 |
| 1.5KE110A      | 1.5KE110CA    | 94.00                     | 105.00~116.00                     | 1                   | 152.0                                     | 10.0                | 1                                 |
| 1.5KE120A      | 1.5KE120CA    | 102.00                    | 114.00~126.00                     | 1                   | 165.0                                     | 9.2                 | 1                                 |
| 1.5KE130A      | 1.5KE130CA    | 111.00                    | 124.00~137.00                     | 1                   | 179.0                                     | 8.5                 | 1                                 |
| 1.5KE150A      | 1.5KE150CA    | 128.00                    | 143.00~158.00                     | 1                   | 207.0                                     | 7.3                 | 1                                 |
| 1.5KE160A      | 1.5KE160CA    | 136.00                    | 152.00~168.00                     | 1                   | 219.0                                     | 6.9                 | 1                                 |
| 1.5KE170A      | 1.5KE170CA    | 145.00                    | 162.00~179.00                     | 1                   | 234.0                                     | 6.5                 | 1                                 |

## Transient Voltage Suppressors

1.5KE

8

| Part Number    |               | Reverse Stand-Off Voltage | Breakdown Voltage @ $I_T$ | Test Current | Maximum Clamping Voltage @ $I_{PP}$ | Peak Pulse Current | Reverse Leakage @ $V_{RWM}$ |
|----------------|---------------|---------------------------|---------------------------|--------------|-------------------------------------|--------------------|-----------------------------|
| Unidirectional | Bidirectional | $V_{RWM}(V)$              | $V_{BR}(V)$               | $I_T(mA)$    | $V_C(V)$                            | $I_{PP}(A)$        | $I_R(\mu A)$                |
| 1.5KE180A      | 1.5KE180CA    | 154.00                    | 171.00~189.00             | 1            | 246.0                               | 6.2                | 1                           |
| 1.5KE200A      | 1.5KE200CA    | 171.00                    | 190.00~210.00             | 1            | 274.0                               | 5.5                | 1                           |
| 1.5KE220A      | 1.5KE220CA    | 185.00                    | 209.00~231.00             | 1            | 328.0                               | 4.6                | 1                           |
| 1.5KE250A      | 1.5KE250CA    | 214.00                    | 237.00~263.00             | 1            | 344.0                               | 4.4                | 1                           |
| 1.5KE300A      | 1.5KE300CA    | 256.00                    | 285.00~315.00             | 1            | 414.0                               | 3.7                | 1                           |
| 1.5KE350A      | 1.5KE350CA    | 300.00                    | 332.00~368.00             | 1            | 482.0                               | 3.2                | 1                           |
| 1.5KE400A      | 1.5KE400CA    | 342.00                    | 380.00~420.00             | 1            | 548.0                               | 2.8                | 1                           |
| 1.5KE440A      | 1.5KE440CA    | 376.00                    | 418.00~462.00             | 1            | 602.0                               | 2.5                | 1                           |
| 1.5KE480A      | 1.5KE480CA    | 408.00                    | 456.00~504.00             | 1            | 658.0                               | 2.3                | 1                           |
| 1.5KE510A      | 1.5KE510CA    | 434.00                    | 485.00~535.00             | 1            | 698.0                               | 2.1                | 1                           |
| 1.5KE530A      | 1.5KE530CA    | 450.00                    | 503.50~556.50             | 1            | 725.0                               | 2.1                | 1                           |
| 1.5KE540A      | 1.5KE540CA    | 459.00                    | 513.00~567.00             | 1            | 740.0                               | 2.0                | 1                           |
| 1.5KE550A      | 1.5KE550CA    | 467.00                    | 522.50~577.50             | 1            | 760.0                               | 2.0                | 1                           |

Notes: For bidirectional type having  $V_{RWM}$  of 10V and less, the  $I_R$  limit is double.

Ratings and Characteristic Curves ( $T_A=25^\circ\text{C}$  unless otherwise noted)

Figure 1. Peak Pulse Power Rating Curve

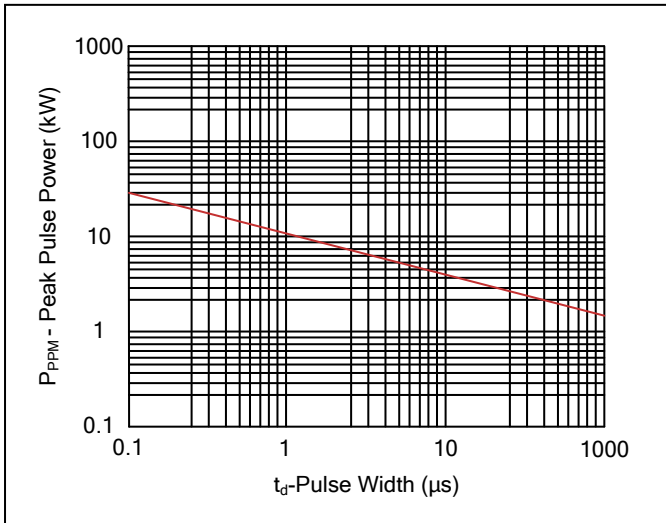


Figure 2. Pulse Derating Curve

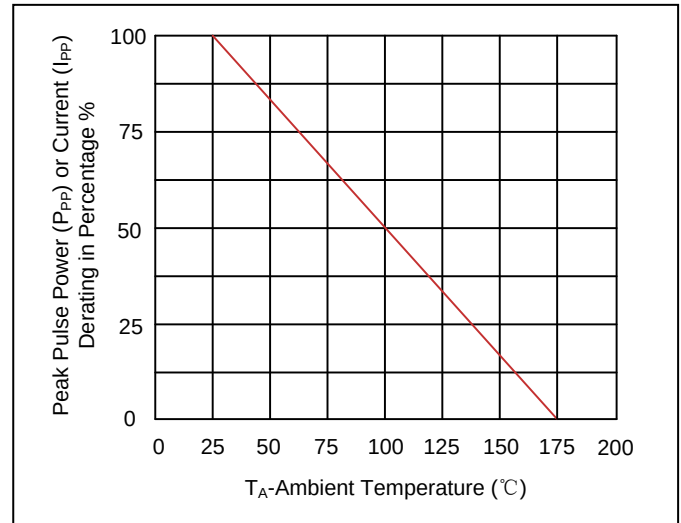


Figure 3. Pulse Waveform

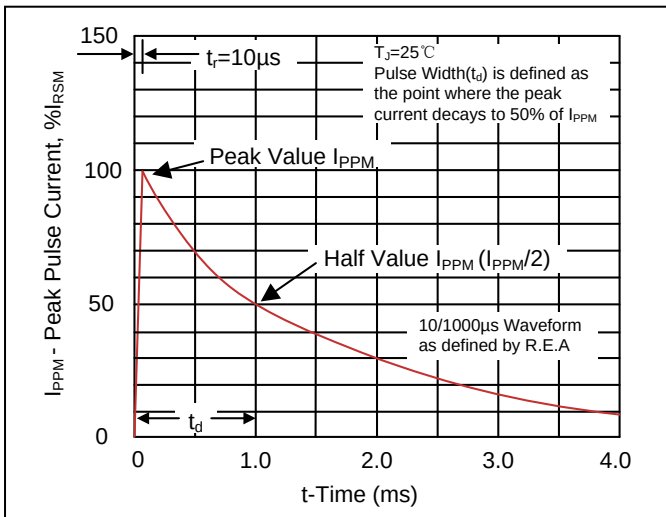


Figure 4. Typical Junction Capacitance

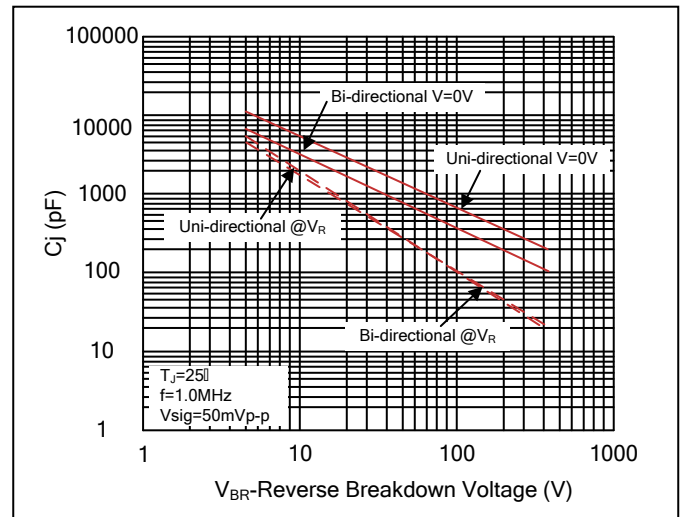


Figure 5. Steady State Power Dissipation Derating Curve



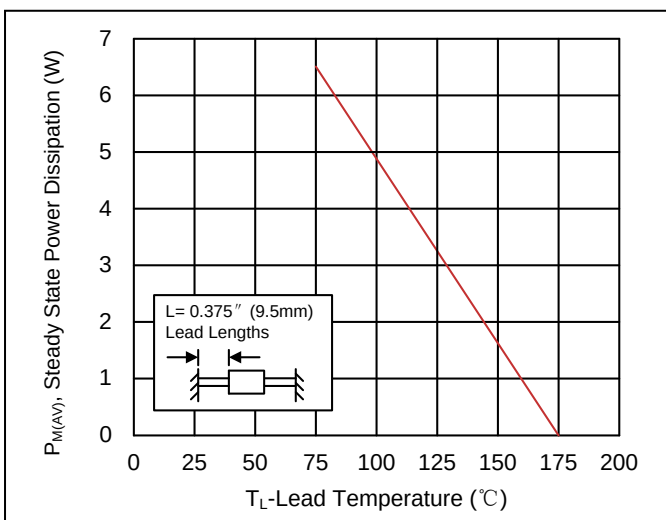


Figure 6. Maximum Non-Repetitive Forward Surge Current Uni-Directional Only

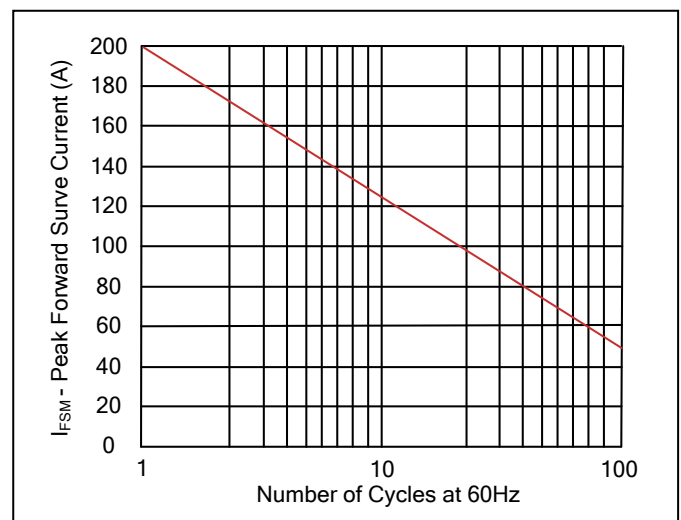


## Recommended Soldering Conditions

### Wave Soldering

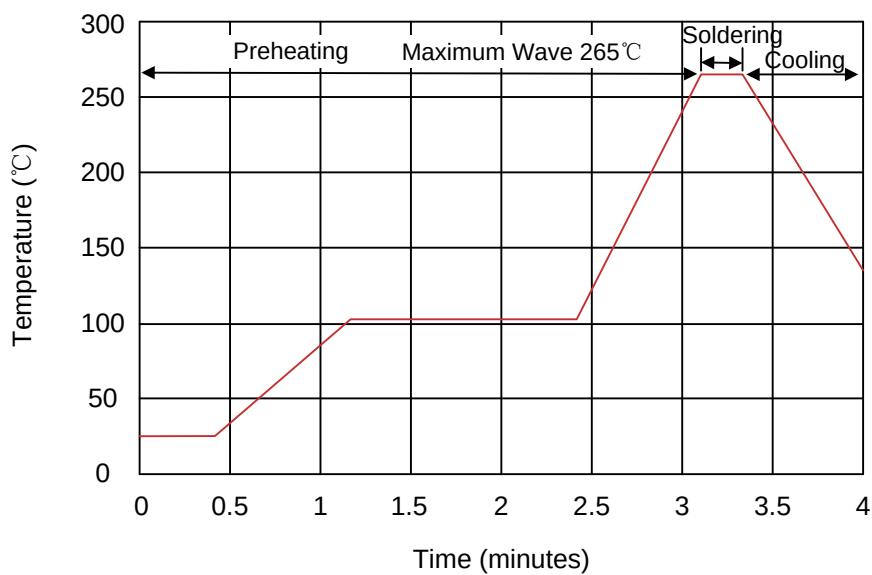




| Item             | Conditions |
|------------------|------------|
| Peak Temperature | 265°C      |
| Dipping Time     | 10 seconds |
| Soldering        | 1 time     |

## Marking Code

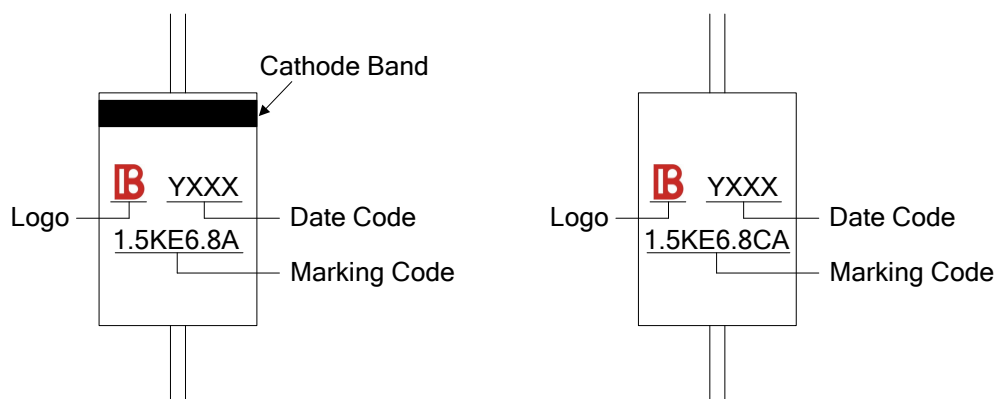

## Packaging

| Tape | Symbol            | Dimension (mm) |
|------|-------------------|----------------|
|      | A                 | 10.0±0.5       |
|      | B                 | 53.0±1.0       |
|      | Z                 | 1.2Max.        |
|      | T                 | 6.0±0.4        |
|      | E                 | 0.8Max.        |
|      | L1-L2             | 1.0Max.        |
|      |                   |                |
| Box  | L                 | 250.0±5.0      |
|      | W                 | 75.0±5.0       |
|      | H                 | 114.0±5.0      |
|      | Quantity: 1000PCS |                |
|      |                   |                |
| Reel | D                 | 330.0±3.0      |
|      | D0                | 16.4±2.0       |
|      | D1                | 86.0±2.0       |
|      | W1                | 76.0±3.0       |
|      | Quantity: 1200PCS |                |

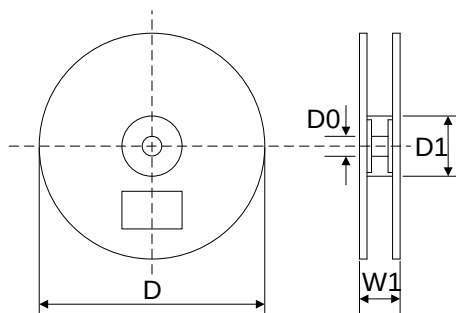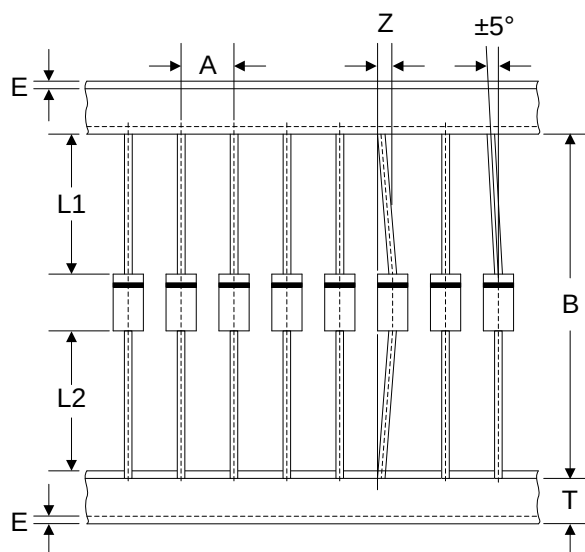



## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9