

Versatile CAN-Based Display

The Series 3D50 5-inch
Touchscreen Display for
off-highway vehicles.



- Intuitive touch technology to select objects and swipe through screens.
- Responsive PCAP touchscreen recognizes bare and gloved fingers, even when the display surface is wet.
- Easy application creation and integration with VUI Builder or Qt.
- Powerful processor with 3 second boot time.
- Scratch resistant/anti-glare cover glass is optically bonded to LCD display for superior mechanical and visual performance.
- Bright, backlit display provides high contrast text and full color graphics for excellent sunlight readability.
- Convenient flush mounting provides modern look and feel, to seamlessly blend with vehicle cab design.
- Armrest, A-post, and dashboard mounting.
- Rugged design for extreme environments.



Functions as an engine
monitor or input device.

Versatile Display. Many Features.

Flexible.

Series 3D50 is available with or without a projected capacitance touch screen. This advanced touchscreen works even when **wet** or when the user is **wearing gloves**.

Bright.

This 5.0-inch backlit WVGA LCD (800x480) is very bright (700 nits) providing good daylight readability. It has software controlled LED backlighting and 16 bit color.

Powerful.

The powerful embedded computer can monitor and display many events and camera images simultaneously:

- 800MHz
- 512MB RAM
- 4GB storage
- USB 2.0

Useful.

Ideal for agriculture and construction vehicle applications, including virtual gauges, diagnostic menus, engine monitor, operator input, fault indicators and service reminders.

Easy to Program.

PC-based configuration tools make application development fast and easy. Drag and drop graphics, bitmaps, text with the click of a mouse.

Adaptable.

Designed for integration into off-highway vehicles. It functions in 12V/24V operation, boots in 3 seconds and is sealed against the ingress of liquids and dust.

Rugged.

The protective cover lens is scratch resistant glass, not plastic. Optical bonding of the cover glass improves impact resistance.

Adjustable.

There are many system interface options:

- Up to two CAN-bus ports
- Up to two NTSC/PAL camera input ports
- Up to four digital inputs
- Up to four digital outputs
- One USB 2.0 port
- Touchscreen

Readable.

Optically bonding the display, touch sensor and cover glass reduces reflections. An anti-glare coating further improves readability in bright sunlight.



Versatile Display. All the Specifications.

| |
|--|
| Display: 5"/127 mm color transmissive TFT LCD |
| Resolution: WVGA, 800 x 480 pixels, 16 bit color |
| Aspect ratio: 16:9 |
| Orientation: Landscape or Portrait |
| Backlighting: LED, 700 cd/m ² or nits |
| Microprocessor: Freescale™ i.MX6, 800 MHz |
| Flash Memory: 4GB eMMC |
| RAM: 512 MB DDR3 |

POWER SPECIFICATIONS

| | |
|-------------------|--|
| Operating Voltage | 8VDC to 32VDC reverse polarity and load dump |
| Power Consumption | 5 Watts (typical) with full back light |
| Standby Current | <1ma |

ENVIRONMENTAL SPECIFICATIONS

| | | |
|--------------------------------|--------------------------|--|
| Operating temperature | ANSI/SAE EP455 5.1.1 | -30°C to +65°C |
| Storage Temperature | ANSI/SAE EP455 5.1.2 | -40°C to +85°C |
| Thermal Shock | ANSI/SAE EP455 5.1.3 | -40°C to 65°C at a rate of 4°C/min (1 hour at extremes) |
| Altitude (Barometric Pressure) | ANSI/SAE EP455 5.2 | 101.3kPa to 18.6kPa |
| Sand and Dust | SAE J1455 | |
| Solar Radiation | ISO 4892-2 | Method B |
| Wash Down | ANSI/SAE EP455 5.6 | Level 2 |
| Humidity | ANSI/SAE EP455 5.13 | 96% humidity at 35°C for 240 hours |
| Salt Fog | ANSI/SAE EP455 5.9 | 5% aqueous solution of NaCl @ 35°C and a pH between 6.5 and 7.2 for 48 hours |
| Chemical resistance | ISO 16750-5 EP 455 5.8.2 | |
| Ingress Protection | IP67 front and rear | with mating connector installed |

ELECTRICAL PERFORMANCE SPECIFICATIONS

| | | |
|-----------------------------|-------------------------------|---------------------------------------|
| Maximum load | ANSI/SAE EP455 5.1.1 | T(min) = -40C; T(max) = +65C |
| Jump start voltage | EP455 5.10.2 | 36V for 5 minutes; -36V for 5 minutes |
| Short circuit protection | EP455 5.10.4 | 36V |
| Reverse polarity protection | EP455 5.10.3 | -36V |
| Starting profile | ISO 16750-2:2006-08-01 | Code C for 12V, Code E for 24V |
| Battery-less operation | ANSI/SAE EP455 5.11.3 | Level 1 |
| Load dump | ISO 7637-2:2004 Test Pulse 5a | Level 4 |
| Switching spikes | ISO 7637-2:2004 | Level 4 |
| Alternator field decay | ANSI/SAE EP455 5.11.2 | |

| |
|---|
| USB: 2.0 host (high speed) |
| Real Time Clock: Internal non-rechargeable battery backup |
| CAN: (2) CAN 2.0 B J1939 protocol |
| RS232: full duplex |
| Video Input: 2 NTSC/PAL |
| Inputs: (4) 0-32 VDC discrete digital; 10Hz LPF |
| Outputs: (4) digital 200 mA switched high side |

MECHANICAL PERFORMANCE

| | | |
|-----------------------|-------------------------------|--|
| Vibration, Random | ANSI/SAE EP455 5.15.1 | 2h each axis 50Hz to 2000Hz |
| Vibration, Sinusoidal | ANSI/SAE EP455 5.15.2 | A logarithmic sweep from 10Hz to 2000Hz to 10Hz over a period of 20 minutes for 4 hours in each axis |
| Shock | ANSI/SAE EP455 5.14 | 11ms half sine pulse of 490 m/s ² in 3 axis |
| Drop | ANSI/SAE EP455 5.14.2 Level 1 | 400 mm onto a hardwood benchtop on all practical edges. |

CE COMPLIANCE

| | | |
|-----|---------------|-----|
| EMC | EN 13309:2010 | ESA |
|-----|---------------|-----|

ELECTROMAGNETIC COMPATIBILITY SPECIFICATIONS

| | | |
|---------------------|---------------------|---------------------------------------|
| ESD | ANSI/SAE EP455 5.12 | Level 1 (Handling), Level 2 (Powered) |
| Radiated Immunity | EP455 5.16 | Level 1 |
| Conducted emissions | CISPR25 | Level 3 |
| Radiated emissions | ISO14982 | |

SOFTWARE DEVELOPMENT TOOLS


| | | |
|-------------|---|---|
| VUI Builder | Grayhill's proprietary application for PC | Ideal for engineers that wish to quickly create common vehicle functions without coding |
| Qt | Cross platform development app from Digia Plc | Ideal for software developers familiar with coding for human interface applications |
| CoDeSys | IEC 61131-3 Development System | Coming Soon |

Easily create custom graphic icons, text boxes and active gauge elements that monitor J1939 CAN-bus parameters.


- Applications can be developed in Grayhill's proprietary VUI Builder or in Qt - the most trusted cross platform development environment.
- A development kit is offered to provide the hardware and software required to set up a programmer's workstation for either tool.



DIMENSIONS in inches (and mm)

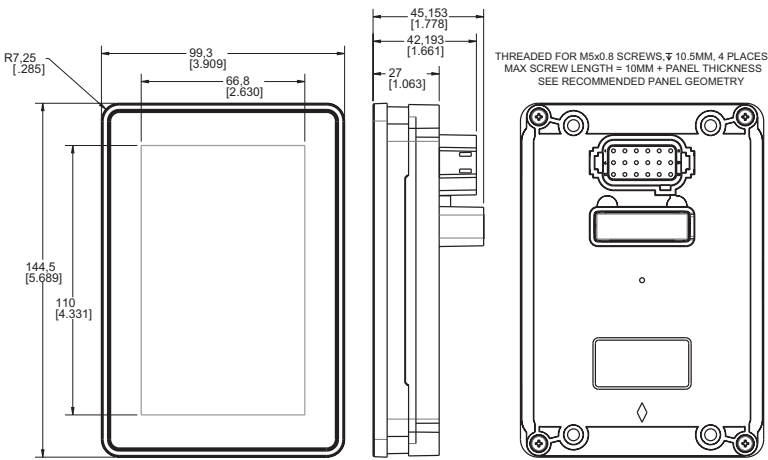


Recommended Mounting Cut Out

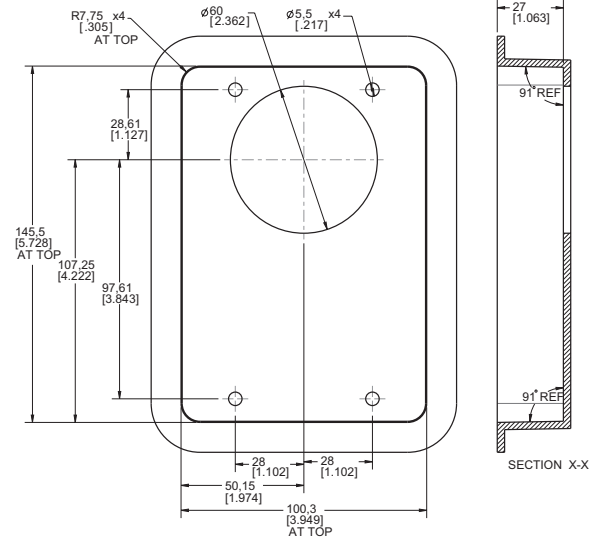

Weight: 360 grams

REAR CONNECTOR

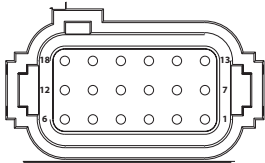

| Pin | Function | Pin | Function | Pin | Function | Pin | Function | Pin | Function | Pin | Function |
|-----|--------------|-----|-------------|-----|-------------|-----|----------|-----|----------|-----|----------|
| 1 | VIN Positive | 4 | Digital In | 7 | Digital I/O | 10 | VIDEO1- | 13 | CAN1 Hi | 16 | CAN2 Low |
| 2 | VIN Return | 5 | Digital Out | 8 | Digital I/O | 11 | VIDEO2+ | 14 | CAN1 Low | 17 | RS232Tx |
| 3 | VIN Switched | 6 | Digital I/O | 9 | VIDEO1+ | 12 | VIDEO2- | 15 | CAN2 Hi | 18 | RS232Rx |

Mating Connector:
DEUTSCH DT16-18SA-K004

VERSATILE DISPLAY. ORDER INFORMATION.

| | RS232 | USB 2.0 | CAN1 | CAN2 | VIDEO1 | VIDEO2 | RTC | Touch | DIG IN | DIG OUT | DIG I/O |
|--------------|--|---------|------|------|--------|--------|-----|-------|--------|---------|---------|
| 3D50XX-100 | X | X | X | | | | | | 0 | 0 | 0 |
| 3D50VX-100 | X | X | X | X | X | X | X | | 1 | 1 | 3 |
| 3D50VT-100 | X | X | X | X | X | X | X | X | 1 | 1 | 3 |
| 3D50DEV-BASE | Development Kit (does not include display) | | | | | | | | | | |
| 3D50DEV-100 | Development Kit with 3D50VT-100 display | | | | | | | | | | |
| Linux | Available upon request | | | | | | | | | | |

Custom Options Available

- Custom Logo
- Icons / screens pre-loaded

Your Experts in Cab Controls

Grayhill specializes in the design, development and production of human interface controls, including:

- Cab user interface design
- Customized control panels
- CAN-bus interface devices



Grayhill, Inc.
561 Hillgrove Avenue
LaGrange, Illinois 60525
Phone: (708) 354-1040
Fax: (708) 354-2820

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9