



LED Display

Product Data Sheet

LTP-2C44F-01

Spec No.: DS-30-97-133

Effective Date: 10/27/2000

Revision: -

LITE-ON DCC

RELEASE

BNS-OD-FC001/A4

LITE-ON Technology Corp. / Optoelectronics

No.90,Chien 1 Road, Chung Ho, New Taipei City 23585, Taiwan, R.O.C.

Tel: 886-2-2222-6181 Fax: 886-2-2221-1948 / 886-2-2221-0660

<http://www.liteon.com/opto>

0FEATURES

- * 1.854-inch (47.10-mm) MATRIX HEIGHT.
- * CONTINUOUS UNIFORM DOTS.
- * LOW POWER REQUIREMENT.
- * EXCELLENT CHARACTERS AND APPEARANCE.
- * SOLID STATE RELIABILITY.
- * 4×4 ARRAY WITH X-Y SELECT.
- * WIDE VIEWING ANGLE.
- * CATEGORIZED FOR LUMINOUS INTENSITY.
- * EPOXY TYPE.

DESCRIPTION

The LTP-2C44F-01 is a 1.854 inch (47.10 mm) matrix height 4×4 dot matrix display. The LTP-2C44F-01 is a full color applicable display and has gray face white dots. This display utilizes AlGaAs red, green and blue LED chips. The AlGaAs red LED chips are made from AlGaAs on a non-transparent GaAs substrate, the green LED chips are made from GaP on a GaP substrate, the blue LED chips are made from GaN on a SiC substrate.


DEVICE

PART NO.	DESCRIPTION
FULL COLOR	ANODE ROW
LTP-2C44F-01	CATHODE COLUMN

***CAUTION :**


The LEDs will be damaged by the static electricity. Anti-electrostatic equipment is recommended when holding the LED. The application must be grounded.

PACKAGE DIMENSIONS

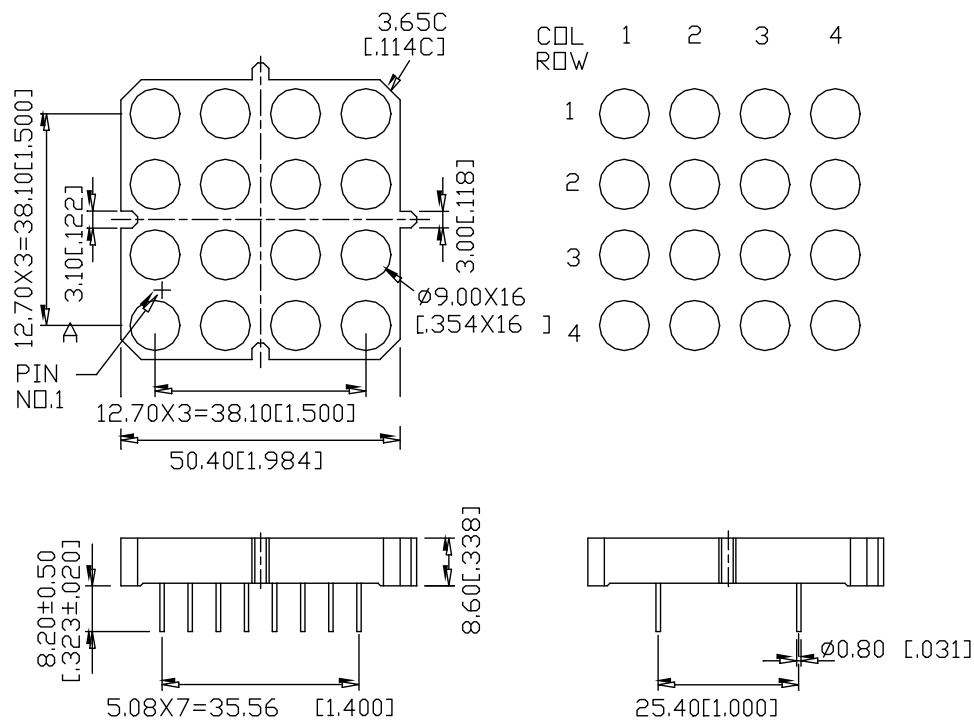

NOTES: All dimensions are in millimeters. Tolerances are ± 0.25 mm (0.01") unless otherwise noted.

INTERNAL CIRCUIT DIAGRAM

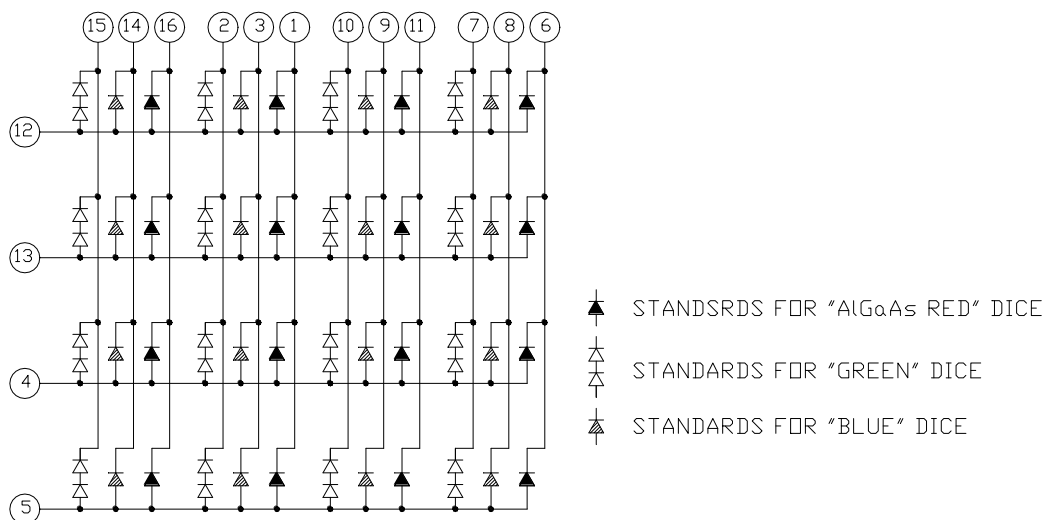

PIN CONNECTION

No.	CONNECTION
1	CATHODE COLUMN 2 AlGaAs RED
2	CATHODE COLUMN 2 GREEN
3	CATHODE COLUMN 2 BLUE
4	ANODE ROW 3
5	ANODE ROW 4
6	CATHODE COLUMN 4 AlGaAs RED
7	CATHODE COLUMN 4 GREEN
8	CATHODE COLUMN 4 BLUE
9	CATHODE COLUMN 3 BLUE
10	CATHODE COLUMN 3 GREEN
11	CATHODE COLUMN 3 AlGaAs RED
12	ANODE ROW 1
13	ANODE ROW 2
14	CATHODE COLUMN 1 BLUE
15	CATHODE COLUMN1 GREEN
16	CATHODE COLUMN 1 AlGaAs RED

ABSOLUTE MAXIMUM RATING AT Ta=25°C

PARAMETER	AlGaAs RED	GREEN	BLUE	UNIT
Average Power Dissipation Per Dot	36	64	54	mW
Peak Forward Current Per Dot	100	90	40	mA
Average Forward Current Per Dot	14	11	5	mA
Derating Linear From 25°C Per Dot	0.19	0.15	0.06	
Reverse Voltage Per Dot	5	10	5	V
Operating Temperature Range	-35°C to +85°C			
Storage Temperature Range	-35°C to +85°C			
Solder Temperature: max 260°C for max 3sec at 1.6mm[1/16inch] below seating plane.				

ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta=25°C
AlGaAs Red

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I _v	3000	7800		μcd	I _p =80mA 1/16Duty
Peak Emission Wavelength	λ _p		660		nm	I _F =20mA
Spectral Line Half-Width	Δλ		35		nm	I _F =20mA
Dominant Wavelength	λ _d		638		nm	I _F =20mA
Forward Voltage any Dot	V _F		1.8	2.4	V	I _F =20mA
			2.0	3.1		I _F =80mA
Reverse Current any Dot	I _R			100	μA	V _R =5V
Luminous Intensity Matching Ratio	I _v -m			2:1		I _p =80mA 1/16Duty

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.

ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta=25°C

Green

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I _V	3000	6200		μcd	I _p =80mA 1/16Duty
Peak Emission Wavelength	λ _p		565		nm	I _F =20mA
Spectral Line Half-Width	Δλ		30		nm	I _F =20mA
Dominant Wavelength	λ _d		569		nm	I _F =20mA
Forward Voltage any Dot	V _F		4.2	5.2	V	I _F =20mA
			6.0	7.4		I _F =80mA
Reverse Current any Dot	I _R			100	μA	V _R =10V
Luminous Intensity Matching Ratio	I _{V-m}			2:1		I _p =80mA 1/16Duty

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.

ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta=25°C





Blue

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITION
Average Luminous Intensity	I _V	1370	4500		μcd	I _p =80mA 1/16Duty
Peak Emission Wavelength	λ _p		430		nm	I _F =20mA
Spectral Line Half-Width	Δλ		65		nm	I _F =20mA
Dominant Wavelength	λ _d		468		nm	I _F =20mA
Forward Voltage any Dot	V _F		3.8	4.5	V	I _F =20mA
			4.8	5.6		I _F =80mA
Reverse Current any Dot	I _R			100	μA	V _R =5V
Luminous Intensity Matching Ratio	I _{V-m}			2:1		I _p =80mA 1/16Duty

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision Internationale De L'Eclairage) eye-response curve.

TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES

(25°C Ambient Temperature Unless Otherwise Noted)

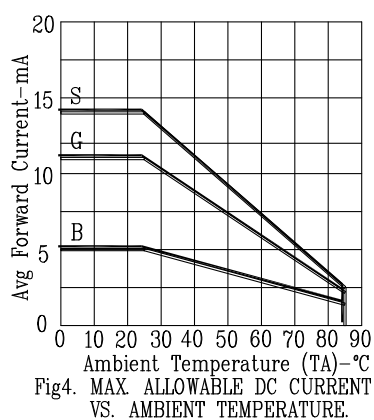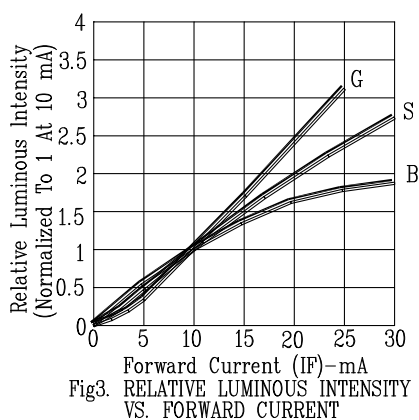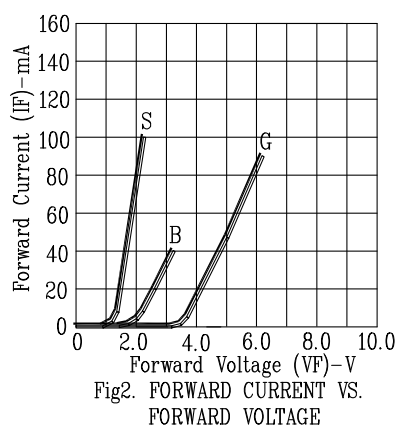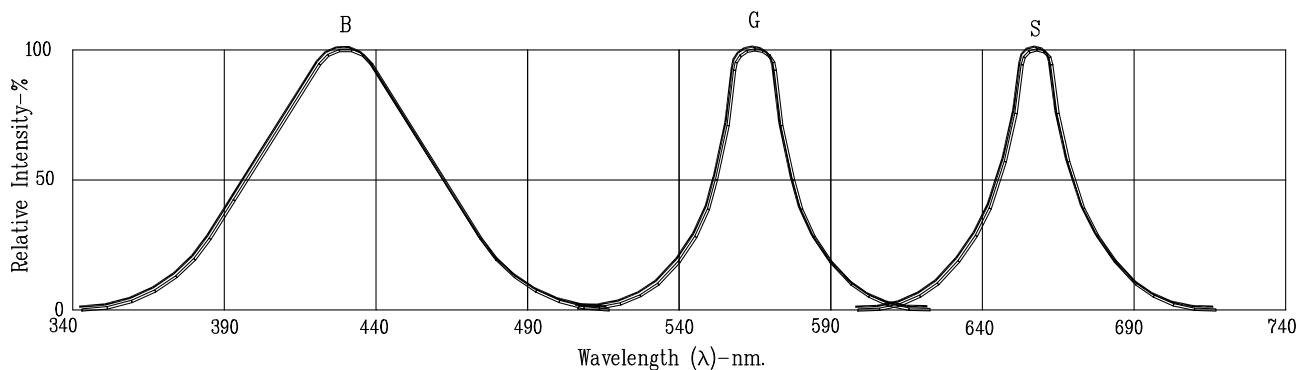

NOTE: S=AlGaAs RED. G=GREEN B=BLUE

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Lite-On:

[LTP-2C44F-01](#)

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9