

**UBC**Chip Type, High Temperature Range,  
Vibration Resistance

For SMD



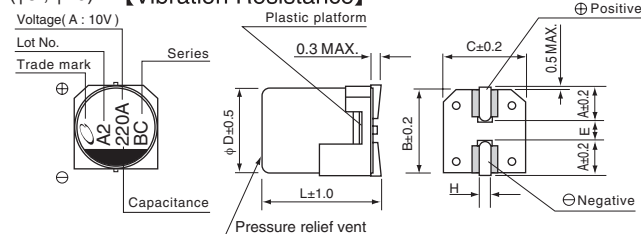
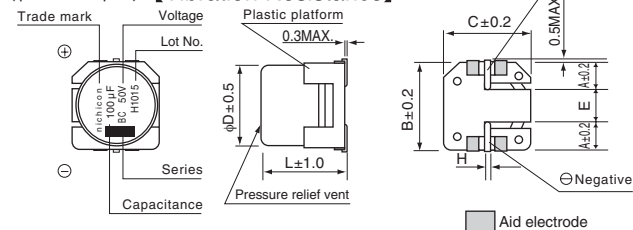
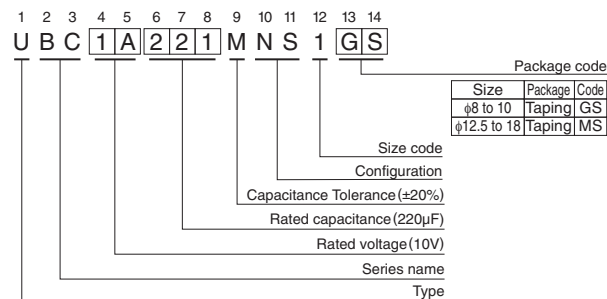
Long Life

Anti-Solvent  
Feature**UBC**

- Highly dependable reliability withstanding load life of 1000 hours at +150°C.
- Suited for automobile electronics where heavy duty services are indispensable.
- Compliant to the RoHS directive (2011/65/EU, (EU)2015/863).
- AEC-Q200 compliant. Please contact us for details.

**Specifications**

| Item                          | Performance Characteristics                                                                                                                                                                                                             |              |      |      |                    |                                                   |      |            |
|-------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------|------|--------------------|---------------------------------------------------|------|------------|
| Category Temperature Range    | -40 to +150°C (φ8 to 10), -55 to +150°C (φ12.5 to 18)                                                                                                                                                                                   |              |      |      |                    |                                                   |      |            |
| Rated Voltage Range           | 10 to 50V                                                                                                                                                                                                                               |              |      |      |                    |                                                   |      |            |
| Rated Capacitance Range       | 33 to 3300μF                                                                                                                                                                                                                            |              |      |      |                    |                                                   |      |            |
| Capacitance Tolerance         | ±20% at 120Hz, 20°C                                                                                                                                                                                                                     |              |      |      |                    |                                                   |      |            |
| Leakage Current               | After 1 minute's application of rated voltage at 20°C, leakage current is not more than 0.03CV or 4 (μA), whichever is greater.                                                                                                         |              |      |      |                    |                                                   |      |            |
| Tangent of loss angle (tan δ) | Rated voltage (V)                                                                                                                                                                                                                       |              | 10   | 16   | 25                 | 35                                                | 50   | 120Hz 20°C |
|                               | tan δ<br>(MAX.)                                                                                                                                                                                                                         | φ8, φ10      | 0.26 | 0.20 | 0.16               | 0.14                                              | 0.14 |            |
|                               |                                                                                                                                                                                                                                         | φ12.5 to φ18 | 0.22 | 0.18 | 0.16               | 0.14                                              | 0.12 |            |
|                               | For capacitance of more than 1000μF, add 0.02 for every increase of 1000μF. (φ12.5 to φ18)                                                                                                                                              |              |      |      |                    |                                                   |      |            |
| Stability at Low Temperature  | Rated voltage (V)                                                                                                                                                                                                                       |              | 10   | 16   | 25                 | 35                                                | 50   | 120Hz      |
|                               | Impedance ratio<br>Z-40°C / Z+20°C<br>(MAX.)                                                                                                                                                                                            | φ8, φ10      | 10   | 8    | 6                  | 4                                                 | 4    |            |
|                               |                                                                                                                                                                                                                                         | φ12.5 to φ18 | 8    | 6    | 4                  | 4                                                 | 4    |            |
| Endurance                     | The specifications listed at right shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 150°C.                                                                                    |              |      |      | Capacitance change | Within ±30% of the initial capacitance value      |      |            |
|                               |                                                                                                                                                                                                                                         |              |      |      | tan δ              | 300% or less than the initial specified value     |      |            |
|                               |                                                                                                                                                                                                                                         |              |      |      | Leakage current    | Less than or equal to the initial specified value |      |            |
| Shelf Life                    | After storing the capacitors under no load at 150°C for 1000 hours and then performing voltage treatment based on JIS C 5101-4 clause 4.1 at 20°C, they shall meet the specified values for the endurance characteristics listed above. |              |      |      |                    |                                                   |      |            |
| Marking                       | Black print on the case top.                                                                                                                                                                                                            |              |      |      |                    |                                                   |      |            |

**Chip Type****(φ8, φ10) 【Vibration Resistance】****(φ12.5 to φ18) 【Vibration Resistance】****Type numbering system (Example : 10V 220μF)**

|    | (mm)       |            |            |            |            |  |
|----|------------|------------|------------|------------|------------|--|
| φD | 8          | 10         | 12.5       | 16         | 18         |  |
| A  | 2.9        | 3.2        | 4.8        | 5.4        | 6.4        |  |
| B  | 8.3        | 10.3       | 13.6       | 17.1       | 19.1       |  |
| C  | 8.3        | 10.3       | 13.6       | 17.1       | 19.1       |  |
| E  | 3.1        | 4.5        | 4.0        | 6.3        | 6.3        |  |
| L  | 10         | 10         | 13.5       | 16.5, 21.5 | 21.5       |  |
| H  | 1.1 to 1.5 | 1.1 to 1.5 | 1.0 to 1.4 | 1.0 to 1.4 | 1.0 to 1.4 |  |

**Dimensions**

| V         |      | 10          |      | 16          |      | 25          |      | 35          |      | 50                       |              |
|-----------|------|-------------|------|-------------|------|-------------|------|-------------|------|--------------------------|--------------|
| Cap. (μF) | Code | 1A          |      | 1C          |      | 1E          |      | 1V          |      | 1H                       |              |
| 33        | 330  |             |      |             |      |             |      |             |      | 8 × 10                   | 70           |
| 47        | 470  |             |      |             |      |             |      |             |      | 10 × 10                  | 100          |
| 100       | 101  |             |      | 8 × 10      | 110  | 8 × 10      | 110  | 8 × 10      | 80   | 12.5 × 13.5              | 420          |
| 220       | 221  | 8 × 10      | 110  | 10 × 10     | 150  | 10 × 10     | 150  | 12.5 × 13.5 | 550  | 16 × 16.5                | 550          |
| 330       | 331  | 10 × 10     | 150  |             |      | 12.5 × 13.5 | 650  | 12.5 × 13.5 | 650  | 16 × 21.5                | 650          |
| 470       | 471  |             |      | 12.5 × 13.5 | 750  | 12.5 × 13.5 | 700  | 16 × 16.5   | 750  | 16 × 21.5                | 850          |
| 680       | 681  | 12.5 × 13.5 | 800  | 12.5 × 13.5 | 800  | 16 × 16.5   | 800  | 16 × 21.5   | 950  | 18 × 21.5                | 1100         |
| 1000      | 102  | 12.5 × 13.5 | 900  | 16 × 16.5   | 850  | 16 × 21.5   | 1000 | 18 × 21.5   | 1150 |                          |              |
| 2200      | 222  | 18 × 21.5   | 1350 | 18 × 21.5   | 1350 |             |      |             |      |                          |              |
| 3300      | 332  | 18 × 21.5   | 1400 |             |      |             |      |             |      |                          |              |
|           |      |             |      |             |      |             |      |             |      | Case size<br>φD × L (mm) | Rated ripple |

Rated ripple current (mA rms) at 150°C 100kHz

**Frequency coefficient of rated ripple current**

| Frequency   | 120 Hz | 300 Hz | 1 kHz | 10kHz or more |
|-------------|--------|--------|-------|---------------|
| Coefficient | 0.67   | 0.79   | 0.91  | 1.00          |

- Taping specifications are given in page 23.
- Recommended land size, soldering by reflow are given in page 18, 19.
- Please refer to page 3 for the minimum order quantity.

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9