




## features

- Small size power type resistor
- Coated with UL94V0 equivalent flameproof material
- Suitable for automatic machine insertion
- Marking: Pink body color with color-coded bands or alpha-numeric black marking
- Products with lead-free terminations meet EU RoHS and China RoHS requirements
- Surface mount style "N" forming is suitable for automatic mounting

## dimensions and construction

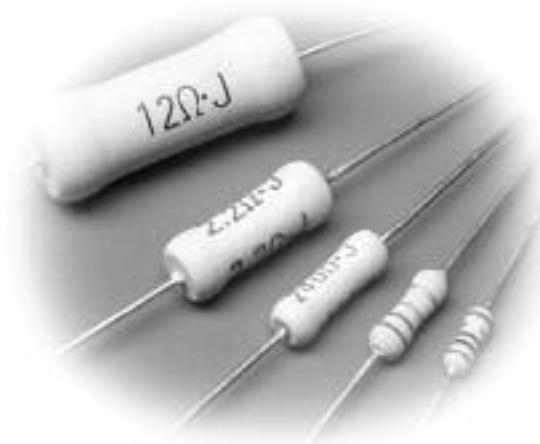

| Type              | Dimensions inches (mm)  |                |                        |               |                          |
|-------------------|-------------------------|----------------|------------------------|---------------|--------------------------|
|                   | L                       | C (max.)       | D                      | d (nom.)      | I*                       |
| MOS1/2<br>MOSX1/2 | .244±.02<br>(6.2±0.5)   | .280<br>(7.1)  | .098±.02<br>(2.5±0.5)  | .024<br>(0.6) | .945 Min.<br>(24.0 Min.) |
| MOS1<br>MOSX1     | .354±.039<br>(9.0±1.0)  | .437<br>(11.1) | .118±.02<br>(3.0±0.5)  | .031<br>(0.8) |                          |
| MOS2<br>MOSX2     | .472±.039<br>(12.0±1.0) | .591<br>(15.0) | .157±.02<br>(4.0±0.5)  |               |                          |
| MOS3<br>MOSX3     | .610±.039<br>(15.5±1.0) | .709<br>(18.0) | .236±.039<br>(6.0±1.0) |               |                          |
| MOS5<br>MOSX5     | .965±.039<br>(24.5±1.0) | 1.10<br>(28.0) | .354±.039<br>(9.0±1.0) |               |                          |
|                   |                         |                |                        |               | 1.18±.118<br>(30.0±3.0)  |
|                   |                         |                |                        |               | 1.50±.118<br>(38.0±3.0)  |

\* Lead length changes depending on taping and forming type.

## ordering information

| New Part # | MOS         | 1/2                                                           | C                               | T52                                                                                                                                      | A                                                                    | 103                                                                                                                                                                                              | J                                       |
|------------|-------------|---------------------------------------------------------------|---------------------------------|------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------|
| Type       | MOS<br>MOSX | Power Rating<br>1/2: 0.5W<br>1: 1W<br>2: 2W<br>3: 3W<br>5: 5W | Termination Material<br>C: SnCu | Taping and Forming<br>Axial: T26, T52, T521, T631<br>Stand-off Axial: L52, L521, L631<br>Radial: VTP, VTE, GT, GT4<br>L, U, M, N Forming | Packaging<br>A: Ammo<br>R: Reel<br>TEB: Plastic embossed (N forming) | Nominal Resistance<br>±2%, ±5%: 2 significant figures + 1 multiplier<br>"R" indicates decimal on value <10Ω<br>±1%: 3 significant figures + 1 multiplier<br>"R" indicates decimal on value <100Ω | Tolerance<br>F: ±1%<br>G: ±2%<br>J: ±5% |

For further information on packaging, please refer to Appendix C.

## reduced size metal oxide power type leaded resistor

### applications and ratings

| Part Designation | Power Rating @ 70°C | Minimum Dielectric Withstanding Voltage | T.C.R. (ppm/°C) Max. | Resistance Range   |              |              | Absolute Maximum Working Voltage | Absolute Maximum Overload Voltage | Operating Temperature Range |            |            |         |         |              |             |            |         |             |            |         |
|------------------|---------------------|-----------------------------------------|----------------------|--------------------|--------------|--------------|----------------------------------|-----------------------------------|-----------------------------|------------|------------|---------|---------|--------------|-------------|------------|---------|-------------|------------|---------|
|                  |                     |                                         |                      | E-24, E-96* (F±1%) | E-24* (G±2%) | E-24 (J±5%)  |                                  |                                   |                             |            |            |         |         |              |             |            |         |             |            |         |
| MOS1/2           | 0.5W                | 400V                                    | ±300                 | 10Ω - 47kΩ         | 10Ω - 47kΩ   | 10Ω - 47kΩ   | 300V                             | 600V                              | -55°C to +200°C             |            |            |         |         |              |             |            |         |             |            |         |
| MOS1             | 1.0W                | 500V                                    |                      | 10Ω - 68kΩ         | 10Ω - 68kΩ   | 10Ω - 100kΩ  | 350V                             |                                   |                             | 700V       |            |         |         |              |             |            |         |             |            |         |
| MOS2             | 2.0W                |                                         |                      | 10Ω - 100kΩ        | 10Ω - 100kΩ  |              |                                  | 500V                              |                             |            | 1000V      |         |         |              |             |            |         |             |            |         |
| MOS3             | 3.0W                | 700V                                    |                      | —                  |              | 10Ω - 100kΩ  | 500V                             |                                   |                             | 1000V      |            |         |         |              |             |            |         |             |            |         |
| MOS5             | 5.0W                | 800V                                    |                      | —                  | 10Ω - 100kΩ  |              |                                  | 500V                              |                             |            | 1000V      |         |         |              |             |            |         |             |            |         |
| MOSX1/2          | 0.5W                | 400V                                    |                      | 1Ω - 9.1Ω          |              | 0.22Ω - 9.1Ω | 0.1Ω - 9.1Ω                      |                                   |                             | E = √P x R |            | E x 2.5 |         |              |             |            |         |             |            |         |
| MOSX1            | 1.0W                | 500V                                    |                      |                    | 0.22Ω - 9.1Ω |              |                                  | 0.1Ω - 9.1Ω                       |                             |            | E = √P x R |         | E x 2.5 |              |             |            |         |             |            |         |
| MOSX2            | 2.0W                |                                         |                      |                    |              |              |                                  |                                   |                             |            |            |         |         | 0.22Ω - 9.1Ω | 0.1Ω - 9.1Ω | E = √P x R | E x 2.5 |             |            |         |
| MOSX3            | 3.0W                | 700V                                    |                      | 0.22Ω - 9.1Ω       |              |              |                                  |                                   |                             |            |            |         |         |              |             |            |         | 0.1Ω - 9.1Ω | E = √P x R | E x 2.5 |
| MOSX5            | 5.0W                | 800V                                    |                      |                    |              |              |                                  |                                   |                             |            |            |         |         |              |             |            |         |             |            |         |

\* Please consult when there is a demand of the resistance besides the 1% and 2% range.

### environmental applications

#### Derating Curve



For resistors operated at an ambient temperature of 70°C or above, a power rating shall be derated in accordance with the above derating curve.

#### Surface Temperature Rise



### Performance Characteristics

| Parameter                   | Requirement                                                   | $\Delta R \pm(\% + 0.05\Omega)$ | Test Method                                                                                                                                                                                                                                                                                                                                                                             |
|-----------------------------|---------------------------------------------------------------|---------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
|                             | Limit                                                         | Typical                         |                                                                                                                                                                                                                                                                                                                                                                                         |
| Resistance                  | Within specified tolerance                                    | —                               | Measuring points are at 10mm ±1mm from the end cap.                                                                                                                                                                                                                                                                                                                                     |
| T.C.R.                      | Within specified T.C.R.                                       | —                               | Room temperature +100°C                                                                                                                                                                                                                                                                                                                                                                 |
| Overload (Short time)       | $\pm(2\% + 0.1\Omega)$                                        | ±1%                             | Rated voltage x 2.5 for 5 seconds                                                                                                                                                                                                                                                                                                                                                       |
| Resistance to Solder Heat   | ±1%                                                           | ±0.5%                           | 260°C ±5°C, 10 seconds ± 1 second                                                                                                                                                                                                                                                                                                                                                       |
| Terminal Strength           | No lead-coming off and loose terminals                        | —                               | Twist 360°C, 5 times                                                                                                                                                                                                                                                                                                                                                                    |
| Rapid Change of Temperature | ±1%                                                           | ±0.5%                           | -55°C (30 minutes), +155°C (30 minutes), 5 cycles                                                                                                                                                                                                                                                                                                                                       |
| Moisture Resistance         | $\pm(5\% + 0.1\Omega)$                                        | ±2.5%                           | 40°C ± 2°C, 90 - 95% RH, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle                                                                                                                                                                                                                                                                                                                        |
| Endurance at 70°C           | $\pm(5\% + 0.1\Omega)$                                        | ±2.5%                           | 70°C ± 2°C, 1000 hours, 1.5 hr ON, 0.5 hr OFF cycle                                                                                                                                                                                                                                                                                                                                     |
| Resistance to Solvent       | No abnormality in appearance. Marking shall be easily legible | —                               | Ultrasonic washing with isopropyl alcohol for 2 minutes. Power: 0.3W/cm³, f: 28kHz, Temp: 35°C ±5°C                                                                                                                                                                                                                                                                                     |
| Flame Retardant             | No evidence of flaming or self-flaming                        | —                               | Flame test: the test flame shall be applied and removed for each 15 seconds respectively to repeat the cycle 5 times. Overload flame retardant: power (AC) corresponding to 2, 4, 8, 16 and 32 times the power rating shall be applied for each 1 minute until disconnection occurs. However the applied voltage shall not exceed the value of 4 times of the maximum operating voltage |

## Данный компонент на территории Российской Федерации

**Вы можете приобрести в компании MosChip.**

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9