

DPDT SWITCH FOR 2.4 GHz AND 6 GHz DUAL-BAND WIRELESS LAN

DESCRIPTION

The μ PG2164T5N is a GaAs MMIC DPDT (Double Pole Double Throw) switch which was developed for 2.4 GHz and 6 GHz dual-band wireless LAN. This device can operate frequency from 2.4 GHz band and 6 GHz band, having the low insertion loss and high isolation.

This device is housed in a 6-pin plastic TSON (Thin Small Out-line Non-leaded) package. And this package is able to high-density surface mounting.

FEATURES

- Operating frequency : $f = 2.4$ to 2.5 GHz and 4.9 to 6.0 GHz
- Switch control voltage : $V_{\text{cont}}(\text{H}) = 2.8$ to 5.0 V (3.0 V TYP.)
: $V_{\text{cont}}(\text{L}) = -0.3$ to 0.3 V (0 V TYP.)
- Low insertion loss : $L_{\text{ins1}} = 0.50$ dB TYP. @ $f = 2.4$ to 2.5 GHz, $V_{\text{cont}}(\text{H}) = 3.0$ V, $V_{\text{cont}}(\text{L}) = 0$ V
: $L_{\text{ins2}} = 0.70$ dB TYP. @ $f = 4.9$ to 6.0 GHz, $V_{\text{cont}}(\text{H}) = 3.0$ V, $V_{\text{cont}}(\text{L}) = 0$ V
- High isolation : $ISL1 = 25$ dB TYP. @ $f = 2.4$ to 2.5 GHz, $V_{\text{cont}}(\text{H}) = 3.0$ V, $V_{\text{cont}}(\text{L}) = 0$ V
: $ISL2 = 17$ dB TYP. @ $f = 4.9$ to 6.0 GHz, $V_{\text{cont}}(\text{H}) = 3.0$ V, $V_{\text{cont}}(\text{L}) = 0$ V
- Handling power : $P_{\text{in}}(1 \text{ dB}) = +31.0$ dBm TYP. @ $f = 2.5$ GHz, $V_{\text{cont}}(\text{H}) = 3.0$ V, $V_{\text{cont}}(\text{L}) = 0$ V
: $P_{\text{in}}(1 \text{ dB}) = +29.0$ dBm TYP. @ $f = 6.0$ GHz, $V_{\text{cont}}(\text{H}) = 3.0$ V, $V_{\text{cont}}(\text{L}) = 0$ V
- High-density surface mounting : 6-pin plastic TSON package ($1.5 \times 1.5 \times 0.37$ mm)

APPLICATION

- Dual-band wireless LAN (IEEE802.11a + b/g)

ORDERING INFORMATION

Part Number	Order Number	Package	Marking	Supplying Form
μ PG2164T5N-E2	μ PG2164T5N-E2-A	6-pin plastic TSON (Pb-Free)	G5B	• Embossed tape 8 mm wide • Pin 1, 6 face the perforation side of the tape • Qty 3 kpcs/reel


Remark To order evaluation samples, contact your nearby sales office.

Part number for sample order: μ PG2164T5N-A

Caution: Observe precautions when handling because these devices are sensitive to electrostatic discharge

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.

PIN CONNECTIONS AND INTERNAL BLOCK DIAGRAM

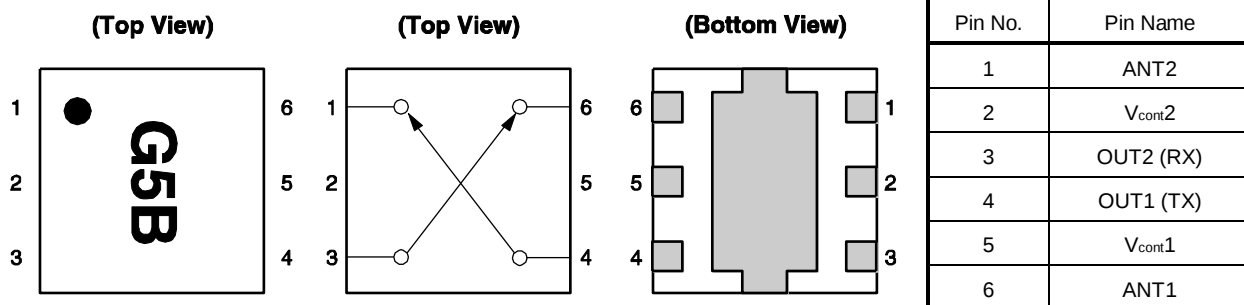

Remark Exposed pad : GND

TRUTH TABLE

V _{cont1}	V _{cont2}	ANT1-OUT1 (TX)	ANT1- OUT2 (RX)	ANT2- OUT1 (TX)	ANT2-OUT2 (RX)
High	Low	OFF	ON	ON	OFF
Low	High	ON	OFF	OFF	ON

ABSOLUTE MAXIMUM RATINGS (T_A = +25°C, unless otherwise specified)

Parameter	Symbol	Ratings	Unit
Switch Control Voltage	V _{cont}	-6.0 to +6.0	V
Input Power	P _{in}	+32	dBm
Operating Ambient Temperature	T _A	-45 to +85	°C
Storage Temperature	T _{stg}	-55 to +135	°C

RECOMMENDED OPERATING RANGE (T_A = +25°C, unless otherwise specified)

Parameter	Symbol	MIN.	TYP.	MAX.	Unit
Switch Control Voltage (H)	V _{cont (H)}	2.8	3.0	5.0	V
Switch Control Voltage (L)	V _{cont (L)}	-0.3	0	0.3	V
Operating Frequency 1	f ₁	2.4	—	2.5	GHz
Operating Frequency 2	f ₂	4.9	—	6.0	GHz

ELECTRICAL CHARACTERISTICS


($T_A = +25^\circ\text{C}$, $V_{\text{cont (H)}} = 3.0\text{ V}$, $V_{\text{cont (L)}} = 0\text{ V}$, $Z_0 = 50\ \Omega$, DC blocking capacitors = 4 pF, unless otherwise specified)

Parameter	Symbol	Test Conditions	MIN.	TYP.	MAX.	Unit
Insertion Loss 1	L_{ins1}	$f = 2.4\text{ to }2.5\text{ GHz}$	–	0.50	0.75	dB
Insertion Loss 2	L_{ins2}	$f = 4.9\text{ to }6.0\text{ GHz}$	–	0.70	1.00	dB
Isolation 1 (ANT to OUT)	$ISL1$	$f = 2.4\text{ to }2.5\text{ GHz}$	22	25	–	dB
Isolation 2 (ANT to OUT)	$ISL2$	$f = 4.9\text{ to }6.0\text{ GHz}$	14	17	–	dB
Isolation 3 (ANT1 to ANT2, TX to RX)	$ISL3$	$f = 2.4\text{ to }2.5\text{ GHz}$	22	25	–	dB
Isolation 4 (ANT1 to ANT2, TX to RX)	$ISL4$	$f = 4.9\text{ to }6.0\text{ GHz}$	15	17	–	dB
Input Return Loss 1	RL_{in1}	$f = 2.4\text{ to }2.5\text{ GHz}$	–	15	–	dB
Input Return Loss 2	RL_{in2}	$f = 4.9\text{ to }6.0\text{ GHz}$	–	15	–	dB
Output Return Loss 1	RL_{out1}	$f = 2.4\text{ to }2.5\text{ GHz}$	–	15	–	dB
Output Return Loss 2	RL_{out2}	$f = 4.9\text{ to }6.0\text{ GHz}$	–	15	–	dB
1 dB Loss Compression Input Power 1 ^{Note}	$P_{\text{in (1 dB) 1}}$	$f = 2.4\text{ to }2.5\text{ GHz}$	–	+31.0	–	dBm
1 dB Loss Compression Input Power 2 ^{Note}	$P_{\text{in (1 dB) 2}}$	$f = 4.9\text{ to }6.0\text{ GHz}$	–	+29.0	–	dBm
Input 3rd Order Intercept Point	IIP_3	$f_1 = 2\ 500\text{ MHz}$, $f_2 = 2\ 501\text{ MHz}$, $P_{\text{in (1 tone)}} = +20\text{ dBm}$	–	+50	–	dBm
Switch Control Current	I_{cont}		–	0.1	1.0	μA
Switch Control Speed	t_{sw}	50% CTL to 90/10%	–	50	–	ns

Note $P_{\text{in (1 dB)}}$ is measured the input power level when the insertion loss increases more 1 dB than that of linear range.

Caution This device is used it is necessary to use DC blocking capacitors.

EVALUATION CIRCUIT

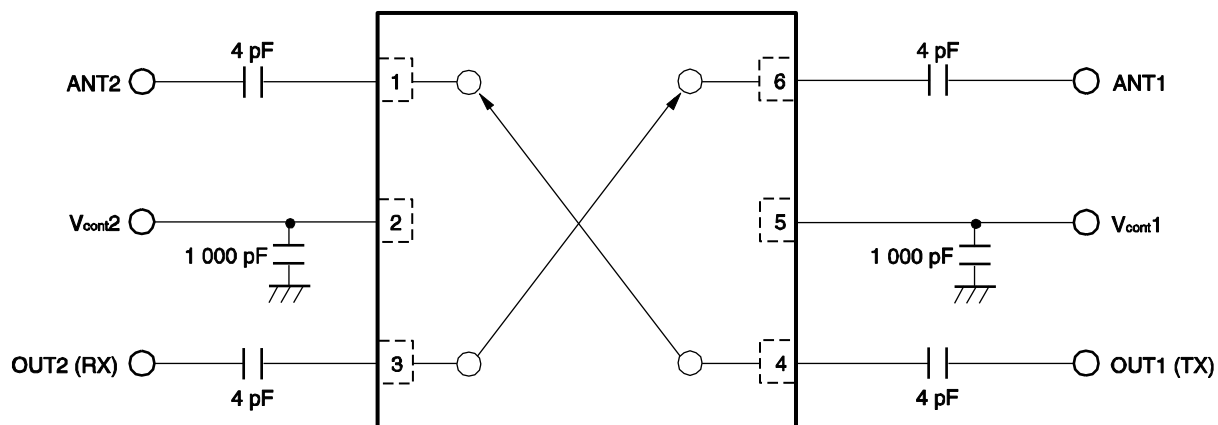


The application circuits and their parameters are for reference only and are not intended for use in actual design-ins.


MOUNTING PAD AND SOLDER MASK LAYOUT DIMENSIONS

6-PIN PLASTIC TSON (UNIT: mm)

MOUNTING PAD

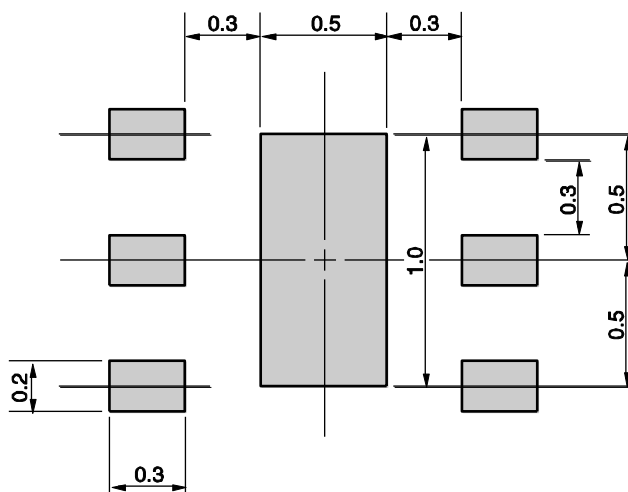

SOLDER MASK

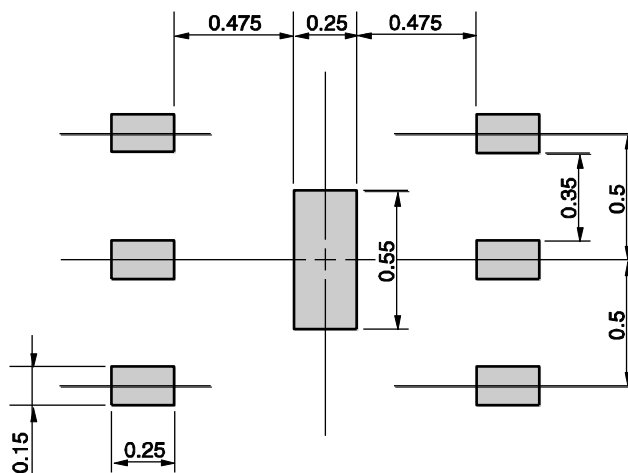


Solder thickness : 0.08 mm

Remark The mounting pad and solder mask layouts in this document are for reference only.

<R> **PACKAGE DIMENSIONS**

6-PIN PLASTIC TSON (UNIT: mm)

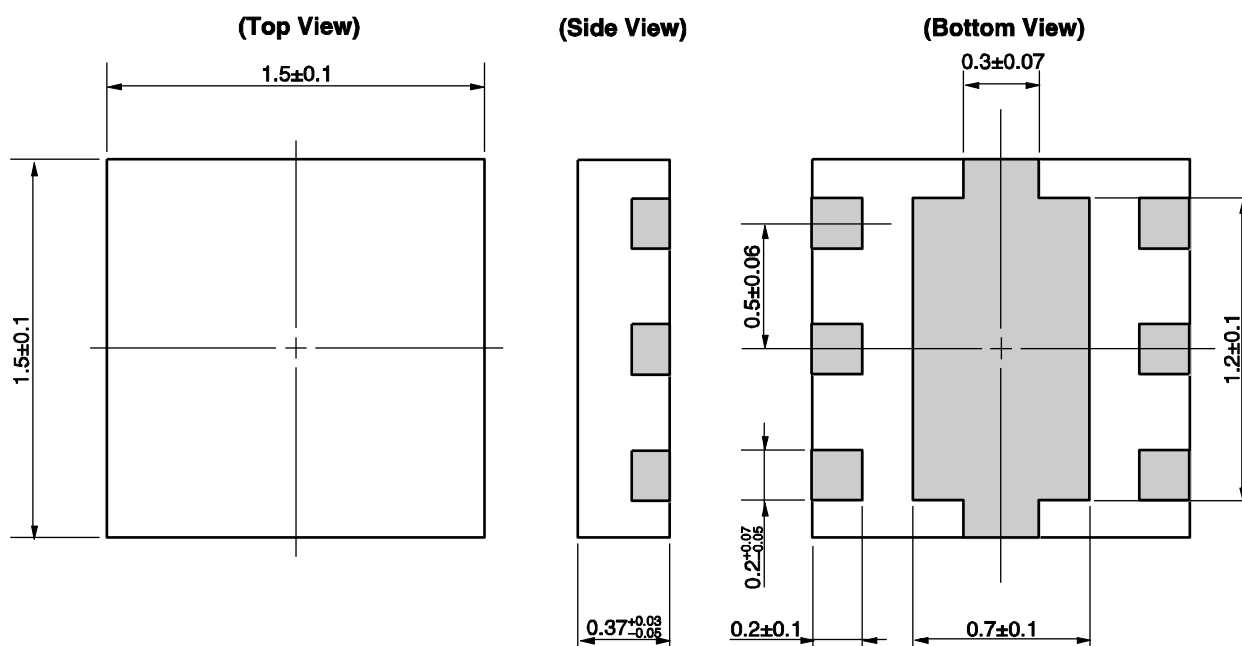

RECOMMENDED SOLDERING CONDITIONS

This product should be soldered and mounted under the following recommended conditions. For soldering methods and conditions other than those recommended below, contact your nearby sales office.

Soldering Method	Soldering Conditions	Condition Symbol
Infrared Reflow	Peak temperature (package surface temperature) : 260°C or below Time at peak temperature : 10 seconds or less Time at temperature of 220°C or higher : 60 seconds or less Preheating time at 120 to 180°C : 120±30 seconds Maximum number of reflow processes : 3 times Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	IR260
Wave Soldering	Peak temperature (molten solder temperature) : 260°C or below Time at peak temperature : 10 seconds or less Preheating temperature (package surface temperature) : 120°C or below Maximum number of flow processes : 1 time Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	WS260
Partial Heating	Peak temperature (terminal temperature) : 350°C or below Soldering time (per side of device) : 3 seconds or less Maximum chlorine content of rosin flux (% mass) : 0.2%(Wt.) or below	HS350

Caution Do not use different soldering methods together (except for partial heating).

Caution

GaAs Products

This product uses gallium arsenide (GaAs).

GaAs vapor and powder are hazardous to human health if inhaled or ingested, so please observe the following points.

- Follow related laws and ordinances when disposing of the product. If there are no applicable laws and/or ordinances, dispose of the product as recommended below.
 1. Commission a disposal company able to (with a license to) collect, transport and dispose of materials that contain arsenic and other such industrial waste materials.
 2. Exclude the product from general industrial waste and household garbage, and ensure that the product is controlled (as industrial waste subject to special control) up until final disposal.
- Do not burn, destroy, cut, crush, or chemically dissolve the product.
- Do not lick the product or in any way allow it to enter the mouth.

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:

moschip.ru

moschip.ru_4

moschip.ru_6

moschip.ru_9