

## FO converters - PSI-MOS-DNET/FO 850 T - 2313986

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)



Fiber optic converter with integrated optical diagnostics, for DeviceNet™, CAN, CANopen® up to 1000 kbps, T-coupler, interfaces: 1 x CAN, 1 x Alarm, 2 x FO (B-FOC), 850 nm, for HCS/fiberglass (multi-mode)

### Product Features

- ✓ Data rates of up to 1000 kbps
- ✓ Supply voltage and data signals routed through via DIN rail connectors
- ✓ Can be combined with the PSI copper repeater in a modular way using DIN rail connectors
- ✓ Automatic data rate detection or fixed data rate setting via DIP switches
- ✓ Integrated optical diagnostics for continuous monitoring of fiber optic paths
- ✓ High-quality electrical isolation between all interfaces (DeviceNet // fiber optic ports // power supply // DIN rail connector)
- ✓ Connections can be plugged in using a COMBICON screw terminal block
- ✓ Redundant power supply possible by means of optional system power supply unit
- ✓ Approved for use in zone 2
- ✓ Intrinsically safe fiber optic interface (Ex op is) for direct connection to devices in zone 1
- ✓ Floating switch contact for leading alarm generation in relation to critical fiber optic paths



CANopen



DeviceNet

CANopen

### Key commercial data

|                                      |          |
|--------------------------------------|----------|
| Packing unit                         | 1 pc     |
| Weight per Piece (excluding packing) | 0.26 GRM |
| Custom tariff number                 | 85176200 |
| Country of origin                    | Germany  |

### Technical data

#### Note

|                         |   |
|-------------------------|---|
| Utilization restriction | EMC: class A product, see manufacturer's declaration in the download area |
|-------------------------|---|

# FO converters - PSI-MOS-DNET/FO 850 T - 2313986

## Technical data

### Dimensions

|        |        |
|--------|--------|
| Width  | 35 mm  |
| Height | 102 mm |
| Depth  | 119 mm |

### Ambient conditions

|   |  |
|---|--|
| Ambient temperature (operation)         | -20 °C ... 60 °C   |
| Ambient temperature (storage/transport) | -40 °C ... 85 °C   |
| Permissible humidity (operation)        | 30 % ... 95 % (non-condensing)                           |
| Altitude                                | 5000 m (For restrictions see manufacturer's declaration) |
| Degree of protection                    | IP20   |
| Noise immunity                          | EN 61000-6-2   |

### Serial interface

|  |  |
|--|--|
| Interface 1                            | CAN interface, in accordance with ISO/IS 11898 for DeviceNet, CAN, CANopen |
| Operating mode                         | Semi-duplex  |
| No. of channels                        | 2 (CAN_High / CAN_Low)   |
| Connection method                      | COMBICON plug-in screw terminal block                                      |
| File format/coding                     | Bit stuffing, NRZ  |
| Transmission medium                    | 2-wire twisted pair, shielded  |
| Transmission method                    | CSMA/CA  |
| Transmission length                    | ≤ 5000 m (Dependent on the data rate and the protocol used)                |
| Number of INTERBUS devices             | ≤ 64 (per potential segment)   |
|  | ≤ 63 (DeviceNet™, can be addressed logically)                              |
|  | ≤ 128 (CANopen®, can be addressed logically)                               |
| Termination resistor                   | 124 Ω (Integrated and ready to be switched)                                |
| Conductor cross section solid min.     | 0.2 mm <sup>2</sup>  |
| Conductor cross section solid max.     | 2.5 mm <sup>2</sup>  |
| Conductor cross section stranded min.  | 0.2 mm <sup>2</sup>  |
| Conductor cross section stranded max.  | 2.5 mm <sup>2</sup>  |
| Conductor cross section AWG/kcmil min. | 24   |
| Conductor cross section AWG/kcmil max  | 14   |

### Optical interface FO

|                              |                         |
|------------------------------|-------------------------|
| Transmit capacity, minimum   | -13.5 dBm (50/125 μm)   |
|                              | -12.3 dBm (62,5/125 μm) |
|                              | -10.2 dBm (200/230 μm)  |
| Minimum receiver sensitivity | -28.1 dBm (50/125 μm)   |
|                              | -28.1 dBm (62,5/125 μm) |

## FO converters - PSI-MOS-DNET/FO 850 T - 2313986

### Technical data

#### Optical interface FO

|   |   |
|---|---|
|   | -28.1 dBm (200/230 µm)  |
| Wavelength                                    | 850 nm  |
| Transmission length incl. 3 dB system reserve | 1800 m (with F-K 200/230 8 dB/km with quick mounting connector) |
|   | 4600 m (with F-G 50/125 2.5 dB/km)                              |
|   | 4200 m (with F-G 62,5/125 3.0 dB/km)                            |
| Transmission medium                           | HCS fiber   |
|   | Multi-mode fiberglass   |
| Transmission protocol                         | Protocol transparent for CAN interface                          |
| Connection method                             | B-FOC (ST®)   |

#### Digital outputs

|                             |              |
|-----------------------------|--------------|
| Output name                 | Relay output |
| Number of outputs           | 1            |
| Contact type                | N/O contact  |
| Minimum switching voltage   | 11 V DC      |
| Maximum switching voltage   | 30 V DC      |
| Limiting continuous current | 500 mA       |

#### Power supply

|                             |   |
|-----------------------------|---|
| Nominal supply voltage      | 24 V DC   |
| Supply voltage range        | 11 V DC ... 30 V DC (via pluggable COMBICON screw terminal block) |
| Typical current consumption | 150 mA (24 V DC)  |

#### General

|  |   |
|--|---|
| Bit distortion, input                    | ± 35 % (permitted)  |
| Bit distortion, output                   | < 6.25 %  |
| Electrical isolation                     | VCC // CAN  |
| Test voltage data interface/power supply | 1.5 kV <sub>rms</sub> (50 Hz, 1 min.)   |
| Electromagnetic compatibility            | Conformance with EMC Directive 2004/108/EC  |
| Noise emission                           | EN 55011  |
| Net weight                               | 161 g   |
| Housing material                         | PA 6.6-FR   |
| Color                                    | green   |
| MTBF                                     | 400 Years (Telcordia standard, 25°C temperature, 21% operating cycle (5 days a week, 8 hours a day))    |
|  | 64 Years (Telcordia standard, 40°C temperature, 34.25% operating cycle (5 days a week, 12 hours a day)) |
| MTTF                                     | 543 Years (SN 29500 standard, temperature 25°C, operating cycle 21 % (5 days a week, 8 hours a day))    |

## FO converters - PSI-MOS-DNET/FO 850 T - 2313986

### Technical data

#### General

|                  |  |
|------------------|--|
|                  | 247 Years (SN 29500 standard, temperature 40 °C, operating cycle 34.25 % (5 days a week, 12 hours a day))                      |
|                  | 102 Years (SN 29500 standard, temperature 40°C, operating cycle 100 % (7 days a week, 24 hours a day))                         |
| Conformance      | CE-compliant   |
| ATEX             | # II (2) D [Ex op is Db] IIIC (PTB 06 ATEX 2042 U) (Please follow the special installation instructions in the documentation!) |
|                  | # II (2) G [Ex op is Gb] IIC (PTB 06 ATEX 2042 U) (Please follow the special installation instructions in the documentation!)  |
|                  | # II 3 G Ex nA IIC T4 Gc X (Please follow the special installation instructions in the documentation!)                         |
| UL, USA / Canada | 508 listed   |

### Classifications

#### eCl@ss

|            |          |
|------------|----------|
| eCl@ss 4.0 | 27230207 |
| eCl@ss 4.1 | 27230207 |
| eCl@ss 5.0 | 27230207 |
| eCl@ss 5.1 | 27230207 |
| eCl@ss 6.0 | 27230207 |
| eCl@ss 7.0 | 27230207 |
| eCl@ss 8.0 | 27143136 |

#### ETIM

|          |          |
|----------|----------|
| ETIM 3.0 | EC000236 |
| ETIM 4.0 | EC000236 |
| ETIM 5.0 | EC001467 |

#### UNSPSC

|               |          |
|---------------|----------|
| UNSPSC 6.01   | 30211506 |
| UNSPSC 7.0901 | 39121008 |
| UNSPSC 11     | 39121008 |
| UNSPSC 12.01  | 39121008 |
| UNSPSC 13.2   | 43201553 |

### Approvals

#### Approvals

# FO converters - PSI-MOS-DNET/FO 850 T - 2313986

## Approvals

Approvals

UL Listed / cUL Listed / DNV / cULus Listed

---

Ex Approvals


ATEX


---

Approvals submitted


---

## Approval details

UL Listed 

cUL Listed 


DNV

cULus Listed 


## Drawings

# FO converters - PSI-MOS-DNET/FO 850 T - 2313986

Schematic diagram

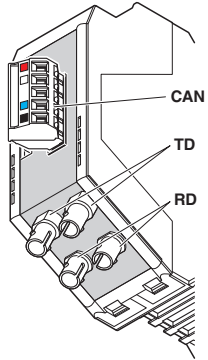


Application drawing

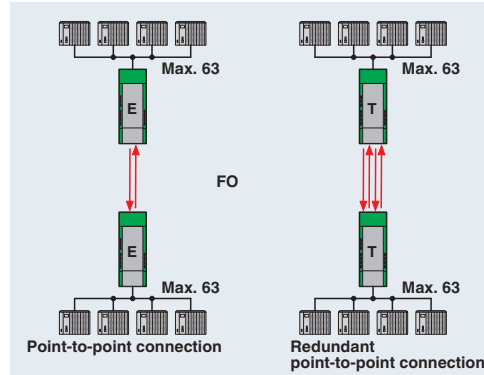

Device connections


Point-to-point connection

Application drawing

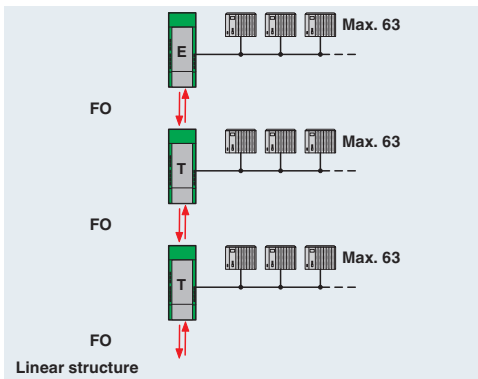


Line structure

Application drawing

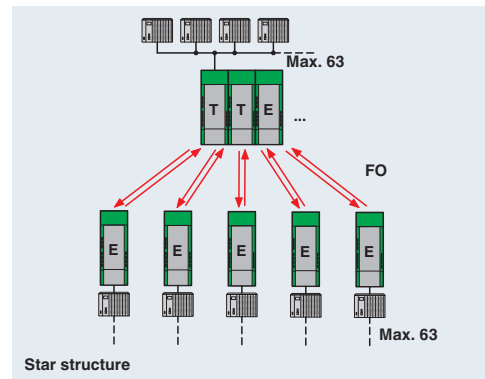


Star structure

Application drawing

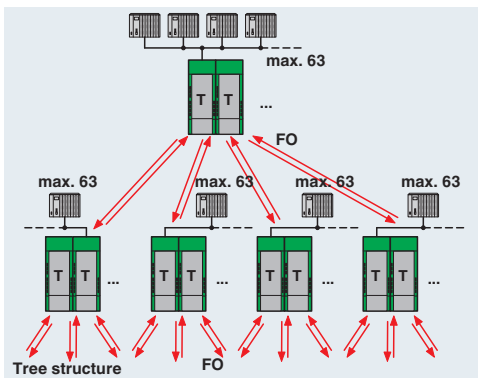


Tree structure

Dimensioned drawing

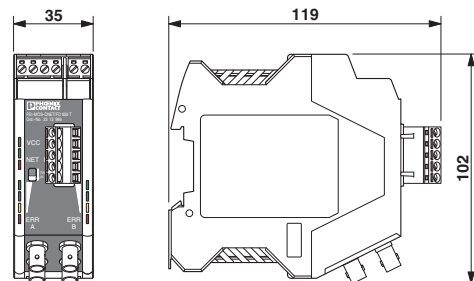

# FO converters - PSI-MOS-DNET/FO 850 T - 2313986

Block diagram

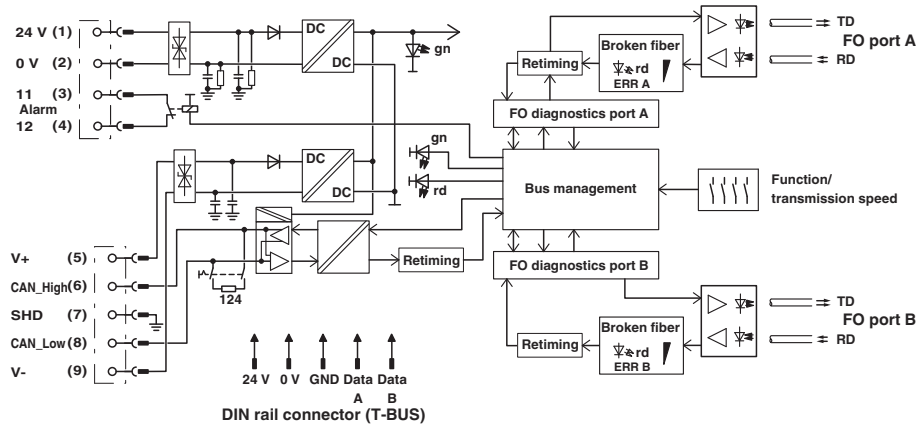

## Данный компонент на территории Российской Федерации

### Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

<http://moschip.ru/get-element>

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

### Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: [info@moschip.ru](mailto:info@moschip.ru)

Skype отдела продаж:

moschip.ru

moschip.ru\_4

moschip.ru\_6

moschip.ru\_9