Corcom Product Guide

TE connectivity



RFI Power Line Filters

TE Connectivity (TE) offers over 300 solutions for RFI problems associated with susceptibility, as well as compliance with international emissions standards.

IEC Inlet Filters and Power Entry Modules

A complete line of power entry modules solves a variety of power entry needs by combining functions to reduce cost, space and labor.



DC Filters

TE has developed a wide range of power line filters and power entry modules that combine several power management functions specifically designed for DC applications.

Feedthrough Filters and Capacitors

Designed to offer reliability and performance in high frequency applications and meet EN132200 and 132400 safety requirements. Available for AC or DC applications.

Signal Line Products

The SignalSentry filtered modular jack connector series combines different levels of filtering with RJ45 and RJ11 modular jacks to address signal line noise problems and crosstalk.

TE Connectivity Corcom Products Engineering Offices

USA

620 S. Butterfield Road
Mundelein, IL 60060
Phone: 847-680-7400
Fax: 847-680-8169

6700 Fallbrook Ave.
Suite 287
West Hills, CA 91307
Phone: 818-226-4306
Fax: 818-704-1757

Germany

Finsinger Feld 1
D-85521 Ottobrunn,
Phone: 49-89-6089-0
Fax: 49-89-6089-767

People's Republic of China

668 Guiping Road
Shanghai, 200233
Phone: 86-21-2407-1588
Fax: 86-21-2407-1599

For Sales assistance in the USA please refer to page 286 to find a Corcom product sales representative in your area. For Sales assistance in all other regions, please refer to page 289 to find the Product Information Center in your area.

Main Table of Contents

Navigating the Catalog 3

1. RFI Power Line Filters 9

RFI Power Line Filter Selector Chart 11
AQ Series 12
B Series 15
DK Series 18
EBP Series 21
EDP Series 21
EOP Series 21
EMC Series 24
EP & VP Series 27
FC Series 30
FL Series 33
G Series 35
HQ Series 37
HT Series 40
HZ Series NEW 4, 6, 10 and 20A versions 43
IK Series 46
K Series 49
MV Series 54
N Series 56
Q Series 58
R Series 61
RK Series 65
S Series 68
SB Series NEW High Performance B Series 71
SK Series 75
T Series 80
U Series 84
V Series 86
W Series 86
WG Series 89
X Series 92
Y Series 92
Z Series 92

2. Three Phase Filters 97

Three Phase Selector Chart 97
A Series 98
ADT Series 101
AYA Series 104
AYC Series 108
AYO Series 111
BCF Series NEW Compact Three Phase Filters 113
CFN Series 116
FCD Series 118

3. Power Inlet Filters & Power Entry Modules 125

Introduction 126
Selector Chart 128
Power Entry Module Selector Guide 129
C Series 130
CU Series NEW Compact 1U Height Power Entry Module 134
EBF Series 138
EC Series 141
ED Series 144
EEA & EEB Series 148
EAS & EBS Models 148
EAH & EBH Models 148
EEJ Series 153

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Table of Contents *(continued)*

EJH & EJHS Models 153
EJM & EJMS Models 153
EJS Models 153
EF Series 160
EJT Series 163
GG & HG Series 166
H Series 169
J Series 172
L Series 175
LA Series 180
M Series 183
P Series 192
SR Series 201
SRB Series 203

4. DC Filters 209
Introduction 210
Selector Chart 211
DA Series 212
DB Series NEW - Compact RFI High Current DC Inlet 214
DC Series 217
P Series 223

5. Feedthrough Filters and Capacitors 225
Feedthrough Application Selector Chart 225
Introduction 226
FFA Series 228
FFD Series 231
AFC Series 234
DFC Series 237

6. Signal Line Products 241
Introduction 242
SignalSentry Filtered Modular Jacks 243
SignalSentry Part Number Matrix / Ordering Information 244
SignalSentry Selector Chart 245
L Series 247
L – Ganged Series 248
LC Series 249
LCT Series 250
N Series 251
X Series 252
Z Series 253
Model Dimensions 255
L, LC, LCT and X Series RJ Jack Dimensions 255
N and Z Series RJ Jack Dimensions 257

7. Technical Notes 261
Introduction 262
Understanding RFI Power Line Filters 263
Understanding Hipot Testing 266
Understanding Leakage Current (Touch Current) 267
Understanding Insertion Loss 268
Appendix A - Conducted RFI Emissions Testing 269
Appendix B - Conducted RFI Susceptibility Testing 270
Appendix C - Health Care Equipment 270
Appendix D - Safety Agency File Numbers 271
Part Number Index and Cross Reference 273
North American Sales Representatives 286
Authorized Corcom Product Distributors 288

Worldwide Contacts . . . . . Inside Back Cover

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Navigating the Catalog

Step 1: Determine the product family.

The Corcom product guide contains seven sections with six distinct product families. Use the index numbers along the side of the catalog to quickly jump to that section.

Corcom Product Families

RFI Power Line Filters

Solutions associated with EMI/RFI susceptibility as well as compliance to international emissions standards for single phase power applications. Includes chassis and board mountable designs as well as single and two-stage filters.

Three Phase Filters

Solutions associated with EMI/RFI susceptibility as well as compliance to international emissions standards for three phase and high current applications.

IEC Inlet and Power Entry Modules

IEC inlet power filters and modular products that address a variety of power entry needs by combining several functions such as on/off switching, voltage selection switching, fuseholder, filtering in combination with the IEC inlet connector.

DC Power Line Filters

EMI/RFI solutions for emissions and susceptibility specifically related to DC systems often found in central office and telecommunication applications.

Feedthrough Filters and Capacitors

Products designed for through-bulkhead mounting for high frequency filtering. Designed to meet EN133200 and EN132400 safety requirements. Available in a variety of standard as well as custom configurations.

Signal Line Products

Products that combine different levels of filtering with various sized RJ modular jacks. Signal line products are used to protect data transmissions as they pass through the RJ jacks or as they are transmitted on the PCB.

Technical Notes

The appendices in the back of the catalog offer information such as safety agency classifications, general information regarding RFI, and testing procedures.

(continued on next page)

1
2
3
4
5
6
7

Looking for Corcom EMI Facility Products?
Power, data and signal line filters for shielded installations
Available in Catalog 1654986 - see page 8 for more information

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Step 2: Use selector charts

Selector charts at the beginning of each section help you to narrow the selection.

Follow the chart to locate one or several product series that could fit your specific application and requirements.

Optimal filter selection requires testing in your specific system, as all systems have unique characteristics.

Selector charts generally show filters in order of performance from good (at the top) to best performance (at the bottom).

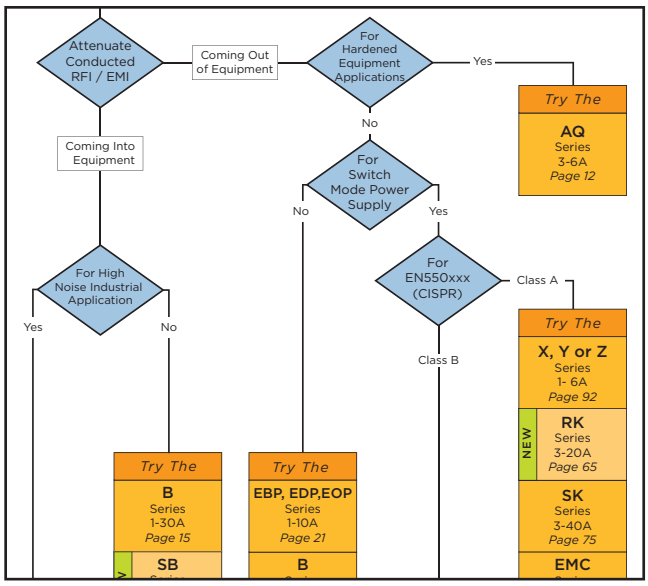

Step 3: Open to the page referenced by the selector chart

Each product series contains three technical sections. The majority of questions relating to product applications can be answered directly from these sections.

Technical Characteristics: This first section contains pictures, appropriate safety agency classifications, a description of the series' capabilities, applications, electrical specifications, schematics, ordering information and available part numbers.

Drawings: The second section contains drawings and dimensions of the parts as well as the recommended cutouts. Dimensions are shown in inches with metric equivalents.

Performance Data: The third section contains performance data in the form of typical insertion loss graphs and minimum insertion loss tables.

If you already know the catalog number or series, the table of contents lists each series in the catalog within each section. The back of the catalog also has an index in alphanumeric order. The index will reference the technical section for that catalog number or series. The index also provides the unique TE ordering number for each part.

Step 4: Contact your local Corcom product sales representative

Corcom product sales representatives for North America as well as distributors and global contacts are listed in the back of the catalog. Contact the sales representative or office closest to you for technical assistance, stock and pricing.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Corcom EMI/RFI Filters and Energy Efficiency

The efficiency of an electrical device is the ratio of the power it delivers to the power that it consumes. The difference is wasted as heat, and to prevent overheating of a device and the system in which it resides, this heat must be transferred out of the system and dissipated. The efficiency of every component, including the power entry module and selected filter, factors into the system's overall efficiency. When the amount of heat is too great to dissipate through the system's enclosure, forced air cooling becomes necessary. This is often accomplished with a fan, and the power used by that fan, (including its own thermal losses) further decreases the system efficiency by another 2% to 5%. Providing room for the fan and air passageways in the equipment increases its size and cost. Careful attention to the efficiency of every component in the system results in a simpler, smaller, lighter, cooler, more competitive product.

Corcom EMI filters can help meet energy efficiency goals, including Energy Star rating and the new 80 Plus certification, which now recognizes systems that exceed 90% efficiency. By using the most energy efficient design and materials, Corcom filters can be the beginning of an energy efficient system strategy.

Energy efficient power components don't just lower energy bills and demand for power from the grid, they also increase product reliability. Small efficiency increases can decrease component temperatures throughout the system, and semiconductor life doubles for every 10°C decrease in temperature. Corcom filters are more efficient and run cooler, and this can help reduce system warranty costs, service calls and total support costs.

Corcom filters

- Have heat dissipation ratings as little as one third that of comparable filters.
- Create less heat and run cooler
- Improve system reliability
- Are more efficient than PC board equivalents
- Can help meet system power efficiency standards
- Enable systems to be smaller and lighter
- Save customers money by reducing energy costs

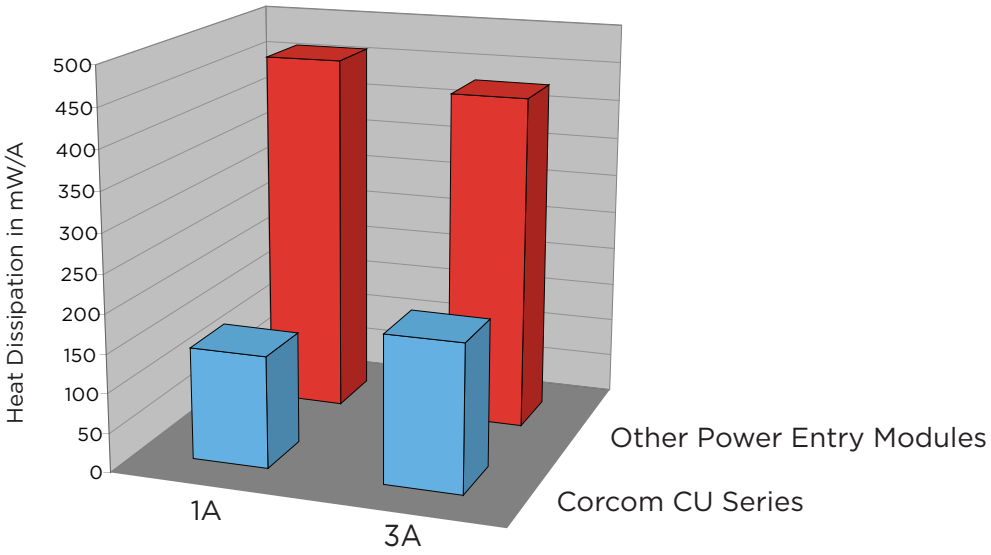

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

Corcom Products Engineering Services and Custom Solutions



TE Connectivity Corcom products were established as the world leader in EMI/RFI filtering technology with the introduction of the first line of catalog filter products over 50 years ago.

Today, TE continues to pursue the latest in EMI/RFI filter design by testing and evaluating application specific solutions for a wide range of industries.

In addition to our complete catalog of standard EMI/RFI filtering solutions, TE offers a full range of engineering services and custom products designed for unique applications.

Corcom custom EMI/RFI product solutions can:

- Optimize both cost and performance to target a unique application
- Fit unique mechanical size, installation and/or connection requirements
- Ensure conformance with EMI/RFI requirements of an entire system
- Apply EMI/RFI filtering in a specific frequency or range

With design and testing facilities worldwide, TE is well suited to design an EMI/RFI solution that meets a wide range of unique application needs.

To discuss application specific filtering, contact the TE Corcom product sales representative or office closest to you. A complete list of sales representative and worldwide contacts is listed in the back of this catalog.

Corcom Custom Filters Key Features:

- Custom filter options
- Custom wire harness design
- Fully customizeable options including packaging
- Agency approvals available as needed by customer
- Time and cost savings to customer
- Simplify installation

Termination and Wiring Customization Options:

- Wire length
- Wire gauge
- Wire color
- Molded connectors
- Ring terminals
- Custom terminations

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

Corcom Engineering Services and Custom Solutions

EMI/RFI Testing Services

Corcom Products Test Lab Key Features:

- We can test product to the FCC / EN / EFT specifications
- Let us know your testing needs and time frame to ensure flexibility of testing and timely results

Available Testing Standards:

- Conducted EMI in accordance with FCC part 15 and 18
- EN55011, EN55022 and EN55014
- EFT (Electrically Fast Transient) in accordance with EN61000-4-4
- Tests conducted up to 30A with insertion loss measured up to 10GHz
- MIL-STD-461 CE101 & CE102

An increase in electronic content and stringent regulatory compliance requirements have increased the need for time spent in qualifying test houses. At these "test labs," products undergo a number of qualifying tests which include conducted emissions, EFT, and harmonic content. Failure to comply with associated standards can lead to delayed time-to-market and product redesign resulting in lost revenue and market share and an increase in time spent at the test lab.

TE Connectivity can help by heading off some of the potential pitfalls during testing and qualifying phases of new products. We offer complimentary testing to existing regulatory standards. We aim for a high standard of accuracy, and can help identify potential problems.

We are not a certifying body and our test lab is not a qualified test lab; however, we test to the same standards and take product through the same rigor as any certifying lab. In addition, our engineers will recommend a solution and help with a design should a product fail to comply with conducted emissions, EFT and/or harmonic content standards.

The advantage is clear: TE will provide you with a high degree of confidence that a product which passed our in-house testing will pass agency testing at a certifying test house in reduced time and with reduced cost.

TE has three Corcom filter testing facilities:

- Mundelein, IL, USA (main office and design center)
- West Hills, CA, USA (regional office)
- Ottobrunn, Germany (regional office and design center)

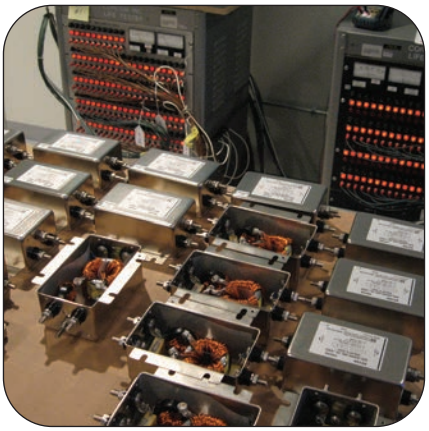

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Corcom EMI Facility Products

Power, data and signal line filters for shielded installations

TE Connectivity has dedicated more than 50 years to developing RFI filter technology for electronic devices. We're proud that our focus on the design and production of the highest quality products has made TE a world leader in RFI technology.

Our leadership in the filter and power entry module markets was enhanced in 1988 with the aquisition of the Heavy Power Line Division of Cornell Dubilier. The high quality designs and manufacturing of these heavy power line filter products is maintained and enhanced by TE.

We have continued that dedication to excellence begun by Cornell Dubilier and inherent to TE's way of doing business. Only the highest quality designs, capacitors, inductors, and workmanship are used to produce these filters. We recognize the need for great care demanded by hi-rel military filters and automatically apply like quality to the heavy power line products. We treat all product as if it is high-reliability.

The Mundelein, IL office provides application engineering service for these heavy power line and military products. Our engineers can help to design a special filter in the rare case a standard product from this catalog cannot adequately solve the problem. Additional product performance data and test results are available from the engineers at this facility.

TE's worldwide sales offices can help you locate information on these products or any of the hundreds of high quality power line filters, power entry modules and SignalSentry products made by TE.

For more information on the complete line of EMI Facility products, request catalog number 1654986 or visit www.corcom.com

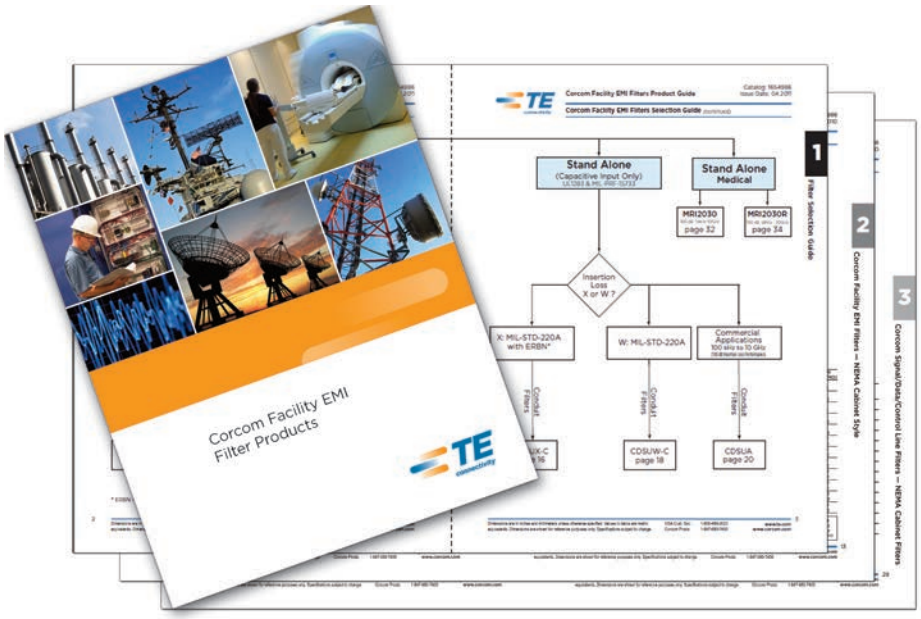

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

1. RFI Power Line Filters — Table of Contents

RFI Power Line Filter Selector Chart 11
AQ Series 12
B Series 15
DK Series 18
EBP Series 21
EDP Series 21
EOP Series 21
EMC Series 24
EP & VP Series 27
FC Series 30
FL Series 33
G Series 35
HQ Series 37
HT Series 40
HZ Series 43
IK Series 46
K Series 49
MV Series 54
N Series 56
Q Series 58
R Series 61
RK Series 65
S Series 68
SB Series 71
SK Series 75
T Series 80
U Series 84
V Series 86
W Series 86
WG Series 89
X Series 92
Y Series 92
Z Series 92

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Engineering Notes

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

RFI Power Line Filter Selector Chart

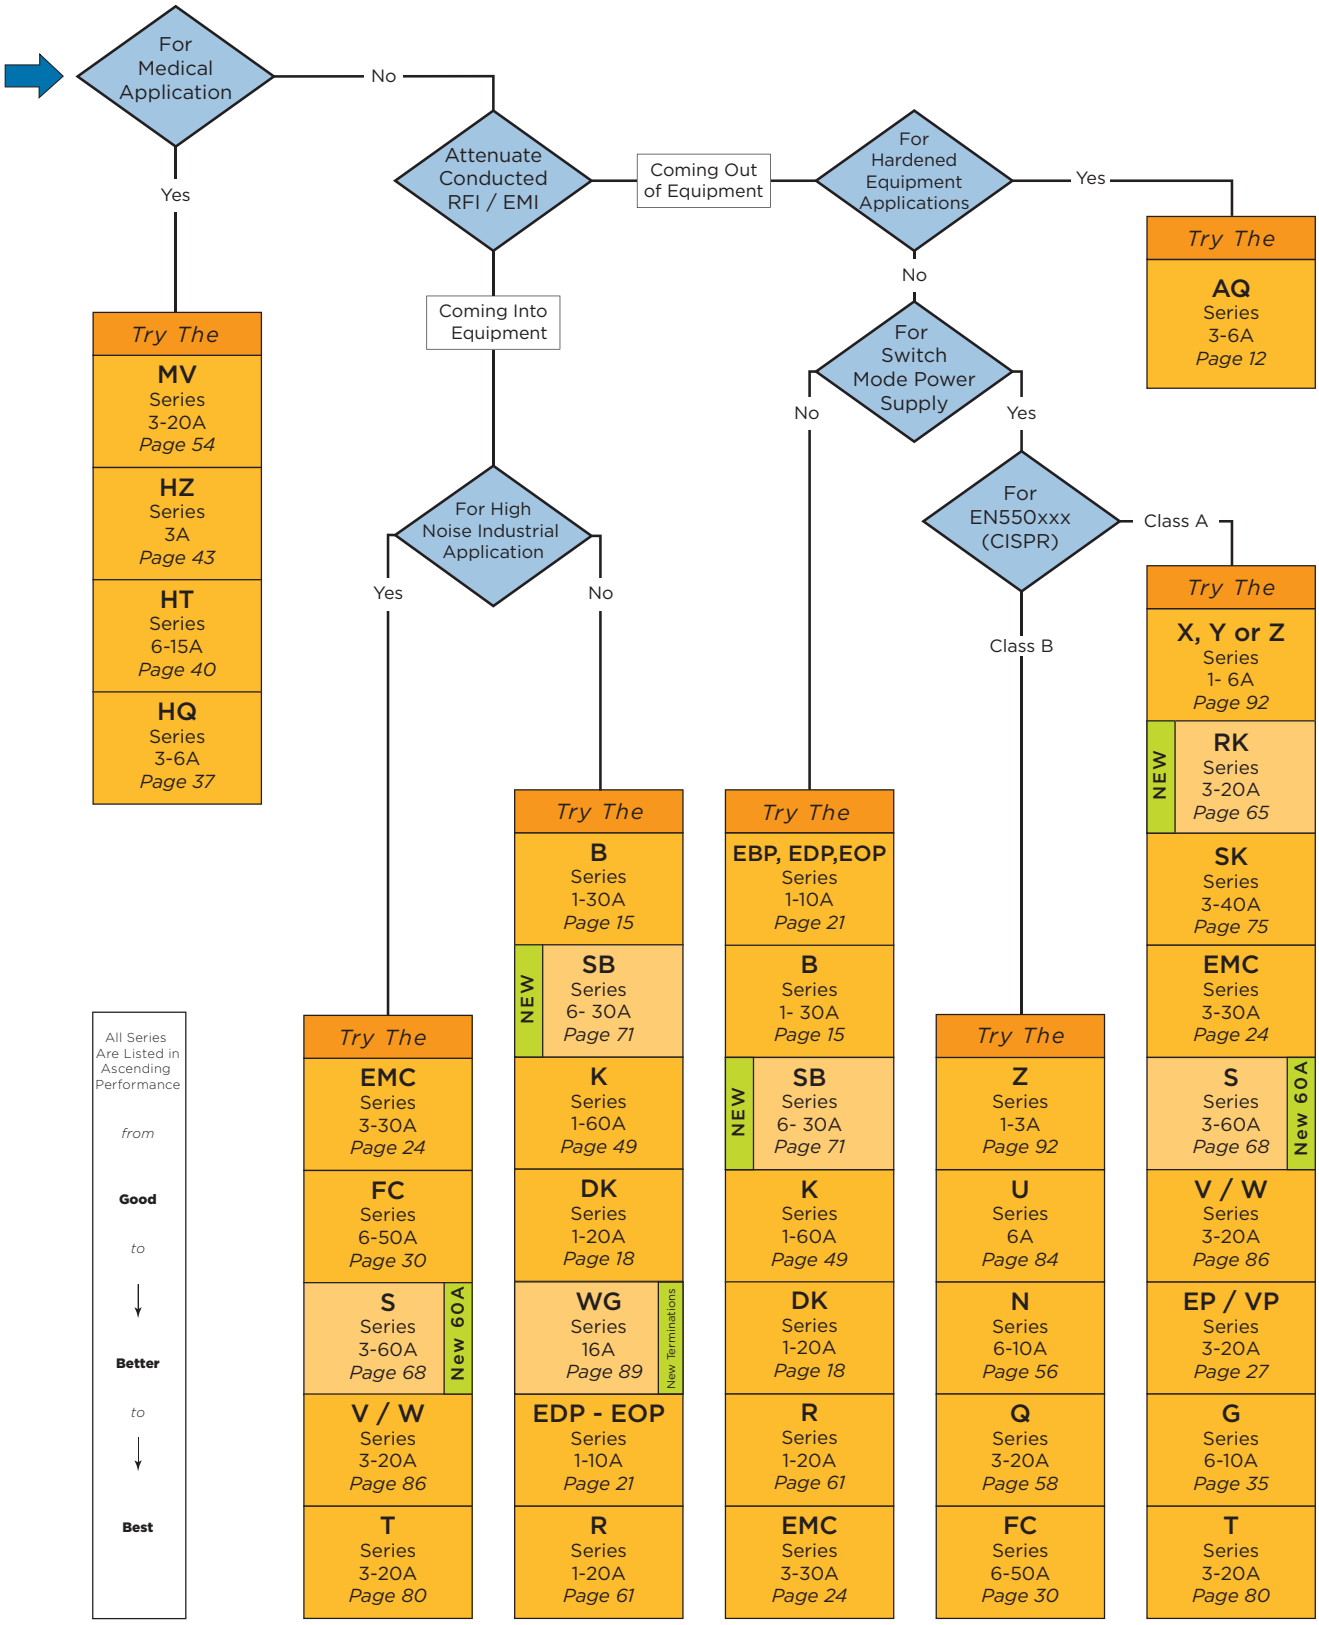

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

AQ Series

UL Recognized
CSA Certified

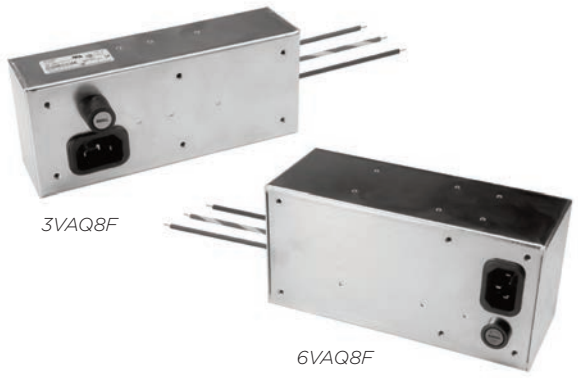

3VAQ8F

6VAQ8F

AQ Series

- Low cost solution to power line noise at high frequencies
- High common and differential mode performance from 10kHz to 1GHz
- Available with an IEC inlet, fuseholder and switch
- Suitable for applications where computers are used to process secret or confidential information

Ordering Information

3 V AQ 8 FS

Suffix
F – Fuseholder
FS – Fuseholder & Switch
(F & FS on VAQ8 only)
Omit if none

Input / Output Style
3 – Wire leads
8 – IEC inlet* *(line side)*
Wire leads *(load side)*

AQ Series

Leakage current designation
V – Standard

Current Rating
3 or 6A

Available Part Numbers

3VAQ3	6VAQ3
3VAQ8F	6VAQ8F
3VAQ8FS	6VAQ8FS

**IEC 60320-1 C14 inlet mates with C13 connector*

Specifications

Maximum leakage current each Line to Ground:

	3A Models	6A Models
@ 120 VAC 60 Hz:	1.2 mA	.7 mA
@250 VAC 50 Hz:	2.3 mA	1.2 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3 or 6A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematics

3A Models

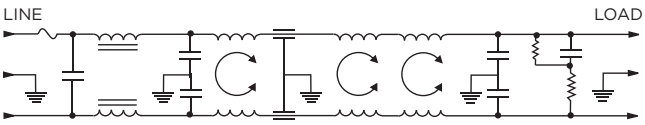

6A Models



Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord



Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

AQ Series

Case Styles and Dimensions

3VAQ3

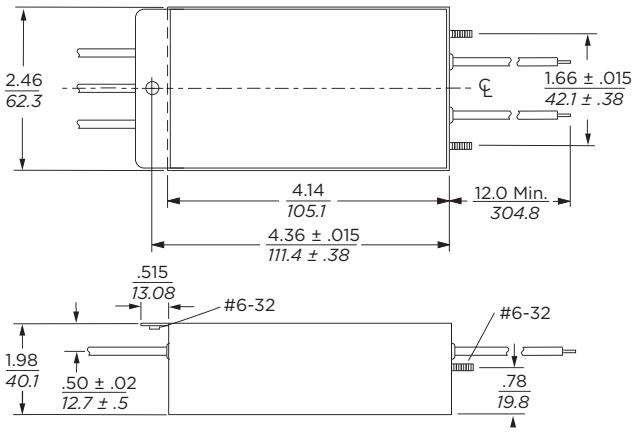

6VAQ3

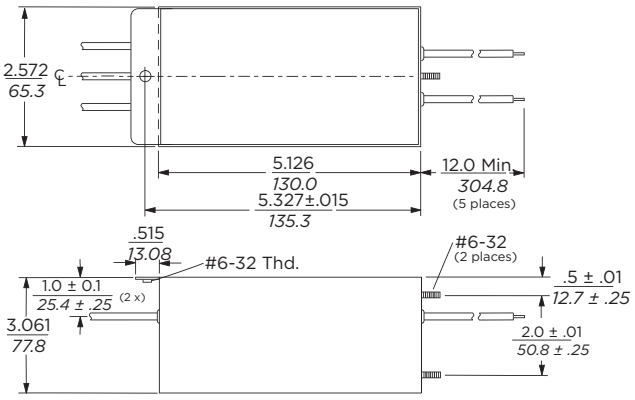

3VAQ8F

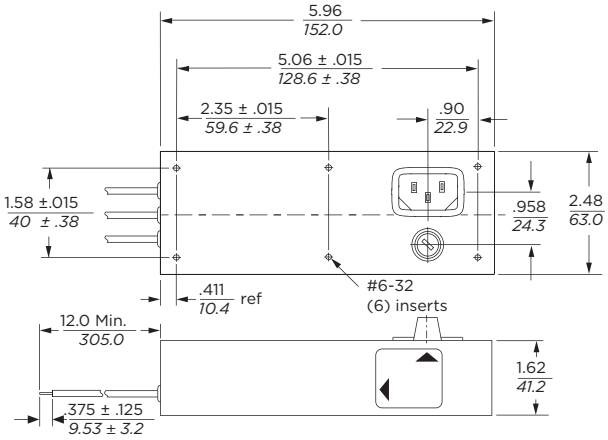

6VAQ8F

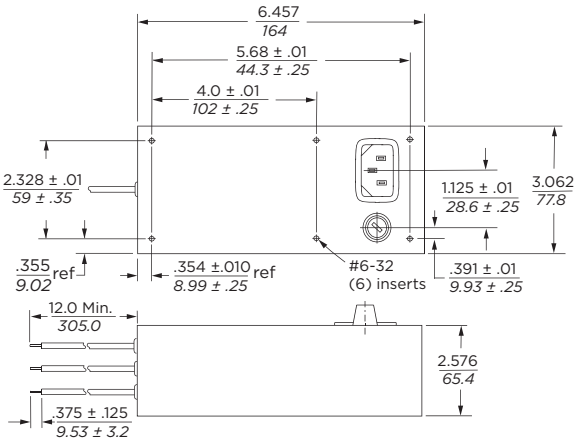

3VAQ8FS

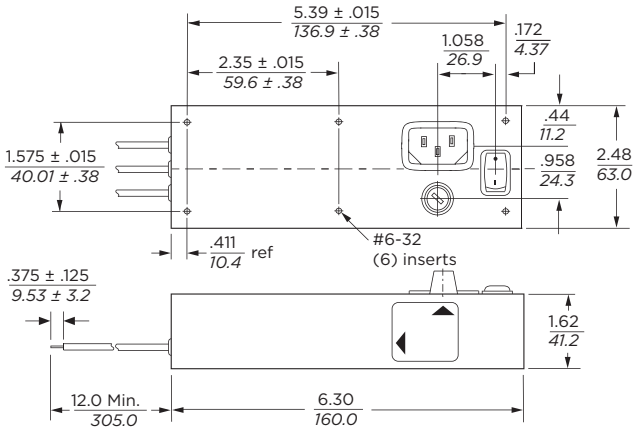

6VAQ8FS

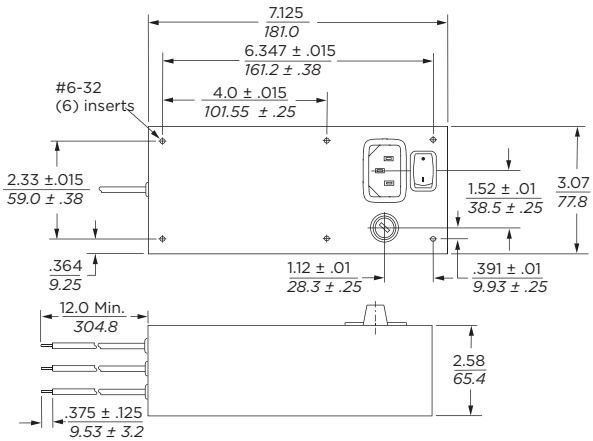

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

AQ Series

Recommended Panel Cutouts

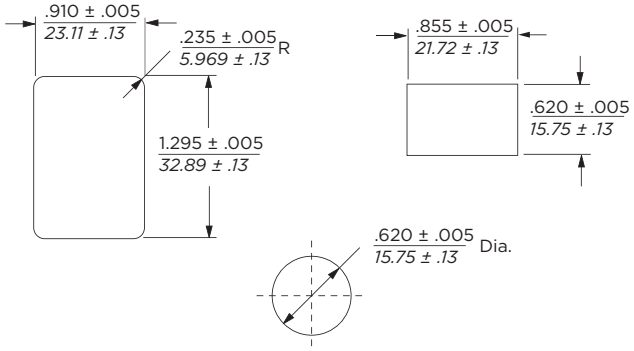

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

3VAQ

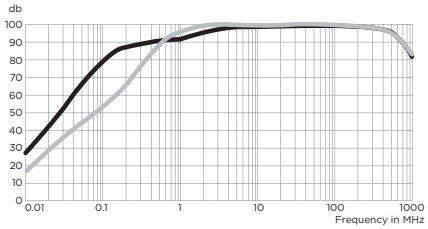

6VAQ

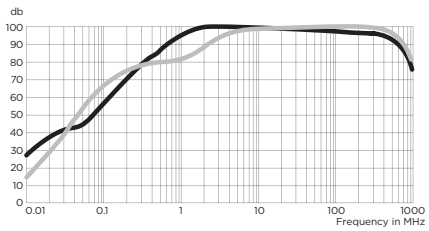

Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current	Frequency – MHz								
Rating	.01	.1	.5	1	10	50	100	300	1000
3A	10	80	88	88	100	100	100	93	85
6A	26	59	80	80	100	100	100	93	85

Differential Mode / Symmetrical (Line to Line)

Current	Frequency – MHz								
Rating	.01	.1	.5	1	10	50	100	300	1000
3A	6	51	78	88	100	100	100	93	85
6A	10	65	86	95	100	100	100	93	85

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

B Series

UL Recognized
CSA Certified
VDE Approved

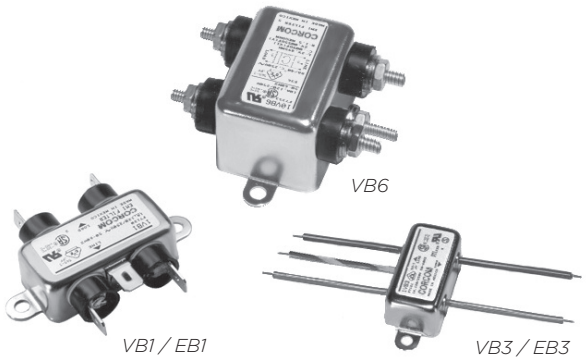

B Series

- Small size & low cost
- General purpose
- Wide variety of termination options
- Meets low leakage current requirements of VDE portable equipment and non-patient medical equipment

Ordering Information

10 E B 1

- 1 — Input / Output Style
  - 1 – .250 [6.3] spade terminals
  - 3 – Wire leads
  - 6 – Threaded bolt
- B — B Series
- E — Leakage current designation
  - E – Low leakage *(<0.5 mA)*
  - V – Standard
- 10 — Current Rating
  - 1, 2, 3, 5, 10, 20 or 30A

Electrical Schematic

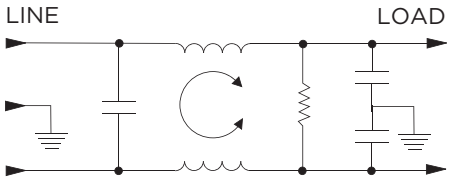

Specifications

Maximum leakage current each Line to Ground:

	VB Models	EB Models
@ 120 VAC 60 Hz:	.4 mA	.21 mA
@250 VAC 50 Hz:	.7 mA	.36 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 1 to 30A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85\text{-}Ta)/45}$

Available Part Numbers

1VB1	1EB1
1VB3	1EB3
2VB1	2EB1
2VB3	2EB3
3VB1	3EB1
3VB3	3EB3
5VB1	5EB1
5VB3	5EB3
10VB1	10EB1
10VB3	10EB3
10VB6	20EB1
20VB1	
20VB6	
30VB6	

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

B Series

Case Styles

B1

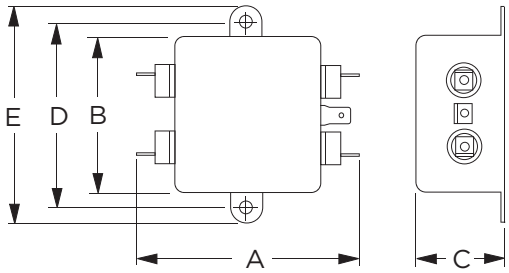

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.75*] Dia.

B3

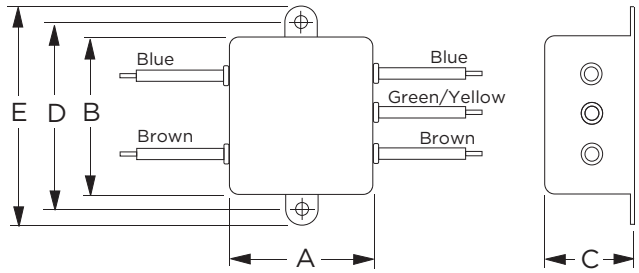

Typical Dimensions:

Wire leads (5):	4.0 [*101.6*] Min. AWG18, (AWG16 for 10A)
Mounting Holes (2):	.188 [*4.75*] Dia.

10VB6 & 20VB6

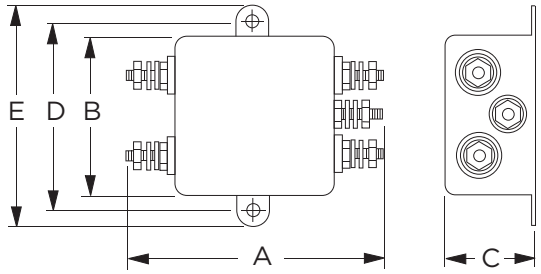

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Holes (4):	.188 [*4.75*] Dia.

30VB6

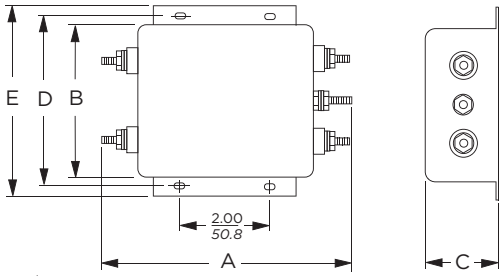

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Slots (4):	.250 x .156 [*6.35 x 3.96*]

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 ± .38	E (max)
1VB1, 1EB1, 2VB1, 2EB1	**2.25** *57.2*	**1.82** *46.2*	**0.66** *16.8*	**2.125** *53.98*	**2.53** *64.3*
1VB3, 1EB3, 2VB3, 2EB3	**0.96** *24.4*	**1.82** *46.2*	**0.66** *16.8*	**2.125** *53.98*	**2.53** *64.3*
3VB1, 3EB1, 5VB1, 5EB1	**2.61** *66.3*	**1.82** *46.2*	**0.78** *193.8*	**2.125** *53.98*	**2.53** *64.3*
3VB3, 3EB3, 5VB3, 5EB3	**1.32** *33.5*	**1.82** *46.2*	**0.78** *19.8*	**2.125** *53.98*	**2.53** *64.3*
10VB1, 10EB1	**2.61** *66.3*	**1.82** *46.2*	**1.16** *29.5*	**2.125** *53.98*	**2.53** *6.3*
10VB3, 10EB3	**1.32** *33.5*	**1.82** *46.2*	**1.16** *29.5*	**2.125** *53.98*	**2.53** *64.3*
10VB6	**2.72** *69.1*	**1.82** *46.2*	**1.16** *29.5*	**2.125** *53.98*	**2.53** *64.3*
20VB1, 20EB1	**3.36** *85.3*	**2.07** *52.6*	**1.16** *29.5*	**2.375** *60.33*	**2.81** *71.4*
20VB6	**3.46** *87.9*	**2.07** *52.6*	**1.16** *29.5*	**2.375** *60.33*	**2.81** *71.4*
30VB6	**5.34** *135.6*	**3.38** *85.9*	**1.53** *38.9*	**3.75** *95.3*	**4.20** *106.7*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

B Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

1EB & 3EB



2EB, 5EB & 10EB



20EB



1VB



2VB



3VB



10VB



20VB



30VB



Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .15	.5	1	5	10	30
VB Models						
1A, 3A	15	30	38	50	50	50
2A, 5A, 10A, 20A, 30A	7	20	25	40	45	48
EB Models						
1A, 3A	15	29	35	45	45	48
2A, 5A, 10A, 20A	7	19	23	34	37	42

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

DK Series

UL Recognized
CSA Certified
VDE Approved

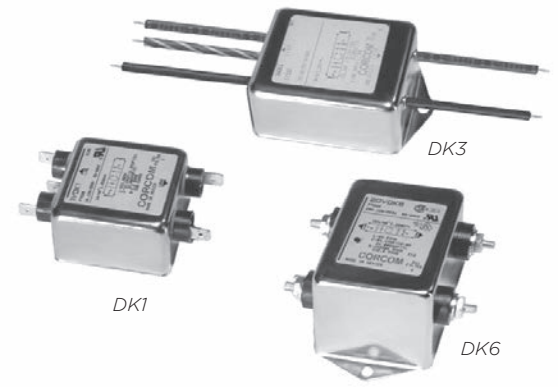

DK Series

- Higher performance Line to Line attenuation than the K Series
- E version meets the low leakage current requirements of VDE portable equipment and non-patient care equipment
- V version features same high performance with more cost-effective design

Ordering Information

10 E DK 3

- Input / Output Style
  - 1 – .250 [6.3] spade terminals
  - 3 – Wire leads
  - 6 – Threaded bolt
- DK Series
- Leakage current designation
  - E – Low leakage *(<0.5 mA)*
  - V – Standard
- Current Rating
  - 1, 3, 6, 10, or 20A

Electrical Schematic

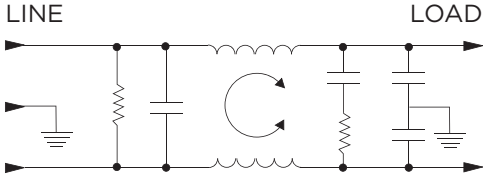

Specifications

Maximum leakage current each Line to Ground:

	VDK Models	EDK Models
@ 120 VAC 60 Hz:	.4 mA	.22 mA
@250 VAC 50 Hz:	.7 mA	.38 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 1 to 20A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Available Part Numbers

1VDK1	1EDK1
1VDK3	1EDK3
3VDK1	3EDK1
3VDK3	3EDK3
6VDK1	6EDK1
6VDK3	6EDK3
10VDK1	10EDK1
10VDK3	10EDK3
20VDK1	20EDK1
20VDK6	

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

DK Series

Case Styles

VDK1 / EDK1

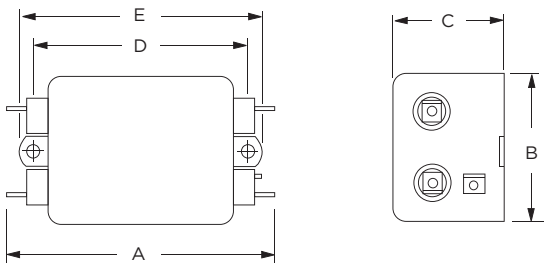

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.75*] Dia.

VDK3 / EDK3

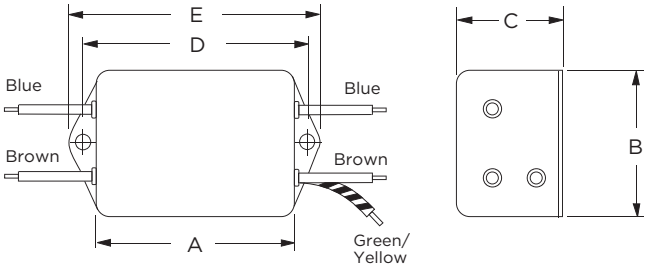

Typical Dimensions:

Wire leads (5):	4.0 [*101.6*] Min., AWG18 (AWG16 for 10A)
Mounting Holes (2):	.188 [*4.75*] Dia.

20VDK1 / 20EDK1

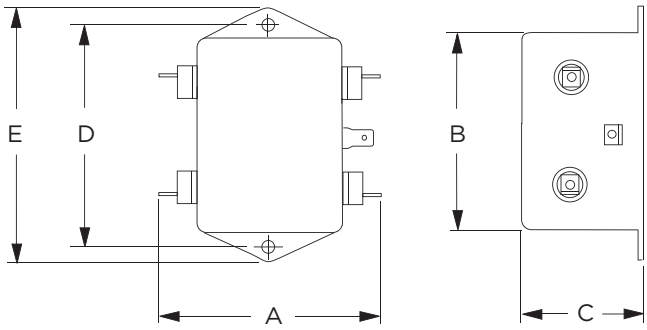

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (4):	.188 [*4.75*] Dia.

20VDK6

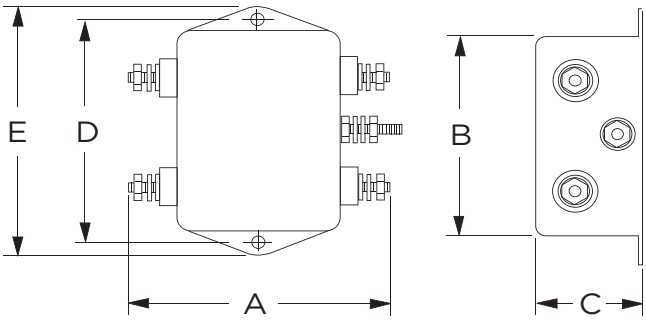

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Holes (2):	.188 [*4.75*] Dia.

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 / ± .38	E (max)
1VDK1, 1EDK1	**3.35** *85.1*	**2.07** *52.6*	**1.16** *29.5*	**2.375** *60.33*	**2.81** *71.4*
1VDK3, 1EDK3	**2.07** *52.6*	**2.07** *52.6*	**1.16** *29.5*	**2.375** *60.33*	**2.81** *71.4*
3VDK1, 3EDK1, 6VDK1, 6EDK1	**3.85** *97.8*	**2.07** *52.6*	**1.16** *29.5*	**2.938** *74.63*	**3.35** *85.1*
3VDK3, 3EDK3, 6VDK3, 6EDK3	**2.56** *65.0*	**2.07** *52.6*	**1.16** *29.5*	**2.938** *74.63*	**3.35** *85.1*
10VDK1, 10EDK1	**3.85** *97.8*	**2.07** *52.6*	**1.32** *33.5*	**2.938** *74.63*	**3.35** *85.1*
10VDK3, 10EDK3	**2.57** *65.3*	**2.07** *52.6*	**1.32** *33.5*	**2.938** *74.63*	**3.35** *85.1*
20VDK1, 20EDK1	**3.85** *97.8*	**2.58** *65.5*	**1.78** *45.2*	**2.938** *74.63*	**3.35** *85.1*
20VDK6	**3.46** *87.9*	**2.58** *65.5*	**1.78** *45.2*	**2.938** *74.63*	**3.35** *85.1*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

DK Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

1 & 3VDK



6, 10, 20VDK



1 & 3EDK



6, 10, 20EDK



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .15	.5	1	5	10	30
VDK Models						
1A, 3A	18	30	40	48	48	40
6A, 10A, 20A	10	22	30	39	44	50
EDK Models						
1A, 3A	17	27	33	45	45	40
6A, 10A, 20A	10	19	25	34	40	46

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .15	.5	1	5	10	30
VDK & EDK Models						
1A, 3A	18	47	62	60	50	45
6A, 10A, 20A	20	43	55	65	60	55

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EBP, EDP & EOP Series

UL Recognized*
CSA Certified*
VDE Approved*

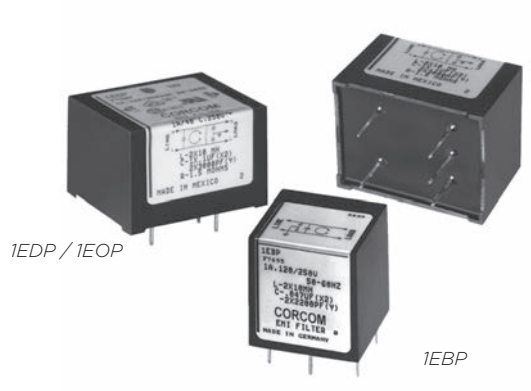

EBP Series

- General purpose
- Low leakage current
- Cost-effective
- Compact size

EDP Series

- Enhanced differential mode performance
- Low leakage current
- Cost-effective

EOP Series

- General purpose
- Low leakage current
- Cost-effective

Ordering Information

6 EDP

- **EBP Series** Compact Size
- **EDP Series** Enhanced Performance
- **EOP Series** General Performance
- **Current Rating** 1, 3, 6 or 10A

**EBP models are approved to VDE standards only*

Specifications

Maximum leakage current each Line to Ground:

	EDP/EOP	EBP
@ 120 VAC 60 Hz:	.22 mA	.13 mA
@250 VAC 50 Hz:	.38 mA	.21 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 1 to 10A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematic

EBP



EDP & EOP



Available Part Numbers

1EBP	3EBP
1EDP	1EOP
3EDP	3EOP
6EDP	6EOP
10EDP	10EOP

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

EBP, EDP, EOP Series

Case Styles

EBP

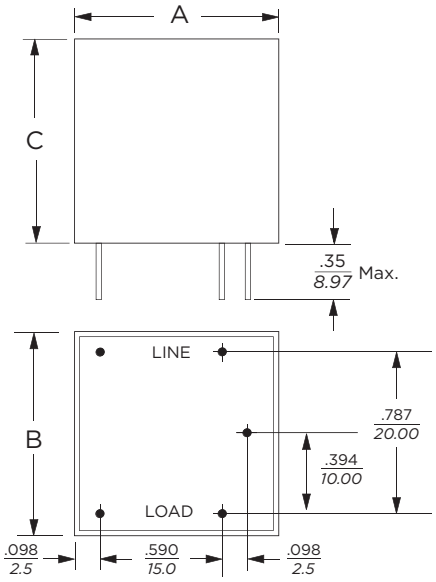

Typical Dimensions:
Pins (5): 0.025 [0.635] square

EDP / EOP

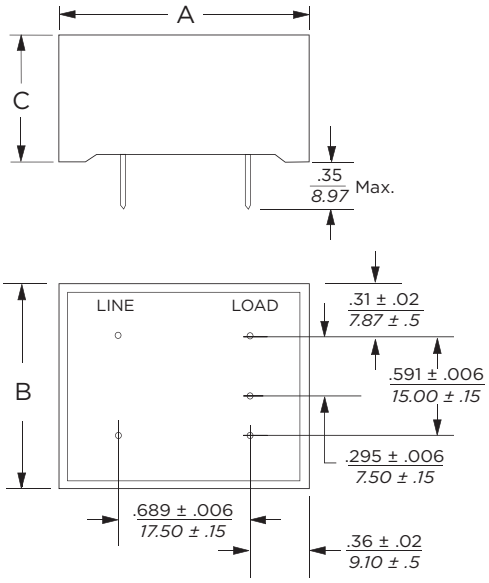

Typical Dimensions:
Pins (5): 0.025 [0.635] square

Case Dimensions

Part No.	A (max)	B (max)	C (max)
EBP	**.984** *25.0*	**.984** *25.0*	**.984** *25.0*
EDP	**1.44** *36.6*	**1.24** *31.5*	**0.95** *24.15*
EOP	**1.44** *36.6*	**1.24** *31.5*	**0.78** *19.9*

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

1EBP



3EBP



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EBP, EDP & EOP Series

Performance Data *(continued)*

Typical Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

1EDP



3EDP



6EDP



10EDP



1EOP



3EOP



6EOP



10EOP



Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .15	.5	1	5	10	30
EBP Models						
1A	30	40	40	42	45	45
3A	24	29	30	42	45	45
EOP Models						
1A	32	41	54	54	46	40
3A	18	28	35	41	40	40
6A	10	20	28	37	40	40
10A	5	14	19	27	33	40
EDP Models						
1A	32	41	54	54	46	40
3A	18	28	35	41	40	40
6A	10	20	28	37	40	40
10A	5	14	19	27	33	40

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .15	.5	1	5	10	30
EBP Models						
1A	-	14	25	35	33	25
3A	-	14	15	31	34	25
EOP Models						
1A	4	14	42	42	44	38
3A	4	14	24	38	38	38
6A	4	14	22	30	34	34
10A	6	16	22	40	50	45

EDP Models	Frequency – MHz .15	.5	1	2	4	10	20	30
1A	1	6	19	39	48	52	38	35
3A	1	4	9	9	28	41	36	35
6A	1	4	9	9	40	40	42	35
10A	1	4	9	9	14	35	42	35

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

EMC Series

UL Recognized
CSA Certified
VDE Approved

EMC6

EMC1

EMC Series

- Compact dual stage filter series
- Cost-effective design
- Current rating up to 30A
- High differential mode attenuation in the lower frequency range
- High common mode performance
- Suitable for switching mode power supplies

Ordering Information

10 EMC 1

- 1 – Case Styles
  - 1 – .250 [6.3] spade terminals
  - 3 – Wire leads
  - 6 – Threaded bolt
- EMC Series
- 10 – Current Rating
  - 3, 6, 10, 15, 20 or 30A

Specifications

Maximum leakage current each Line to Ground:

	3, 6, 10A	15, 20, 30A
@ 120 VAC 60 Hz:	.21 mA	.73 mA
@250 VAC 50 Hz:	.43 mA	1.52 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3 to 30A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematic

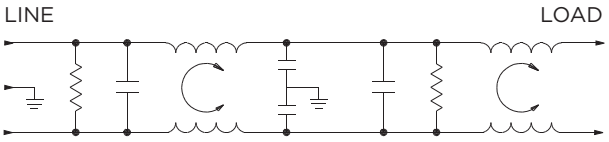

Available Part Numbers

3EMC1	10EMC3
6EMC1	15EMC3
10EMC1	10EMC6
15EMC1	15EMC6
20EMC1	20EMC6
3EMC3	30EMC6
6EMC3	

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

EMC Series

Case Styles

EMC1

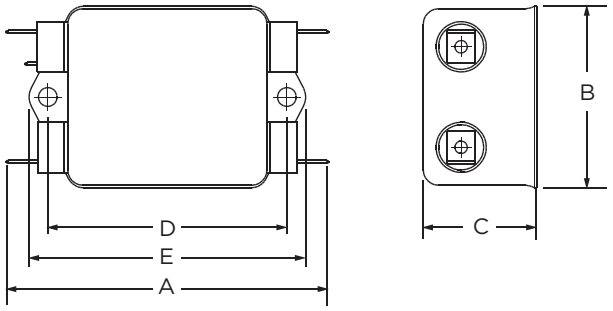

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.187 ±.008 [*4.75 ±.20*] Dia.

EMC3

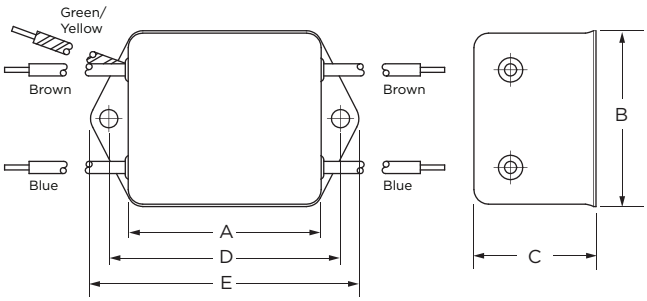

Typical Dimensions:

Wire leads (5):	4.0 [*101.6*] Min., AWG18 (AWG16 for 15A)
Mounting Holes (2):	.187 ±.008 [*4.75 ±.20*] Dia.

EMC6

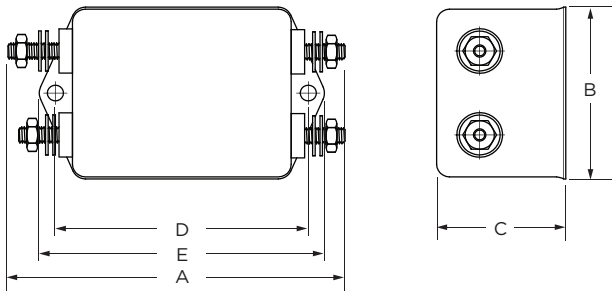

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Holes (4):	.187 ±.008 [*4.75 ±.20*] Dia.

30EMC6

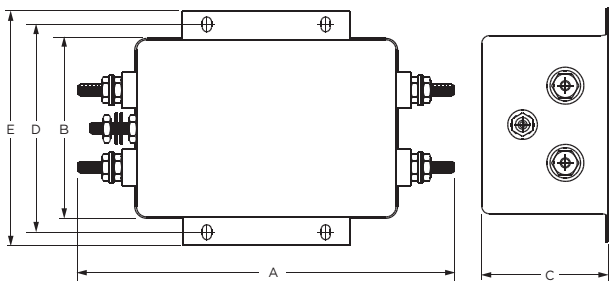

Typical Dimensions:

Terminals (5):	10-32, Torque 27 lbf-in. [*3.05* N-m] max. ± 3 [*.34*]
Mounting Slots (4):	.203 x .156 [5.16 x 3.96]

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D (max)	E (max)
3EMC1	**3.35** *85.1*	**1.81** *46*	**1.16** *29.5*	**2.375** *60.3*	**2.78** *70.6*
6EMC1	**3.85** *97.8*	**2.07** *52.6*	**1.16** *29.5*	**2.938** *74.6*	**3.35** *85.1*
10EMC1	**3.85** *97.8*	**2.07** *52.6*	**1.53** *38.91*	**2.938** *74.6*	**3.35** *85.1*
15EMC1 20EMC1	**4.97** *126.2*	**2.25** *57.2*	**1.78** *45.2*	**4.063** *103.2*	**4.46** *113.3*
3EMC3	**2.07** *52.6*	**1.81** *46*	**1.16** *29.5*	**2.375** *60.3*	**2.78** *70.6*
6EMC3	**2.56** *65*	**2.07** *52.6*	**1.16** *29.5*	**2.938** *74.6*	**3.35** *85.1*
10EMC3	**2.56** *65*	**2.07** *52.6*	**1.53** *38.9*	**2.938** *74.6*	**3.35** *85.1*
15EMC3	**3.69** *93.7*	**2.25** *57.2*	**1.78** *45.2*	**4.063** *103.2*	**4.47** *113.5*
10EMC6	**3.94** *99.9*	**2.07** *52.6*	**1.53** *38.9*	**2.938** *74.6*	**3.35** *85.1*
15EMC6 20EMC6	**5.09** *129.3*	**2.25** *57.2*	**1.78** *45.2*	**4.063** *103.2*	**4.47** *113.5*
30EMC6	**6.05** *153.7*	**3.12** *79.2*	**2.18** *55.4*	**3.5** *88.9*	**3.96** *100.6*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

EMC Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

3EMC



6EMC



10EMC



15EMC



20EMC



30EMC



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz								
	.05	.07	.11	.15	1	2	10	20	30
3A	6	6	3	16	65	66	62	60	59
6A	6	6	2	15	65	67	65	62	63
10A	5	2	13	24	72	72	56	50	48
15A	3	1	12	22	70	68	57	54	53
20A	2	2	11	21	58	57	63	55	52
30A	2	2	14	22	47	52	60	48	43

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz								
	.05	.07	.11	.15	1	2	10	20	30
3A	12	13	7	18	64	69	65	60	52
6A	12	12	8	27	61	61	59	56	54
10A	14	15	12	33	54	58	47	34	36
15A	16	16	13	34	61	52	36	36	23
20A	17	19	15	37	67	62	36	32	30
30A	17	18	14	40	62	53	30	28	26

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EP / VP Series

UL Recognized
CSA Certified
VDE Approved

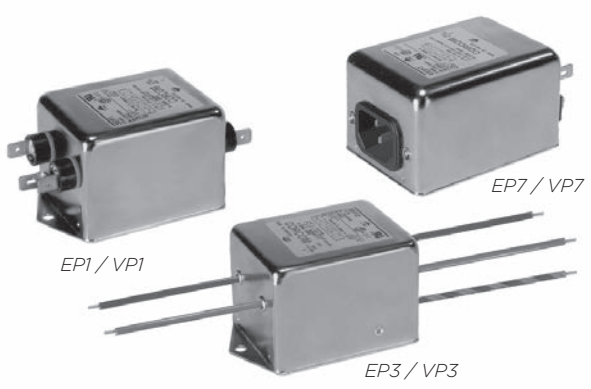

EP & VP Series

- Dual stage filter offers high insertion loss
- Well suited for meeting CISPR 22 A and FCC Part 15J, Class B
- EP model meets very low leakage current requirements
- 7A and 12A versions offer optimum package size

Ordering Information

3 EP 7 M

Suffix
M – Metric inserts *(style 7 only)*
Omit for standard or none

Input / Output Style
1 – .250 [6.3] spade terminals
3 – Wire leads
6 – Threaded bolt
7 – IEC inlet* *(line side)*
.250 [6.3] spade terminals
(load side)

EP / VP Series
EP – Low leakage *(<0.5 mA)*
VP – Standard *(20A only)*

Current Rating
3, 6, 7, 10, 12 or 20A

Electrical Schematic

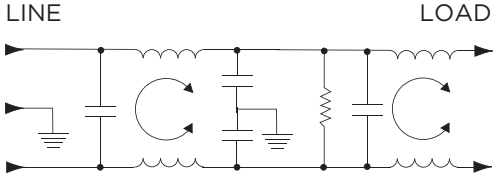

*IEC 60320-1 C14 inlet mates with C13 connector

Specifications

Maximum leakage current each Line to Ground:

	VP Models	EP Models
@ 120 VAC 60 Hz:	.73 mA	.21 mA
@250 VAC 50 Hz:	1.27 mA	.36 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3 to 20A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Available Part Numbers

3EP1	10EP1
3EP3	10EP3
3EP7	12EP1
3EP7M	12EP3
6EP1	20EP1
6EP3	20EP6
7EP1	20VP1
7EP3	20VP6

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord

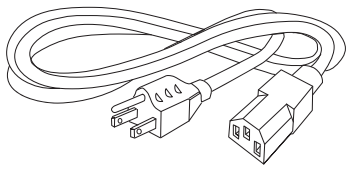

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

EP / VP Series

Case Styles

EP1 / VP1 (1-15A)

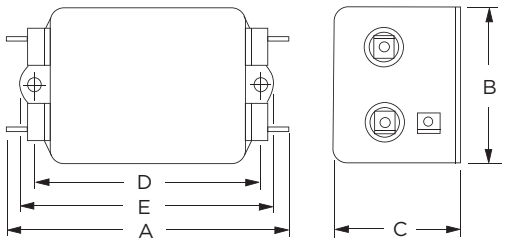

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [4.78] Dia.

20EP1 / VP1

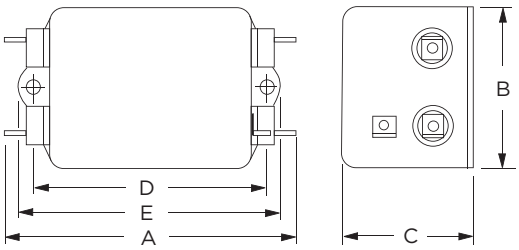

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [4.78] Dia.

EP3

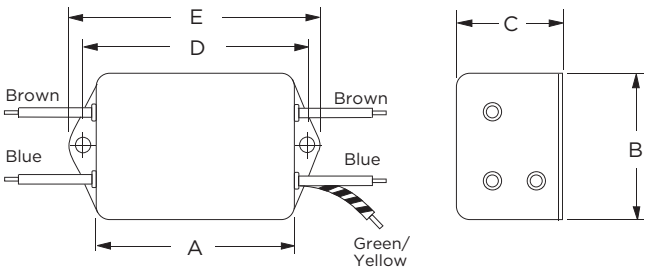

Typical Dimensions:

Wire leads (5):	4.0 [*101.6*] Min, AWG18
Mounting Holes (2):	.188 [4.78] Dia.

EP7 & EP7M

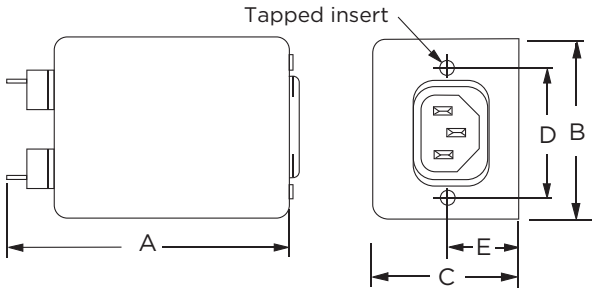

Typical Dimensions:

Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Line Inlet (1):	IEC 60320-1 C14
EP7 Tapped Inserts (2):	6-32 x 1/4
EP7M Tapped Inserts (2):	M3 x .5

20EP6 / VP6

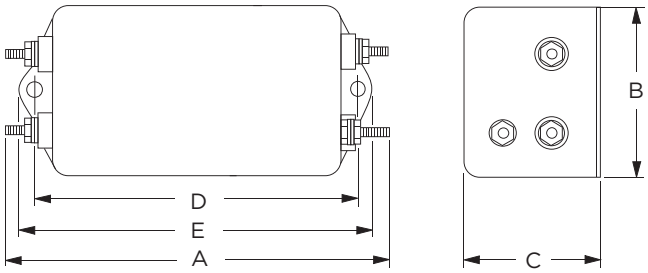

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Holes (2):	.188 [4.78] Dia.

Recommended Panel Cutout

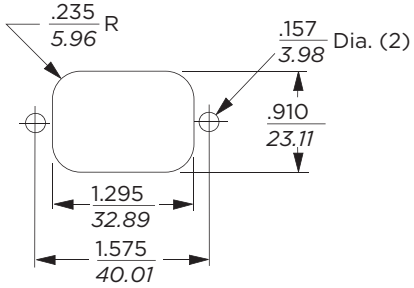

Tolerance ± .005 [0.13]

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

EP / VP Series

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 ± .38	E (max)
3EP1	**3.85** *97.8*	**2.07** *52.6*	**1.78** *45.2*	**2.938** *74.63*	**3.35** *85.1*
3EP3	**2.56** *65.0*	**2.07** *52.6*	**1.78** *45.2*	**2.938** *74.63*	**3.35** *85.1*
3EP7/7M	**3.21** *81.5*	**2.25** *57.2*	**1.78** *45.2*	**1.575** *40.01*	**0.63*** *12.1**
6EP1	**6.62** *168.1*	**2.07** *52.6*	**2.28** *57.9*	**5.625** *142.88*	**6.03** *153.2*
6EP3	**5.33** *135.4*	**2.07** *52.6*	**2.28** *57.9*	**5.625** *142.88*	**6.03** *153.2*
7EP1	**4.79** *121.7*	**2.07** *52.6*	**1.53** *38.9*	**3.947** *10.25*	**4.33** *109.98*
7EP3	**3.50** *88.9*	**2.07** *52.6*	**1.53** *38.9*	**3.947** *100.25*	**4.33** *109.98*
10EP1	**6.62** *168.1*	**2.07** *52.6*	**2.78** *70.6*	**5.625** *142.88*	**6.03** *153.2*
10EP3	**5.35** *135.9*	**2.03** *52.6*	**2.78** *70.6*	**5.625** *142.88*	**6.03** *153.2*
12EP1	**4.97** *126.2*	**1.78** *45.2*	**1.78** *45.2*	**4.063** *103.20*	**4.46** *113.28*
12EP3	**3.624** *92.05*	**1.78** *45.2*	**1.78** *45.2*	**4.063** *103.20*	**4.46** *113.28*
20EP1/VP1	**4.95** *125.7*	**1.8** *45.7*	**1.8** *45.7*	**4.063** *103.20*	**4.47** *113.5*
20EP6/VP6	**5.09** *127.3*	**1.78** *45.2*	**1.78** *45.2*	**4.063** *103.20*	**4.46** *113.3*

*±0.02 [0.5]

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

3EP



6EP



7EP



10EP



Typical Insertion Loss *(continued)*

12EP



20EP



20VP



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .01	.05	.15	.5	1	5	10	30
EP Models								
3A	12	10	58	65	65	66	62	30
6, 10A	10	15	60	65	65	65	60	35
7A	15	28	63	75	78	75	75	55
12A	12	7	52	68	70	70	70	45
20A	3	6	28	50	55	60	55	55
VP Models								
20A	3	2	42	60	65	65	55	55

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .01	.05	.15	.5	1	5	10	30
EP Models								
3A	1	3	36	65	65	65	58	58
6, 10A	1	3	30	65	65	65	65	35
7A	10	13	55	65	68	70	65	50
12A	11	7	43	70	70	70	65	45
20A	8	25	60	65	65	58	58	58
VP Models								
20A	8	-	25	60	65	65	58	58

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

Single Phase Power Line Filter for Frequency Converters

FC Series

UL Recognized

FC Series

- Designed for frequency inverters and variable speed motor drives
- Suitable for electronically noisy environments
- Protects programmable logic controllers from RF noise on the AC power line
- Side flanges for easy mounting
- Touch safe terminals provide easy connections and prevent inadvertent contact for safety in the most demanding applications

Ordering Information

36 FC 10 B

- **Suffix**
  - B – Single stage
  - Omit for dual stage
- **Input / Output Style**
  - 10 – DIN type terminal block
- **FC Series**
- **Current Rating**
  - 6, 12, 16, 25, 36 or 50A

Available Part Numbers

6FC10	
12FC10	12FC10B
16FC10	16FC10B
25FC10	25FC10B
36FC10	36FC10B
50FC10	50FC10B

Specifications

Maximum leakage current each Line to Ground:

	B suffix	no suffix
@ 120 VAC 60 Hz:	3.9 mA	3.8 mA
@250 VAC 50 Hz:	7.0 mA	6.7 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 6 to 50A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematics

FC10

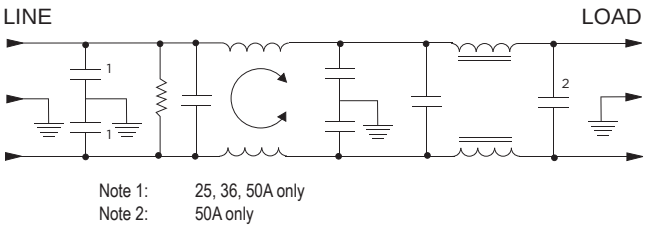

Note 1: 25, 36, 50A only
Note 2: 50A only

FC10B

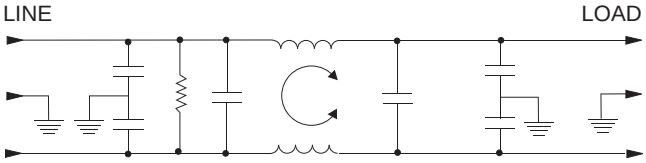

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

FC Series

Case Styles

FC10 / FC10B (6, 12, 16A)

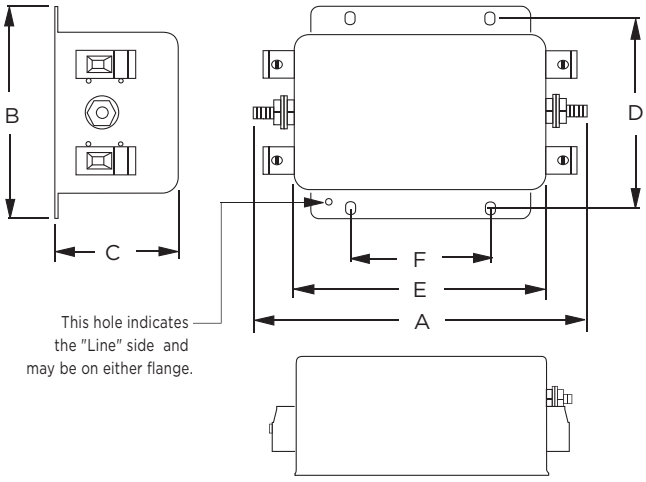

Typical Dimensions:

Line/Load Terminals (4):	DIN type accepts 10AWG solid / 12AWG stranded
Ground Terminals (2):	8-32 screw terminals
Mounting Holes (4):	.203 x .156 [*5.16 x 3.96*]

FC10 / FC10B (25, 36, 50A)

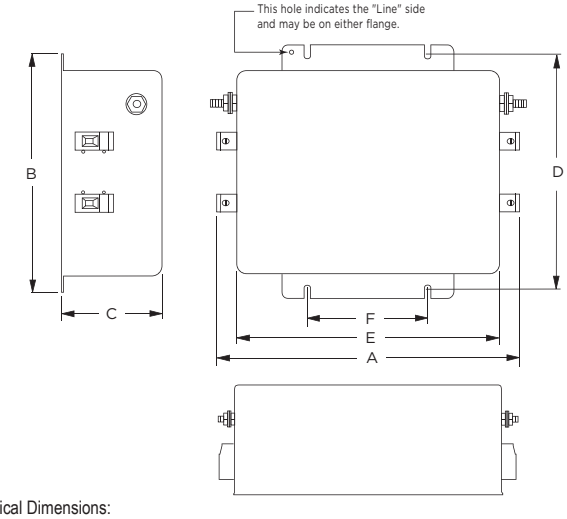

Typical Dimensions:

Line/Load Terminals (4):	DIN type accepts 8AWG solid / 10AWG stranded
Ground Terminals (2):	8-32 screw terminals
Mounting Slots (4):	.260 [*6.6*] wide

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .020 / ± .510	E (max)	F ± .010 / ± .254
6FC10	**4.60**	**3.10**	**1.78**	**2.677**	**3.70**	**2.0**
	116.8	*78.7*	*45.21*	*67.8*	*94.0*	*50.8*
12FC10/10B	**5.47**	**3.96**	**2.18**	**3.50**	**4.53**	**2.0**
16FC10/10B	*139.0*	*100.6*	*55.4*	*88.9*	*114.8*	*5.08*
25, 36, 50	**6.90**	**5.48**	**2.55**	**4.90**	**5.94**	**2.756**
FC10/10B	*175.3*	*139.2*	*64.77*	*124.5*	*150.9*	*70.0*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

FC Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

6FC10



12FC10



16FC10



25FC10



36, 50FC10



12, 16FC10B



25FC10B



36FC10B



50FC10B



Minimum Insertion Loss

Common Mode / Asymmetrical (Line to Ground)

	Frequency – MHz								
Part No.	**.01**	**.03**	**.05**	**.1**	**.5**	**1**	**5**	**10**	**30**
6FC10	9	19	26	37	65	65	50	40	35
12FC10	5	17	25	37	65	65	65	60	35
16FC10	4	15	22	36	65	65	70	70	35
25FC10	2	14	22	36	75	75	70	70	48
36, 50FC10	-	6	14	27	68	75	70	70	50
12, 16FC10B	16	28	37	50	81	76	63	55	38
25FC10B	14	25	36	49	91	88	71	64	46
36FC10B	11	25	37	50	81	87	73	66	49
50FC10B	11	24	36	49	81	75	62	54	37

Differential Mode / Symmetrical (Line to Line)

	Frequency – MHz								
Part No.	**.01**	**.03**	**.05**	**.1**	**.5**	**1**	**5**	**10**	**30**
6FC10	10	10	35	60	75	75	60	50	45
12FC10	14	14	30	51	75	75	75	70	45
16FC10	14	14	29	55	75	75	75	70	45
25FC10	14	14	17	42	75	75	70	70	50
36, 50FC10	14	14	17	42	75	75	70	70	50
12, 16FC10B	30	32	46	64	91	86	77	78	65
25FC10B	24	24	31	46	92	87	86	75	55
36FC10B	27	33	27	41	89	88	82	74	55
50FC10B	30	32	48	64	91	87	82	79	67

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

FL Series

UL Listed

FL Series

- Specifically designed for fluorescent lights
- Suitable for industrial environments
- UL Listed for aftermarket installation

Specifications

Maximum leakage current each Line to Ground:
@ 125 VAC 60 Hz: 3.0 mA
@280 VAC 50 Hz: 6.0 mA

Hipot rating (one minute):
Line to Ground: 1560 VAC
Line to Line: 1560 VAC

Rated Voltage: 125/280 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3.9 A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Ordering Information

3 FL 3

- Input / Output Style: 3 – Wire leads
- FL Series
- Current Rating: 3 – 3.9A

Electrical Schematic

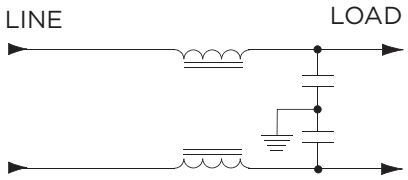

Available Part Number

3FL3	

Differential Mode Filter for Fluorescent Lighting Applications *(continued)*

FL Series

Case Styles

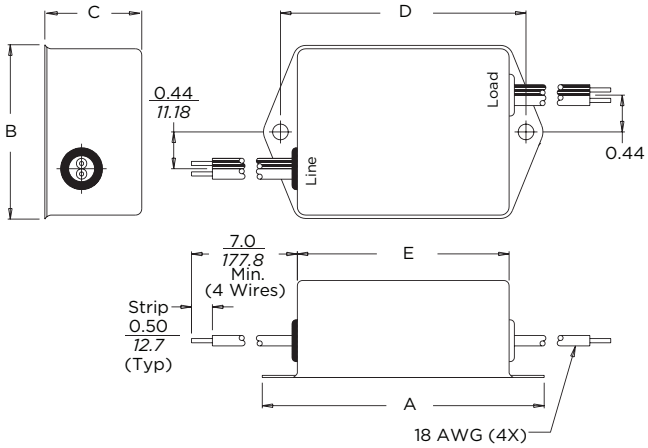

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 / ± .38	E (max)
3FL3	**3.35** *85.09*	**2.07** *52.58*	**1.16** *29.5*	**2.938** *74.63*	**2.57** *65.3*

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

3FL3



Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Differential Mode / Symmetrical (Line to Line)

	Frequency – MHz						
Part No.	**.15**	**.3**	**.6**	**1**	**4**	**10**	**20**
3FL3	10	18	34	46	56	38	26

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

G Series

UL Recognized
CSA Certified
VDE Approved

G Series

- Designed to provide excellent attenuation for most digital electronics equipment
- Broad frequency range of performance from 20kHz to 30MHz
- Size and cost-effective solution
- Designed to help comply with EN55022 Level A and FCC Part 15J Class B

Ordering Information

10 E G 1

- 1 – Input / Output Style: 1 – .250 [6.3] spade terminals
- G – G Series
- E – Leakage current designation: E – Low leakage *(<0.5 mA)*, V – Standard
- 10 – Current Rating: 6 or 10A

Available Part Numbers

6EG1	6VG1
10EG1	10VG1

Specifications

Maximum leakage current each Line to Ground:

	EG Models	VG Models
@ 120 VAC 60 Hz:	.30 mA	1.2 mA
@250 VAC 50 Hz:	.50 mA	2.0 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 6 & 10A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematics

6EG1 & 6VG1

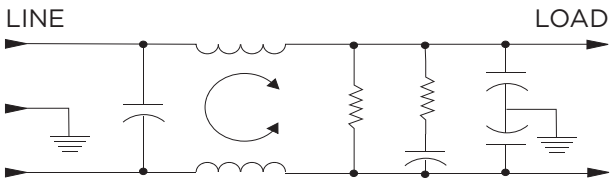

10EG1 & 10VG1

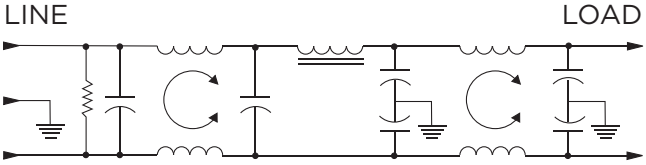

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

G Series

Case Styles

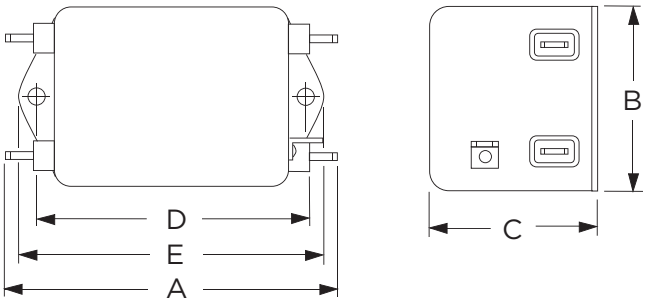

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [4.78] Dia.

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 / ± .38	E (max)
6EG1/VG1	**3.56** *90.4*	**2.15** *54.6*	**1.56** *39.6*	**2.938** *74.63*	**3.38** *85.8*
10EG1/VG1	**4.69** *119.1*	**2.27** *57.7*	**1.8** *45.7*	**4.063** *103.2*	**4.47** *113.5*

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

6EG1



6VG1



10EG1



10VG1



Minimum Insertion Loss

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .01	.05	.07	.1	.15	.5	1	5	10	30
EG Models										
6A	6	19	23	25	29	48	44	43	40	40
10A	8	10	15	18	42	64	65	65	60	60
VG Models										
6A	4	18	21	25	30	56	55	53	45	45
10A	5	10	24	37	50	72	70	70	60	60

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .01	.05	.07	.1	.15	.5	1	5	10	30
EG Models										
6A	4	6	10	24	37	66	75	72	50	50
10A	5	5	5	26	40	65	65	60	70	70
VG Models										
6A	4	7	7	26	39	67	75	68	55	55
10A	5	5	7	26	39	65	60	60	70	70

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

HQ Series

UL Recognized
CSA Certified
VDE Approved

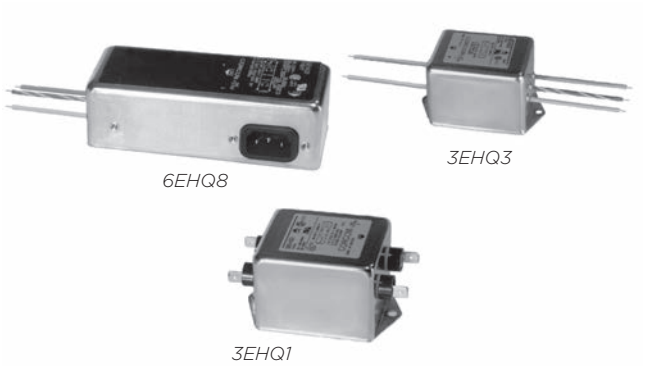

HQ Series

- Designed to provide the highest available attenuation of RFI noise in the frequency range from 10kHz to 30MHz for low leakage current applications
- Size and cost-effective

Ordering Information

6 E HQ 8 M

- **Suffix**
  - M – Metric inserts *(style 8 only)*
  - Omit for standard or none
- **Input / Output Style**
  - 1 – .250 [6.3] spade terminals
  - 3 – Wire leads
  - 8 – IEC inlet* *(line side)*
    Wire leads *(load side)*
- **HQ Series**
- **Leakage current designation**
  - E – Low leakage *(<0.5 mA)*
- **Current Rating**
  - 3 or 6A

**IEC 60320-1 C14 inlet mates with C13 connector*

Specifications

Maximum leakage current each Line to Ground:
@ 120 VAC 60 Hz: 2 µA
@250 VAC 50 Hz: 5 µA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3 & 6A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Available Part Numbers

3EHQ1	6EHQ1
3EHQ3	6EHQ3
3EHQ8	6EHQ8
3EHQ8M	3EHQ8M

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord



Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

HQ Series

Electrical Schematics

3EHQ

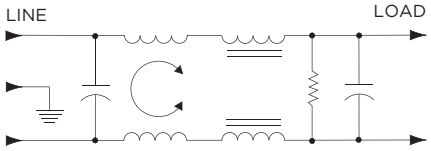

6EHQ

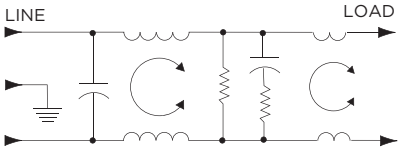

Case Styles

HQ1

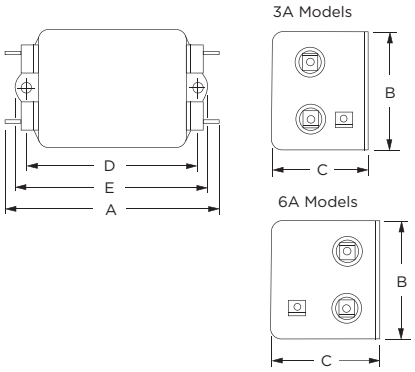

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

HQ3

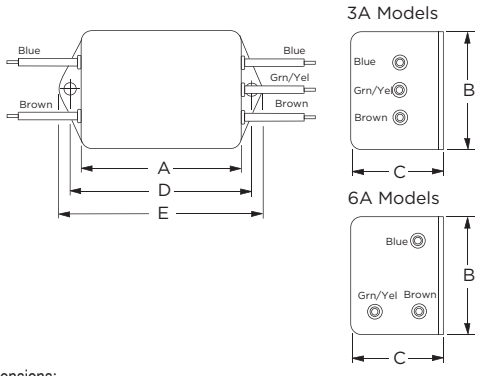

Typical Dimensions:

Wire Leads (5):	4.0 [*101.6*] Min.
Mounting Holes (2):	.188 [4.78] Dia.

3EHQ8 & 3EHQ8M

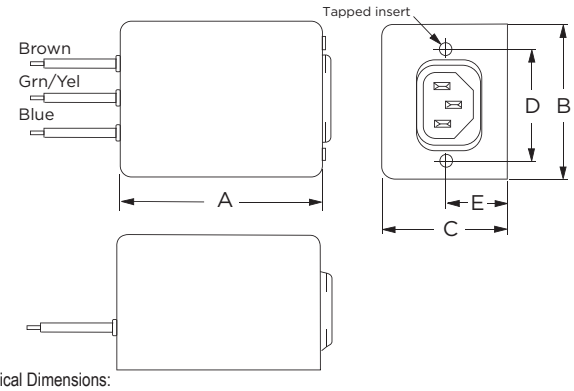

Typical Dimensions:

Wire Leads (3):	4.0 [*101.6*] Min.
Line Inlet (1):	IEC 60320-1 C14
HQ8 Tapped Inserts (2):	6-32 x 1/4
HQ8M Tapped Inserts (2):	M3 x .5

6EHQ8 & 6EHQ8M

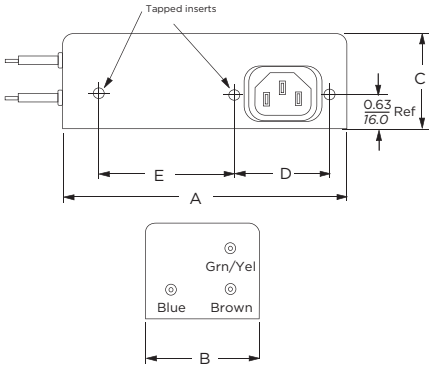

Typical Dimensions:

Wire Leads (3):	4.0 [*101.6*] Min.
Line Inlet (1):	IEC 60320-1 C14
HQ8 Tapped Inserts (2):	6-32 x 1/4
HQ8M Tapped Inserts (2):	M3 x .5

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

HQ Series

Recommended Panel Cutout



Tolerance ± .005 [0.13]

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 ± .38	E (max)
3EHQ1	**3.85** *97.8*	**2.07** *52.6*	**1.78** *45.2*	**2.938** *74.63*	**3.34** *84.8*
3EHQ3	**2.56** *65.0*	**2.07** *52.6*	**1.78** *45.2*	**2.938** *74.63*	**3.34** *84.8*
3EHQ8, 3EHQ8M	**3.07** *78.0*	**2.25** *57.2*	**1.78** *45.2*	**1.575** *40.01*	**0.63*** *16.0**
6EHQ1	**4.98** *126.5*	**2.27** *57.7*	**1.8** *45.7*	**4.063** *103.2*	**4.47** *113.5*
6EHQ3	**3.69** *93.7*	**2.27** *57.7*	**1.8** *45.7*	**4.063** *103.2*	**4.47** *113.5*
6EHQ8, 6EHQ8M	**5.47** *138.9*	**2.07** *52.6*	**1.78** *45.2*	**1.575** *40.01*	**2.7*** *68.6**

*±0.02 [0.5]

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

3EHQ



6EHQ



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .01	.02	.05	.15	.5	1	2	5	7	10	20	30
3A	19	24	32	44	44	40	38	28	25	22	13	10
6A	24	29	39	42	28	35	36	30	30	24	16	15

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .01	.02	.05	.15	.5	1	2	5	7	10	20	30
3A	1	18	43	68	75	75	72	70	66	65	60	60
6A	6	10	43	70	75	75	75	65	50	55	50	40

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

HT Series

UL Recognized
CSA Certified
VDE Approved

HT Series

- Designed to provide significant attenuation of RFI noise in the frequency range from 10kHz to 30MHz
- Size and cost-effective

Specifications

Maximum leakage current each Line to Ground:
@ 120 VAC 60 Hz: 2 µA
@250 VAC 50 Hz: 5 µA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3 to 15A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Ordering Information

6 E HT 7 M

- **Suffix**
  - M – Metric inserts *(style 7 only)*
  - Omit for standard or none
- **Input / Output Style**
  - 1 – .250 [6.3] spade terminals
  - 3 – Wire leads
  - 6 – Threaded bolt
  - 7 – IEC inlet* *(line side)*
    .250 [6.3] spade terminals *(load side)*
- **HT Series**
- **Leakage current designation**
  - E – Low leakage *(<0.5 mA)*
- **Current Rating**
  - 3, 6, 10 or 15A

*IEC 60320-1 C14 inlet mates with C13 connector

Available Part Numbers

3EHT1	6EHT7
3EHT3	6EHT7M
3EHT7	10EHT1
3EHT7M	10EHT3
6EHT1	15EHT1
6EHT3	15EHT6

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord



Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

HT Series

Electrical Schematics

3 & 6EHT



10EHT



15EHT

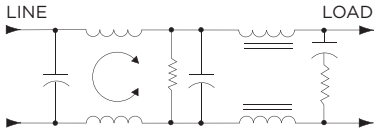

Case Styles

HT1 (3, 6, 10A)

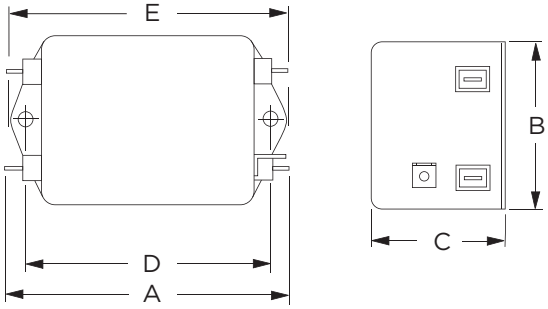

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

HT1 (15A)

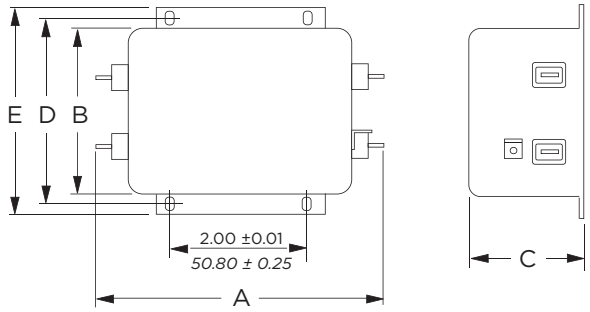

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Slots (4):	.203 x .156 [*5.16 x 3.96*] Dia.

HT3

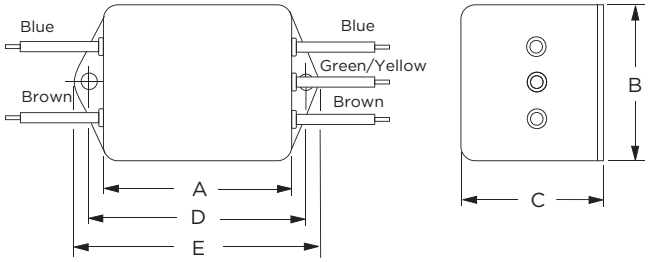

Typical Dimensions:

6A Wire Leads (5):	4.0 [*101.6*] Min., 18AWG
10A Wire Leads (5):	6.0 [152.4] Min., 18AWG
Mounting Holes (2):	.188 [4.78] Dia.

HT6

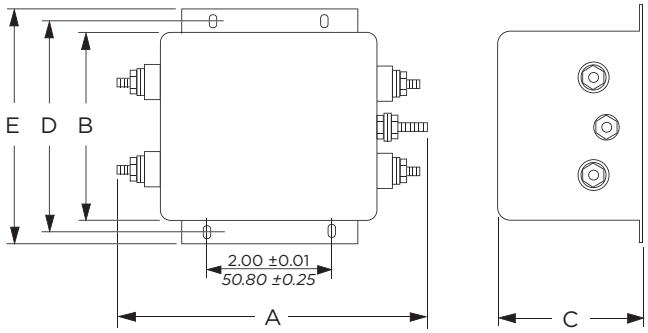

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Slots (4):	.203 x .156 [*5.16 x 3.96*] Dia.

HT7 & HT7M

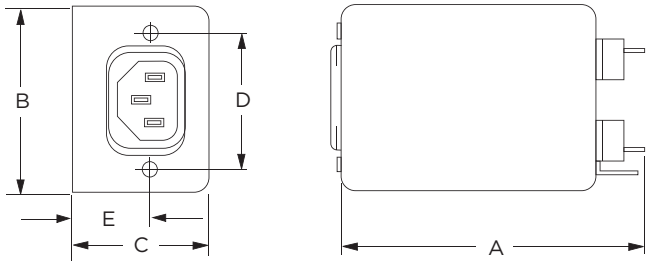

Typical Dimensions:

Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Line Inlet (1):	IEC 60320-1 C14
HT7 Tapped Inserts (2):	6-32 x 1/4
HT7M Tapped Inserts (2):	M3 x .5

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

HT Series

Recommended Panel Cutout

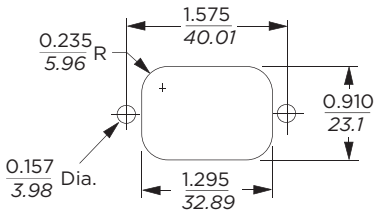

Tolerance ± .005 [0.13]

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 / ± .38	E (max)
3EHT1, 6EHT1	**3.56** *90.4*	**2.15** *54.6*	**1.81** *46.0*	**2.938** *74.63*	**3.38** *85.9*
3EHT3, 6EHT3	**2.55** *64.8*	**2.15** *54.6*	**1.81** *46.0*	**2.938** *74.63*	**3.38** *85.9*
3EHT7 / 7M, 6EHT7 / 7M	**3.52** *89.4*	**2.25** *57.2*	**1.78** *45.2*	**1.575** *40.01*	**0.63*** *16.0**
10EHT1	**4.69** *119.1*	**2.27** *57.7*	**1.8** *45.7*	**4.063** *103.2*	**4.47** *113.5*
10EHT3	**3.69** *93.7*	**2.27** *57.7*	**1.8** *45.7*	**4.063** *103.2*	**4.47** *113.5*
15EHT1	**5.45** *138.4*	**3.12** *79.2*	**2.18** *55.4*	**3.5** *88.9*	**3.96** *100.6*
15EHT6	**5.95** *151.1*	**3.12** *79.2*	**2.18** *55.4*	**3.5** *88.9*	**3.96** *100.6*

*±0.02 [0.5]

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

3EHT



6EHT



10EHT



15EHT



Minimum Insertion Loss

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .02	.02	.05	.08	.15	.5	1	2	5	10	20	30
3A	22	32	36	-	49	46	40	30	22	12	12	12
6A	16	23	32	41	46	41	33	26	15	9	6	2
10A	9	15	24	30	36	42	34	22	11	12	8	8
15A	4	9	18	22	27	41	34	22	12	12	5	2

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .02	.02	.05	.08	.15	.5	1	2	5	10	20	30
3A	3	1	30	-	61	70	65	65	48	40	32	32
6A	4	1	14	45	51	70	70	65	55	47	37	37
10A	7	8	17	32	52	70	70	70	65	55	40	35
15A	12	16	15	10	51	70	70	70	70	70	65	55

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

HZ Series

UL Recognized
CSA Certified
VDE Approved

HZ Series

- Designed to provide good attenuation to RFI noise in the frequency range from 10kHz to 30MHz
- Size and cost-effective
- Low leakage current
- New versions up to 30A

Ordering Information

3 E HZ 1

- Input / Output Style
  - 1 – .250 [6.3] spade terminals
  - 6 – Threaded bolt
- HZ Series
- Leakage current designation
  - E – Low leakage *(<0.5 mA)*
- Current Rating
  - 3, 4, 6, 10, 15, 20 or 30A

Available Part Numbers

3EHZ1	4EHZ1
6EHZ1	10EHZ1
15EHZ1	20EHZ1
30EHZ6	

Electrical Schematic

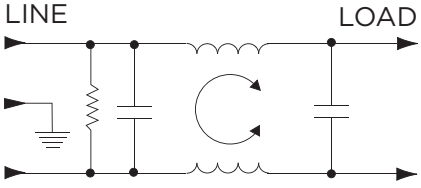

Specifications

Maximum leakage current each Line to Ground:
@ 120 VAC 60 Hz: 2 µA
@250 VAC 50 Hz: 5 µA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3 to 30A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Case Styles

3EHZ1

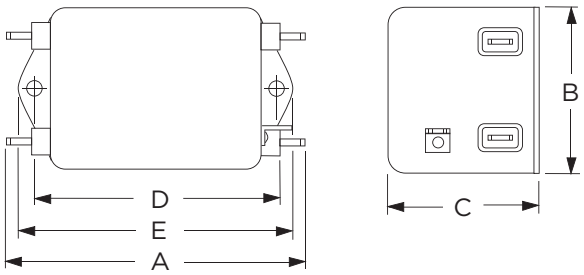

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

HZ Series

Case Styles *(continued)*

4EHZ1

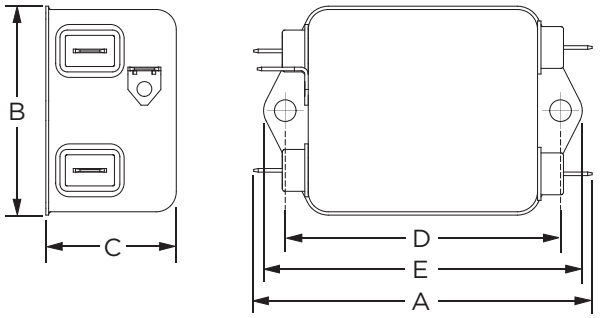

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

6EHZ1

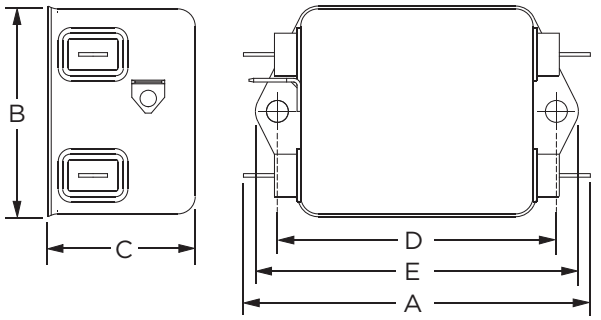

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

10, 15 & 20EHZ1

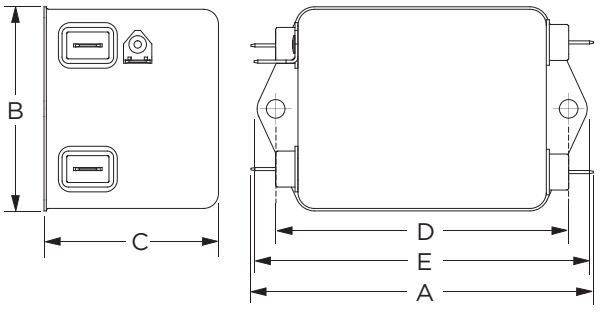

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

30EHZ6

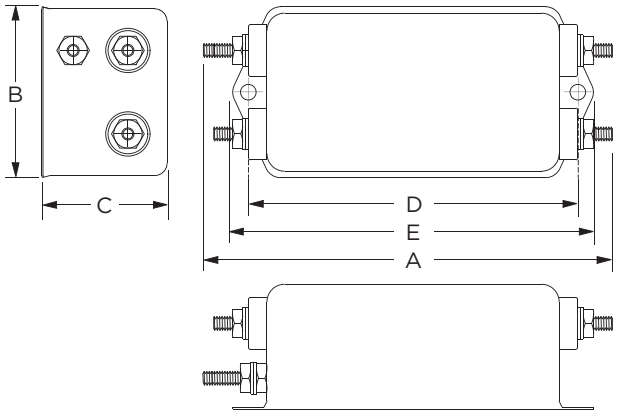

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Holes (4):	.188 [*4.75*] Dia.

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 / ± .38	E (max)
3EHZ1	**3.54** *89.91*	**2.08** *52.8*	**1.31** *33.3*	**2.938** *74.63*	**3.35** *85.1*
4EHZ1	**3.07** *77.98*	**1.82** *46.23*	**1.16** *29.46*	**2.375** *60.33*	**2.78** *70.61*
6EHZ1	**3.07** *77.98*	**1.82** *46.23*	**1.28** *32.51*	**2.375** *60.33*	**2.78** *70.61*
10EHZ1 15EHZ1 20EHZ1	**3.54** *89.92*	**2.047** *51.99*	**1.805** *45.85*	**2.938** *74.63*	**3.54** *89.92*
30EHZ6	**4.92** *124.97*	**2.07** *52.58*	**1.53** *38.86*	**3.947** *100.25*	**4.33** *109.98*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

3EHZ1



4EHZ1



6EHZ1



10EHZ1



15EHZ1



20EHZ1



30EHZ6



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Common Mode / Asymmetrical (Line to Ground)

	Frequency – MHz								
Part No.	**.01**	**.05**	**.1**	**.15**	**.5**	**1**	**5**	**10**	**30**
3EHZ1	10	24	30	34	34	35	15	10	5
4EHZ1	12	24	31	35	47	47	30	25	18
6EHZ1	9	21	27	30	36	34	27	22	16
10EHZ1	7	21	25	31	43	40	26	21	14
15EHZ1	7	27	27	30	43	37	24	17	12
20EHZ1	5	19	24	28	31	29	14	9	4
30EHZ6	-	5	11	14	27	30	20	17	14

Differential Mode / Symmetrical (Line to Line)

	Frequency – MHz								
Part No.	**.01**	**.05**	**.1**	**.15**	**.5**	**1**	**5**	**10**	**30**
3EHZ1	10	25	30	54	70	70	65	55	55
4EHZ1	-	-	14	32	72	83	68	63	30
6EHZ1	-	-	7	17	59	80	67	60	52
10EHZ1	-	-	4	21	63	80	80	74	36
15EHZ1	-	-	7	15	51	77	80	74	48
20EHZ1	-	-	11	9	54	77	74	69	47
30EHZ6	-	-	13	14	47	67	76	70	58

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

IK Series

IK Series

- Excellent performance for applications with high interference levels
- Designed for single or two-phase applications
- Wide current range
- For small to medium sized industrial equipment, power converters and variable speed motors
- Touch safe terminals on the 6 to 60A product provide easy connections and prevent inadvertent contact for safety in the most demanding applications

Ordering Information

1 IK 1 C

Suffix
C – Ground Choke *(1IK1C only)*

Input / Output Style
1 – .250 [6.3] spade terminals
10 – DIN type terminal block
16 & 35IK: DIN input / Wire leads output
50 & 80IK: DIN input / DIN output

IK Series

Current Rating
1, 6, 16, 35, 50 & 80A

Available Part Number

1IK1C	6IK1
16IK10	35IK10
50IK10	80IK10

Specifications

Maximum leakage current each Line to Ground:
@120 VAC 60 Hz:

1IK & 6IK:	0.6 mA
16, 35 & 50IK:	1.7 mA
80IK:	5.2 mA

@289 VAC 50 Hz:

1IK:	1.2 mA

@277 VAC 50 Hz:

6IK:	1.15 mA
16, 35 & 50IK:	3.2 mA
80IK:	9.9 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max):	**1IK**	**6 to 80IK**
Line to Ground:	289 VAC	500 VAC
Line to Line:	277 VAC	480 VAC

Operating Frequency: 50/60 Hz

Rated Current: 1 to 80A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematic

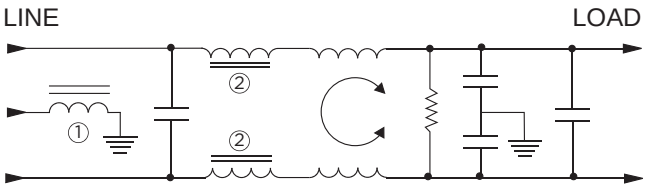

Note 1: 1IK1C only
Note 2: 6IK1 only

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

IK Series

Case Styles

1IK1C

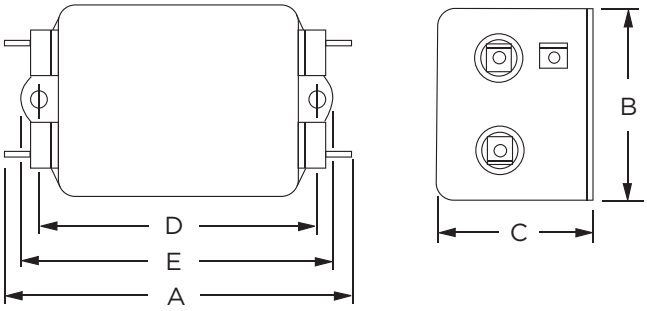

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

6IK1

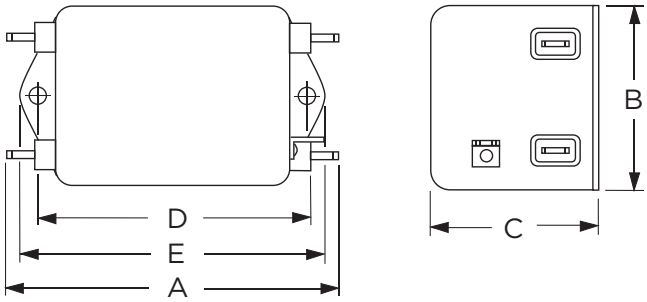

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

16 & 35IK10

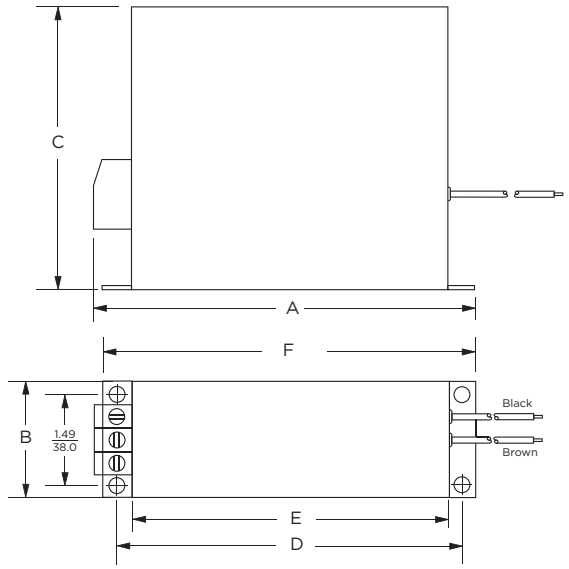

Typical Dimensions:

Input Terminals (3):	DIN type terminal block
Output Wire Leads (2):	7.0 [*180.0*] min.
Mounting Holes (4):	.216 [*5.5*] dia.

50 & 80IK10

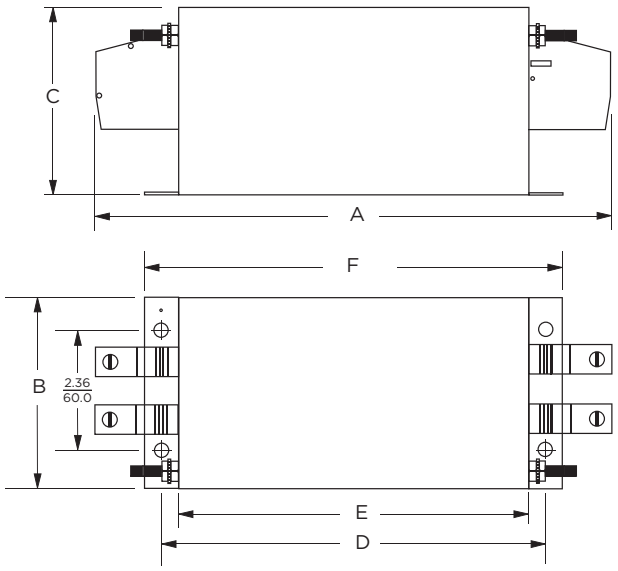

Typical Dimensions:

Line / Load terminals (4):	DIN type terminal block
Ground terminals (2):	1/4-20 screw
Mounting Holes (4):	.260 [*6.5*] dia.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

IK Series

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .020 / ± .510	E (max)	F ± .010 / ± .254
1IK1C	**3.85** *97.8*	**2.07** *52.6*	**1.53** *38.9*	**2.93** *74.4*	**3.35** *85.1*	-
6IK1	**4.69** *119.1*	**2.27** *57.7*	**1.8** *45.7*	**4.063** *103.2*	**4.47** *113.5*	-
16IK10	**6.28** *159.5*	**1.97** *50.0*	**4.76** *121.0*	**5.90** *150.0*	**5.35** *136.0*	**6.34** *161.0*
35IK10	**6.48** *164.5*	**1.97** *50.0*	**4.76** *121.0*	**5.90** *150.0*	**5.35** *136.0*	**6.34** *161.0*
50IK10 80IK10	**9.45** *240.0*	**3.94** *100.0*	**3.54** *90.0*	**6.89** *175.0*	**6.3** *160.0*	**7.48** *190.0*

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

1IK1C



6IK1



16 & 35IK10



50 & 80IK10



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

K Series

UL Recognized
CSA Certified
VDE Approved**

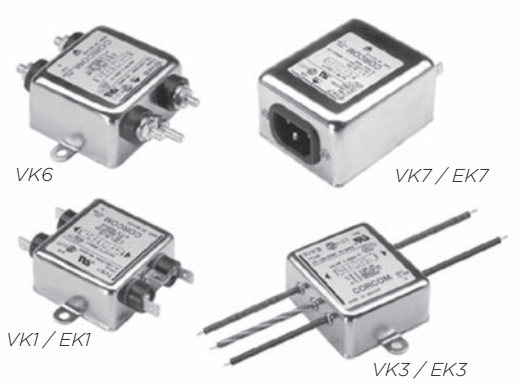

K Series

- Suitable for high impedance loads
- Well suited to applications where pulsed, continuous and/or intermittent RFI interference is present
- EK models meet the very low leakage current requirements for VDE portable equipment and non-patient care medical equipment
- Available with ground line inductor (choke)

Ordering Information

10 E K 7 M

Suffix
M – Metric inserts *(style 7 only)*
Omit for standard or none
C – Ground choke *(30, 40VK6 only)*

Input / Output Style
1 – .250 [6.3] spade terminals
3 – Wire leads
6 – Threaded bolt
7 – IEC inlet* *(line side)*
.250 [6.3] spade terminals *(load side)*

K Series

Leakage current designation
E – Low leakage *(<0.5 mA)*
V – Standard

Current Rating
1, 2, 3, 5, 10, 20, 30, 40 or 60A

**1-15A: IEC 60320-1 C14 inlet mates with C13 connector*
20VK7: C20 inlet mates with C19 connector

Specifications

Maximum leakage current each Line to Ground:

	VK Models	EK Models
@ 120 VAC 60 Hz:	.5 mA	.21 mA
@250 VAC 50 Hz:	1.0 mA	.36 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 1 to 60A*

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Available Part Numbers

1VK1	10VK6	2EK3
1VK3	10VK7	3EK1
2VK1	10VK7M	3EK3
2VK3	20VK1	3EK7
3VK1	20VK6	3EK7M
3VK3	20VK7*	5EK1
3VK7	30VK6	5EK3
3VK7M	30VK6C	5EK7
5VK1	40VK6	5EK7M
5VK3	40VK6C	10EK1
5VK7	60VK6	10EK3
5VK7M	1EK1	10EK7
10VK1	1EK3	10EK7M
10VK3	2EK1	20EK1

***20VK7, 20A model tested by Underwriters Laboratories to US and Canadian requirements and is VDE approved at 16A, 250VAC*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

K Series

Electrical Schematics

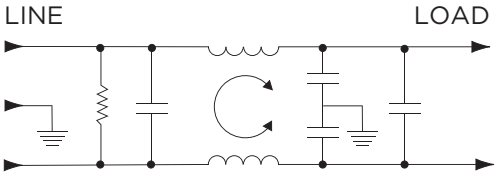

30 & 40VK6C *(Inductor in Ground Line)*

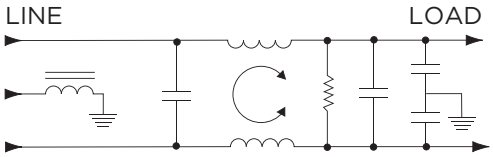

60VK6

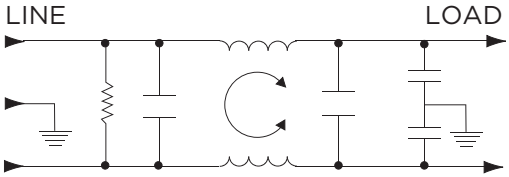

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord



Case Styles

K1 (1, 2, 3, 6, 10A)

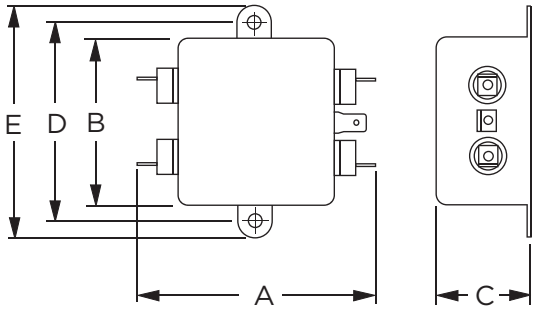

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

K1 (20A)

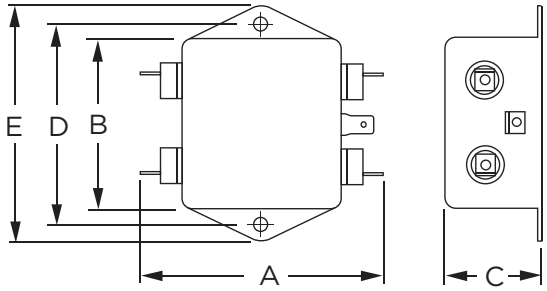

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

K3

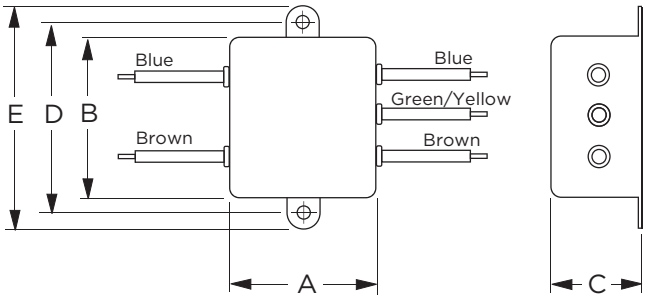

Typical Dimensions:

Wire Leads (5):	4.0 [*101.6*] Min., AWG18 (AWG16 for 10A)
Mounting Holes (2):	.188 [4.78] Dia.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

K Series

Case Styles *(continued)*

10VK6

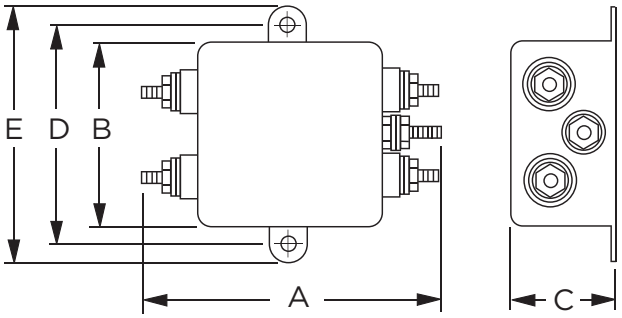

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Holes (2):	.188 [4.78] Dia.

20VK6

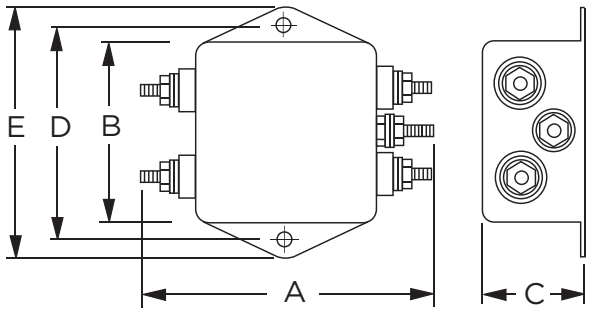

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Holes (2):	.188 [4.78] Dia.

30VK6/6C & 40VK6/6C

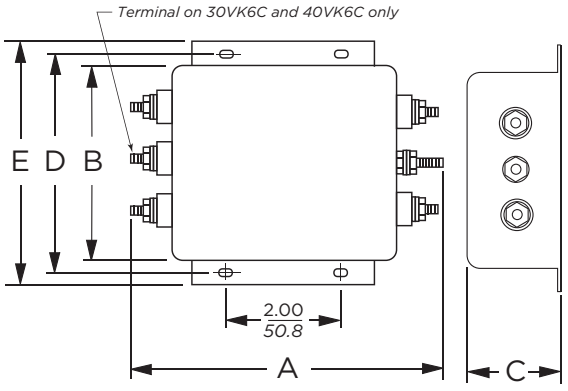

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Slots (4):	.250 x .156 [*6.35 x 3.96*] Dia.

60VK6

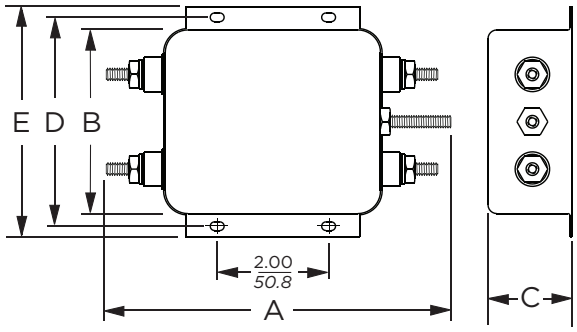

Typical Dimensions:

Terminals (5):	1/4-20, Torque 56 lbf-in. [*6.32* N-m] max. ± 2 [*.22*]
Mounting Slots (4):	.250 x .156 [*6.35 x 3.96*] Dia.

K7 & K7M (3, 5, 10A)

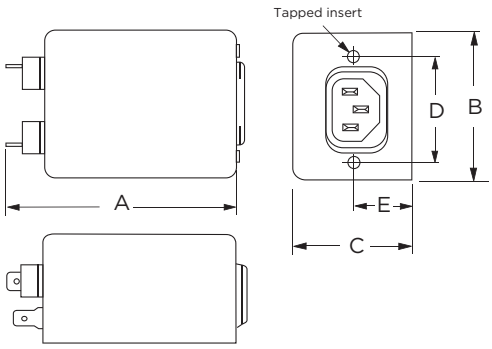

Typical Dimensions:

Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Line Inlet (1):	IEC 60320-1 C14
K7 Tapped Inserts (2):	6-32 x 1/4
K7M Tapped Inserts (2):	M3 x .5

20VK7

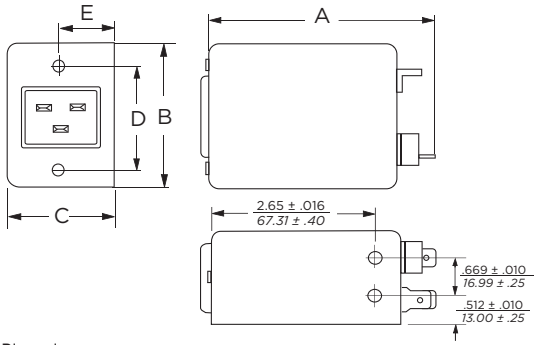

Typical Dimensions:

Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Line Inlet (1):	IEC 60320-1 C20
K7 Tapped Inserts (2):	6-32 x 1/4
K7M Tapped Inserts (2):	M3 x .5

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

K Series

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 / ± .38	E (max)
1VK1, 1EK1, 2VK1, 2EK1	**3.1** *78.7*	**2.07** *52.6*	**0.91** *23.1*	**2.375** *60.33*	**2.81** *74.1*
1VK3, 1EK3, 2VK3, 2EK3	**1.81** *46.0*	**2.07** *52.6*	**0.91** *23.1*	**2.375** *60.33*	**2.81** *74.1*
3VK1, 3EK1, 5VK1, 5EK1	**3.10** *78.7*	**2.07** *52.6*	**1.16** *29.5*	**2.375** *60.33*	**2.81** *74.1*
3VK3, 3EK3, 5VK5, 5EK3	**1.81** *46.0*	**2.07** *52.6*	**1.16** *29.5*	**2.375** *60.33*	**2.81** *74.4*
3VK7/7M, 3EK7/7M	**3.21** *81.5*	**2.25** *57.2*	**1.28** *32.5*	**1.575** *40.01*	**0.63*** *16.0**
5VK7/7M, 5EK7/7M	**3.21** *81.5*	**2.25** *57.2*	**1.28** *32.5*	**1.575** *40.01*	**0.63*** *16.0**
10VK1, 10EK1	**3.35** *85.1*	**2.07** *52.6*	**1.16** *29.5*	**2.375** *60.33*	**2.81** *71.4*
10VK3, 10EK3	**2.07** *52.6*	**2.07** *52.6*	**1.16** *29.5*	**2.375** *60.33*	**2.81** *71.4*
10VK6	**3.46** *87.9*	**2.07** *52.6*	**1.16** *29.5*	**2.375** *60.33*	**2.81** *71.4*
10VK7/7M, 10EK7/7M	**3.71** *94.2*	**2.25** *57.2*	**1.28** *32.5*	**1.575** *40.01*	**0.63*** *16.0**
20VK1, 20EK1	**3.35** *85.1*	**2.56** *65.0*	**1.53** *38.9*	**2.938** *74.63*	**3.35** *85.1*
20VK6	**3.46** *87.9*	**2.56** *65.0*	**1.53** *38.9*	**2.938** *74.63*	**3.35** *85.1*
20VK7	**3.8** *90.4*	**2.28** *54.6*	**1.78** *39.6*	**1.575** *74.63*	**.846¹** *85.8¹*
30VK6, 30VK6C	**5.34** *135.6*	**3.38** *85.9*	**1.53** *38.9*	**3.75** *95.25*	**4.20** *106.7*
40VK6, 40VK6C	**5.34** *135.6*	**3.38** *85.9*	**1.53** *38.9*	**3.75** *95.25*	**4.20** *106.7*
60VK6	**6.0** *152.4*	**3.38** *85.9*	**1.53** *38.9*	**3.75** *95.25*	**4.20** *106.7*

*±0.02 [0.5]
¹±0.01 [0.25]

Recommended Panel Cutouts

K7 & K7M Cutout (3, 5, 10A)

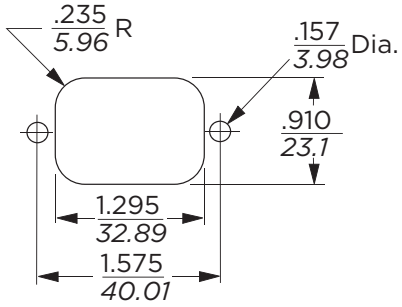

20VK7 Cutout



Tolerance ± .005 [0.13]

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

1 & 3EK



2 & 10EK



5EK



20EK



Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

K Series

Performance Data *(continued)*

Typical Insertion Loss

Measured in closed 50 Ohm system

1VK



2VK



3VK



5VK



10VK



20VK



30VK & 30VK6C



40VK & 40VK6C



60VK



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .15	.5	1	5	10	30
VK Models						
1A, 3A	15	30	38	50	50	50
2A, 5A, 10A	6	19	28	42	45	50
20A	6	19	28	42	45	50
30A, 40A	6	19	28	42	45	50
60A	6	22	28	32	39	35
EK Models						
1A, 3A	15	29	35	45	45	50
2A, 5A, 10A	8	19	25	38	40	45
20A	8	19	25	38	40	45

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .15	.5	1	5	10	30
VK Models						
1A, 3A	-	-	48	55	50	35
2A, 5A, 10A	-	-	30	50	30	30
20A	6	6	30	50	30	30
30A, 40A	2	40	60	65	57	55
60A	13	49	67	57	53	53
EK Models						
1A, 3A	-	-	48	55	50	35
2A, 5A, 10A	-	-	30	50	30	30
20A	6	6	30	50	30	30

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

Multi-purpose Medical Filter for Power Line Noise Protection

MV Series

UL Recognized
CSA Certified
VDE Approved

MV Series

- Multi-purpose medical filter
- Improved Line to Ground performance
- A good solution to emission or immunity problems
- Meets leakage current requirements of UL2601 for health care equipment

Specifications

Maximum leakage current each Line to Ground:
@ 120 VAC 60 Hz: .07 mA
@250 VAC 50 Hz: .13 mA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3 to 20A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Ordering Information

6 MV 1

- 1 — Input / Output Style: 1 – .250 [6.3] spade terminals
- MV — MV Series
- 6 — Current Rating: 3, 6, 10 or 20A

Electrical Schematic

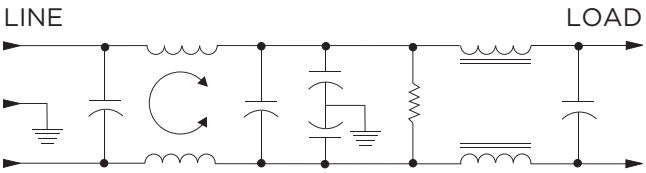

Available Part Numbers

3MV1	6MV1
10MV1	20MV1

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

MV Series

Case Styles

MV1 (3, 6, 10A)

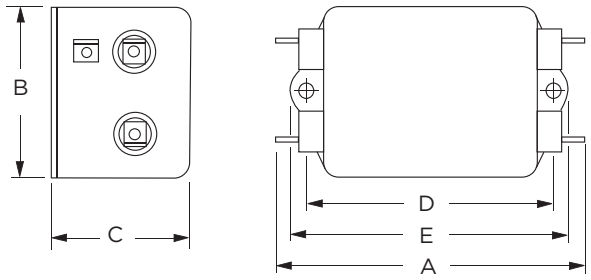

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

20MV1

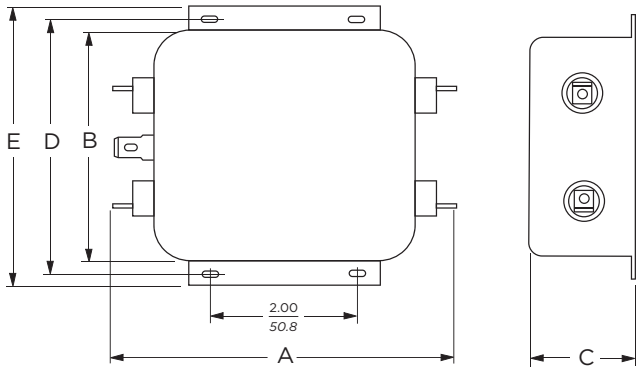

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 / ± .38	E (max)
3MV1	**3.36** *85.3*	**1.82** *46.2*	**1.28** *32.5*	**2.375** *60.33*	**2.78** *70.6*
6MV1	**3.86** *98.0*	**2.08** *52.8*	**1.53** *38.9*	**2.938** *74.63*	**3.34** *84.8*
10MV1	**3.86** *98.0*	**2.08** *52.8*	**1.53** *38.9*	**2.938** *74.63*	**3.34** *84.8*
20MV1	**5.23** *132.8*	**3.38** *85.9*	**1.53** *38.9*	**3.75** *95.25*	**4.20** *106.7*

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

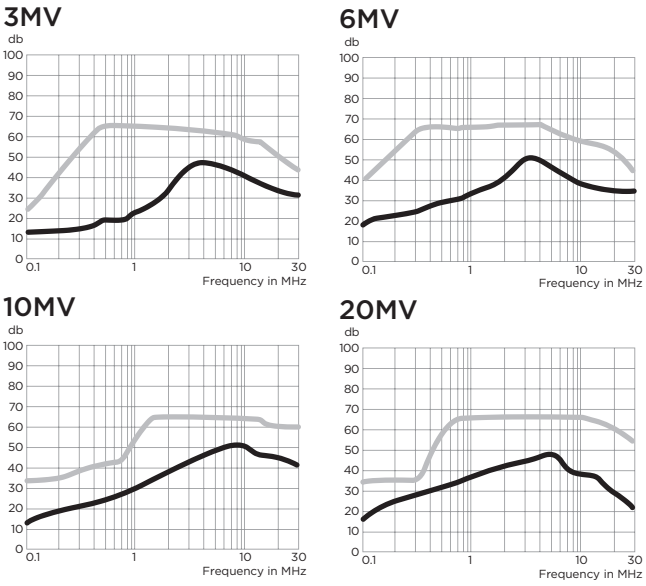

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .15	.5	1	2	5	10	20	30
3A	14	19	20	30	46	40	34	31
6A	19	27	30	38	50	40	35	35
10A	15	25	26	34	46	50	44	42
20A	18	30	34	34	46	40	36	20

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .15	.5	1	2	5	10	20	30
3A	33	65	65	65	65	60	53	50
6A	40	65	65	65	65	60	57	55
10A	33	65	65	65	65	65	55	55
20A	25	65	65	65	65	60	57	45

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

N Series

UL Recognized
CSA Certified
VDE Approved

N Series

- Superior attenuation for most digital electronic equipment over the frequency range of 10kHz to 30MHz
- Provides excellent common mode and differential mode performance
- Cost-effective solution to very noisy equipment that must meet conducted emission limits

Ordering Information

10 V N 1

- 1 – Input / Output Style: 1 – .250 [6.3] spade terminals
- N – N Series
- V – Leakage current designation: V – Standard
- 10 – Current Rating: 6 or 10A

Available Part Numbers

6VN1	10VN1

Specifications

Maximum leakage current each Line to Ground:
@ 120 VAC 60 Hz: 1.2 mA
@250 VAC 50 Hz: 2.0 mA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 6 to 10A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematics

3VN

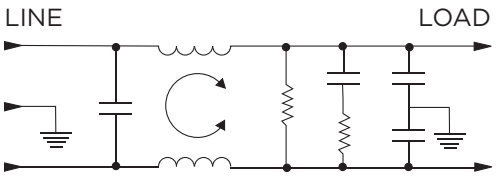

10VN

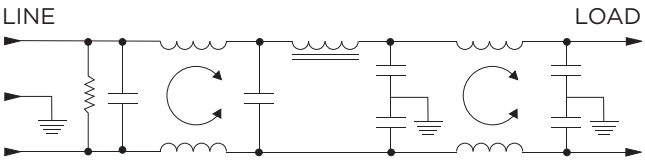

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

N Series

Case Styles

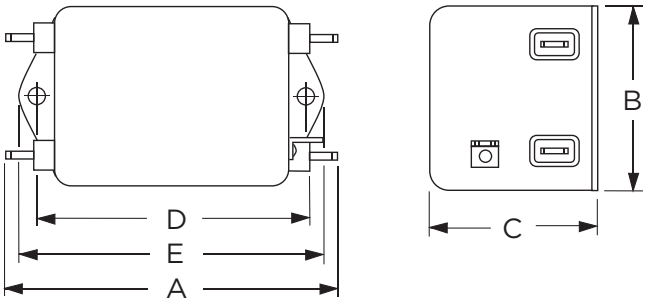

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 / ± .38	E (max)
6VN1	**3.56** *90.4*	**2.15** *54.6*	**1.81** *45.9*	**2.938** *74.63*	**3.38** *85.8*
10VN1	**4.69** *119.1*	**2.27** *57.7*	**1.8** *45.7*	**4.063** *103.2*	**4.47** *113.5*

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

6VN



10VN



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .01	.05	.1	.15	.5	1	5	10	30
6A	6	20	28	34	58	54	53	53	43
10A	8	8	44	55	75	70	70	70	55

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .01	.05	.1	.15	.5	1	5	10	30
6A	6	14	41	52	66	77	72	60	60
10A	6	6	35	45	72	70	72	75	70

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

Highest Performance RFI Filters for Switching Power Supplies

Q Series

UL Recognized
CSA Certified
VDE Approved

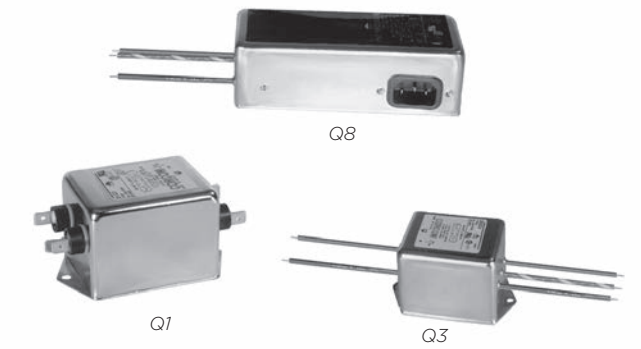

Q Series

- Specifically developed for switching power supplies
- High attenuation for common and differential mode interference
- Effective from 10kHz to 30MHz
- Optimized for attenuation and size
- 3 or 6A versions available with IEC inlet

Ordering Information

6 E Q 8 M

- **Suffix**
  - M – Metric inserts *(style 8 only)*
  - Omit for standard or none
- **Input / Output Style**
  - 1 – .250 [6.3] spade terminals
  - 3 – Wire leads
  - 8 – IEC inlet* *(line side)*
    Wire leads *(load side)*
- **Q Series**
- **Leakage current designation**
  - E – Low leakage *(<0.5 mA)*
  - V – Standard
- **Current Rating**
  - 3, 6 or 20A

*IEC 60320-1 C14 inlet mates with C13 connector

Specifications

Maximum leakage current each Line to Ground:

3 & 20A	VQ Models	EQ Models
@120 VAC 60 Hz:	.73 mA	.22 mA
@250 VAC 50 Hz:	1.27 mA	.38 mA
6A		
@120 VAC 60 Hz:	—	.29 mA
@250 VAC 50 Hz:	—	.51 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3 to 20A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Available Part Numbers

3EQ1	6EQ8M
3EQ3	20EQ1
3EQ8	3VQ1
3EQ8M	3VQ3
6EQ1	3VQ8
6EQ3	3VQ8M
6EQ8	20VQ1

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord



Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Q Series

Electrical Schematics

3A

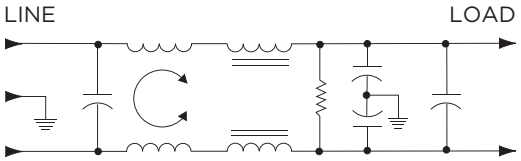

6, 20A

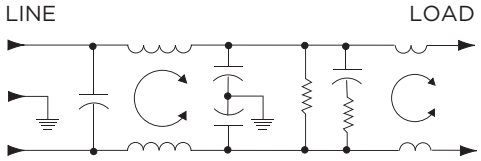

Case Styles

Q1

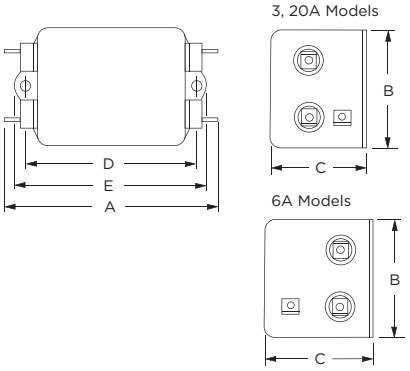

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

Q3

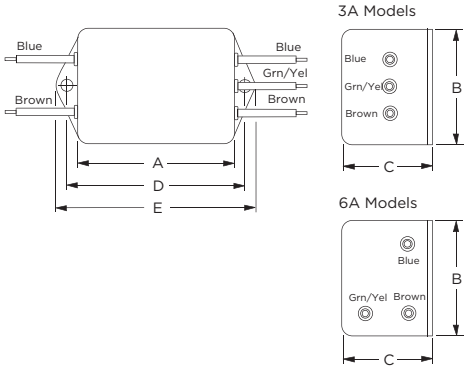

Typical Dimensions:

Wire Leads (5):	4.0 [*101.6*] Min., 18AWG
Mounting Holes (2):	.188 [4.78] Dia.

Q8, Q8M (3A)

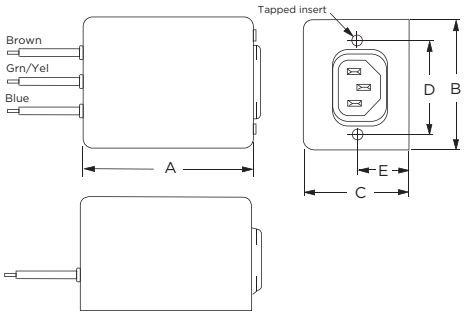

Typical Dimensions:

Wire Leads (3):	6.0 [*152.4*] Min., 18AWG
Line Inlet (1):	IEC 60320-1 C14
Q8 Tapped Inserts (2):	6-32 x 1/4
Q8M Tapped Inserts (2):	M3 x .5

Q8, Q8M (6A)

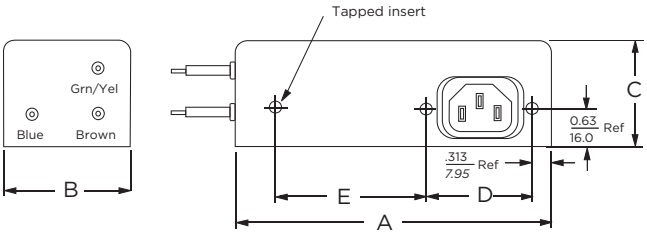

Typical Dimensions:

Wire Leads (3):	6.0 [*152.4*] Min., 18AWG
Line Inlet (1):	IEC 60320-1 C14
Q8 Tapped Inserts (3):	6-32 x 1/4
Q8M Tapped Inserts (3):	M3 x .5

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 / ± .38	E (max)
3VQ1, 3EQ1	**3.85**	**2.07**	**1.78**	**2.938**	**3.34**
	97.8	*52.6*	*45.2*	*74.63*	*84.8*
3VQ3, 3EQ3	**2.56**	**2.07**	**1.78**	**2.938**	**3.34**
	65.0	*52.6*	*45.2*	*74.63*	*84.8*
3VQ8/8M, 3EQ8/8M	**3.07**	**2.25**	**1.78**	**1.575**	**0.63***
	78.0	*57.2*	*45.2*	*40.01*	*16.0**
6EQ1	**4.98**	**2.27**	**1.80**	**4.063**	**4.47**
	126.5	*57.7*	*45.7*	*103.2*	*113.5*
6EQ3	**3.69**	**2.27**	**1.80**	**4.063**	**4.47**
	93.7	*57.7*	*45.7*	*103.2*	*113.5*
6EQ8/8M	**5.47**	**2.07**	**1.78**	**1.575**	**2.70**
	138.9	*52.6*	*45.2*	*40.01*	*68.0*
20EQ1, 20VQ1	**6.66**	**2.07**	**2.28**	**5.625**	**6.03***
	168.1	*52.6*	*57.9*	*142.9*	*153.2**

*±0.02 [*0.5*]

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

Q Series

Recommended Panel Cutout



Tolerance ± .005 [0.13]

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

3VQ



3EQ



6EQ



20VQ



20EQ



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .01	.02	.05	.15	.5	1	5	10	30
3VQ	22	27	37	50	55	55	55	50	55
3EQ	22	27	36	47	47	43	45	45	45
6EQ	26	31	20	68	72	72	65	65	65
20EQ	6	10	8	39	60	65	65	65	55
20VQ	6	3	17	52	65	70	70	70	70

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .01	.02	.05	.15	.5	1	5	10	30
3VQ	1	17	42	65	75	75	60	65	65
3EQ	1	17	42	65	75	75	65	65	60
6EQ	6	10	43	70	75	75	65	55	55
20EQ	15	20	20	46	65	70	65	60	60
20VQ	15	20	20	46	65	70	65	60	60

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

R Series

UL Recognized
CSA Certified
VDE Approved

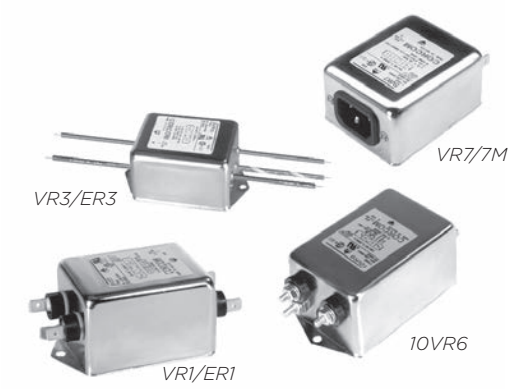

R Series

- Dual T section RFI filter provides premium performance
- Well suited for low impedance loads where noisy RFI environments are present
- Controls pulsed, continuous and/or intermittent interference
- ER models offer low leakage current without deterioration of insertion loss

Ordering Information

10E R 7 M

Suffix
M – Metric inserts *(style 8 only)*
Omit for standard or none
C – Ground choke *(select models)*

Input / Output Style
1 – .250 [6.3] spade terminals
3 – Wire leads
6 – Threaded bolt
7 – IEC inlet* *(line side)*
.250 [6.3] spade terminals *(load side)*

R Series

Leakage current designation
E – Low leakage *(<0.5 mA)*
V – Standard

Current Rating
1, 2, 3, 5, 10 or 20A

**IEC 60320-1 C14 inlet mates with C13 connector*

Specifications

Maximum leakage current each Line to Ground:

	VR Models	ER Models
@120 VAC 60 Hz:	.4 mA	.21 mA
@250 VAC 50 Hz:	.7 mA	.36 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 1 to 20A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85\text{-}Ta)/45}$

Available Part Numbers

1VR1	1ER1
1VR3	1ER3
2VR1	2ER1
2VR3	2ER3
3VR1	3ER1
3VR3	3ER3
3VR7	3ER7
3VR7M	3ER7M
5VR1	5ER1
5VR3	5ER3
5VR7	5ER7
5VR7M	5ER7M
10VR1	10ER1
10VR3	10ER3
10VR6	10ER7
10VR7	10ER7M
10VR7M	20ER1
20VR1	
20VR6	

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

R Series

Electrical Schematic

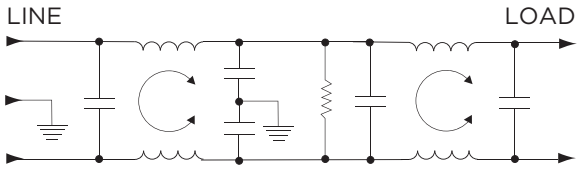

Case Styles

R1 (1, 2, 3, 5, 10A)

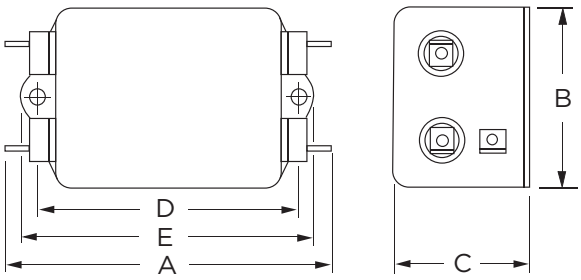

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

R1 (20A)

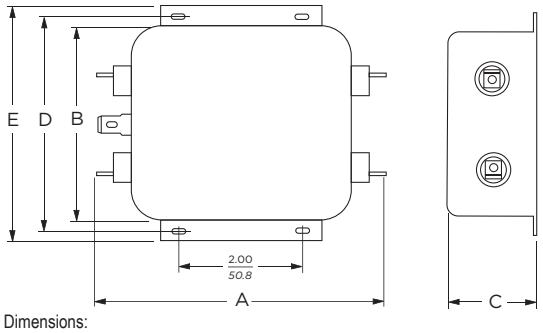

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Slots (4):	.250 x .156 [*6.35 x 3.96*] Dia.

Case Styles *(continued)*

R3

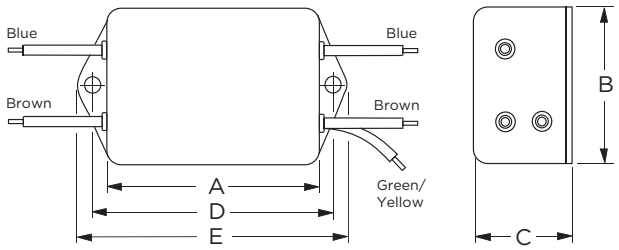

Typical Dimensions:

Wire Leads (5):	4.0 [*101.6*] Min., AWG18
Mounting Holes (2):	.188 [4.78] Dia.

10VR6

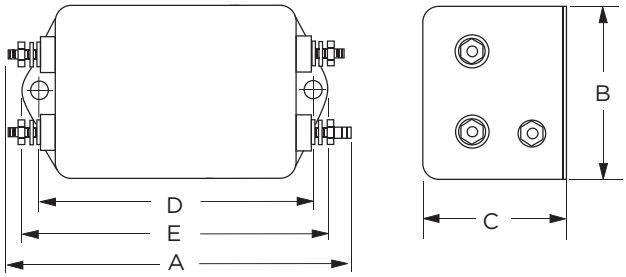

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Holes (2):	.188 [4.78] Dia.

20VR6

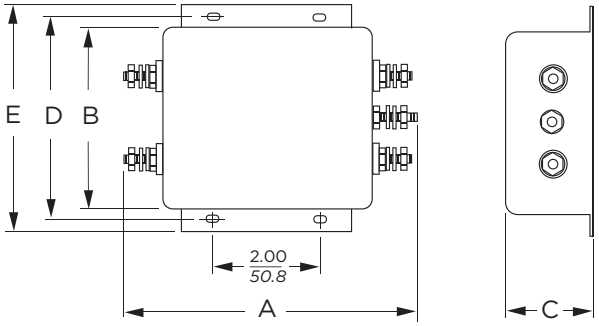

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Slots (4):	.250 x .156 [*6.35 x 3.96*] Dia.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

R Series

Case Styles *(continued)*

R7 & R7M

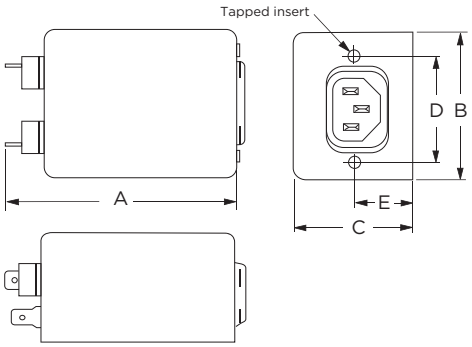

Typical Dimensions:

Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Line Inlet (1):	IEC 60320-1 C14
K7 Tapped Inserts (2):	6-32 x 1/4
K7M Tapped Inserts (2):	M3 x .5

Recommended Panel Cutout



Tolerance ± .005 [0.13]

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord



Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 ± .38	E (max)
1VR1, 1ER1, 2VR1, 2ER1	**3.35** *85.1*	**1.81** *46.0*	**1.16** *29.5*	**2.375** *60.33*	**2.78** *70.6*
1VR3, 1ER1, 2VR3, 2ER3	**2.07** *52.6*	**1.81** *46.0*	**1.16** *29.5*	**2.375** *60.33*	**2.78** *70.6*
3VR1, 3ER1, 5VR1, 5ER1	**3.85** *97.8*	**2.07** *52.6*	**1.16** *29.5*	**2.938** *74.63*	**3.35** *85.1*
3VR3, 3ER3, 5VR3, 5ER3	**2.56** *65.0*	**2.07** *52.6*	**1.16** *29.5*	**2.938** *74.63*	**3.35** *85.1*
3VR7/7M, 3ER7/7M	**4.33** *110.0*	**2.25** *57.2*	**1.28** *32.5*	**1.575** *40.01*	**0.64*** *16.3**
5VR7/7M, 5ER7/7M	**4.33** *110.0*	**2.25** *57.2*	**1.28** *32.5*	**1.575** *40.01*	**0.64*** *16.3**
10VR1, 10ER1	**3.85** *97.8*	**2.07** *52.6*	**1.53** *38.9*	**2.938** *74.63*	**3.35** *85.1*
10VR3, 10ER3	**2.56** *65.0*	**2.07** *52.6*	**1.53** *38.9*	**2.938** *74.63*	**3.35** *85.1*
10VR6	**3.96** *100.6*	**2.07** *52.6*	**1.53** *38.9*	**2.938** *74.63*	**3.35** *85.1*
10VR7/7M, 10ER7/7M	**4.33** *110.0*	**2.25** *57.2*	**1.53** *38.9*	**1.575** *40.01*	**0.88*** *22.4**
20VR1, 20ER1	**5.23** *132.8*	**3.37** *85.6*	**1.53** *38.9*	**3.75** *95.25*	**4.20** *106.7*
20VR6	**5.34** *135.6*	**3.37** *85.6*	**1.53** *38.9*	**3.75** *95.25*	**4.20** *406.7*

*±0.02 [*0.5*]

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

R Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

1ER



3ER



5ER



2ER, 10ER & 20ER



1VR



2VR



3VR



5VR



10VR



20VR



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .15	.5	1	5	10	30
VR Models						
1A, 3A	30	65	65	65	65	65
2A, 5A, 10A, 20A	5	44	60	65	65	60
ER Models						
1A, 3A	25	60	65	65	65	65
2A, 5A, 10A, 20A	2	35	51	63	60	50

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .15	.5	1	5	10	30
VR Models						
1A, 3A	-	-	65	60	54	46
2A, 5A, 10A, 20A	-	-	35	60	57	45
ER Models						
1A, 3A	-	-	65	60	54	46
2A, 5A, 10A, 20A	-	-	35	60	57	45

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

RK Series

UL Recognized
CSA Certified
VDE Approved

RK Series

- Compact
- Single stage
- Chassis mount
- Significant differential mode performance
- Suitable for industrial machinery
- Low input leakage current makes it suitable for portable equipment

Ordering Information

10 E RK 1

- Input / Output Style
  1 – .250 [6.3] spade terminals
- RK Series
- Leakage current designation
  E – Low leakage *(<0.5 mA)*
- Current Rating
  3, 6, 10, 15 or 20A

Available Part Numbers

3ERK1	6ERK1
10ERK1	15ERK1
20ERK1	

Specifications

Maximum leakage current each Line to Ground:
@ 120 VAC 60 Hz: 0.16 mA
@250 VAC 50 Hz: 0.26 mA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3 to 20A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematic

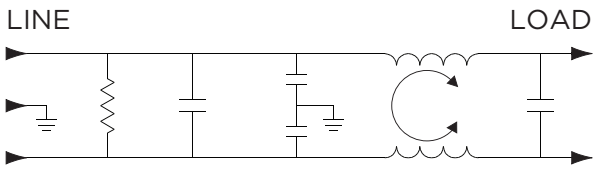

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

RK Series

Case Styles

RK1 (3 & 6A)

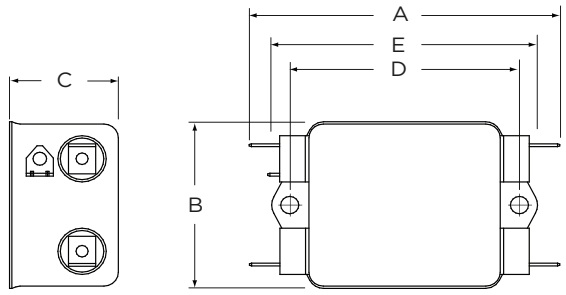

RK1 (10, 15 & 20A)

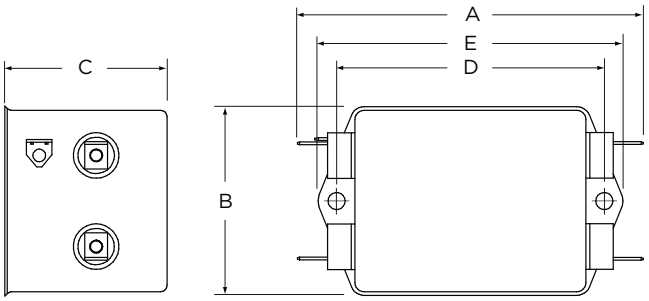

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 / ± .38	E (max)
3ERK1	**3.35** *85.09*	**1.82** *46.23*	**1.16** *29.46*	**2.38** *74.68*	**2.78** *70.61*
6ERK1	**3.35** *85.09*	**1.82** *46.23*	**1.28** *32.51*	**2.38** *74.68*	**2.78** *70.61*
10ERK1, 15ERK1, 20ERK1	**3.85** *97.79*	**2.07** *52.58*	**1.78** *45.21*	**2.94** *74.67*	**3.35** *85.09*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

RK Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

3RK



6RK



10RK



15RK



20RK



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz									
	.05	.10	.15	.5	1	2	5	10	20	30
3A	21	27	30	43	49	50	50	48	50	49
6A	19	29	29	37	43	44	48	46	50	48
10A	20	27	31	45	45	44	46	47	53	44
15A	21	28	31	45	43	41	42	42	47	57
20A	19	25	29	34	36	38	40	41	43	52

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz									
	.05	.10	.15	.5	1	2	5	10	20	30
3A	9	20	35	67	78	78	72	66	61	60
6A	14	14	13	59	74	80	72	68	61	60
10A	14	12	30	65	80	84	78	70	60	50
15A	15	13	20	61	76	88	70	72	64	50
20A	16	19	16	54	74	90	74	67	61	54

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Multipurpose Power Line RFI Filter for Emission Control

S Series

UL Recognized
CSA Certified
VDE Approved

20VS1 3VS1

S Series

- Combines Line to Ground interference rejection filters with additional circuitry to reduce Line to Line noise and transients
- Designed for use when equipment impedance at RF frequencies is high
- Effective for use with switch-mode power supplies
- Effective when used to control emissions in equipment using SCR and T2L circuits for compliance with FCC Part 15, Subpart J and EN55022, Level A, down to 150kHz

Ordering Information

20 V S 6

- 6 – Input / Output Style
  1 – .250 [6.3] spade terminals
  6 – Threaded bolt
- S – S Series
- V – Leakage current designation
  V – Standard
- 20 – Current Rating
  3, 6, 10, 20 or 60A

Available Part Numbers

3VS1	20VS1
6VS1	20VS6
10VS1	60VS6

Specifications

Maximum leakage current each Line to Ground:

	3 & 20A	60A
@120 VAC 60 Hz:	.4 mA	.75 mA
@250 VAC 50 Hz:	.7 mA	1.25 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3 to 60A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematics

3, 6, 10VS

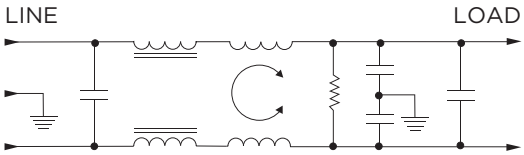

20VS

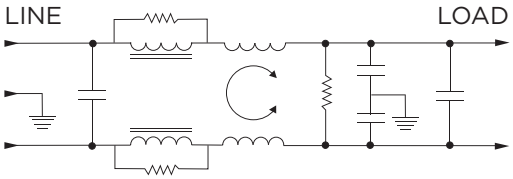

60VS

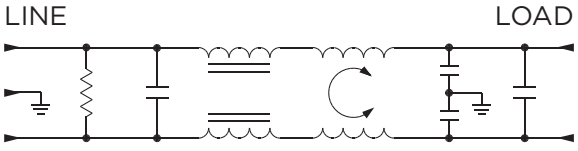

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

S Series

Case Styles

S1 (3, 6, 10A)

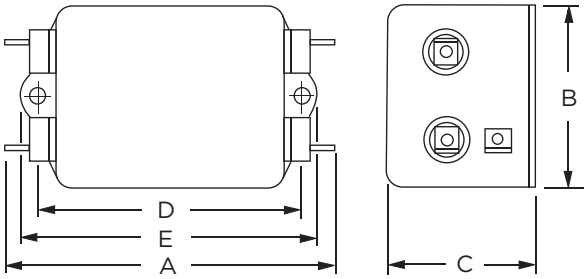

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

20VS1

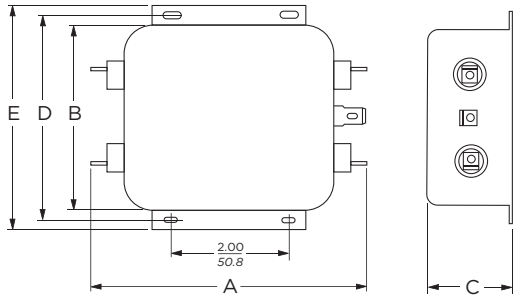

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Slots (4):	.250 x .156 [*6.35 x 3.96*] Dia.

20VS6

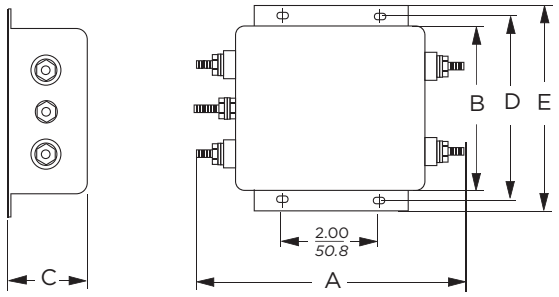

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Slots (4):	.250 x .156 [*6.35 x 3.96*] Dia.

60VS6

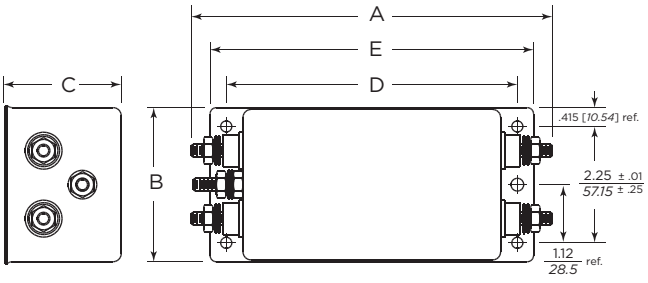

Typical Dimensions:

Terminals (5):	1/4-20, Torque 56 lbf-in. [*6.32* N-m] max. ± 2 [*.22*]
Mounting Holes (5):	.218 [*5.53*] Dia. ± .006 [*.152*]

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 / ± .38	E (max)
3VS1	**3.36**	**1.82**	**1.16**	**2.375**	**2.78**
	85.3	*46.2*	*29.5*	*60.33*	*70.6*
6VS1	**3.86**	**2.08**	**1.53**	**2.938**	**3.34**
	98.0	*52.8*	*38.9*	*74.63*	*84.8*
10VS1	**3.86**	**2.08**	**1.53**	**2.938**	**3.34**
	98.0	*52.8*	*38.9*	*74.63*	*84.8*
20VS1	**5.23**	**3.38**	**1.53**	**3.75**	**4.20**
	132.8	*85.9*	*38.9*	*95.25*	*106.7*
20VS6	**5.34**	**3.38**	**1.53**	**3.75**	**4.20**
	135.6	*85.9*	*38.9*	*95.25*	*106.7*
60VS6	**7.2**	**3.08**	**2.28**	**5.625**	**6.25**
	182.88	*78.23*	*57.91*	*142.87*	*158.75*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

S Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

3VS



6VS



10VS



20VS



60VS



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz							
	.15	.5	1	2	5	10	20	30
3A	15	27	35	40	32	44	47	47
6A	15	27	35	40	32	44	47	47
10A	15	27	35	40	32	44	47	47
20A	15	30	38	38	32	43	42	40
60A	7	27	34	38	45	54	44	40

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz								
	.15	.3	.5	1	2	5	10	20	30
3A	35	50	65	65	65	60	50	40	45
6A	35	50	65	65	65	60	45	48	48
10A	35	50	65	65	65	60	50	40	45
20A	35	50	65	65	65	60	45	48	48
60A	37	-	77	93	86	70	54	64	54

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

SB Series

UL Recognized
CSA Certified
VDE Approved

SB Series

- Enhanced performance version of our popular B Series of RFI line filters
- Small size with enhanced performance
- 30A version half the size of other 30A filters
- Low leakage version available that meets current requirements of VDE portable equipment and non-patient care medical equipment

Ordering Information

20 E SB 6

- 6 – Input / Output Style
  - 1 – .250 [6.3] spade terminals
  - 6 – Threaded bolt
- SB – SB Series
- E – Leakage current designation
  - E – Low leakage *(<0.5 mA)*
  - V – Standard
- 20 – Current Rating
  - 6, 10, 20 or 30A

Electrical Schematic

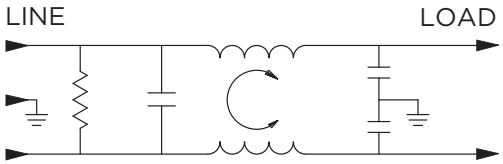

Specifications

Maximum leakage current each Line to Ground:

	VSB Models	ESB Models
@ 120 VAC 60 Hz:	.75 mA	.22 mA
@250 VAC 50 Hz:	1.25 mA	.36 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max): 250 VAC, 250 VDC

Operating Frequency: 50/60 Hz

Rated Current: 6 to 30A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_O) is calculated as follows: $I_O = I_r \sqrt{(85-Ta)/45}$

Available Part Numbers

6ESB1	6VSB1
10ESB1	10VSB1
10ESB6	10VSB6
20ESB1	20VSB1
20ESB6	20VSB6
30ESB6	30VSB6

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

SB Series

Case Styles

6ESB1 & 6VSB1

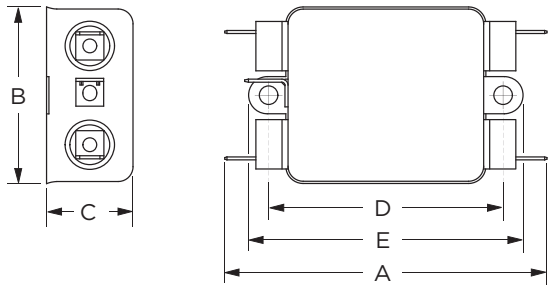

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.75*] Dia.

10ESB1, 10VSB1, 20ESB1 & 20VSB1

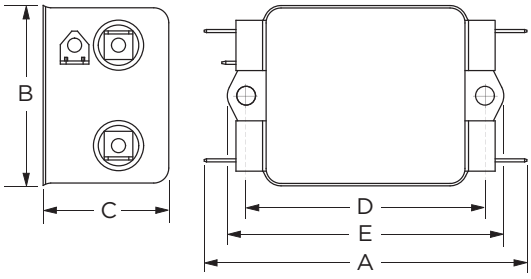

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.75*] Dia.

ESB6 & VSB6

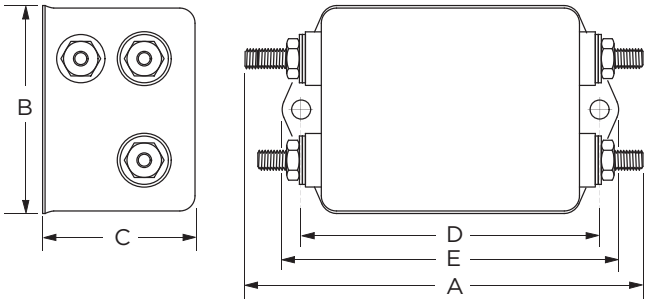

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Holes (2):	.188 [*4.75*] Dia.

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 / ± .38	E (max)
6ESB1, 6VSB1	**3.36** *85.34*	**1.82** *46.23*	**0.91** *23.11*	**2.375** *60.325*	**2.78** *70.61*
10ESB1, 10VSB1	**3.36** *85.34*	**1.82** *46.23*	**1.28** *32.51*	**2.375** *60.325*	**2.78** *70.61*
10ESB6, 10VSB6	**3.47** *88.14*	**1.82** *46.23*	**1.53** *38.86*	**2.375** *60.325*	**2.78** *70.61*
20ESB1, 20VSB1	**3.85** *97.79*	**2.07** *52.58*	**1.31** *33.27*	**2.938** *74.625*	**3.35** *85.09*
20ESB6, 20VSB6	**4.00** *101.60*	**2.07** *52.58*	**1.53** *38.86*	**2.938** *74.625*	**3.35** *85.09*
30ESB6, 30VSB6	**4.92** *124.97*	**2.07** *52.58*	**1.53** *38.86*	**3.947** *100.254*	**4.33** *109.98*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

SB Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

ESB Models

6ESB1



10ESB1



10ESB6



20ESB1



20ESB6



30ESB6



VSB Models

6VSB1



10VSB1



10VSB6



20VSB1



20VSB6



30VSB6



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

SB Series

Performance Data *(continued)*

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

	Frequency – MHz										
Part No.	**.03**	**.05**	**.1**	**.15**	**.5**	**1**	**2**	**5**	**10**	**20**	**30**
ESB Models											
6ESB1	3	8	13	17	31	37	40	47	50	58	62
10ESB1	3	9	15	19	31	39	41	44	47	54	51
10ESB6	3	9	14	18	31	39	41	44	47	54	54
20ESB1	3	7	13	15	30	35	37	39	40	46	40
20ESB6	3	7	13	16	30	35	39	40	44	58	46
30ESB6	3	7	13	17	30	34	37	40	42	49	58
VSB Models											
6VSB1	3	8	14	19	37	47	51	58	66	59	49
10VSB1	3	9	15	21	41	49	50	56	64	54	46
10VSB6	4	9	15	21	39	49	50	56	64	54	44
20VSB1	3	7	14	19	37	45	47	50	60	48	40
20VSB6	3	7	14	19	37	44	49	52	62	48	41
30VSB6	3	6	13	18	37	45	49	51	60	50	42

Differential Mode / Symmetrical (Line to Line)

	Frequency – MHz											
Part No.	**.01**	**.03**	**.05**	**.1**	**.15**	**.5**	**1**	**2**	**5**	**10**	**20**	**30**
ESB Models												
6ESB1	5	14	20	25	29	41	49	47	50	60	74	72
10ESB1	5	15	20	26	29	41	47	50	54	64	74	74
10ESB6	5	14	20	25	29	41	47	48	50	60	62	64
20ESB1	5	15	21	26	29	41	45	48	54	63	70	66
20ESB6	5	15	21	26	29	41	44	48	54	63	70	66
30ESB6	5	14	20	25	29	40	46	50	50	58	70	70
VSB Models												
6VSB1	5	14	20	25	29	40	41	57	66	78	56	62
10VSB1	5	15	21	26	29	39	40	60	64	67	67	64
10VSB6	5	14	20	25	29	39	40	60	64	68	70	64
20VSB1	5	15	20	26	29	40	42	60	68	70	70	67
20VSB6	5	15	21	26	29	39	38	58	68	70	70	66
30VSB6	5	15	20	25	29	39	39	56	62	70	70	66

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

SK Series

UL Recognized
CSA Certified
VDE Approved

SK Series

- Designed to reduce conducted noise to acceptable limits for equipment that must comply with FCC / EN specifications
- Utilizes significantly higher element values than the general purpose K Series which makes them better suited for equipment with Line to Ground and Line to Line conducted emissions including those with switching power supplies
- ESK6C and VSK6C incorporate separate ground circuit inductor to isolate the equipment chassis from power line ground at RF frequencies

Ordering Information

10 E SK 7 M

Suffix
M – Metric inserts *(style 7 only)*
Omit for standard or none
C – Ground choke *(30ESK/VSK only)*

Input / Output Style
1 – .250 [6.3] spade terminals
3 – Wire leads
6 – Threaded bolt
7 – IEC inlet* *(line side)*
.250 [6.3] spade terminals
(load side)

SK Series

Leakage current designation
E – Low leakage *(<0.5 mA)*
V – Standard

Current Rating
3, 6, 10, 20, 30 or 40A

**IEC 60320-1 C14 inlet mates with C13 connector*

Specifications

Maximum leakage current each Line to Ground:

3, 6 & 10A	VSK Models	ESK Models
@120 VAC 60 Hz:	.4 mA	.21 mA
@250 VAC 50 Hz:	.7 mA	.36 mA
20, 30 & 40A		
@120 VAC 60 Hz:	.75 mA	.3 mA
@250 VAC 50 Hz:	1.25 mA	.5 mA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3 to 40A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Available Part Numbers

3VSK1	3ESK1	20ESK6
3VSK3	3ESK3	20VSK6
3VSK7	3ESK7	30ESK6
3VSK7M	3ESK7M	30ESK6C
6VSK1	6ESK1	30VSK6
6VSK3	6ESK3	30VSK6C
6VSK7	6ESK7	40VSK6
6VSK7M	6ESK7M	
10VSK1	10ESK1	
10VSK3	10ESK3	
10VSK7	10ESK7	
10VSK7M	10ESK7M	

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

SK Series

Electrical Schematic

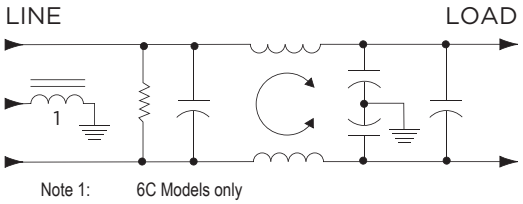

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord



ESK6 / VSK6

Case Styles

SK1

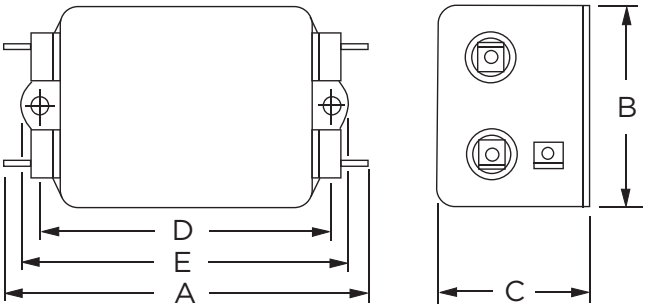

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

SK3 (3A)

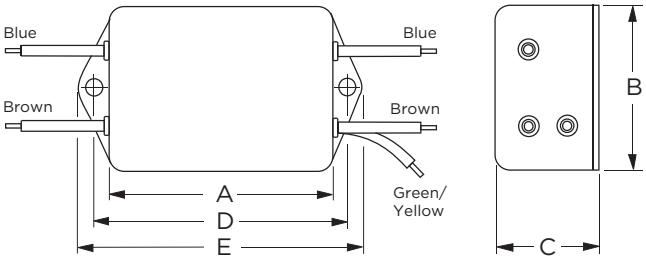

Typical Dimensions:

Wire Leads (5):	4.0 [*101.6*] Min., AWG18
Mounting Holes (2):	.188 [4.78] Dia.

SK3 (6 & 10A)

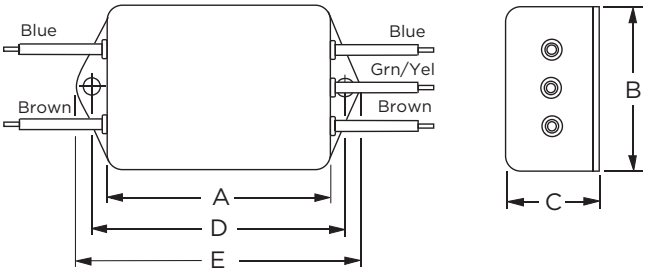

Typical Dimensions:

Wire Leads (5):	4.0 [*101.6*] Min., AWG18 (AWG16 for 10A)
Mounting Holes (2):	.188 [4.78] Dia.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

SK Series

Case Styles *(continued)*

SK6 (20A)

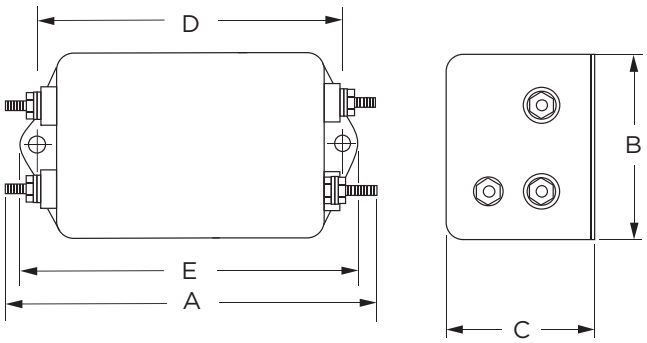

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Holes (2):	.188 [4.78] Dia.

SK6 (30A)

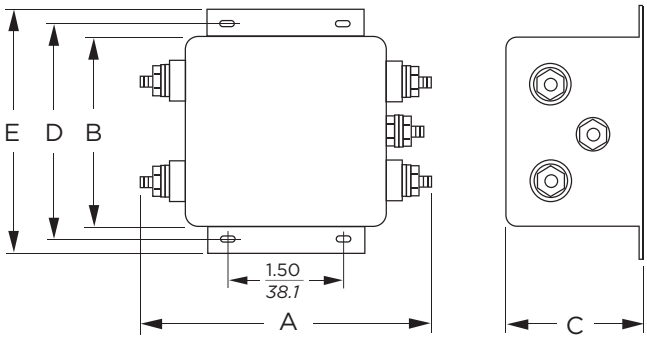

Typical Dimensions:

Terminals (5):	10-32, Torque 27 lbf-in. [*3.05* N-m] max. ± 2 [*.22*]
Mounting Slots (4):	.250 x .156 [*6.35 x 3.96*] Dia.

SK6C (30A)

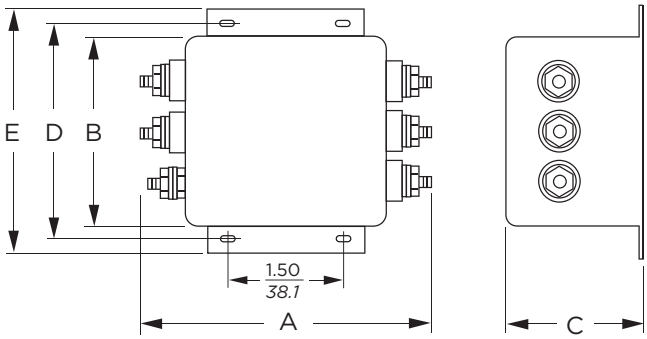

Typical Dimensions:

Terminals (5):	10-32, Torque 27 lbf-in. [*3.05* N-m] max. ± 2 [*.22*]
Mounting Slots (4):	.250 x .156 [*6.35 x 3.96*] Dia.

SK6 (40A)

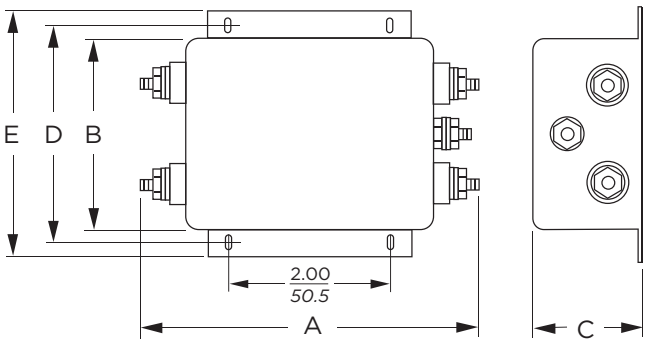

Typical Dimensions:

Terminals (5):	10-32, Torque 27 lbf-in. [*3.05* N-m] max. ± 2 [*.22*]
Mounting Slots (4):	.203 x .156 [*5.15 x 3.96*] Dia.

SK7 & SK7M

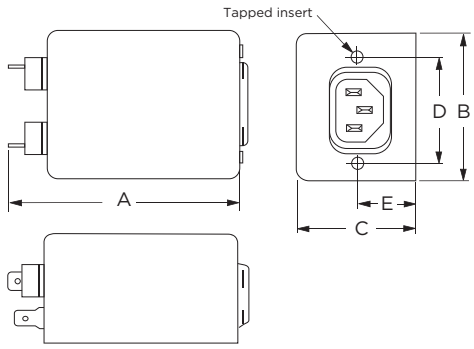

Typical Dimensions:

Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Line Inlet (1):	IEC 60320-1 C14
K7 Tapped Inserts (2):	6-32 x 1/4
K7M Tapped Inserts (2):	M3 x .5

Recommended Panel Cutout

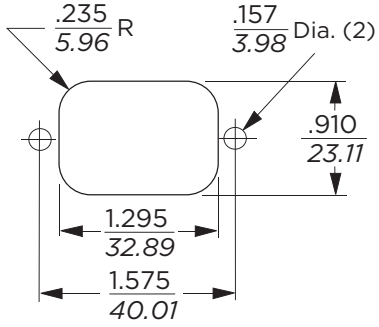

Tolerance ± .005 [0.13]
Back Mount Only

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

SK Series

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 / ± .38	E (max)
3VSK1, 3ESK1	**3.85** *97.8*	**2.07** *52.6*	**1.16** *29.5*	**2.938** *74.63*	**3.35** *85.1*
3VSK3, 3ESK3	**2.56** *65.0*	**2.07** *52.6*	**1.16** *29.5*	**2.938** *74.63*	**3.35** *85.1*
3VSK7/7M, 3ESK7/7M	**3.21** *81.5*	**2.25** *57.2*	**1.53** *38.9*	**1.575** *40.01*	**0.63*** *16.0**
6VSK1, 6ESK1	**4.34** *110.2*	**2.25** *57.2*	**1.28** *32.5*	**3.427** *87.05*	**3.83** *97.3*
6VSK3, 6ESK3	**3.05** *77.5*	**2.25** *57.2*	**1.28** *32.5*	**3.427** *87.05*	**3.83** *97.3*
6VSK7/7M, 6ESK7/7M	**3.21** *81.5*	**2.25** *57.2*	**1.78** *45.2*	**1.575** *40.01*	**0.63*** *16.0**
10VSK1, 10ESK1	**4.97** *126.2*	**2.25** *57.2*	**1.78** *45.2*	**4.063** *103.2*	**4.46** *113.3*
10VSK3, 10ESK3	**3.69** *93.7*	**2.25** *57.2*	**1.78** *45.2*	**4.063** *103.2*	**4.46** *113.3*
10VSK7/7M, 10ESK7/7M	**4.34** *110.0*	**2.25** *57.2*	**1.78** *45.2*	**1.575** *40.01*	**0.63*** *16.0**
20VSK6, 20ESK6	**5.09** *127.3*	**2.25** *57.2*	**1.78** *45.2*	**4.063** *103.2*	**4.46** *129.3*

Part No.	A (max)	B (max)	C (max)	D ± .020 / ± .51	E (max)
30VSK6, 30ESK6	**4.92** *125.0*	**3.12** *79.25*	**2.75** *69.85*	**3.437** *87.3*	**4.00** *101.6*
30VSK6C, 30ESK6C	**4.92** *125.0*	**3.12** *79.25*	**2.75** *69.85*	**3.437** *87.3*	**4.00** *101.6*
40VSK6	**6.45** *163.83*	**3.12** *79.25*	**2.18** *55.4*	**3.50** *88.9*	**3.96** *100.6*

*±0.02 [0.5]

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

3 & 6VSK



3 & 6ESK



10 & 20VSK



10 & 20ESK



30VSK



30ESK



40VSK



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

SK Series

Performance Data *(continued)*

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz								
	.01	.08	.1	.15	.5	1	5	10	30
VSK Models									
3A, 6A	4	23	25	29	43	44	42	42	30
10A	4	23	25	29	43	44	42	42	30
20A	7	23	25	29	43	44	48	48	48
30A	2	13	14	15	27	31	46	51	39
40A	2	15	18	22	40	43	45	50	30
ESK Models									
3A, 6A	4	22	24	28	42	40	36	36	27
10A	4	22	24	28	42	40	36	36	27
20A	7	22	24	28	35	38	45	45	45
30A	2	13	15	15	27	31	40	41	36

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz								
	.01	.08	.1	.15	.5	1	5	10	30
VSK Models									
3A, 6A	1	3	10	25	59	65	62	40	40
10A	1	3	3	10	55	65	65	50	50
20A	1	10	8	8	45	60	65	60	60
30A	5	13	13	13	60	60	51	43	43
40A	7	14	16	30	65	65	65	57	50
ESK Models									
3A, 6A	1	3	10	25	59	65	62	40	40
10A	1	3	3	10	55	65	65	65	45
20A	1	10	8	8	45	60	65	60	60
30A	5	12	12	13	60	60	51	43	43

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

T Series

UL Recognized
CSA Certified
VDE Approved

T Series

- Superior common-mode and premium differential-mode attenuation
- Smaller package sizes than the EP Series
- Size and cost-effective
- ET models can help meet very low leakage current requirements

Specifications

Maximum leakage current each Line to Ground:

3, 6 & 10A	ET Models	VT Models
@120 VAC 60 Hz:	.30 mA	.75 mA
@250 VAC 50 Hz:	.50 mA	1.2 mA
15 & 20A		
@120 VAC 60 Hz:	.30 mA	1.2 mA
@250 VAC 50 Hz:	.50 mA	2.0 mA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3 to 20A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85\text{-}Ta)/45}$

Ordering Information

10 E T 1

- 1 – Input / Output Style
  - 1 – .250 [6.3] spade terminals
  - 3 – Wire leads
  - 6 – Threaded bolt
  - 7 – IEC inlet* *(line side)* .250 [6.3] spade terminals *(load side)*
- T – T Series
- E – Leakage current designation
  - E – Low leakage *(<0.5 mA)*
  - V – Standard
- 10 – Current Rating
  - 3, 6, 10, 15 or 20A

*IEC 60320-1 C14 inlet mates with C13 connector

Available Part Numbers

3ET1	10ET1	10VT1
3ET3	10ET3	10VT3
3ET7	15ET1	15VT1
6ET1	15ET6	15VT6
6ET3	20ET1	20VT1
6ET7	20ET6	20VT6

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

T Series

Electrical Schematics

3 & 6A

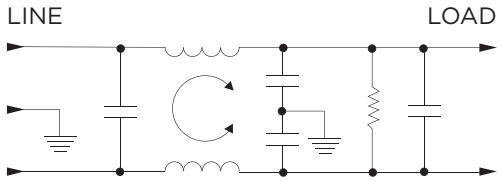

10A

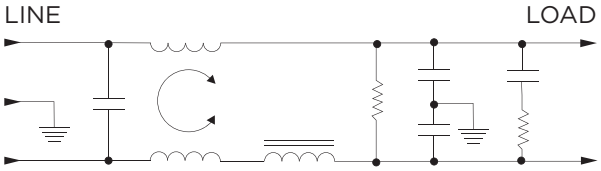

15 & 20A

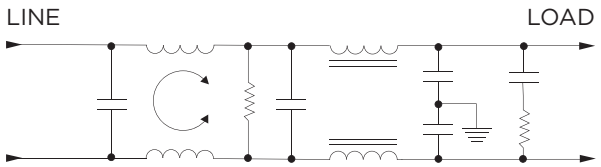

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord



Case Styles

T1 (3, 6, 10A)

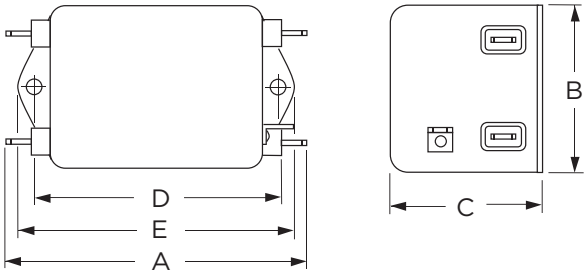

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

T1 (15 & 20A)

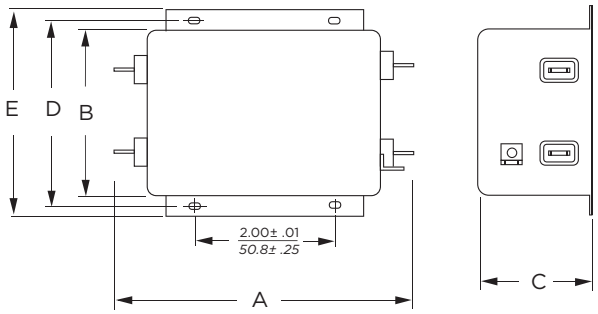

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Slots (4):	.250 x .156 [*6.35 x 3.96*] Dia.

T3

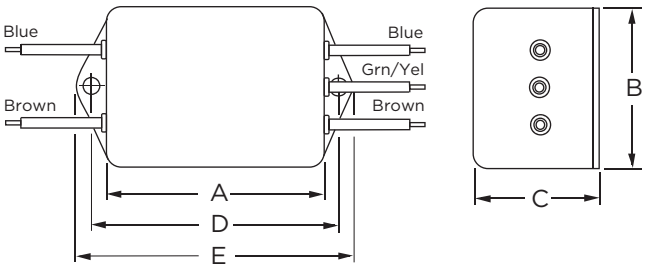

Typical Dimensions:

Wire Leads (5):	4.0 [*101.6*] Min., AWG18
Mounting Holes (2):	.188 [4.78] Dia.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

T Series

Case Styles *(continued)*

T6

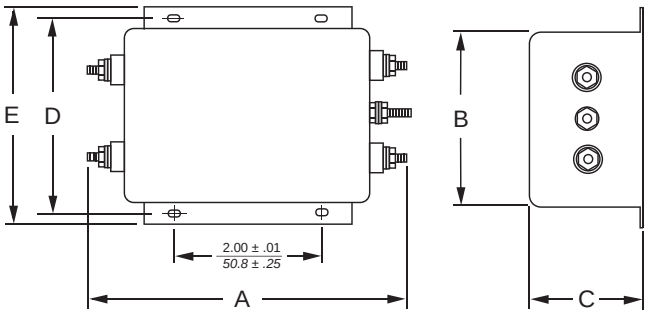

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Slots (4):	.250 x .156 [*6.35 x 3.96*] Dia.

T7

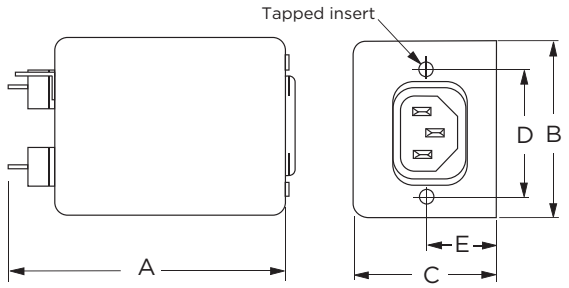

Typical Dimensions:

Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Line Inlet (1):	IEC 60320-1 C14
Tapped Inserts (2):	6-32 x 1/4

Recommended Panel Cutout

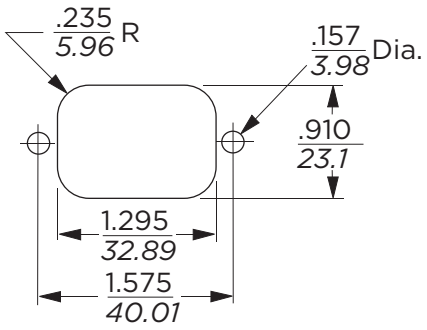

Tolerance ± .005 [0.13]

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 ± .38	E (max)
3ET1, 6ET1	**3.56** *90.4*	**2.15** *54.6*	**1.81** *46.0*	**2.938** *74.63*	**3.38** *85.9*
3ET3, 6ET3	**2.55** *64.8*	**2.15** *54.6*	**1.81** *46.0*	**2.938** *74.63*	**3.38** *85.9*
3ET7, 6ET7	**3.52** *89.4*	**2.25** *57.2*	**1.78** *45.2*	**1.575** *40.01*	**0.63*** *16.0**
10ET1, 10VT1	**4.69** *119.1*	**2.27** *57.7*	**1.80** *45.7*	**4.063** *103.2*	**4.47** *113.5*
10ET3, 10VT3	**3.69** *93.7*	**2.27** *57.7*	**1.80** *45.7*	**40.63** *103.2*	**4.47** *113.5*
15ET1, 15VT1, 20ET1, 20VT1	**5.45** *138.4*	**3.12** *79.2*	**2.18** *55.4*	**3.5** *88.9*	**3.96** *100.6*
15ET6, 15VT6, 20ET6, 20VT6	**5.95** *151.1*	**3.12** *79.2*	**2.18** *55.4*	**3.5** *88.9*	**3.96** *100.6*

*±0.02 [*0.5*]

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

T Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

3ET



6ET



10ET



15ET



20ET



10VT



15VT



20VT



Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz										
	.01	.03	.05	.15	.5	1	2	5	10	20	30
ET Models											
3A	22	32	36	46	47	44	43	40	42	42	42
6A	16	26	30	41	47	44	43	43	40	42	42
10A	12	22	26	36	47	42	42	40	42	42	45
15A	8	17	22	31	43	44	44	42	47	52	43
20A	3	12	17	26	34	36	37	37	42	47	38
VT Models											
10A	12	22	26	38	52	50	50	50	50	50	50
15A	8	17	22	33	52	52	52	52	57	45	35
20A	3	12	17	29	42	47	50	51	55	40	30

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz										
	.01	.03	.05	.15	.5	1	2	5	10	20	30
ET Models											
3A	3	1	30	61	70	70	70	50	50	50	55
6A	4	2	14	51	70	70	70	65	47	50	55
10A	7	12	17	52	70	70	70	65	55	50	60
15A	12	19	15	51	70	70	70	70	70	65	60
20A	10	17	13	51	70	70	70	70	67	65	60
VT Models											
10A	7	12	17	52	70	70	70	65	65	50	65
15A	12	19	15	51	70	70	70	70	70	65	60
20A	10	17	13	51	70	70	70	70	67	65	60

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

U Series

UL Recognized
CSA Certified
VDE Approved

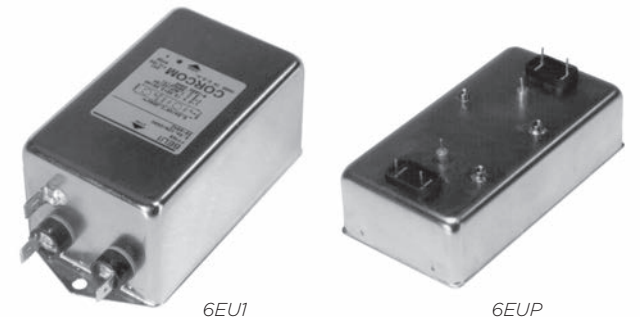

6EU1 6EUP

U Series

- Designed for equipment using power factor corrected power supplies
- Offers high impedance circuit to mismatch the power supply's impedance characteristics
- Available in PC board mountable version
- All models meet low leakage current requirements

Specifications

Maximum leakage current each Line to Ground:
@ 120 VAC 60 Hz: .30 mA
@250 VAC 50 Hz: .50 mA

Hipot rating (one minute):
Line to Ground: 2250 VAC
Line to Line: 1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 6A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Ordering Information

6 E U 1

- Input / Output Style
  - 1 – .250 [6.3] spade terminals
  - P – PC board pins
- U Series
- Leakage current designation
  - E – Low leakage *(<0.5 mA)*
- Current Rating
  - 6A

Electrical Schematic

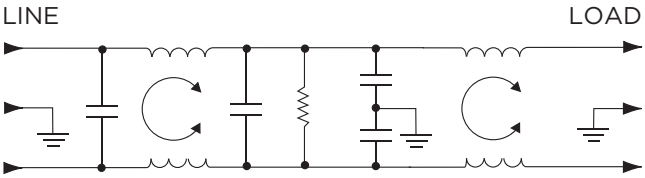

Available Part Numbers

6EUP	6EU1

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

U Series

Case Styles

6EU1

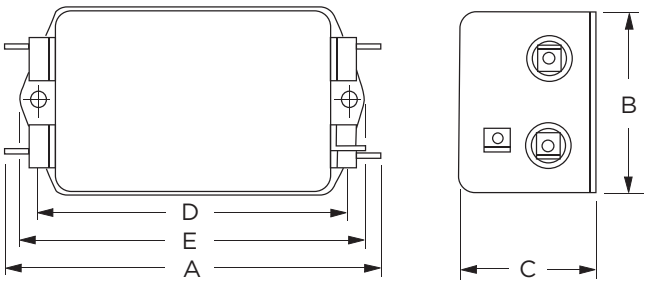

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

6EUP

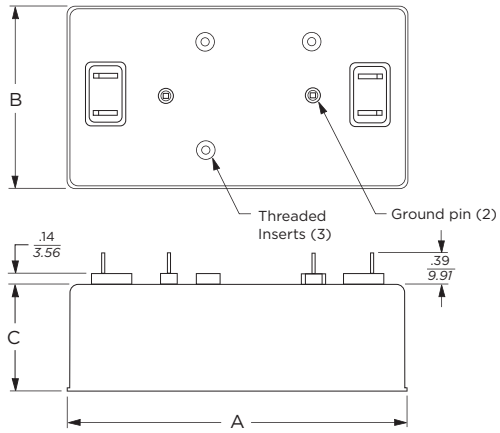

Typical Dimensions:

Pins (6):	0.065 [*1.65*] diagonal max.
Threaded insert(3):	6-32

Recommended PC Board Layout

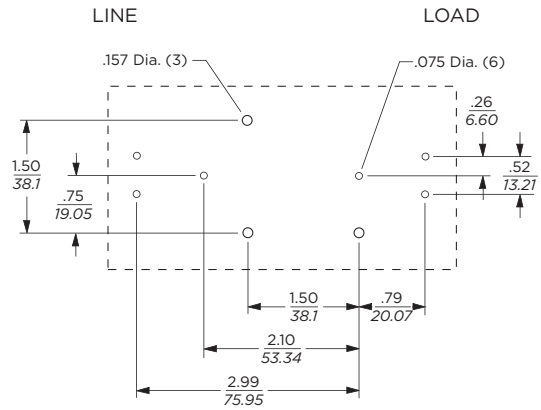

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 ± .38	E (max)
6EU1	**4.95** *125.73*	**2.27** *57.66*	**1.80** *45.72*	**4.060** *103.12*	**4.47** *113.54*
6EUP	**4.70** *119.4*	**2.51** *66.8*	**1.22** *31.0*	-	-

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

6EU



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .05	.1	.15	.5	1	5	10	30
6A	4	30	40	70	70	70	65	50

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .05	.1	.15	.5	1	5	10	30
6A	10	35	45	70	70	70	65	55

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

V and W Series

UL Recognized
CSA Certified
VDE Approved[1]

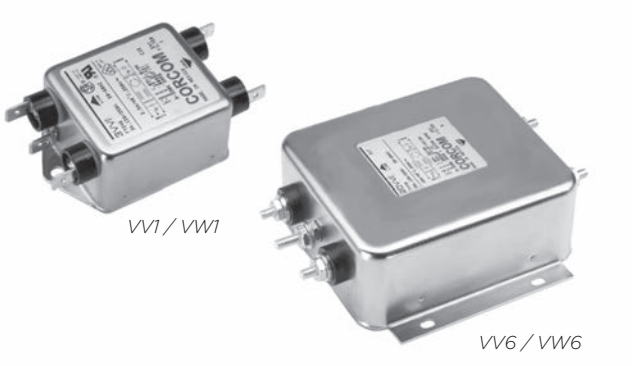

Both the V and W series are effective to control emissions in equipment using SCR and T²L circuits for compliance with FCC Part 15, Subpart J and EN55022, Level A, down to 150kHz

V Series

- Offers an N = 3 ("T") Line to Ground impedance to common mode and an N = 5 "Dbl. Pi") impedance for Line to Line differential mode interference
- Designed for susceptibility use when equipment impedance at RF frequencies is low

W Series

- Offers an N = 4 ("Dbl. L") Line to Ground impedance for common mode and an N=5 ("Dbl. Pi") impedance for Line to Line differential mode interference
- Designed for use when equipment impedance at RF frequencies is high
- Two stage construction provides excellent suppression at high frequencies

Ordering Information

20 V V 6

- 6 — Input / Output Style
  - 1 – .250 [6.3] spade terminals
  - 6 – Threaded bolt
  - 7 – IEC inlet* *(line side)* .250 [6.3] spade terminals *(load side)*
- V — V or W Series
- V — Leakage current designation
  - V – Standard
- 20 — Current Rating
  - 3, 6, 10 or 20A

*IEC 60320-1 C20 inlet mates with C19 connector

Specifications

Maximum leakage current each Line to Ground:
@ 120 VAC 60 Hz: .5 mA
@250 VAC 50 Hz: .82 mA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3 to 20A*

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematics

V Series

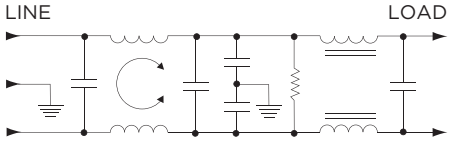

W Series (3, 6 & 10A)

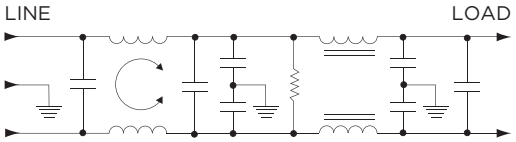

W Series (20A)

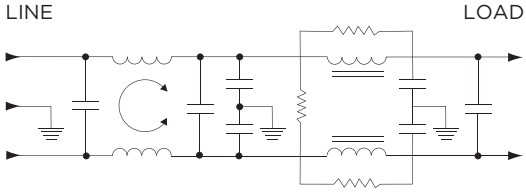

[1]20VW7, 20A model tested by Underwriters Laboratories to US and Canadian requirements and is VDE approved at 16A, 250VAC

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

V and W Series

Available Part Numbers

3VV1	3VW1
6VV1	3VW1
10VV1	10VW1
20VV1	20VW1
20VV6	20VW6
	20VW7*

Case Styles

V1 / W1 (3, 6 & 10A)

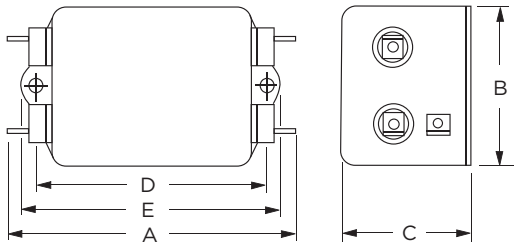

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

V1 / W1 (20A)

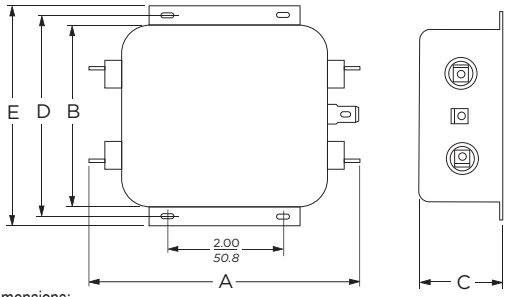

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Slots (4):	.250 x .156 [*6.35 x 3.96*] Dia.

V6 / W6

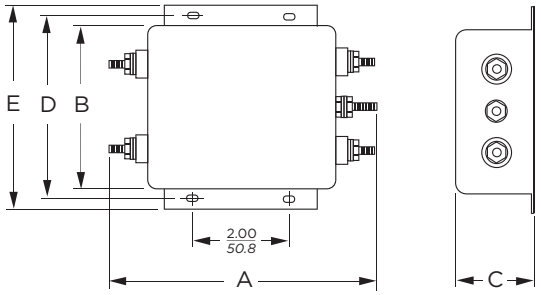

Typical Dimensions:

Terminals (5):	8-32, Torque 18 lbf-in. [*2.03* N-m] max. ± 2 [*.22*]
Mounting Slots (4):	.250 x .156 [*6.35 x 3.96*] Dia.

Case Styles *(continued)*

VW7

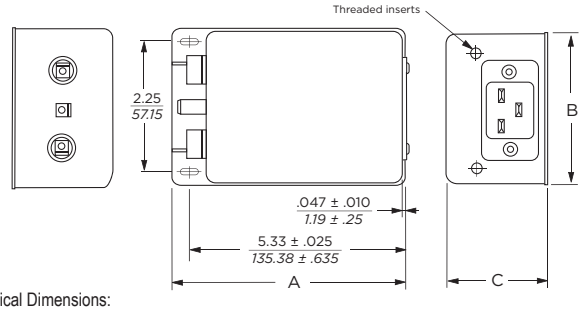

Typical Dimensions:

Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Line Inlet (1):	IEC 60320-1 C20
Tapped Inserts (2):	6-32 x 1/4

Recommended Panel Cutout



Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 ± .38	E (max)
3VV1, 3VW1	**3.36** *85.3*	**1.82** *46.2*	**1.28** *32.5*	**2.375** *60.33*	**2.78** *70.6*
6VV1, 6VW1	**3.86** *98.0*	**2.08** *52.8*	**1.53** *38.9*	**2.938** *74.63*	**3.34** *84.8*
10VV1, 10VW1	**3.86** *98.0*	**2.08** *52.8*	**1.53** *38.9*	**2.938** *74.63*	**3.34** *84.8*
20VV1, 20VW1	**5.23** *132.8*	**3.38** *85.9*	**1.53** *38.9*	**3.75** *95.25*	**4.20** *106.7*
20VV6, 20VW6	**5.34** *135.64*	**3.38** *85.9*	**1.53** *38.9*	**3.76** *95.5*	**4.20** *106.7*
20VW7	**5.65** *143.51*	**3.12** *79.25*	**2.29** *58.17*	—	—

**20VW7, 20A model tested by Underwriters Laboratories to US and Canadian requirements and is VDE approved at 16A, 250VAC*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

V and W Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

3VV



6VV



10VV



20VV



3VW



6VW



10VW



20VW



Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .15	.5	1	2	5	10	20	30
V Series								
3A	15	27	38	47	55	55	50	48
6A	15	27	28	47	55	55	50	48
10A	15	27	38	47	55	55	50	48
20A	15	30	41	49	55	46	36	30
W Series								
3A	13	25	20	45	60	65	65	63
6A	18	30	34	40	65	65	57	47
10A	18	30	34	40	65	65	57	47
20A	18	30	34	40	65	65	57	47

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .15	.5	1	2	5	10	20	30
V Series								
3A	25	25	65	63	60	52	50	50
6A	40	54	65	65	65	60	57	55
10A	25	25	65	63	60	52	50	50
20A	25	25	65	63	60	52	50	50
W Series								
3A	25	40	65	65	62	55	35	35
6A	30	54	65	65	60	55	38	38
10A	25	25	65	65	65	50	45	45
20A	25	25	65	65	65	50	45	45

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

High Performance, Low Cost Filter Ideal for Appliance Equipment

WG Series

UL Recognized
CSA Certified
VDE Approved

WG_1 Style

WG Series

- Cost-effective
- Tubular design
- WGA, WGB and WGC versions designed to comply with leakage current for fixed appliances not easily moved from one place to another
- WGD, WGE and WGF versions designed to comply with leakage current requirements for appliances which may be easily moved from one place to another
- Available in a variety of styles

Ordering Information

16 WG A 1

Input / Output Style
1 – .250 [6.3] spade terminals
3 – Wire Leads
7 – RAST 5 connection

Leakage Current & Performance
A, B & C: for fixed appliances
A = Standard
B = Enhanced
C = High performance
D, E & F: for mobile appliances
D = Standard
E = Enhanced
F = High performance

WG Series

Current Rating
16A

Specifications

Maximum leakage current each Line to Ground:

	A, B & C Models	D, E & F Models
@ 120 VAC 60 Hz:	.76 mA	.10 mA
@250 VAC 50 Hz:	1.27 mA	.20 mA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 16A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematics

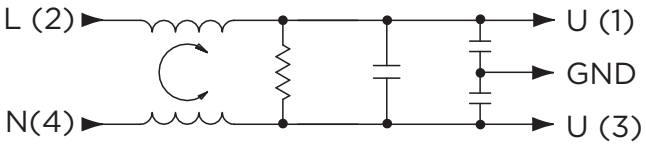

With RAST 5 Connector (style 7)

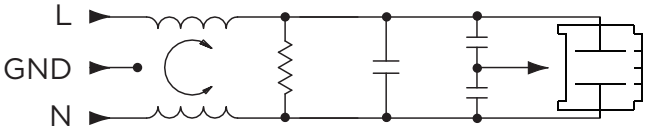

Available Part Numbers

16WGA1	16WGA3	16WGA7
16WGB1	16WGB3	16WGB7
16WGC1	16WGC3	16WGC7
16WGD1	16WGD3	16WGD7
16WGE1	16WGE3	16WGE7
16WGF1	16WGF3	16WGF7

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

High Performance, Low Cost Filter for Appliance Equipment *(continued)*

WG Series

Case Styles

WG_1

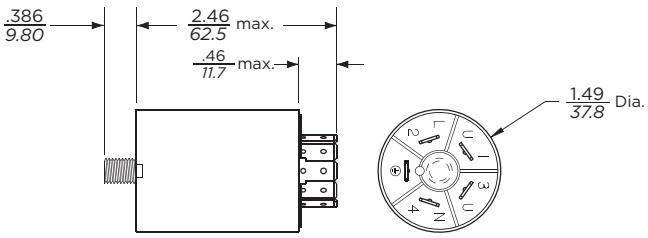

Typical Dimensions:

Terminals (5):	.25 [*6.3*] with .07 [*1.8*] Dia. hole
Mounting Stud (1):	M8 x 1.25

WG_7

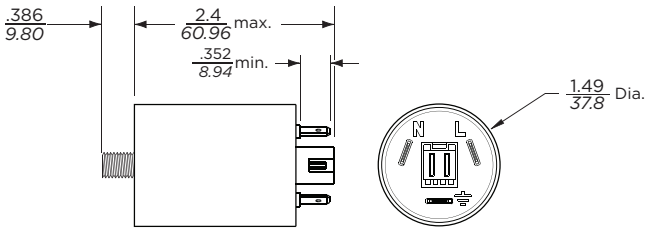

Typical Dimensions:

Terminals (3):	.25 [*6.3*] with .07 [*1.8*] Dia. hole
RAST 5:	Unkeyed RAST 5 Header interface*
Mounting Stud (1):	M8 x 1.25

*The RAST 5 interface mates with any two-position (keyed or unkeyed) TE Standard Power Timer connector or RAST 5 Positive Lock Mark III connector

WG_3

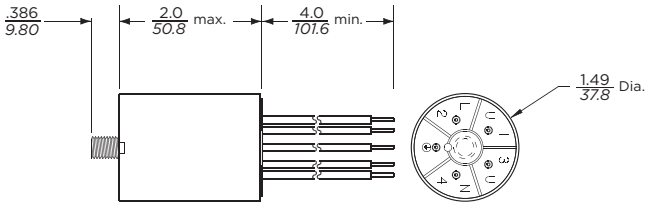

Typical Dimensions:

Wire Leads(5):	4.0 [101.6] min. 18AWG UL 1015
Mounting Stud (1):	M8 x 1.25

Wire Colors:

L(2)	Brown
N(4)	Blue
U(1)	Brown
Gnd	Green / Yellow
U(3)	Blue

WG_7 Style

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

WG Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

All Case Styles

16WGA



16WGB



16WGC



16WGD



16WGE



16WGF



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

	Frequency – MHz									
Part No.	**.05**	**.1**	**.15**	**.5**	**1**	**2**	**5**	**10**	**20**	**30**
All Styles										
16WGA	3	10	14	33	41	47	54	50	37	30
16WGB	11	16	21	33	39	44	53	55	37	30
16WGC	12	18	22	34	41	46	51	52	34	27
16WGD	3	8	11	22	26	31	31	33	40	44
16WGE	5	12	15	21	23	25	31	32	37	45
16WGF	9	14	18	24	26	28	31	32	37	44

Differential Mode / Symmetrical (Line to Line)

	Frequency – MHz									
Part No.	**.05**	**.1**	**.15**	**.5**	**1**	**2**	**5**	**10**	**20**	**30**
All Styles										
16WGA	14	19	22	33	41	51	47	42	48	50
16WGB	14	19	22	33	41	51	50	45	52	45
16WGC	13	19	22	33	40	50	58	42	48	42
16WGD	13	19	22	33	40	48	58	57	54	45
16WGE	13	19	22	33	40	48	58	57	51	45
16WGF	13	19	22	33	40	49	58	59	50	44

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

X, Y, Z Series

UL Recognized
CSA Certified
VDE Approved

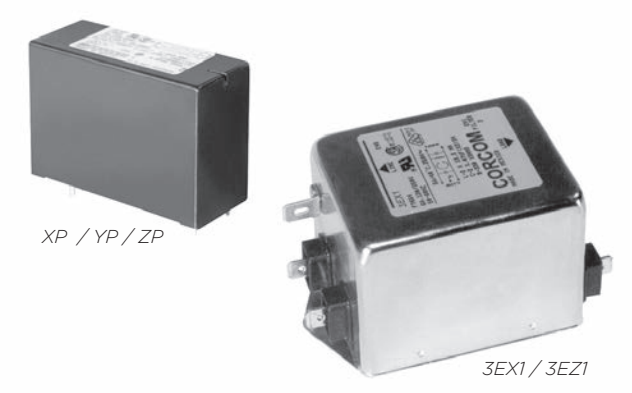

X, Y, Z Series

- Compact chassis or PC board mountable
- Three levels of performance
- Complete filtering solution in minimal size

X Series

- Designed to bring most digital equipment (including those with switching power supplies) into compliance with FCC Part 15J, Class B conducted emission limits

Y Series

- Designed to bring most digital equipment (including those with switching power supplies) into compliance with EN55022, Level A and FCC Part 15J, Class B conducted emission limits

Z Series

- Designed to bring most digital equipment (including those with switching power supplies) into compliance with EN55022, Level B and FCC Part 15J, Class B conducted emission limits

Ordering Information

3 E X 1

- Input / Output Style
  - 1 – .250 [6.3] spade terminals
  - P – PC board pins
- X, Y or Z Series
- Leakage current designation
  - E – Low leakage *(<0.5 mA)*
- Current Rating
  - 1, 2, 3, 4 or 6A

Specifications

Maximum leakage current each Line to Ground:
@ 120 VAC 60 Hz: .30 mA
@250 VAC 50 Hz: .50 mA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 1 to 6A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematic

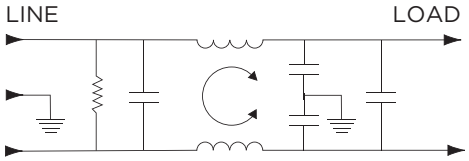

Available Part Numbers

3EXP	4EYP
3EX1	1EZP
4EXP	2EZP
6EXP	3EZP
2EYP	3EZ1
3EYP	

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

X, Y, Z Series

Case Styles

X1 & Z1

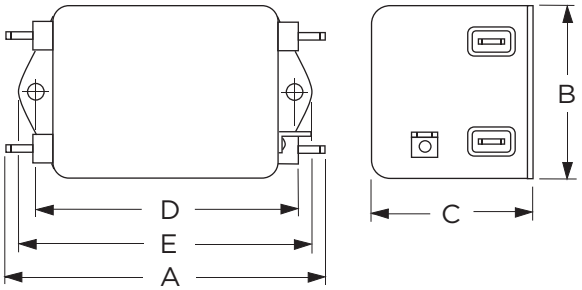

Typical Dimensions:

Line/Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

XP, YP & ZP

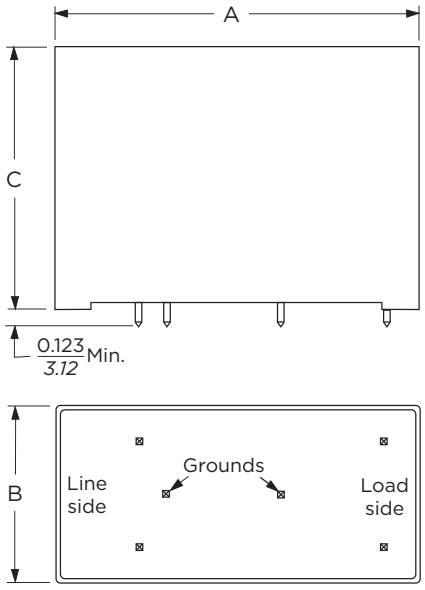

Typical Dimensions:

Pins (5):	0.065 [1.65] max. diagonal

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ± .015 ± .38	E (max)
3EXP	**2.61** *66.3*	**1.13** *28.7*	**1.62** *41.1*	—	—
3EX1	**3.01** *76.7*	**1.84** *46.8*	**1.16** *29.46*	**2.375** *60.33*	**2.79** *70.87*
4EXP	**2.61** *66.6*	**1.13** *28.7*	**1.62** *41.1*	—	—
6EXP	**2.61** *66.3*	**1.13** *28.7*	**1.75** *44.5*	—	—
2EYP	**2.61** *66.3*	**1.13** *28.7*	**1.62** *41.1*	—	—
3EYP, 4EYP	**2.61** *66.3*	**1.13** *28.7*	**1.75** *44.5*	—	—
1EZP	**2.61** *66.3*	**1.13** *28.7*	**1.62** *41.1*	—	—
2EZP, 3EZP	**2.61** *66.3*	**1.13** *28.7*	**1.75** *44.5*	—	—
3EZ1	**3.54** *89.9*	**2.08** *52.8*	**1.31** *33.3*	**2.938** *74.63*	**3.35** *85.1*

Recommended PC Board Layout

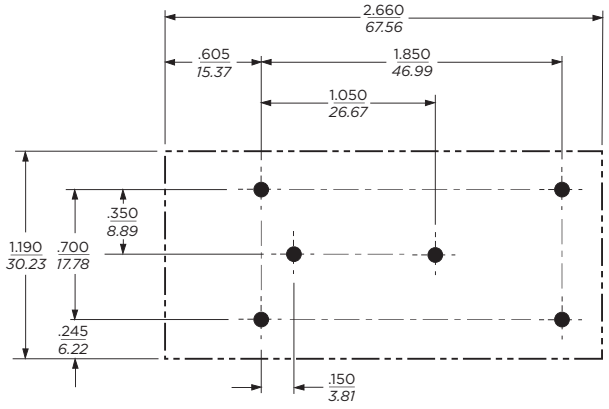

Tolerance ± .006 [.152]

Holes(6): .075 [1.91] Dia.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

X, Y, Z Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

3EX



4EX



6EX



2EY



3EY



4EY



1EZ



2EZ



3EZ



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Performance Data *(Continued)*

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Part No.	Frequency – MHz .01	.05	.15	.5	1	5	10	30
X Series								
3A	2	13	21	35	46	44	44	44
4A	2	13	22	38	44	44	44	38
6A	2	11	20	35	40	40	40	36
Y Series								
2A	8	21	31	49	44	40	40	40
3A	11	24	36	43	40	40	40	40
4A	5	18	28	45	40	40	40	36
Z Series								
1A	18	32	43	47	44	43	43	45
2A	18	32	45	41	40	40	40	40
3A	15	29	39	43	42	40	40	40

Differential Mode / Symmetrical (Line to Line)

Part No.	Frequency – MHz .02	.03	.05	.07	.15	.5	1	5	10	30
X Series										
3A	-	-	-	5	34	60	65	60	45	50
4A	-	-	-	10	37	70	70	70	65	55
6A	-	-	-	3	31	65	70	70	65	55
Y Series										
2A	-	-	10	19	40	70	75	70	60	55
3A	-	-	10	20	42	68	68	67	62	50
4A	-	-	6	18	41	67	75	70	65	55
Z Series										
1A	7	29	34	43	62	70	70	70	60	55
2A	2	15	31	40	57	75	70	65	55	50
3A	-	10	26	34	53	75	75	70	60	55

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Engineering Notes

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

2. Three Phase Filters — Table of Contents

Three Phase Selector Chart 97
A Series 98
ADT Series 101
AYA Series 104
AYC Series 108
AYO Series 111
BCF Series 113
CFN Series 116
FCD Series 118

Three Phase Selector Chart

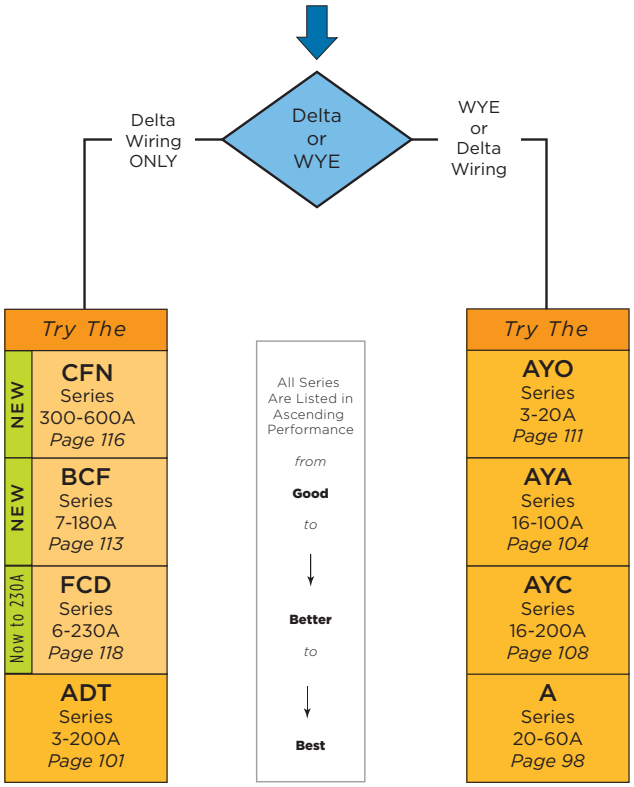

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

A Series

UL Recognized
CSA Certified
VDE Approved

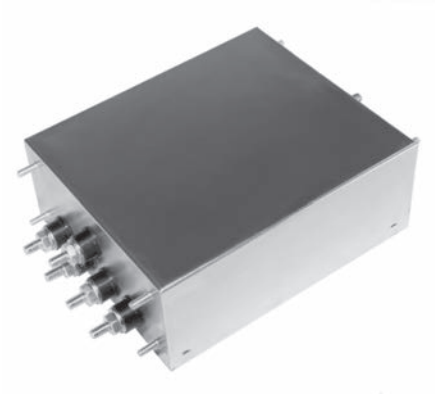

A Series

- For 3-phase, four wire, WYE Applications
- Filters each of the three lines plus the neutral and ground line
- Both common mode and differential mode suppression from 50kHz to 30MHz
- Effective for both balanced and unbalanced loads
- Ground choke included
- Optional end bell kits available to shield input and output terminals
- AYP single stage for lower noise environments
- AYT dual stage provides highest performance

Ordering Information

45 AYT 6 C

Suffix
C – Ground Choke

Input / Output Style
6 – Threaded 1/4 – 20 bolt

Series designation
AYP – Single Stage
AYT – Dual Stage

Current Rating
20, 30, 45 or 60A

Specifications

Maximum leakage current, each Line to Ground:

@ 120 VAC 60 Hz:	1.4 mA
@ 250 VAC 50 Hz:	3.4 mA

Hipot rating (one minute):

Line to Ground:	1500 VAC
Neutral to Ground:	1500 VAC
Line to Neutral:	1450 VDC

Rated Voltage (max):

Phase to Phase:	440 VAC
Phase to Neutral / Ground:	250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 20 to 60A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematics

AYP6C Models

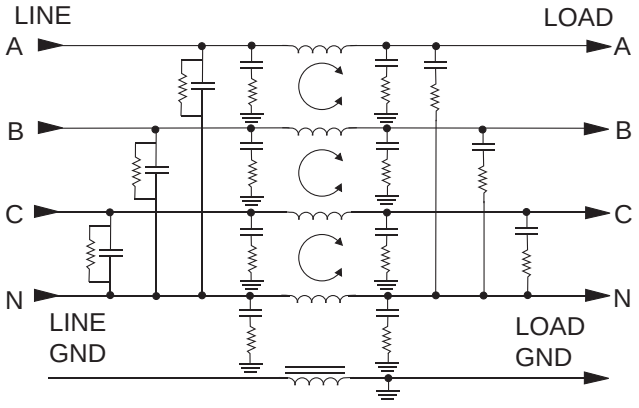

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

A Series

Electrical Schematics *(continued)*

AYT6C Models

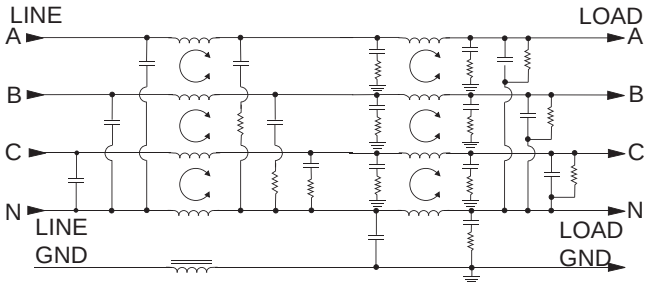

Available Part Numbers

20AYP6C	20AYT6C
30AYP6C	30AYT6C
45AYP6C	45AYT6C
60AYP6C	60AYT6C

Accessories

Mounting bracket kit with captive nuts:

AA400: 20A & 30A versions

AA405: 45A & 60A versions

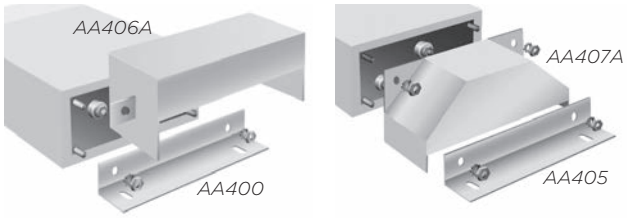

Protective cover for use with mounting bracket:
(*For Europe only. Limited availability in other regions*)

AA406A: 20A & 30A versions

AA407A: 45A & 60A versions

End bell kit (bracket and cover) with captive nuts:

AA406: 20A & 30A versions

AA407: 45A & 60A versions

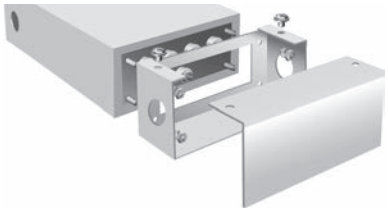

AA406 / AA407

Kits includes both bracket and cover

Additional captive nuts:

AA401: 10 nuts

Case Style

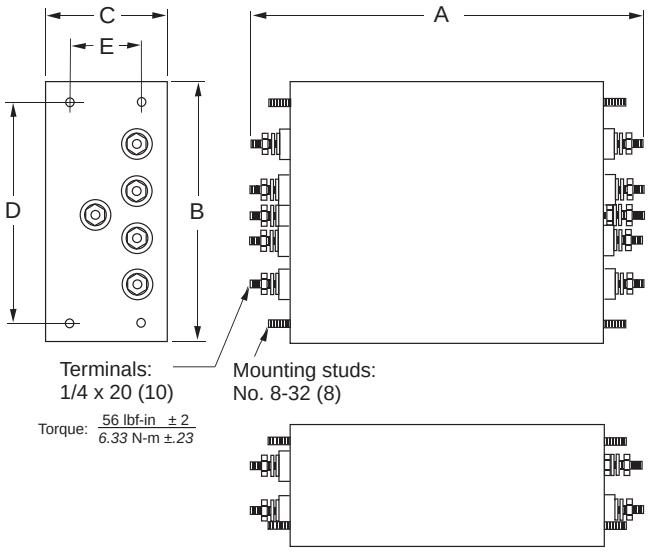

Case Dimensions

Part No.	A* (max.)	B (max.)	C (max.)	D ± .030 / ± .76	E ± .015 / ± .38
20AYP6C	**8.82** *224.0*	**5.57** *141.5*	**2.56** *65.0*	**4.616** *117.2*	**1.50** *38.1*
30AYP6C	**8.82** *224.0*	**5.57** *141.5*	**2.56** *65.0*	**4.616** *117.2*	**1.50** *38.1*
45AYP6C	**9.43** *239.5*	**6.92** *175.8*	**4.82** *122.4*	**5.95** *151.1*	**3.75** *95.3*
60AYP6C	**9.43** *239.5*	**6.92** *175.8*	**4.82** *122.4*	**5.95** *151.1*	**3.75** *95.3*
20AYT6C	**13.82** *351.0*	**5.57** *141.5*	**2.56** *65.0*	**4.616** *117.2*	**1.50** *38.1*
30AYT6C	**13.82** *351.0*	**5.57** *141.5*	**2.56** *65.0*	**4.616** *117.2*	**1.50** *38.1*
45AYT6C	**13.83** *351.3*	**6.92** *175.8*	**4.82** *122.4*	**5.95** *151.1*	**3.75** *95.3*
60AYT6C	**13.83** *351.3*	**6.92** *175.8*	**4.82** *122.4*	**5.95** *151.1*	**3.75** *95.3*

*For end bell covering terminals and connections, add:
20 & 30A: 5.57 [*141.48*]
45 & 60A: 6.45 [*163.83*]

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

A Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

20AYP6C



30AYP6C



45AYP6C



60AYP6C



20AYT6C



30AYT6C



45AYT6C



60AYT6C



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

AYP6C

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency –MHz							
	.05	.1	.15	.5	1	5	10	30
20A	22	32	39	55	56	65	65	54
30A	15	24	30	55	55	61	63	50
45A	8	19	25	49	49	56	58	45
60A	5	16	22	50	50	54	54	47

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency –MHz							
	.05	.1	.15	.5	1	5	10	30
20A	20	38	50	65	65	65	60	52
30A	18	28	43	65	65	65	59	48
45A	8	20	27	60	65	65	56	43
60A	20	24	27	60	65	65	56	50

AYT6C

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency –MHz							
	.05	.1	.15	.5	1	5	10	30
20A	45	63	70	75	75	75	75	65
30A	29	53	61	75	75	75	75	60
45A	15	36	43	75	75	75	75	50
60A	12	37	46	75	75	75	70	45

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency –MHz							
	.05	.1	.15	.5	1	5	10	30
20A	27	56	65	70	70	70	70	70
30A	17	46	55	75	75	75	75	70
45A	14	41	50	75	75	75	75	65
60A	26	50	58	75	75	75	75	60

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

ADT Series

UL Recognized

ADT Series

- Designed for very high insertion loss for Delta three phase, three wire applications
- Available with common or differential mode coils

Ordering Information

100 ADT 6 S

- **Suffix**
  S – Differential mode coils
  Omit if none
- **Input / Output Style**
  6 – Threaded bolt
- **ADT Series**
- **Current Rating**
  63, 100, 160 or 200A

Available Part Numbers

63ADT6	63ADT6S
100ADT6	100ADT6S
160ADT6	160ADT6S
200ADT6	200ADT6S

Specifications

Maximum leakage current at 277 VAC 60 Hz, each Line to Ground:

ADT6:	1.3 A
63ADT6S:	2.6 A
100, 160, 200ADT6S	4.6 A

Hipot rating (one minute):

Line to Ground:	2210 VDC
Line to Line:	2158 VDC

Rated Voltage (max):

Phase to Phase:	480 VAC
Phase to Ground:	277 VAC

Operating Frequency: 50/60 Hz

Rated Current: 63 to 200A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85\text{-}Ta)/45}$

Electrical Schematics

63ADT6

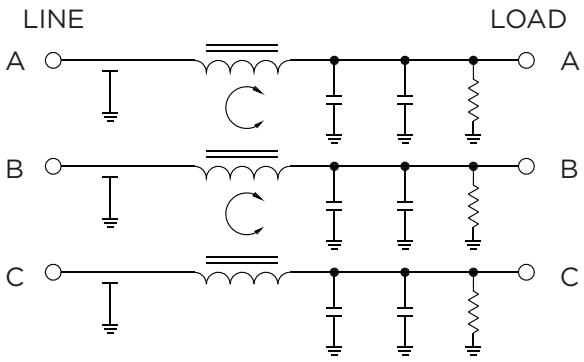

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

ADT Series

Electrical Schematics *(continued)*

100, 160 & 200 ADT6

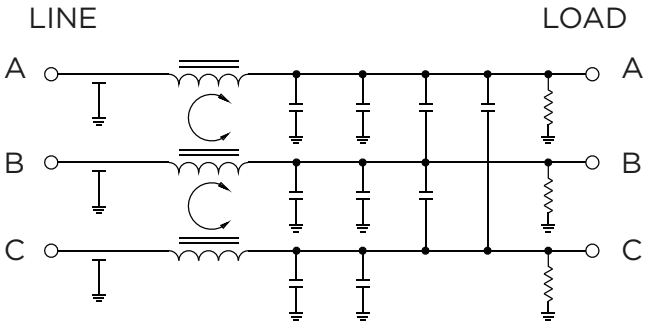

ADT6S

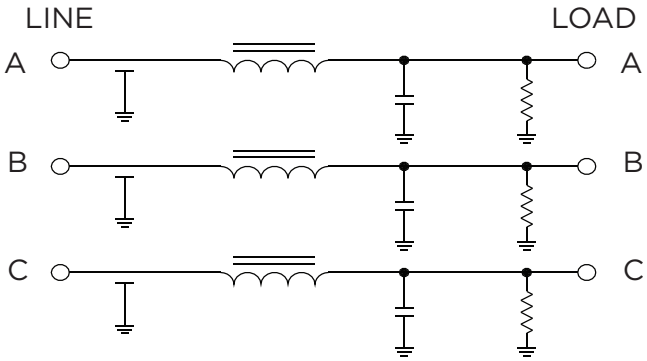

Case Style

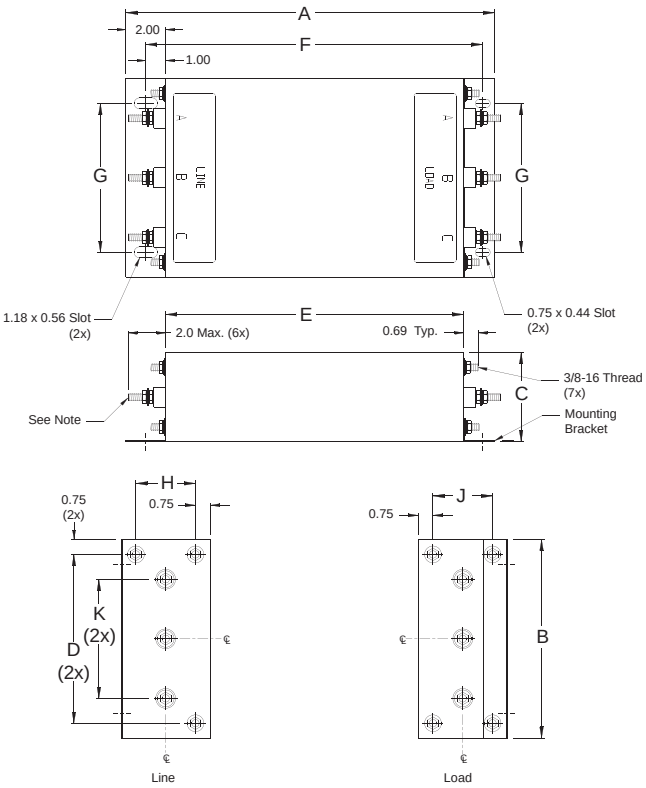

Terminals (6) :

63ADT6, 63ADT6S, 100ADT6S: 3/8-16, Torque (max.) 70 lbf-in [*7.91* N-m]
100ADT6, 160 & 200 ADT6/S: 7/16-20, Torque (max.) 125 lbf-in [*14.12* N-m]

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D ± .030 ± .76	E (max.)	F ± .030 ± .76	G ± .030 ± .76	H ± .030 ± .76	J ± .030 ± .76	K (max.)
63ADT6	**14.00** *355.6*	**10.00** *254.0*	**3.5** *89.0*	**8.5** *216.0*	**10.00** *254.0*	**11.97** *304.0*	**7.5** *190.35*	**1.75** *44.4*	**2.00** *50.8*	**6.00** *152.4*
63ADT6S	**19.00** *482.6*	**10.00** *254.0*	**4.5** *114.3*	**8.5** *216.0*	**15.00** *381.0*	**16.97** *431.0*	**7.5** *190.5*	**3.00** *76.2*	**3.00** *76.2*	**6.00** *152.4*
100ADT6	**19.00** *482.6*	**10.00** *254.0*	**4.5** *114.3*	**8.5** *216.0*	**15.00** *381.0*	**16.97** *431.0*	**7.5** *190.5*	**3.00** *76.2*	**3.00** *76.2*	**6.00** *152.4*
100ADT6S	**19.00** *482.6*	**11.00** *279.4*	**4.5** *114.3*	**8.5** *216.0*	**15.00** *381.0*	**16.97** *431.0*	**8.5** *215.9*	**3.00** *76.2*	**3.00** *76.2*	**6.00** *152.4*
160/200ADT6	**19.00** *482.6*	**10.00** *254.0*	**4.5** *114.3*	**8.5** *216.0*	**15.00** *381.0*	**16.97** *431.0*	**7.5** *190.5*	**3.00** *76.2*	**3.00** *76.2*	**6.00** *152.4*
160/200ADT6S	**22.00** *558.8*	**13.00** *330.2*	**4.5** *114.3*	**11.5** *292.2*	**18.00** *457.2*	**19.97** *507.2*	**10.5** *266.7*	**2.75** *69.8*	**3.00** *76.2*	**7.00** *177.8*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

ADT Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

63ADT6



100ADT6



160ADT6



200ADT6



63ADT6S



100ADT6S



160ADT6S



200ADT6S



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

	Frequency –MHz						
Part No.	.01	.1	1	10	30	100	300
63ADT6	45	85	95	100	100	100	100
100ADT6	45	85	90	100	100	100	100
160ADT6	45	80	90	100	100	100	100
200ADT6	45	77	88	100	100	100	100
63ADT6S	28	45	90	90	90	90	90
100ADT6S	38	60	95	100	100	100	100
160ADT6S	37	58	85	100	100	100	100
200ADT6S	35	54	80	100	100	100	100

Differential Mode / Symmetrical (Line to Line)

	Frequency –MHz						
Part No.	.01	.1	1	10	30	100	300
63ADT6	35	100	100	100	100	100	100
100ADT6	43	100	100	100	100	100	100
160ADT6	44	100	100	100	100	100	100
200ADT6	43	100	100	100	100	100	100
63ADT6S	35	100	100	100	100	100	100
100ADT6S	43	100	100	100	100	100	100
160ADT6S	44	100	100	100	100	100	100
200ADT6S	43	100	100	100	100	100	100

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

AYA Series

UL Recognized*

25AYA6A

AYA Series

- For 3-phase, four wire, WYE applications
- Cost-effective, universal 3-phase filters
- Good attenuation over the complete frequency range of 10kHz to 30MHz
- Two different mounting styles available

Specifications

Maximum leakage current each Line to Ground:
@ 120 VAC 60 Hz: 1.62 mA
@ 250 VAC 50 Hz: 2.82 mA

Hipot rating (one minute):
Line to Ground: 1500 VAC
Line to Line: 1450 VDC

Rated Voltage (max):
Phase to Phase: 440 VAC
Phase to Ground: 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 16 to 100A*

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Ordering Information

36 AYA 6 A

- **Suffix**
  - A – Flange Mounted *(for threaded bolt style only)*
  - Omit for bulkhead mount or for Terminal Blocks *(flange mount only)*
- **Input / Output Style**
  - 6 – Threaded bolt
  - 10 – Terminal block *(flange mount only)*
- **AYA Series**
- **Current Rating**
  - 16, 25, 36, 50, 63 or 100A

Available Part Numbers

Flange Mount	Bulkhead Mount
16AYA6A	16AYA6
16AYA10	25AYA6
25AYA6A	36AYA6
36AYA6A	50AYA6
36AYA10	
50AYA6A	
63AYA6A	
63AYA10	
100AYA6A	

**UL Approvals for all models except: 16AYA10, 36AYA10, 63AYA10, 63AYA6, 63AYA6A and 100AYA6A*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

AYA Series

Electrical Schematic

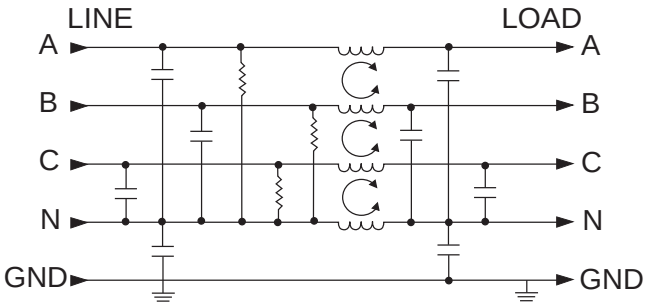

Case Style

AYA6A *(Flange mount with screw terminals)*

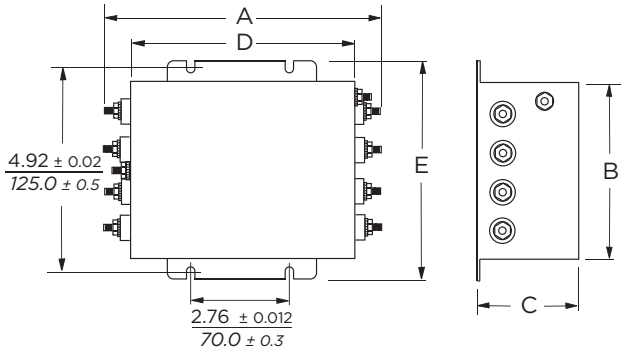

Typical Dimensions:

Mounting slots (4):	.425 x .254 [*10.8 x 6.6*]
16 & 25A Terminals(8):	8-32, Torque (max.) 26 lbf-in [*2.94* N-m]
36A Terminals(8):	10-32, Torque (max.) 27 lbf-in [*3.05* N-m]
50, 63 & 100A Terminals(8):	1/4-20, Torque (max.) 56 lbf-in [*6.33* N-m]

AYA6 *(Bulkhead mount with screw terminals)*

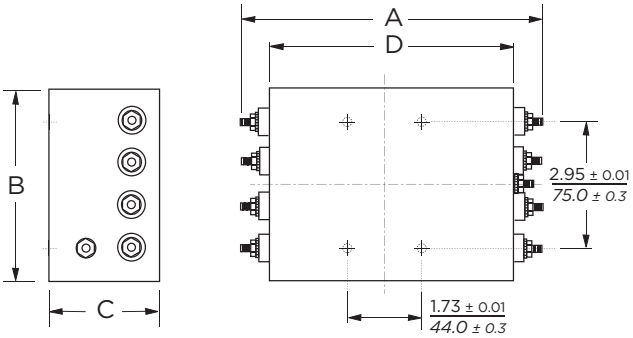

Typical Dimensions:

Threaded mounting holes(4):	M5 x 8
16 & 25A Terminals(8):	8-32, Torque (max.) 26 lbf-in [*2.94* N-m]
36A Terminals(8):	10-32, Torque (max.) 27 lbf-in [*3.05* N-m]
50A Terminals(8):	1/4-20, Torque (max.) 56 lbf-in [*6.33* N-m]

16AYA10

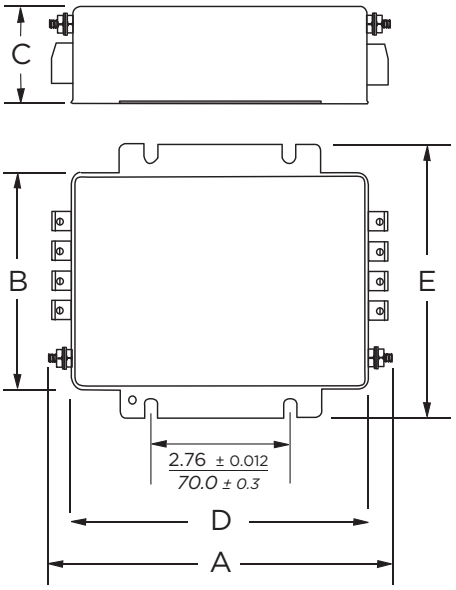

Typical Dimensions:

Mounting slots (4):	.425 x .254 [*10.8 x 6.6*]
Terminal blocks(8):	4 mm² Torque (max.) 7.08 lbf-in [*0.8* N-m]
Ground terminal(1):	M5, Torque (max.) 26.58 lbf-in [*3.0* N-m]

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

AYA Series

36AYA10

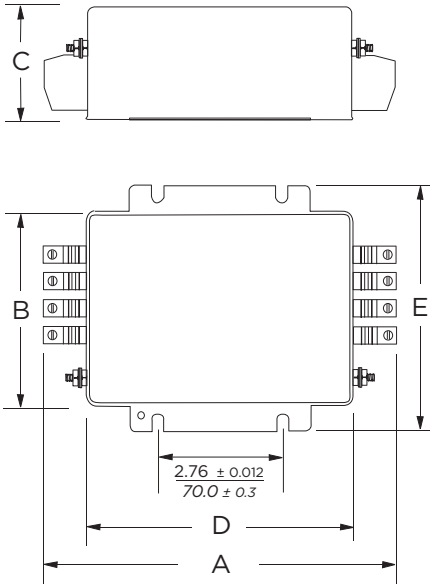

Typical Dimensions:

Mounting slots (4):	.425 x .254 [*10.8 x 6.6*]
Terminal blocks(8):	10 mm² Torque (max.) 15.93 lbf-in [*1.8* N-m]
Ground terminal(1):	M5, Torque (max.) 26.58 lbf-in [*3.0* N-m]

63AYA10

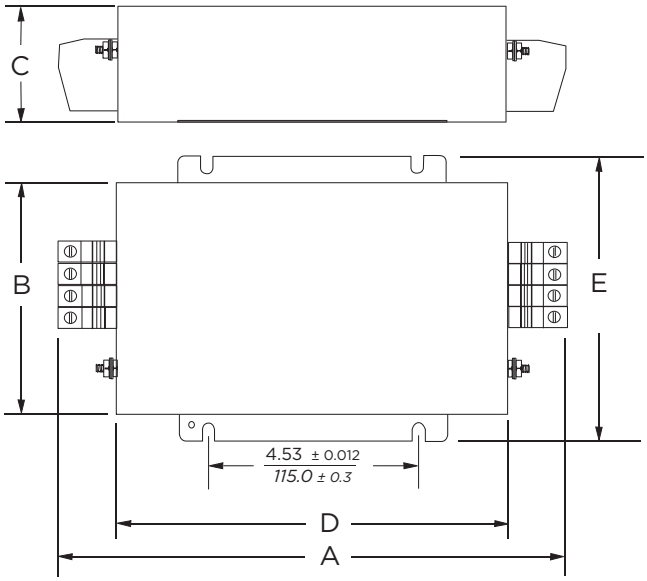

Typical Dimensions:

Mounting slots (4):	.425 x .254 [*10.8 x 6.6*]
Terminal blocks(8):	16 mm² Torque (max.) 20.35 lbf-in [*2.3* N-m]
Ground terminal(1):	M6, Torque (max.) 53.1 lbf-in [*6.0* N-m]

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D (max.)	E* (max.)
16AYA6 /A 25AYA6 /A	**7.91** *201.0*	**4.37** *111.0*	**1.97** *50.0*	**5.94** *151.0*	**5.51** *140.0*
36AYA6 /A 50AYA6 /A	**7.91** *201.0*	**4.37** *111.0*	**2.56** *65.0*	**5.94** *151.0*	**5.51** *140.0*
63AYA6 /A 100AYA6A	**7.91** *201.0*	**4.37** *111.0*	**2.56** *65.0*	**5.94** *151.0*	**5.51** *140.0*
16AYA10	**6.97** *177.0*	**4.37** *111.0*	**1.97** *50.0*	**5.94** *151.0*	**5.51** *140.0*
36AYA10	**7.88** *200.0*	**4.37** *111.0*	**2.56** *65.0*	**5.94** *151.0*	**5.51** *140.0*
63AYA10	**10.98** *279.0*	**5.08** *129.0*	**2.95** *75.0*	**8.43** *214.0*	**6.26** *159.0*

*Does not apply for bulkhead models

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

AYA Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

16AYA



25AYA



36AYA



50AYA



63AYA



100AYA



Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency –MHz							
	.01	.05	.1	.5	1	5	10	30
16A	2	11	19	52	53	70	61	30
25A	2	12	19	46	49	64	54	27
36A	1	10	18	49	54	63	57	32
50A	1	8	14	43	47	63	53	29
63A	2	10	22	50	60	75	70	55
100A	1	15	22	55	60	65	55	50

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency –MHz							
	.01	.05	.1	.5	1	5	10	30
16A	14	31	30	82	87	76	77	47
25A	20	36	38	85	81	68	69	33
36A	20	39	36	86	78	65	62	35
50A	20	30	38	85	82	67	66	38
63A	30	40	45	90	85	70	70	60
100A	20	35	45	80	80	65	60	55

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

3-phase WYE RFI Power Line Filters for High Noise Applications

AYC Series

UL Recognized*

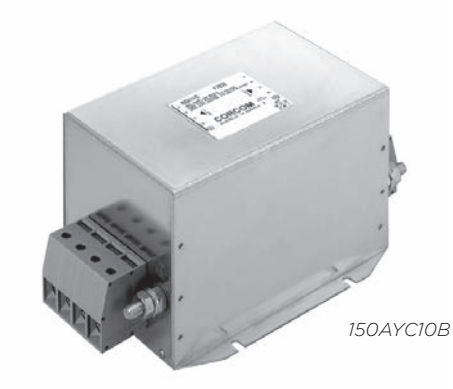

AYC Series

- For 3-phase, four wire, WYE applications
- Very high attenuation
- Low leakage current
- Ideal for EMC troubleshooting and refurbishing in the field
- Touch safe terminals provide easy connections and prevent inadvertent contact for safety in the most demanding applications

Ordering Information

150 AYC 10 B -95

Terminal Block Option
-95 – 95mm terminal block
available on 150A only
Omit for standard terminals

Filter Type
B – Single stage

Input / Output Style
10 – Terminal block

AYC Series

Current Rating
16, 25, 36, 63, 80, 110, 150, 180 or 200A

Available Part Numbers

16AYC10B	110AYC10B
25AYC10B	150AYC10B
36AYC10B	150AYC10B-95
63AYC10B	180AYC10B
80AYC10B	200AYC10B

Specifications

Maximum leakage current each Line to Ground:

	120 VAC 60Hz	277 VAC 50Hz
16A	62 mA	106 mA
25 & 36A	68 mA	118 mA
63A	74 mA	128 mA
80, 100 & 150A	74 mA	129 mA
180, 200A	111 mA	192 mA

Hipot rating (one minute):
Line to Ground: 1850 VDC
Line to Line: 1850 VDC
Line to Neutral: 1450 VDC

Rated Voltage (max):
Phase to Phase: 480 VAC
Phase to Ground: 277 VAC

Operating Frequency: 50/60 Hz

Rated Current: 16 to 200A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematic

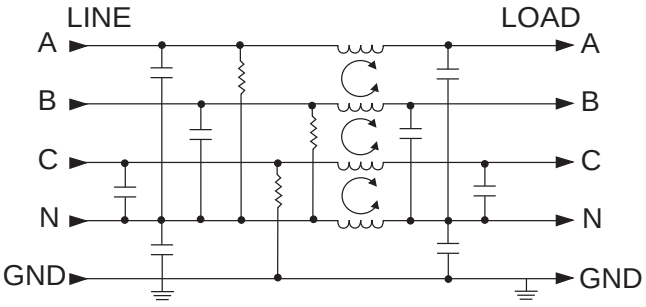

*All except 200AYC10B

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

AYC Series

Case Styles

16, 25, 36, 63AYC10B

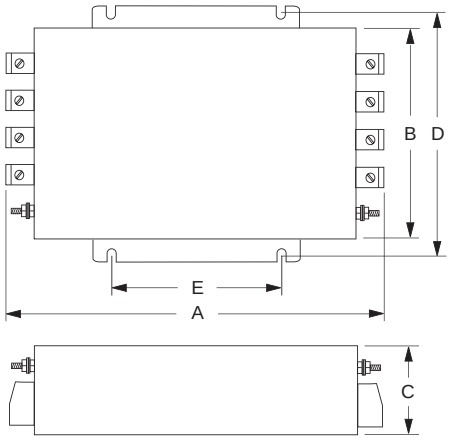

80, 110, 150AYC10B / -95

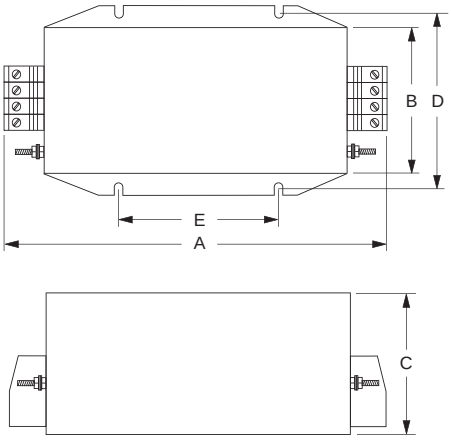

180, 200AYC10B

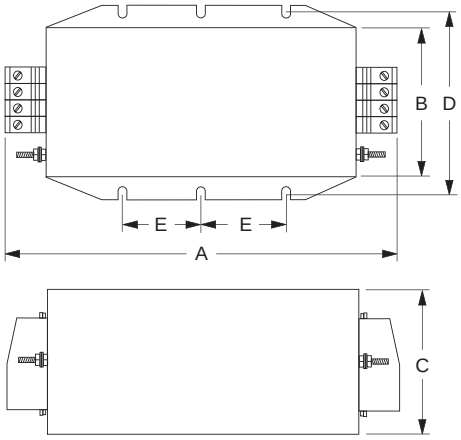

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D (max.)	E ± .078 / ± .2
16AYC10B	**6.69** *170.0*	**4.37** *111.0*	**2.56** *65.0*	**4.92** *125.0*	**2.76** *70.0*
25AYC10B	**9.96** *246.0*	**5.08** *129.0*	**2.52** *64.0*	**5.71** *145.0*	**4.53** *115.0*
36AYC10B	**10.35** *263.0*	**5.08** *129.0*	**2.52** *64.0*	**5.71** *145.0*	**4.53** *115.0*
63AYC10B	**10.98** *279.0*	**5.08** *129.0*	**2.95** *75.0*	**5.71** *145.0*	**4.53** *115.0*
80, 110 & 150AYC10B	**12.09** *307.0*	**5.55** *141.0*	**5.55** *141.0*	**6.10** *155.0*	**4.53** *115.0*
150AYC10B-95	**12.59** *320.0*	**5.55** *141.0*	**5.55** *141.0*	**6.10** *155.0*	**4.53** *115.0*
180AYC10B 200AYC10B	**15.71** *399.0*	**5.55** *141.0*	**5.55** *141.0*	**6.10** *155.0*	**3.25** *82.5*

Terminals

Part No.	Terminal	Size	Torque max. lbf-in [N-m]
16AYC10B	Ground	M5	26.58 [*3.0*]
	Line / Load	4mm² terminal block	7.08 [*0.8*]
25AYC10B	Ground	M5	26.58 [*3.0*]
	Line / Load	6mm² terminal block	15.93 [*1.8*]
36AYC10B	Ground	M5	26.58 [*3.0*]
	Line / Load	10mm² terminal block	15.93 [*1.8*]
63AYC10B	Ground	M6	53.1 [*6.0*]
	Line / Load	16mm² terminal block	20.35 [*2.3*]
80, 110, 150AYC10B	Ground	M10	177.0 [*20.0*]
	Line / Load	50mm² terminal block	70.80 [*8.0*]
150AYC10B-95 180AYC10B 200AYC10B	Ground	M10	177.0 [*20.0*]
	Line / Load	95mm² terminal block	177.0 [*20.0*]

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

AYC Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

16AYC10B



25AYC10B



36AYC10B



63AYC10B



80AYC10B



110AYC10B



150AYC10B



180, 200AYC10B



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

	Frequency –MHz							
Part No.	**.01**	**.05**	**.1**	**.5**	**1**	**5**	**10**	**30**
16AYC10B	23	66	82	88	82	79	55	21
25AYC10B	26	68	83	93	88	68	45	4
36AYC10B	18	61	78	96	91	71	49	7
63AYC10B	11	57	72	90	86	68	44	4
80AYC10B	10	57	75	84	77	75	62	45
110AYC10B	10	51	60	88	84	74	50	12
150AYC10B	-	50	57	82	79	75	51	7
150AYC10B-95	1	51	55	85	82	84	51	11
180, 200AYC10B	3	53	55	97	89	81	56	20

Differential Mode / Symmetrical (Line to Line)

	Frequency –MHz							
Part No.	**.01**	**.05**	**.1**	**.5**	**1**	**5**	**10**	**30**
16AYC10B	21	32	54	90	86	73	72	47
25AYC10B	23	33	60	100	95	87	70	38
36AYC10B	25	37	51	94	87	69	58	17
63AYC10B	27	45	41	84	77	63	61	43
80AYC10B	37	42	67	87	80	66	60	50
110AYC10B	27	35	39	75	72	51	44	31
150AYC10B	28	37	42	74	67	52	45	30
150AYC10B-95	28	40	42	73	66	51	44	31
180, 200AYC10B	30	41	50	70	64	49	42	26

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

AYO Series

UL Recognized
CSA Certified
VDE Approved

AYO Series

- For 3-phase, four wire, WYE applications
- Filters each of the three lines plus neutral
- Good for attenuation beginning at 100kHz
- Space saving design
- Low leakage current
- Easy to connect terminals

Ordering Information

10 AYO 1

- Input / Output Style: 1 – 0.25 [6.3] spade terminals
- AYO Series
- Current Rating: 3, 6, 10 or 20A

Available Part Numbers

3AYO1	6AYO1
10AYO1	20AYO1

Specifications

Maximum leakage current each Line to Ground:

	3, 6, 10A	20A
@ 120 VAC 60 Hz:	2.0 mA	3.5 mA
@ 250 VAC 50 Hz:	3.0 mA	5.5 mA

Hipot rating (one minute):

Line to Ground:	1500 VAC
Line to Line:	1450 VDC

Rated Voltage (max):

Phase to Phase:	440 VAC
Phase to Neutral / Ground:	250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3 to 20A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematic

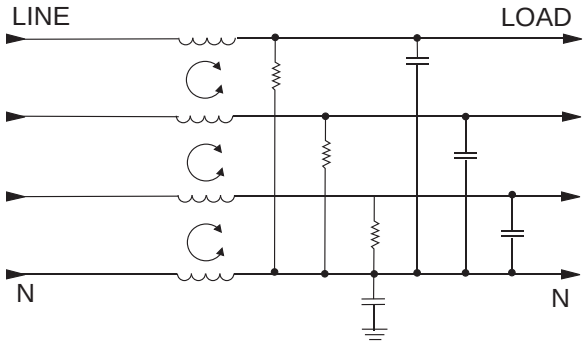

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

AYO Series

Case Style

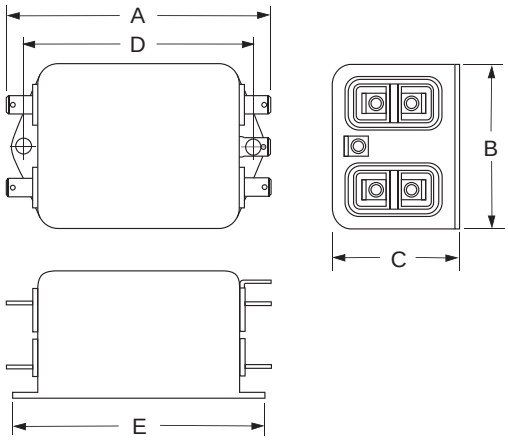

Typical Dimensions:

Line/Load Terminals (8):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.188 [*4.78*] Dia.

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D ±.015 ±.38	E (max.)
AYO Series	**3.37** *85.6*	**2.07** *52.5*	**1.53** *38.7*	**2.938** *74.63*	**3.35** *85.1*

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

3AYO1



6AYO1



10AY01



20AYO1



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency –MHz .15	.5	1	5	10	30
3A	12	23	29	33	38	35
6A	7	23	30	40	50	30
10A	-	-	5	16	28	15
20A	-	7	11	32	23	12

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency –MHz .15	.5	1	5	10	30
3A	-	12	20	50	35	30
6A	10	18	24	31	28	28
10A	10	18	24	42	28	22
20A	10	18	24	42	38	23

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

BCF Series

UL Recognized
VDE Approved

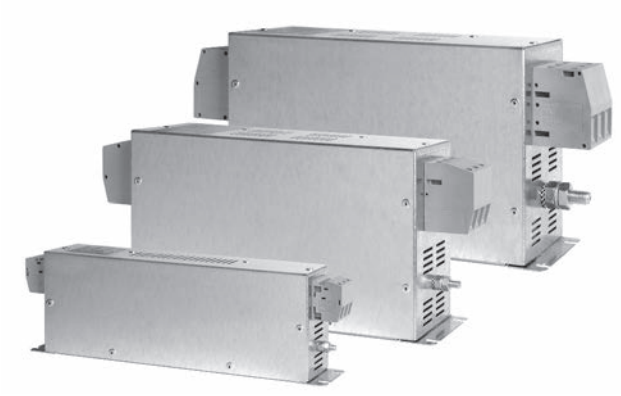

BCF Series

- Designed for universal applications
- Compact book-form design
- Low weight
- Insulated, high quality safety terminals for input and output
- Cost-effective design
- Good common and differential mode performance below 100kHz
- Applications include; 3-phase inverters, converters, variable speed motor drives and process automation equipment
- Touch safe terminals provide easy connections and prevent inadvertent contact for safety in the most demanding applications

Ordering Information

55 BCF 10

- 10 – Input / Output Style: 10 – Terminal block
- BCF – Series
- 55 – Current Rating: 7, 16, 30, 42, 55, 75, 100, 130 or 180A

Available Part Numbers

7BCF10	16BCF10
30BCF10	42BCF10
55BCF10	75BCF10
100BCF10	130BCF10
180BCF10	

Specifications

Maximum leakage current each Line to Ground*:
@ 277 VAC 50 Hz: 30 mA

**If 2 phases are interrupted, this leakage current may rise to a significantly higher level*

Hipot rating (one minute):
Line to Ground: 1850 VAC
Line to Line: 1850 VDC

Rated Voltage (max):
Phase to Phase: 480 VAC
Phase to Ground: 277 VAC

Operating Frequency: 50/60 Hz

Rated Current: 7 to 180A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +50°C

In an ambient temperature (T_a) higher than +50°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/35}$

Electrical Schematic

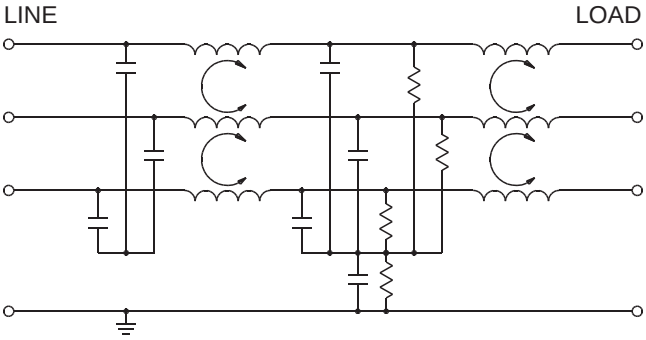

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

BCF Series

Case Style

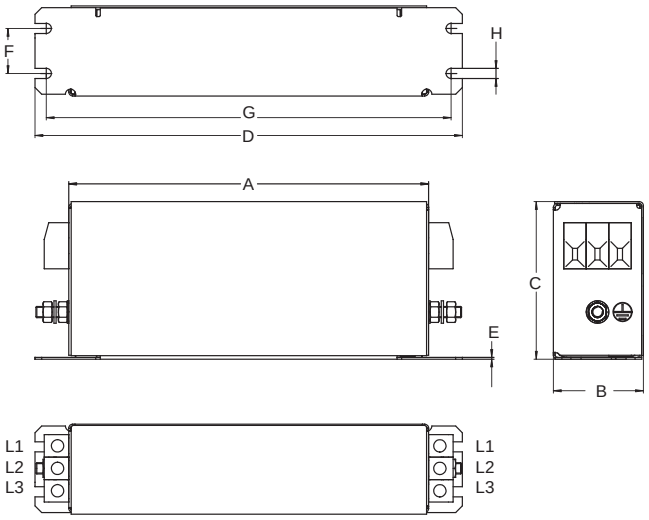

Terminals

Part No.	Ground Terminals	Line/Load Terminals
7BCF10, 16BCF10	M5	4mm²
30BCF10	M5	10mm²
42BCF10	M6	10mm²
55BCF10	M6	16mm²
75BCF10	M6	25mm²
100BCF10, 130BCF10	M10	50mm²
180BCF10	M10	95mm²

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D (max.)	E (max.)	F (max.)	G (max.)	H (max.)
7BCF10	**6.30** *160.0*	**1.57** *40.0*	**2.76** *70.0*	**7.48** *190.0*	**.03** *.8*	**.79** *20.0*	**7.09** *180.0*	**.18** *4.5*
16BCF10	**8.66** *220.0*	**1.77** *45.0*	**2.76** *70.0*	**9.84** *250.0*	**.03** *.8*	**.98** *25.0*	**9.25** *235.0*	**.21** *5.4*
30BCF10	**9.45** *240.0*	**1.97** *50.0*	**3.35** *85.0*	**10.63** *270.0*	**.03** *.8*	**1.18** *30.0*	**10.04** *255.0*	**.21** *5.4*
42BCF10	**11.02** *280.0*	**1.97** *50.0*	**3.35** *85.0*	**12.20** *310.0*	**.03** *.8*	**1.18** *30.0*	**11.61** *295.0*	**.21** *5.4*
55BCF10	**8.66** *220.0*	**3.35** *85.0*	**3.54** *90.0*	**9.84** *250.0*	**.04** *1.0*	**2.36** *60.0*	**9.25** *235.0*	**.21** *5.4*
75BCF10	**9.45** *240.0*	**3.15** *80.0*	**5.31** *135.0*	**10.63** *270.0*	**.04** *1.0*	**2.36** *60.0*	**10.04** *255.0*	**.26** *6.5*
100BCF10	**9.45** *240.0*	**3.54** *90.0*	**5.91** *150.0*	**10.63** *270.0*	**.04** *1.0*	**2.56** *65.0*	**10.04** *255.0*	**.26** *6.5*
130BCF10	**9.45** *240.0*	**3.54** *90.0*	**5.91** *150.0*	**10.63** *270.0*	**.04** *1.0*	**2.56** *65.0*	**10.04** *255.0*	**.26** *6.5*
180BCF10	**13.78** *350.0*	**4.72** *120.0*	**6.69** *170.0*	**14.96** *380.0*	**.04** *1.0*	**4.2** *102.0*	**14.37** *365.0*	**.26** *6.5*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

BCF Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

7BCF10



16BCF10



30BCF10



42BCF10



55BCF10



75BCF10



100BCF10



130BCF10



180BCF10



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency –MHz											
	.01	.03	.05	.1	.15	.3	.5	1	3	5	10	30
7A	18	39	48	62	68	89	96	83	62	53	41	20
16A	17	37	45	58	65	85	96	88	65	56	43	23
30A	16	36	44	58	64	82	90	74	56	48	36	18
42A	12	30	40	52	61	79	90	72	54	47	35	18
55A	16	35	44	58	66	87	87	67	47	38	26	12
75A	12	30	40	53	60	84	90	70	50	42	30	15
100A	12	29	38	50	59	79	80	67	49	40	29	15
130A	11	26	35	48	55	78	83	67	49	40	29	15
180A	11	27	36	49	57	72	77	61	47	40	29	15

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency –MHz											
	.01	.03	.05	.1	.15	.3	.5	1	3	5	10	30
7A	16	23	28	54	67	89	85	76	67	62	57	46
16A	18	26	24	48	58	78	82	80	74	71	65	51
30A	23	31	29	49	62	87	84	78	68	64	59	46
42A	13	35	36	50	67	88	82	69	59	55	50	40
55A	27	35	35	51	68	87	83	71	61	58	54	31
75A	27	35	35	50	66	87	86	72	62	58	53	35
100A	28	37	38	47	70	73	76	78	68	64	58	34
130A	27	37	40	38	53	75	80	64	54	50	47	30
180A	27	37	40	42	50	73	73	60	50	47	42	30

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

3-phase Delta Power Line Filter for High Voltage Applications

CFN Series

UL Recognized*

CFN Series

- Universal high current filter
- Suitable for industrial applications including; motor drives, inverters, converters, uninterruptible power supplies and mining equipment

Ordering Information

400 CFN 12

- 12 – Input / Output Style: Copper bus bar
- CFN Series
- 400 – Current Rating: 300, 400, 500, 600A

Available Part Numbers

300CFN12	400CFN12
500CFN12	600CFN12

*400CFN12 only

Specifications

Maximum leakage current at 10% unsymmetrical mains Line to Ground (3 Phase WYE Center tapped)*:

@ 120 VAC 60 Hz:	5.0 mA
@ 277 VAC 50 Hz:	9.6 mA

**If 2 phases are interrupted, this leakage current may rise to a significantly higher level*

Hipot rating (one minute):

Line to Ground:	2210 VDC
Line to Line:	2158 VDC

Rated Voltage (max):

Phase to Phase:	480 VAC
Phase to Ground:	277 VAC

Operating Frequency: 50/60 Hz

Rated Current: 300 to 600A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85\text{-}Ta)/45}$

Electrical Schematic

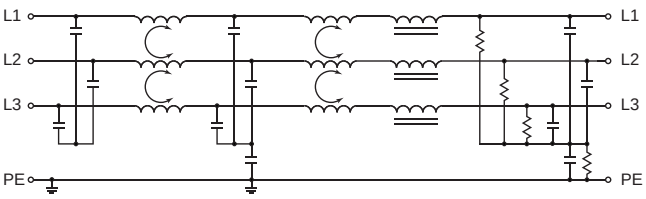

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

CFN Series

Case Style

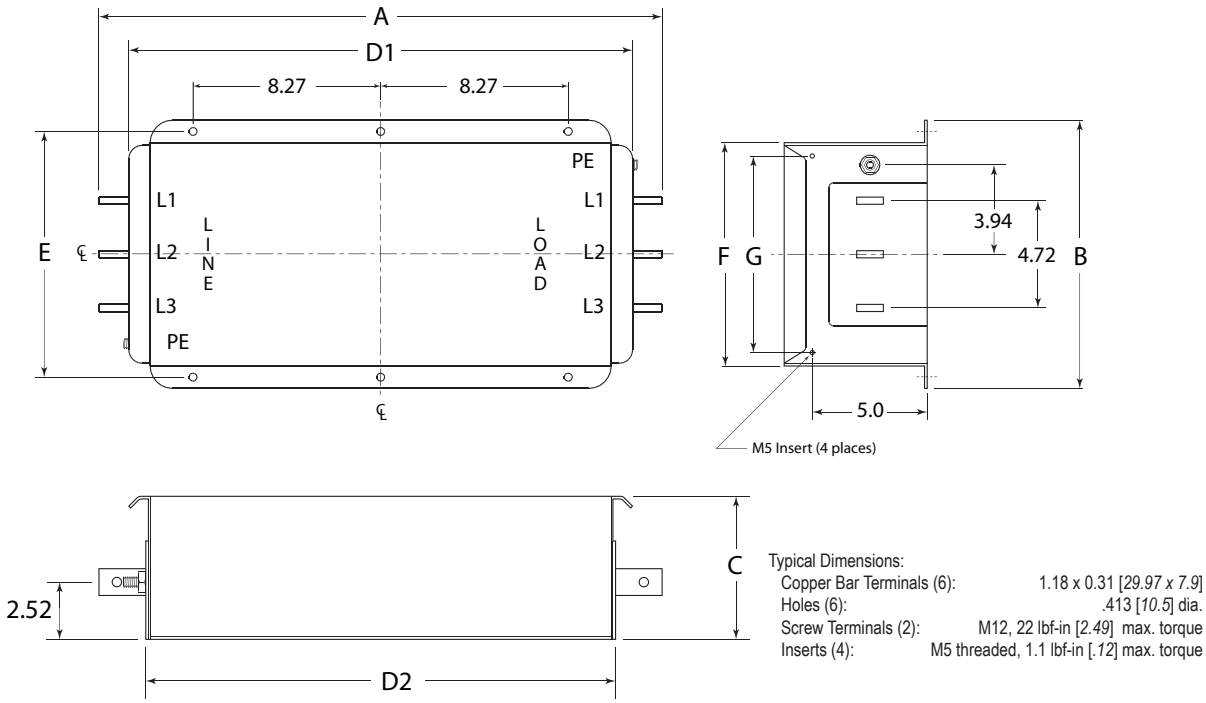

Typical Dimensions:

Copper Bar Terminals (6):	1.18 x 0.31 [*29.97 x 7.9*]
Holes (6):	.413 [*10.5*] dia.
Screw Terminals (2):	M12, 22 lbf-in [*2.49*] max. torque
Inserts (4):	M5 threaded, 1.1 lbf-in [*.12*] max. torque

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D1 (ref.)	D2 (max.)	E ±.02 ± .50	F (max)	G ±.02 ± .50	H (max.)
300-600CFN12	**24.8** *630.0*	**11.81** *300.0*	**6.30** *160.0*	**22.20** *564.0*	**20.31** *516.0*	**10.83** *275.0*	**9.84** *250.0*	**8.66** *220.0*	**5.0** *127.0*

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

300-600CFN12



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency –MHz .01	.03	.07	.1	.15	.5	1	5	10	30
300-600A	10	19	26	40	55	82	76	51	37	20

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency –MHz .01	.03	.07	.1	.15	.5	1	5	10	30
300-600A	32	40	27	55	70	66	57	40	34	20

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

3-phase Delta External Power Line Filter for Frequency Converters

FCD Series

UL Recognized

6FCD10

FCD Series

- Suitable to meet the latest EMC standards
- Insulated safety terminals
- Suitable for EMC troubleshooting in the field
- Very high attenuation
- High insertion loss
- BS models optimized for very high insertion loss
- BS models suitable for infeed/regenerative (ER) applications
- Touch safe terminals provide easy connections and prevent inadvertent contact for safety in the most demanding applications

Ordering Information

150 FCD 10 BS -95

Terminal Block Option
-95 – 95mm terminal block
available on 150A only
omit for standard terminals

Filter Type
B – Single stage
BS – High performance Single stage.
Omit for dual stage

Input / Output Style
10 – Terminal Block

FCD Series

Current Rating
6, 12, 16, 25, 36, 50, 80, 110, 150, 180 or 230A

Specifications

Maximum leakage current voltage drop to virtual N to PE/V:

6FCD10:	.26 mA/V
12 & 16FCD10:	.45 mA/V
25, 36 & 50FCD10:	.52 mA/V
12 & 16FCD10B:	.46 mA/V
25& 36FCD10B:	.52 mA/V
50FCD10B:	.57 mA/V
80 & 110FCD10B:	.62 mA/V
150FCD10B:	.63 mA/V
180 & 230FCD10B:	.92 mA/V
FCD10BS:	3.25 mA/V

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max):

Phase to Phase:	480 VAC
Phase to Neutral / Ground:	277 VAC

Operating Frequency: 50/60 Hz

Rated Current: 6 to 230A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85\text{-}Ta)/45}$

Electrical Schematics

6FCD10

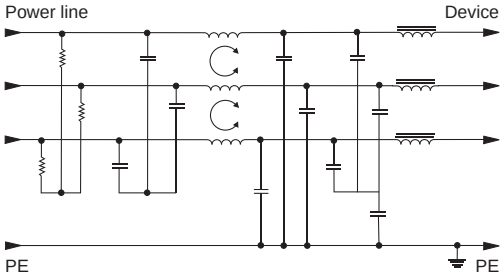

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

FCD Series

Electrical Schematics *(continued)*

12 to 50A FCD10

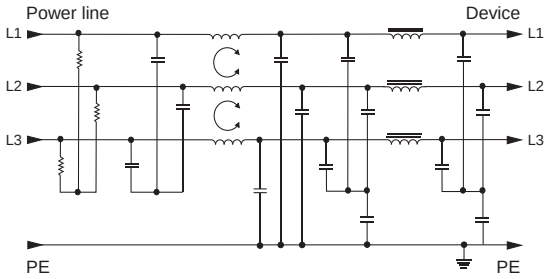

12 to 50A FCD10B

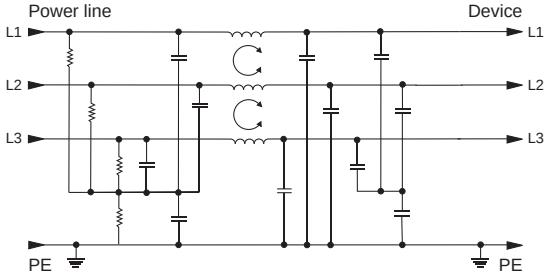

80 to 230A FCD10B

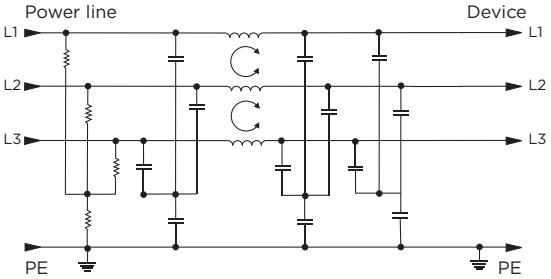

FCD10BS

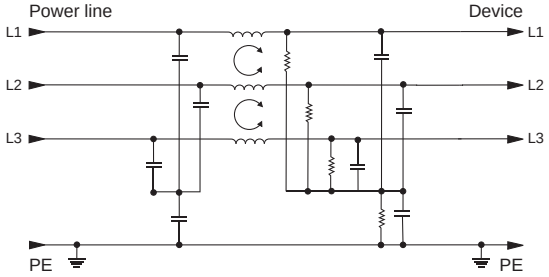

Available Part Numbers

6FCD10	12FCD10B	50FCD10BS
12FCD10	16FCD10B	80FCD10BS
16FCD10	25FCD10B	110FCD10BS
25FCD10	36FCD10B	150FCD10BS
36FCD10	50FCD10B	150FCD10BS-95
50FCD10	80FCD10B	180FCD10BS
	110FCD10B	230FCD10BS
	150FCD10B	
	150FCD10B-95	
	180FCD10B	
	230FCD10B	

Case Styles

6 to 50A FCD10 & FCD10B

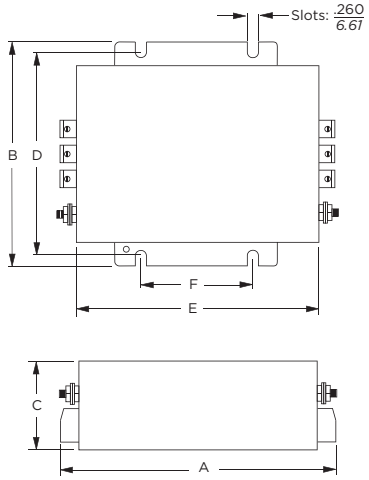

80 to 150A FCD10B
50 to 150A FCD10BS

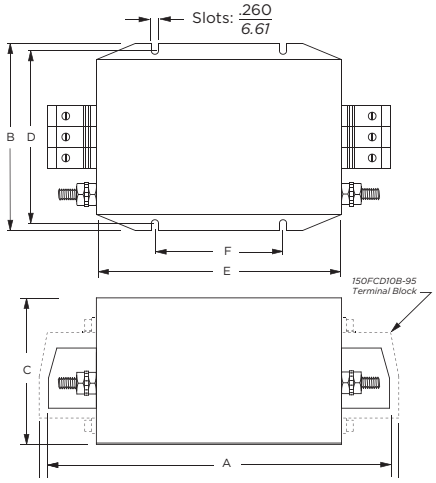

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

FCD Series

Case Styles *(continued)*
180 to 230FCD10B\BS

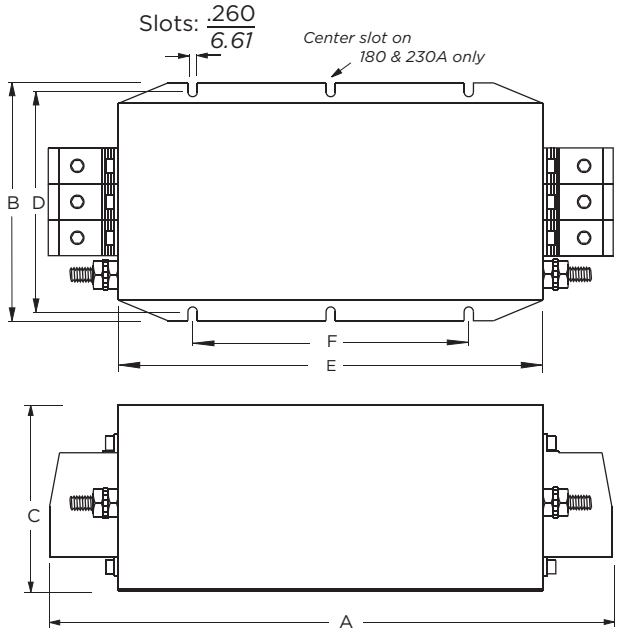

Terminals

Part No.	Terminal	Size	Torque max. lbf-in [N-m]
6FCD10	Ground	8-32	20.7 [*2.34*]
	Line/Load	4mm² terminal block	7.08 [*0.8*]
12FCD10/10B 16FCD10/10B	Ground	M5	26.58 [*3.0*]
	Line/Load	4mm² terminal block	7.08 [*0.8*]
25FCD10/10B 36FCD10/10B	Ground	M5	26.58 [*3.0*]
	Line/Load	6mm² terminal block	15.93 [*1.8*]
50FCD10/10B	Ground	M5	26.58 [*3.0*]
	Line/Load	10mm² terminal block	15.93 [*1.8*]
50FCD10BS	Ground	M10	88.5 [*10.0*]
	Line/Load	16mm² terminal block	20.36 [*2.3*]
80 to 150FCD10B 80 to 150FCD10BS	Ground	M10	88.5 [*10.0*]
	Line/Load	50mm² terminal block	70.80 [*8.0*]
150FCD10B/BS-95 180FCD10B/BS 230FCD10B/BS	Ground	M10	88.5 [*10.0*]
	Line/Load	95mm² terminal block	177.0 [*20.0*]

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D ± .02 ± .5	E (max.)	F ± .02 ± .5
6FCD10	**6.18**	**4.33**	**2.32**	**3.74**	**5.16**	**2.76**
	157.0	*110.0*	*59.0*	*95.0*	*131.0*	*70.0*
12FCD10/10B 16FCD10/10B	**6.97**	**5.51**	**2.56**	**4.92**	**5.94**	**2.76**
	177.0	*140.0*	*65.0*	*125.0*	*151.0*	*70.0*
25FCD10/10B 36FCD10/10B 50FCD10/10B	**9.69**	**6.26**	**2.52**	**5.71**	**8.43**	**4.53**
	246.0	*159.0*	*64.0*	*145.0*	*214.0*	*115.0*
50FCD10BS	**11.41**	**6.61**	**3.54**	**6.10**	**8.70**	**4.53**
	290.0	*168.0*	*90.0*	*155.0*	*221.0*	*115.0*
80FCD10B/BS 110FCD10B/BS 150FCD10B/BS	**12.09**	**6.61**	**5.55**	**6.10**	**8.70**	**4.53**
	307.0	*168.0*	*141.0*	*155.0*	*221.0*	*115.0*
150FCD10B-95 150FCD10BS-95	**12.6**	**6.61**	**5.55**	**6.10**	**8.70**	**4.53**
	320.0	*168.0*	*141.0*	*155.0*	*221.0*	*115.0*
180FCD10B/BS 230FCD10B/BS	**15.71**	**6.61**	**5.55**	**6.10**	**11.81**	**6.50**
	399.0	*168.0*	*141.0*	*155.0*	*300.0*	*165.0*

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

6FCD10



12FCD10



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

FCD Series

Performance Data *(continued)*

Typical Insertion Loss *(continued)*

Measured in closed 50 Ohm system

16FCD10



25FCD10



36FCD10



50FCD10



12FCD10B



16FCD10B



25FCD10B



36FCD10B



50FCD10B



80FCD10B



110FCD10B



150FCD10B



180FCD10B



230FCD10B



50/80/110FCD10BS



150FCD10BS



180FCD10BS



230FCD10BS



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

FCD Series

Performance Data *(continued)*

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

	Frequency –MHz								
Part No.	**.01**	**.03**	**.05**	**.1**	**.5**	**1**	**5**	**10**	**30**
6FCD10	2	14	23	39	56	52	48	45	33
12 & 16FCD10	13	30	36	45	75	75	52	45	35
25FCD10	13	30	36	45	75	75	52	45	35
36FCD10	9	26	32	40	75	75	52	45	35
50FCD10	9	26	32	40	75	75	52	45	35
12FCD10B	18	45	59	75	73	65	49	47	26
16FCD10B	18	45	59	75	73	65	49	47	26
25FCD10B	18	45	60	49	83	75	58	56	28
36FCD10B	8	38	52	70	77	70	54	50	47
50FCD10B	3	34	49	67	76	70	59	58	37
80FCD10B	2	35	49	67	74	67	59	58	27
110FCD10B	2	35	49	66	72	65	59	58	18
150FCD10B	1	36	50	66	69	63	59	58	9
180FCD10B	-	36	50	66	67	60	59	58	-
230FCD10B	-	25	40	58	73	66	58	52	21
50FCD10BS	40	66	70	69	65	60	53	51	24
80FCD10BS	35	63	67	66	63	58	52	49	23
110FCD10BS	30	61	69	69	66	60	53	53	25
150FCD10BS	32	61	67	67	62	56	48	46	16
180FCD10BS	30	60	65	65	61	55	47	46	16
230FCD10BS	27	58	62	63	59	54	46	45	15

Differential Mode / Symmetrical (Line to Line)

	Frequency –MHz								
Part No.	**.01**	**.03**	**.05**	**.1**	**.5**	**1**	**5**	**10**	**30**
6FCD10	9	8	24	40	62	57	50	48	38
12 & 16FCD10	9	13	24	55	75	75	75	65	60
25FCD10	9	13	26	55	75	75	75	65	60
36FCD10	9	13	26	46	75	75	75	65	60
50FCD10	9	13	26	46	75	75	75	65	60
12FCD10B	6	13	9	37	90	86	74	78	34
16FCD10B	6	13	9	37	60	86	74	78	34
25FCD10B	10	16	12	41	89	87	69	86	43
36FCD10B	17	24	24	38	87	81	63	66	24
50FCD10B	15	24	27	21	88	74	51	69	52
80FCD10B	17	25	28	23	87	71	50	62	45
110FCD10B	18	27	30	25	86	69	49	56	39
150FCD10B	19	28	31	28	85	66	49	49	32
180FCD10B	21	29	33	30	84	63	48	43	26
230FCD10B	22	31	35	36	78	60	46	41	26
50FCD10BS	25	31	26	59	73	64	50	45	19
80FCD10BS	25	31	26	59	73	64	50	45	19
110FCD10BS	24	31	24	55	72	65	51	46	26
150FCD10BS	25	33	32	51	71	61	47	42	22
180FCD10BS	25	33	32	51	71	61	47	42	22
230FCD10BS	25	33	32	51	71	61	47	42	22

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

Engineering Notes

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Engineering Notes

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

3. Power Inlet Filters & Power Entry Modules — Table of Contents

Introduction 126
Selector Chart 128
Power Entry Module Selector Guide 129
C Series 130
CU Series 134
EBF Series 138
EC Series 141
ED Series 144
EEA & EEB Series 148
EAS & EBS Models 148
EAH & EBH Models 148
EEJ Series 153
EJH & EJHS Models 153
EJM & EJMS Models 153
EJS Models 153
EF Series 160
EJT Series 163
GG & HG Series 166
H Series 169
J Series 172
L Series 175
LA Series 180
M Series 183
P Series 192
SR Series 201
SRB Series 203

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Introduction

Corcom EJS Series
IEC Inlet RFI Filter

Power Inlet Filters feature power sockets integrated with EMI filters enclosed in RFI jackets. The AC power socket complies with IEC an standard to assure worldwide power cord compatibility. These filters are available in a wide variety of filtering, shielding, mounting and termination styles that provide the most compact and cost-effective inlet filtering available. For DC power inlet filters, see the DC section.

Corcom P Series CHAMELEON
Power Entry Module

Power Entry Modules incorporate power sockets with filtering, fuses, switching and voltage selection in a variety of configurations to reduce cost, space and labor. The power sockets comply with IEC standards to assure worldwide AC power cord compatibility. For DC power entry modules, see the DC section.

Equipment marketed worldwide, must operate with

- Multiple different wall plugs and sockets
- Different fuse standards in America and Europe
- Different voltages in different regions
- On/Off switching options
- Different EMI requirements in different regions

The combinations are endless. Your equipment needs a single solution.

TE Connectivity's power entry modules can provide ONE mechanical solution for a variety of power entry needs. Each series supports several different configurations to suit the market requirements. Each starts with an international standard power cord connector, and includes options for fusing, voltage selection, switching, and filtering. Selecting one power entry module series simplifies the mechanical design, and each version within the series replaces the cost and labor of up to including up to five individual parts in the equipment bill of materials. With hundreds of different combinations of power entry functions, the modules in this catalog offer a cost-effective solution to the power entry needs of many systems. It is easy to select the module that best serves your needs.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Introduction *(continued)*

The selector guides on the next two pages help you configure the best power entry module for your application. Just select options from this menu of five categories.

IEC60320-1 Socket – Common to all modules, the 60320-1 universal socket allows your equipment to be used in every country. Simply select a power cord with a mating IEC 60320-1 plug on one end, and a regionally appropriate plug on the other.

Fusing Options – North American (¼" x 1¼" 3AG) or Metric (5mm x 20mm) or both? One fuse or two?

Voltage Selection Options – 4-voltage, 2-voltage, or 1-voltage? Multitap? Center-tap? Dual primary?

Power Switch – Yes or no? Double pole (DPST) or single (SPST)? These power entry module switches feature international on - off markings, current ratings up to 15A and high inrush current.

Shielding – reduce radiated emissions through the panel cut-out by selecting a module with a shield (optional on the C, CU, M and P).

Filtering options – Choice of six filter circuits (all with low leakage current to meet international standards) to fit specific filtering objectives:

- **General purpose** (C, CU, GG, J, LA, M and P) – most cost-effective, for susceptibility and for high-frequency "clean-up" when used with a board-level filter
- **Medical** (in C, GG, L, M, and P series) – for medical equipment
- **Emissions/Linear** (in L and P series) – capable of bringing most digital equipment with linear power supplies into FCC compliance
- **Emissions/SMPS-FCC** (in P, LA and M series) – capable of bringing most digital equipment with switch-mode power supplies into FCC Class B compliance
- **Emissions/SMPS-VDE** (in P, LA and M series) – capable of bringing most digital equipment with switch-mode power supplies into VDE level B (as well as FCC Class B) compliance

Want more filtering options? Select a general purpose or an unfiltered module (C, CU, J, L, M, P, or SR series) and wire it up connect it to the load through one of the many Corcom chassis-mounted filter of your choice from the choices found in this comprehensive catalog. TE's Corcom product engineers can also design a custom filter for your specific applicaiton.

Available accessories expand your options even further. A Corcom product sales engineer can assist you with selecting the right filter for your application.

Having arrived at the best possible combination of power entry elements, TE's worldwide agency approvals will help ease your product through the necessary safety agencies. File numbers and Safety Agency information is listed in Section 7.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Selector Chart

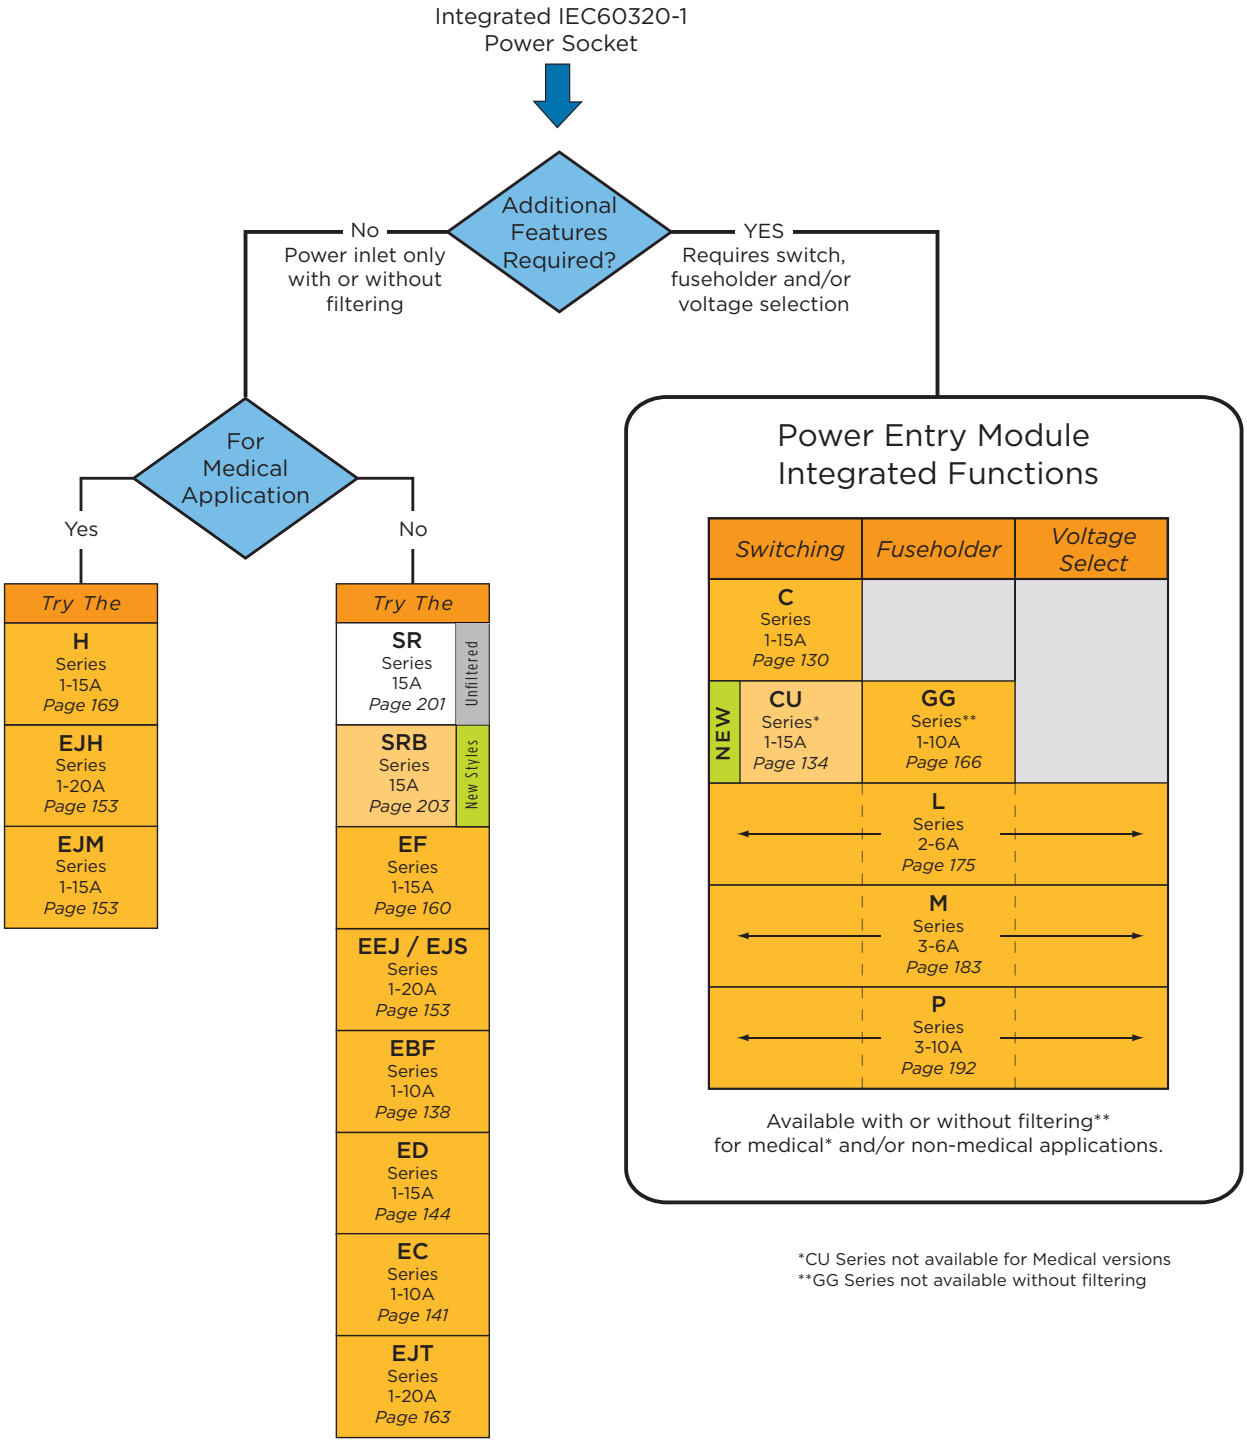

*CU Series not available for Medical versions
**GG Series not available without filtering

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Series	Unfiltered		Filtered			Options		
	Product Photo	Max. Current Rating	Product Photo	Max. Current Rating	Filter Type	On/Off Switch	Voltage Selections	Fuse Holder
C		15A **NEW**		10A	Medical & General Purpose	Yes DPST	N/A	N/A
CU **NEW**		15A		15A	General Purpose	Yes SPST	N/A	N/A
GG	Filtered Only			10A	Medical & General Purpose	N/A	N/A	Metric
L		6A		6A	Medical & General Purpose	Optional DPST	Single or 4	North American or Metric
M		6A		6A	Medical, General Purpose & Switch Mode Power Supply	Optional DPST	Single, 2 or 4	North American or Metric
P		10A		10A	Medical, General Purpose & Switch Mode Power Supply	Optional DPST	Single or 2	North American or Metric
New High Performance versions in PE and PM Mounting Styles								

N/A = Not Available

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

C Series

UL Recognized
CSA Certified
VDE Approved*

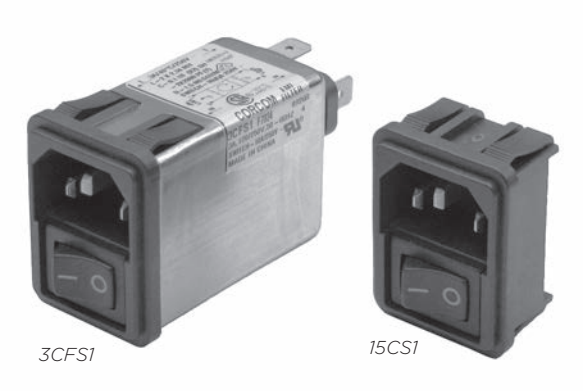

C Series

- Two function power entry module combining a DPST switch and an IEC 60320-1 inlet
- Snap-in or flange mounting
- Available with or without a shielded general purpose or medical grade filter
- Two element circuit provides enhanced EMI attenuation
- Reduce OEM wiring time with optional pre-connected line and switch terminals

Ordering Information

10 C F S 1

Output Styles
1 – Spade terminals *(size varies)*

Mounting Styles
E – Flange Mount
S – Snap-in

Filter Type or Terminal Option
F – General purpose
H – Medical
B – No filter, includes Pre-connected terminals
Omit if none

C Series

Current Rating
1, 3, 6, 10 or 15A
(Filtered versions up to 10A)

**15A versions are tested by Underwriters Laboratories to US and Canadian requirements and are VDE approved at 10A, 250VAC*

Specifications

Maximum leakage current each Line to Ground:

	F Models	H & Unfiltered
@ 120 VAC 60 Hz:	.25 mA	2 µA
@250 VAC 50 Hz:	.40 mA	5 µA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage: 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 1 to 15A*

Switch: DPST
10,000 operations at 51A max. inrush

.250 Terminal Push-on Force: 18 lb. / 80N (max.)

.188 Terminal Push-on Force: 15 lb. / 67N (max.)

Available Part Numbers

Filtered Versions	
1CHE1	1CFE1
3CHE1	3CFE1
6CHE1	6CFE1
10CHE1	10CFE1
1CHS1	1CFS1
3CHS1	3CFS1
6CHS1	6CFS1
10CHS1	10CFS1

Non-filtered Versions	
Standard Terminals	Pre-connected Terminals
10CS1	10CBS1
10CE1	10CBE1
15CS1	15CBS1
15CE1	15CBE1

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

C Series

Electrical Schematics

F Models

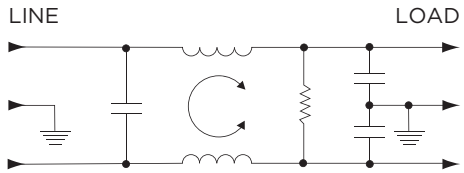

H Models

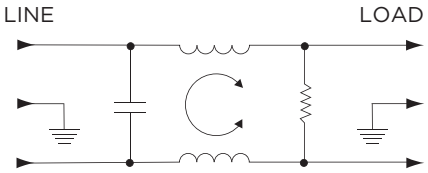

B Models

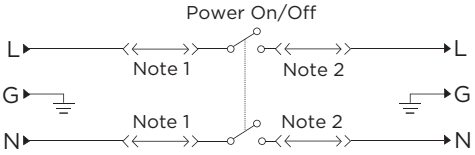

Note 1: Jumpers provided on CBS and CBE versions only
Note 2: Location of optional filter

Case Styles

CS, CBS

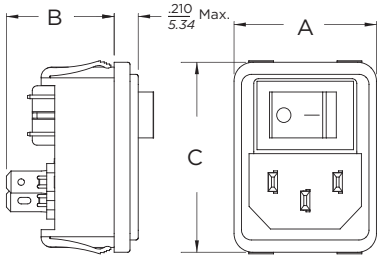

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Terminals (6):	.187 [*4.8*] with .055 [*1.4*] Dia. hole
Ground Terminal (1):	.187 [*4.8*] with .112 x .06 [*2.8 x 1.5*] slot

CE, CBE

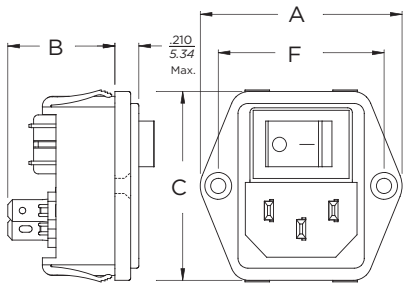

Typical Dimensions:

Mounting holes (2):	.13 [*3.3*] Dia. with .23 [*5.9*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Terminals (6):	.187 [*4.8*] with .055 [*1.4*] Dia. hole
Ground Terminal (1):	.187 [*4.8*] with .112 x .06 [*2.8 x 1.5*] slot

CFS, CHS

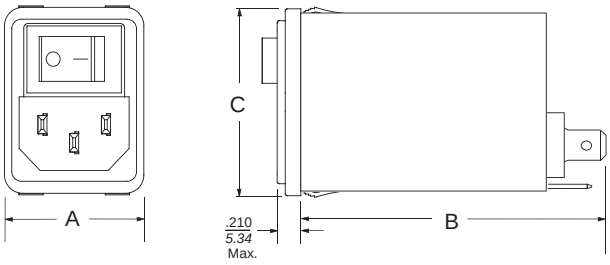

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Terminals (3):	.25 [*6.35*] with .07 [*1.8*] Dia. hole

CFE, CHE

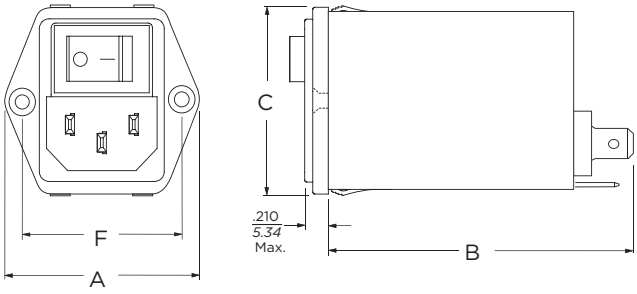

Typical Dimensions:

Mounting holes (2):	.13 [*3.3*] Dia. with .23 [*5.9*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Terminals (3):	.25 [*6.35*] with .07 [*1.8*] Dia. hole

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

C Series

Case Styles *(continued)*

CBS, CBE Pre-Connected Terminals

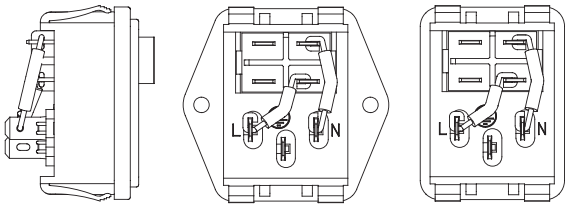

CBS, CBE Side View | CBE Rear View | CBS Rear View

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D ± .01 ± .254	E ± .01 ± .254	F ± .006 ± .152
CS, CBS	**1.22** *31.0*	**.93** *23.6*	**1.62** *41.2*	**1.06** *26.92*	**1.54*** *39.12**	-
CE, CBE	**1.74** *44.2*	**.93** *23.6*	**1.62** *41.2*	**1.06** *26.92*	**1.56** *39.62*	**1.417** *36.0*
CFS, CHS	**1.22** *31.0*	**2.53** *64.3*	**1.62** *41.2*	**1.12** *28.5*	**1.54*** *39.12**	-
CFE, CHE	**1.74** *44.2*	**2.53** *64.3*	**1.62** *41.2*	**1.12** *28.5*	**1.56** *39.62*	**1.417** *36.0*

+ .000 [.000*] / - .008 [*.20*]

Recommended Panel Cutout

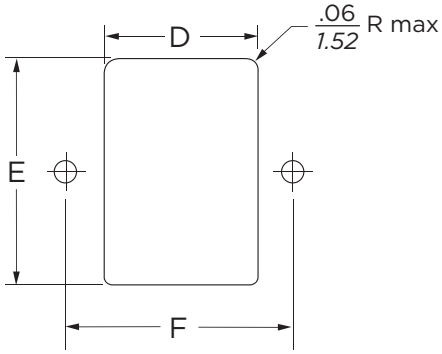

Panel Thickness: .031 - .098 [*0.8 - 2.5*]
Not recommended for plastic panels.
Snap–in models suitable for front mounting only.
For Snap–in applications, the D sides of the cutout must have a .02 [*.508*] radius on the installation side.

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord



Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

C Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

1CF



3CF



6CF



10CF



1CH



3CH



6CH



10CH



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .05	.15	.5	1	5	10	30
F Models							
1A	10	26	46	48	46	47	46
3A	8	16	32	36	43	48	50
6A	4	11	22	27	36	41	50
10A	1	4	14	18	27	33	42
H Models							
1A	16	21	37	44	26	21	10
3A	9	14	31	32	26	24	14
6A	4	10	22	23	19	18	13
10A	2	6	10	15	11	11	9

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .05	.15	.5	1	5	10	30
F Models							
1A	1	3	13	28	62	67	42
3A	2	6	14	23	65	65	67
6A	2	6	14	27	46	48	58
10A	1	7	14	23	42	44	62
H Models							
1A	1	6	13	29	38	42	26
3A	1	5	10	22	36	34	36
6A	1	5	14	20	31	33	37
10A	1	4	11	19	32	37	38

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

Compact 1U Height Switched Power Entry Module

CU Series

UL Recognized
CSA Certified
VDE Approved*

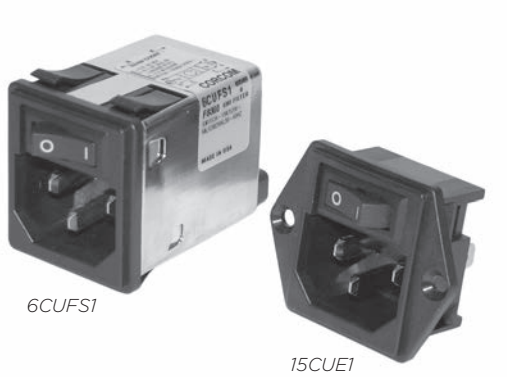

6CUFS1

15CUE1

CU Series

- Designed for popular 1U (1 ¾") height rack mounted equipment
- Two function power entry module combining a SPST switch and an IEC 60320-1 inlet
- Snap–in, flange and flush mounting
- Reduce OEM wiring time with optional pre–connected line and switch terminals

Ordering Information

15 CU 10 B S 1

Output Styles
1 – .187 [*4.8*] spade terminals

Mounting Styles
E – Flange Mount *(Horizontal)*
F – Flush Mount *(Filtered only)*
S – Snap–in

Filter Type or Terminal Option
F – General purpose
B – No filter, includes pre–connected terminals
Omit if none

Side Snap–in Option
Non-filtered versions only
10 – Side snaps *1.0mm max. panel*
15 – Side snaps *1.5mm max. panel*
Omit for none or standard configuration

CU Series

Current Rating
1, 3, 6, 10 or 15A

Specifications

Maximum leakage current each Line to Ground:

	Filtered	Unfiltered
@ 120 VAC 60 Hz:	.25 mA	2 µA
@250 VAC 50 Hz:	.40 mA	5 µA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Operating Voltage:	120/250 VAC
Operating Frequency:	50/60 Hz
Rated Current:	1 to 15A*
Switch:	50A inrush capable SPST
Terminal Push–on Force:	15 lb. / 67N (max.)

Available Part Numbers

Filtered Versions		
1CUFE1	1CUFF1	1CUFS1
3CUFE1	3CUFF1	3CUFS1
6CUFE1	6CUFF1	6CUFS1
10CUFE1	10CUFF1	10CUFS1
15CUFE1	15CUFF1	15CUFS1

Non–filtered Versions	
Standard Terminals	Pre–connected Terminals
15CUE1	15CUBE1
15CUS1	15CUBS1
15CU10S1	15CU10BS1
15CU15S1	15CU15BS1

**15A versions are tested by Underwriters Laboratories to US and Canadian requirements and are VDE approved at 10A, 250VAC*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

CU Series

Electrical Schematic

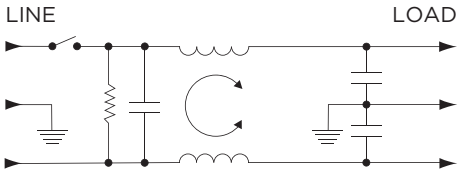

Case Styles

CUFE1

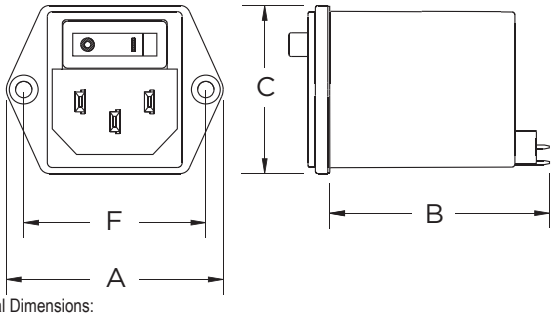

Typical Dimensions:

Mounting holes (2):	.138 [*3.5*] Dia. with .228 [*5.8*] Dia. x 90° countersink for M3 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Terminals (2):	.187 [*4.8*] with .055 [*1.4*] Dia. hole
Ground Terminal (1):	.187 [*4.8*] with .112 x .06 [*2.8 x 1.5*] slot
Output Shroud:	.21 x .34 [*5.2 x 8.6*] inside dimension

CUFF1

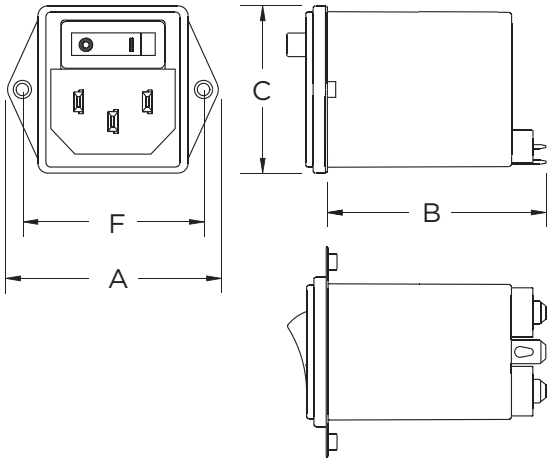

For rear mounted applications only. Maximum panel thickness: .157 [*4.0*]

Typical Dimensions:

Mounting Holes(2):	M3 x 0.5 Threaded flange
Line Inlet (1):	IEC 60320-1 C14
Terminals (2):	.187 [*4.8*] with .055 [*1.4*] Dia. hole
Ground Terminal (1):	.187 [*4.8*] with .112 x .06 [*2.8 x 1.5*] slot
Output Shroud:	.21 x .34 [*5.2 x 8.6*] inside dimension

CUFS1

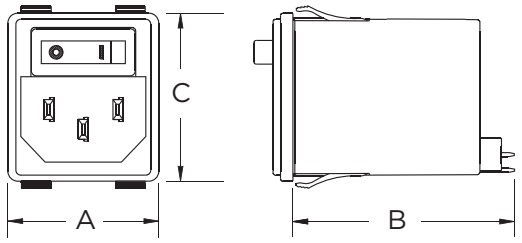

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Terminals (2):	.187 [*4.8*] with .055 [*1.4*] Dia. hole
Ground Terminal (1):	.187 [*4.8*] with .112 x .06 [*2.8 x 1.5*] slot
Output Shroud:	.21 x .34 [*5.2 x 8.6*] inside dimension

CUE1

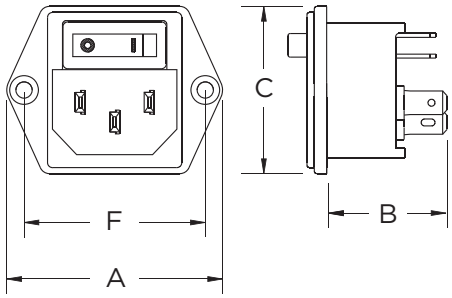

Note: Switch output terminal configuration may vary

Typical Dimensions:

Mounting holes (2):	.138 [*3.5*] Dia. with .228 [*5.8*] Dia. x 90° countersink for M3 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Terminals (4):	.187 [*4.8*] with .055 [*1.4*] Dia. hole
Ground Terminal (1):	.187 [*4.8*] with .112 x .06 [*2.8 x 1.5*] slot

CUS1

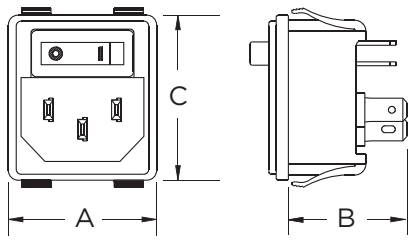

Note: Switch output terminal configuration may vary

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Terminals (4):	.187 [*4.8*] with .055 [*1.4*] Dia. hole
Ground Terminal (1):	.187 [*4.8*] with .112 x .06 [*2.8 x 1.5*] slot

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

CU Series

Case Styles *(continued)*

CU10S1 & CU15S1

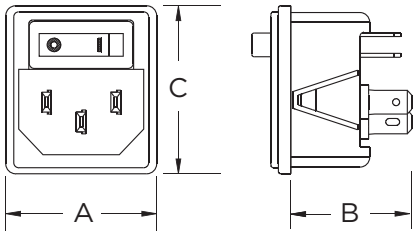

Available for panel thickness .07 - 1.0mm (CU10S1) or 1.2 - 1.5mm CU15S1
Note: Switch output terminal configuration may vary
Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Terminals (4):	.187 [*4.8*] with .055 [*1.4*] Dia. hole
Ground Terminal (1):	.187 [*4.8*] with .112 x .06 [*2.8 x 1.5*] slot

CUBE1 Pre-Connected Terminals

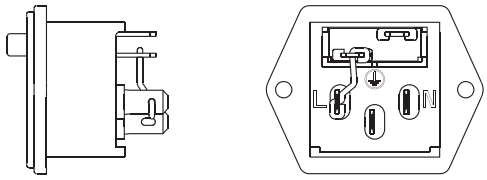

CUBS1 Pre-Connected Terminals

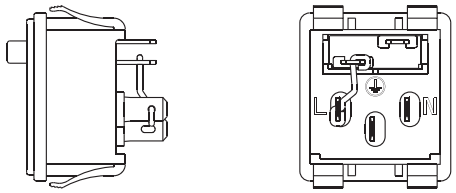

CU10BS1 & CU15BS1 Pre-Connected Terminals

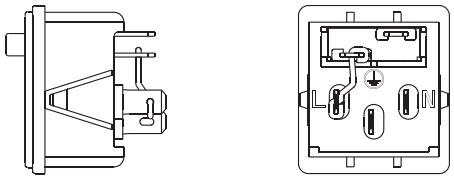

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D ± .004 ± .100	E ± .004 ± .100	F ± .004 ± .100
CUFE1	**1.73**	**1.75**	**1.34**	**1.11**	**1.26**	**1.45**
	43.9	*44.5*	*34.1*	*28.1*	*31.9*	*36.8*
CUFF1	**1.7**	**1.8**	**1.34**	**1.21**	**1.35**	**1.45**
	43.1	*45.0*	*34.1*	*30.8*	*34.3*	*36.8*
CUFS1	**1.20**	**1.8**	**1.34**	**1.11**	**1.26**	-
	30.6	*45.0*	*34.1*	*28.1*	*32.0*	
CUE1, CUBE1	**1.73**	**.96**	**1.34**	**1.06**	**1.09**	**1.45**
	43.9	*24.6*	*34.1*	*26.9*	*27.6*	*36.8*
CUS1, CUBS1	**1.20**	**0.97**	**1.34**	**1.04**	**1.26**	-
	30.6	*24.6*	*34.1*	*26.4*	*32.0*	
10CUS1, 10CUBS1	**1.20**	**0.97**	**1.34**	**1.05**	**1.24**	-
	30.6	*24.6*	*34.1*	*26.7*	*31.6*	
15CUS1, 15CUBS1	**1.20**	**0.97**	**1.34**	**1.05**	**1.24**	-
	30.6	*24.6*	*34.1*	*26.7*	*31.6*	

Recommended Panel Cutout

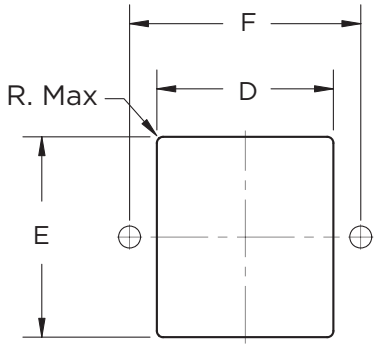

Model	Panel Thickness	R Dim.
CUFF1	.157 [*4.0*] max.	1.8 [*45.72*]
CUFS1, CUS1	.025 – .082 [*0.63 – 2.1*]	1.0 [*25.4*]
CU10S1	.028 – .039 [*0.7 – 1.0*]	1.0 [*25.4*]
CU15S1	.047 – .059 [*1.2 – 1.5*]	1.0 [*25.4*]

Note 1: CUFF1 allows for back mounting only
Note 2: All other models allow for front mounting only

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord



Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

CU Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

1CUF



3CUF



6CUF



10CUF



15CUF



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz						
	.05	.15	.05	1	5	10	30
1A	19	30	44	49	47	44	45
3A	13	23	37	43	47	44	49
6A	5	14	28	34	43	43	48
10A	1	7	19	25	35	36	52
15A	-	1	10	13	25	27	42

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz						
	.05	.15	.05	1	5	10	30
1A	1	10	21	26	48	51	60
3A	1	10	20	26	42	45	65
6A	1	10	20	23	38	41	65
10A	1	10	20	23	29	34	56
15A	1	10	20	23	28	39	54

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EBF Series

UL Recognized
CSA Certified
VDE Approved

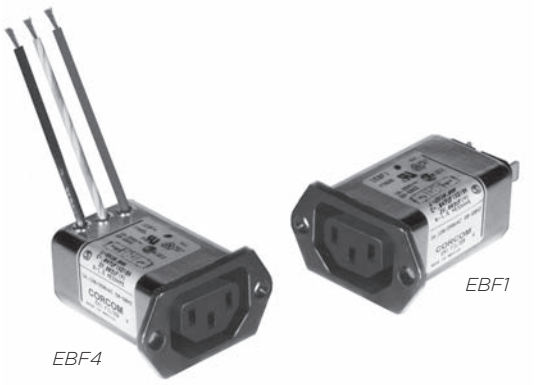

EBF Series

- Accessory IEC 60320-1 C13 filtered outlet
- Allows connection of accessories while filtering noise between a system and the accessory
- Enhanced performance across the frequency range
- Grounded connection
- Suitable for international usage

Ordering Information

3 EBF 1

- Output Styles
  - 1 – .250 [*6.3*] spade terminals
  - 4 – Wire leads *(bottom)*
- EBF Series
- Current Rating
  - 1, 3, 6, or 10A

Specifications

Maximum leakage current each Line to Ground:
@ 120 VAC 60 Hz: .25 mA
@250 VAC 50 Hz: .50 mA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max.): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 1 to 10A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematic

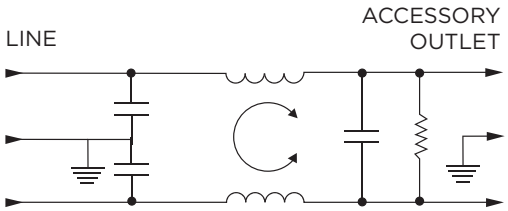

Available Part Numbers

1EBF1	1EBF4
3EBF1	3EBF4
6EBF1	6EBF4
10EBF1	10EBF4

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EBF Series

Case Styles

EBF1

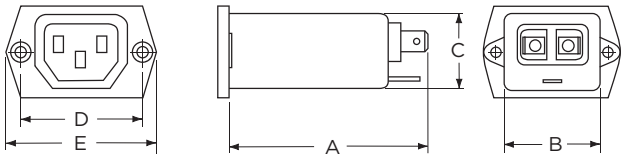

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Load Outlet (1):	IEC 60320-1 C13
Line Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

EBF4

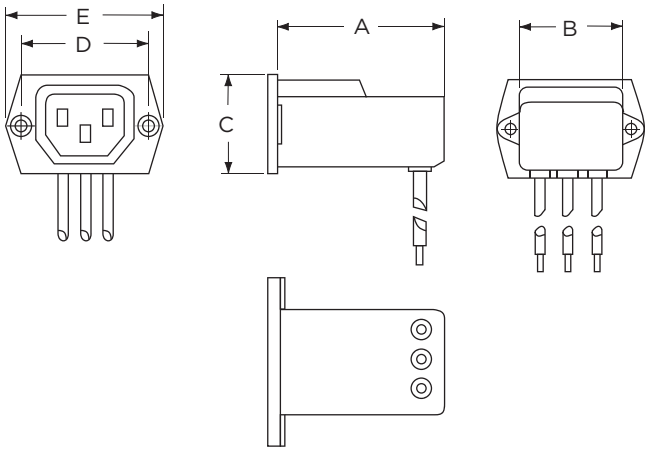

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Load Outlet (1):	IEC 60320-1 C13
Wire Leads (3):	10.0 [*254.0*] min., 18AWG, UL1015

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D ± .01 / ± .25	E (max.)
EBF1	**2.57**	**1.33**	**1.00**	**1.575**	**1.99**
	65.3	*33.8*	*25.4*	*40.01*	*50.5*
EBF4	**2.09**	**1.39**	**1.16**	**1.575**	**1.99**
	53.01	*35.31*	*29.46*	*40.01*	*50.5*

Recommended Panel Cutout

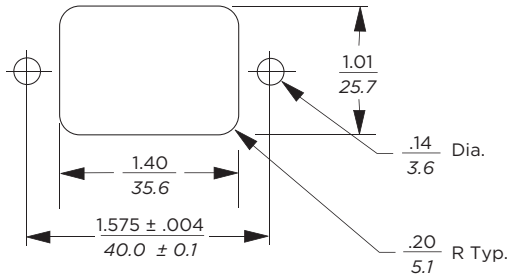

Front Mount Only
Tolerance + .008 [*.203*] / - .000 [*.000*]

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

EBF Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

1EBF



3EBF



6EBF



10EBF



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz						
	.05	.15	.5	1	5	10	30
1A	23	32	41	47	47	47	40
3A	10	19	30	36	48	50	47
6A	1	10	22	28	42	48	47
10A	1	5	14	20	32	38	47

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz						
	.05	.15	.5	1	5	10	30
1A	3	14	23	41	47	50	44
3A	2	11	14	25	38	44	40
6A	2	10	14	20	33	42	40
10A	2	10	16	19	19	39	40

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EC Series

UL Recognized
CSA Certified
VDE Approved

EC Series

- Three element differential mode circuit provides the highest attenuation of any available standard inlet filter
- High common mode inductance
- High differential mode capacitance
- Effective attenuation of Line to Ground and Line to Line noise across the frequency range
- Performance and application similar to the ED series but with higher differential mode performance
- Includes several termination options

Ordering Information

3 EC 1

Output Styles
1 – .250 [*6.3*] spade terminals *(back)*
2 – .250 [*6.3*] spade terminals *(bottom)*
4 – Wire leads *(bottom)*
8 – Wire leads *(back)*

EC Series

Current Rating
1, 3, 6, or 10A

Specifications

Maximum leakage current each Line to Ground:
@ 120 VAC 60 Hz: .25 mA
@250 VAC 50 Hz: .50 mA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max.): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 1 to 10A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematic

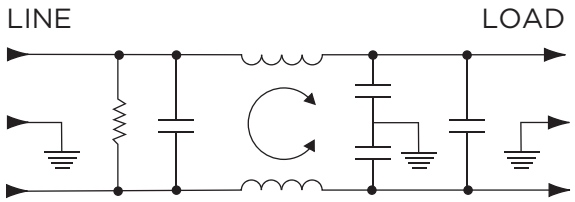

Available Part Numbers

1EC1	1EC2	1EC4	1EC8
3EC1	3EC2	3EC4	3EC8
6EC1	6EC2	6EC4	6EC8
10EC1			

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

EC Series

Case Styles

EC1

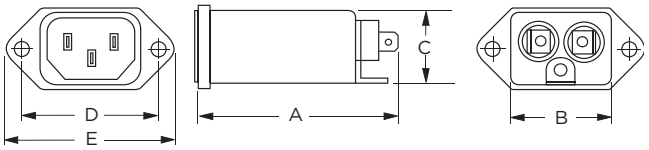

EC2

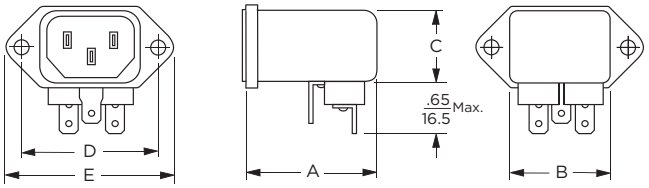

Typical Dimensions:

Line Inlet (1): IEC 60320-1 C14
Load Terminals (2): .250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1): .250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

EC4

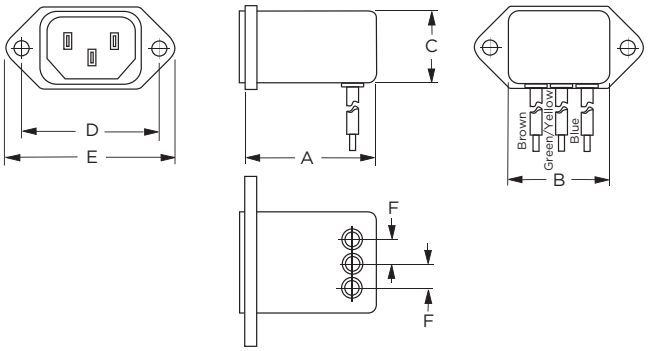

EC8

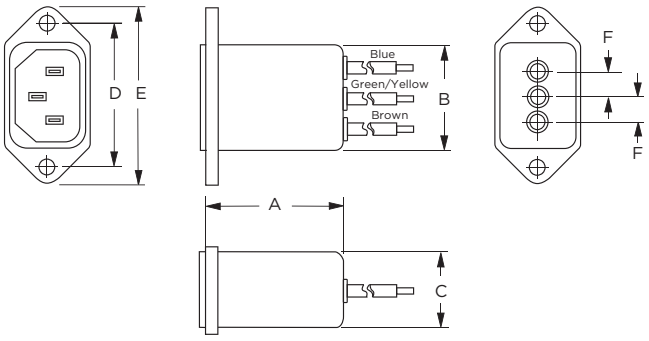

Typical Dimensions:

Line Inlet (1): IEC 60320-1 C14
Wire Leads: 4.0 [*101.6*] Min., 18AWG, UL1015

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D ± .015 / ± .38	E (max.)	F (ref.)
EC1	**2.62** *66.5*	**1.19** *30.2*	**0.81** *20.6*	**1.575** *40.01*	**1.98** *50.3*	–
EC2	**1.97** *50.0*	**1.19** *30.2*	**0.85** *21.6*	**1.575** *40.01*	**1.98** *50.3*	–
EC4	**1.97** *50.0*	**1.19** *30.2*	**0.85** *21.6*	**1.575** *40.01*	**1.98** *50.3*	**.295** *7.5*
EC8	**1.98** *50.0*	**1.19** *30.2*	**0.81** *20.6*	**1.575** *40.01*	**1.98** *50.3*	**.298** *7.5*

Recommended Panel Cutouts

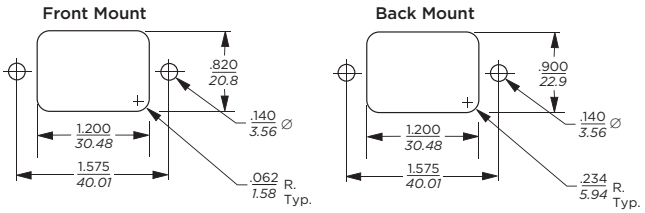

Tolerances ± .005 [*0.13*] unless otherwise noted

Note 1: EC1 and EC8 allow for front or back mounting
Note 2: EC2 and EC4 allow for back mounting only

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord

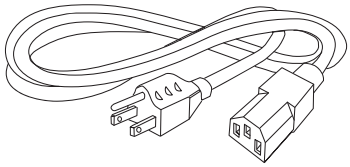

FA601: Insulating Shroud

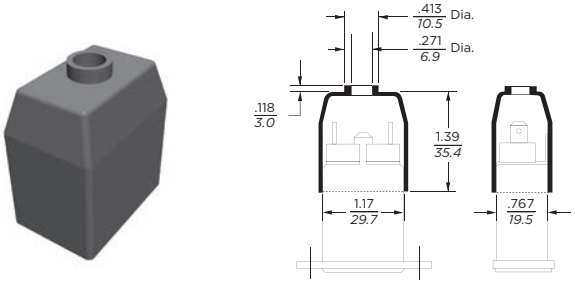

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EC Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

1EC



3EC



6EC



10EC



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .15	.5	1	5	10	30
1A	25	35	40	50	50	50
3A	20	30	37	47	48	50
6A	15	22	25	40	45	50
10A	7	14	20	35	39	48

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .15	.5	1	5	10	20	30
EC1, EC2 & EC8							
1A	5	35	50	60	60	40	40
3A	5	25	45	60	55	34	34
6A	10	10	40	65	60	40	40
10A	10	10	27	65	56	38	38
EC4							
1A	5	35	50	60	60	33	33
3A	5	30	45	60	55	34	34
6A	10	10	40	65	60	33	33

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

ED Series

UL Recognized
CSA Certified
VDE Approved*

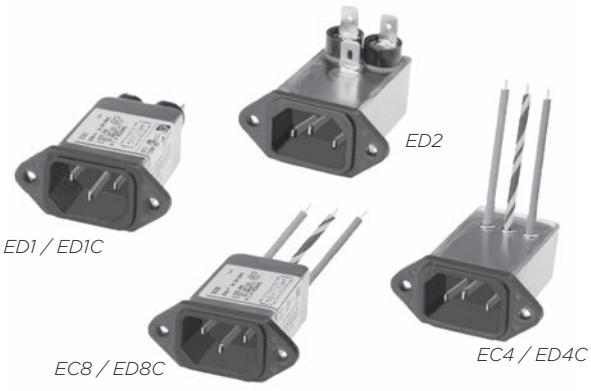

ED Series

- Two element circuit provides medium attenuation
- Available with an internal ground-circuit inductor (C versions) to isolate equipment chassis from power line ground at radio frequencies
- Versions up to 15A*
- Similar to EEJ Series with alternative termination options
- See the EC Series for better differential mode performance

Ordering Information

3 ED 1 C

- **Ground Circuit Inductor**
  Omit if none
- **Output Styles**
  1 – .250 [*6.3*] spade terminals *(back)*
  2 – .250 [*6.3*] spade terminals *(bottom)*
  4 – Wire leads *(bottom)*
  8 – Wire leads *(back)*
- **ED Series**
- **Current Rating**
  1, 3, 6, 10 or 15A

**15A versions are tested by Underwriters Laboratories to US and Canadian requirements and are VDE approved at 10A, 250VAC*

Specifications

Maximum leakage current each Line to Ground:
@ 120 VAC 60 Hz: .22 mA
@250 VAC 50 Hz: .38 mA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max.): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 1 to 15A*

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Available Part Numbers

1ED1	1ED2	1ED4	1ED8
3ED1	3ED2	3ED4	3ED8
6ED1	6ED2	6ED4	6ED8
10ED1			
15ED1			15ED8
Ground Circuit Inductor Versions			
6ED1C		6ED4C	6ED8C
10ED1C			

Electrical Schematic

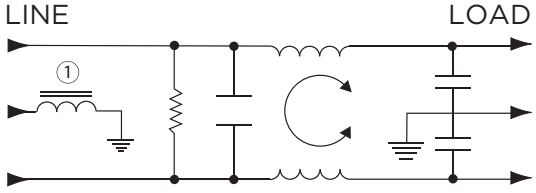

Note 1: C versions only

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

ED Series

Case Styles

ED1 & ED1C

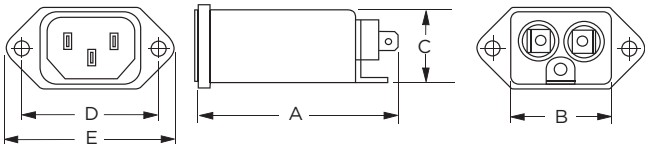

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

ED2

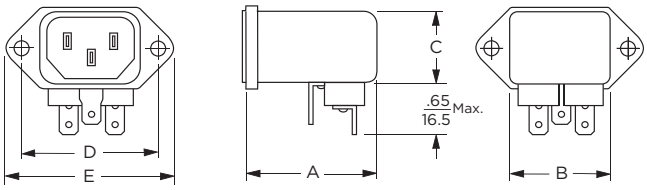

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

ED4 & ED4C

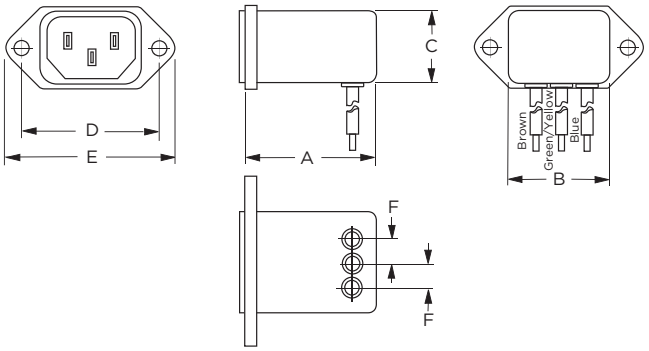

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Wire Leads:	4.0 [*101.6*] Min., 18AWG, UL1015

ED8 & ED8C

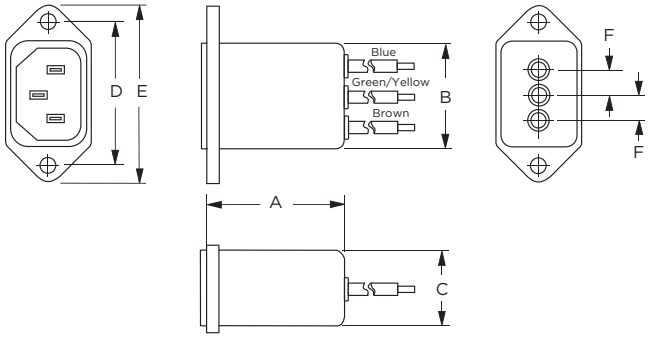

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Wire Leads:	4.0 [*101.6*] Min., 18AWG, UL1015

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D ± .015 ± .38	E (max.)	F (ref.)
1ED1, 3ED1, 6ED1	**2.21** *56.0*	**1.19** *30.2*	**0.81** *20.6*	**1.575** *40.01*	**1.98** *50.3*	-
1ED2, 3ED2, 6ED2	**1.55** *39.4*	**1.19** *30.2*	**0.85** *21.6*	**1.575** *40.01*	**1.98** *50.3*	-
1ED4, 3ED4, 6ED4	**1.55** *39.4*	**1.19** *30.2*	**0.85** *21.6*	**1.575** *40.01*	**1.98** *50.3*	**.295** *7.5*
1ED8, 3ED8, 6ED8	**1.55** *39.4*	**1.19** *30.2*	**0.81** *20.06*	**1.575** *40.01*	**1.98** *50.3*	**.295** *7.5*
6ED1C	**2.62** *66.5*	**1.19** *30.2*	**0.81** *20.6*	**1.575** *40.01*	**1.98** *50.3*	-
6ED4C	**1.98** *50.3*	**1.19** *30.2*	**0.85** *21.6*	**1.575** *40.01*	**1.98** *50.3*	**.295** *7.5*
6ED8C	**1.98** *50.3*	**1.19** *30.2*	**0.81** *20.06*	**1.575** *40.01*	**1.98** *50.3*	**.295** *7.5*
10ED1 /1C, 15ED1	**2.62** *66.5*	**1.19** *30.2*	**0.81** *20.6*	**1.575** *40.01*	**1.98** *50.3*	-
15ED8	**1.98** *1.98*	**1.19** *1.19*	**0.81** *0.81*	**1.575** *1.575*	**1.98** *1.98*	-

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

ED Series

Recommended Panel Cutouts

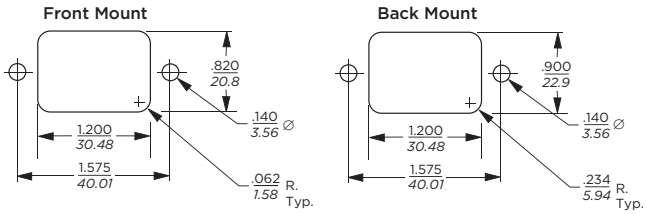

Tolerances ± .005 [*0.13*] unless otherwise noted

Note 1: ED1 and ED8 allow for front or back mounting
Note 2: ED2 and ED4 allow for back mounting only

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord

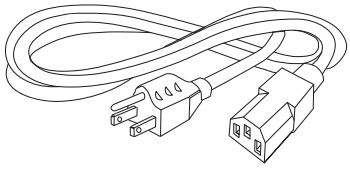

FA601: Insulating Shroud

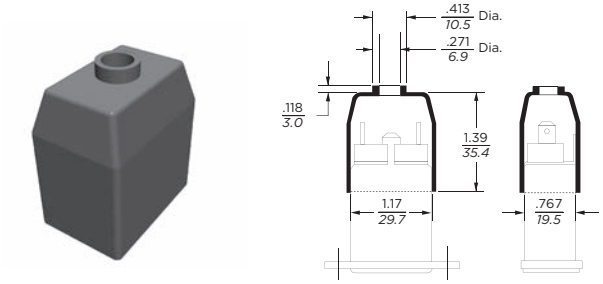

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

1ED



3ED



6ED



6ED1C



10ED1 & 10ED1C



15ED



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

ED Series

Performance Data *(continued)*

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz					
	.15	.5	1	5	10	30
ED1, ED2, ED4 & ED8						
1A	24	35	42	49	52	54
3A	20	29	36	45	50	54
6A	14	23	30	41	45	50
10A	8	14	20	35	39	45
15A	4	9	12	28	34	40
ED1C						
6A	14	20	25	37	42	50
10A	8	14	20	35	39	45
ED4C & ED8C						
6A	14	20	25	37	42	50

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz					
	.15	.5	1	5	10	30
ED1, ED2, ED4 & ED8						
1A	3	15	20	37	37	36
3A	3	15	20	37	37	36
6A	3	15	20	31	35	34
10A	6	15	20	23	44	47
15A	6	18	23	33	44	47
ED1C						
6A	7	17	23	36	42	42
10A	6	15	20	23	44	47
ED4C & ED8C						
6A	7	17	23	29	38	42

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

EEA & EEB Series

Including the EAS/EBS and EAH/EBH Models

UL Recognized
CSA Certified
VDE Approved

EEA2 / EEB2 — EEA1 / EEB1 — EEAP / EEBP

EEA Series

- Compact single stage EMI filter with IEC 60320-1 C14 inlet
- Two element circuit provides basic attenuation
- Same performance as the EF Series
- Available in three terminal configurations
- Supersedes EF Series

EEB Series

- Compact EMI filter with IEC 60320-1 C14 inlet
- Two element circuit provides extended attenuation
- Extended differential mode performance
- Available in three terminal configurations

EAS & EBS Models

- Same performance as EEA and EEB Series
- Snap–in mounting
- Spade terminals

EAH & EBH Models

- Same size as EEA and EEB
- Minimal leakage current suitable for medical applications
- Flange mounted
- Spade terminals

Specifications

Maximum leakage current each Line to Ground:

	EEA/EEB EAS/EBS	EAH/EBH
@ 120 VAC 60 Hz:	.22 mA	2 µA
@ 250 VAC 50 Hz:	.38 mA	5 µA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max.): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 1 to 10A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematic

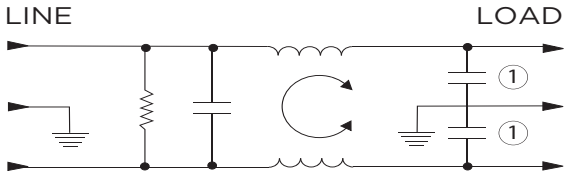

Note 1: Not present in EAH / EBH versions

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EEA & EEB Series

Ordering Information

3 EEB 1

Output Styles
1 – .250 [*6.3*] spade terminals *(back)*
2 – .250 [*6.3*] spade terminals *(bottom)*
P – PC board pins

Series
EEA – Basic Inlet Filter
EAS – Snap-in EEA Filter
EAH – Medical EEA Filter
EEB – Extended EMI Performance
EBS – Snap-in EEB Filter
EBH – Medical EEB Filter

Current Rating
1, 3, 6, or 10A

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord

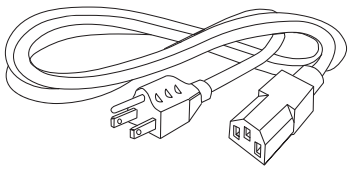

FA601: Insulating Shroud





Available Part Numbers

EEA Models	EEB Models
1EEA1	1EEB1
1EEA2	1EEB2
1EEAP	1EEBP
3EEA1	3EEB1
3EEA2	3EEB2
3EEAP	3EEBP
6EEA1	6EEB1
6EEA2	6EEB2
6EEAP	6EEBP
10EEA1	10EEB1
10EEA2	10EEB2
10EEAP	10EEBP
EAS Models	**EBS Models**
1EAS1	1EBS1
3EAS1	3EBS1
6EAS1	6EBS1
10EAS1	10EBS1
EAH Models	**EBH Models**
1EAH1	1EBH1
3EAH1	3EBH1
6EAH1	6EBH1
10EAH1	10EBH1

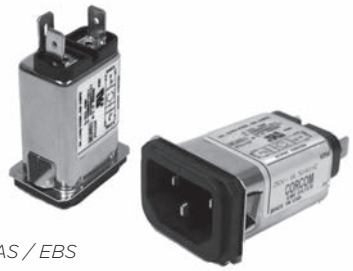

EAS / EBS

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

EEA & EEB Series

Case Styles

EEA1, EEB1, EAH1 & EBH1

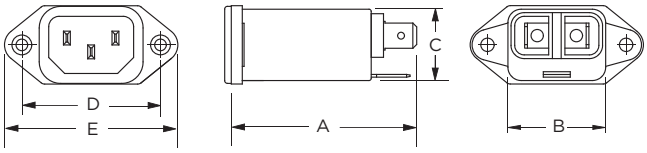

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

EEA2 & EEB2

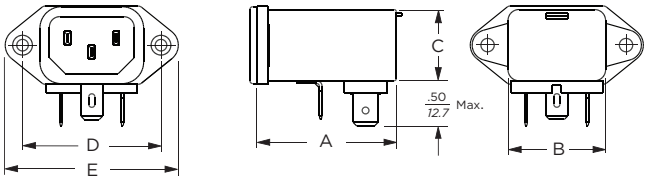

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

EEAP & EEBP

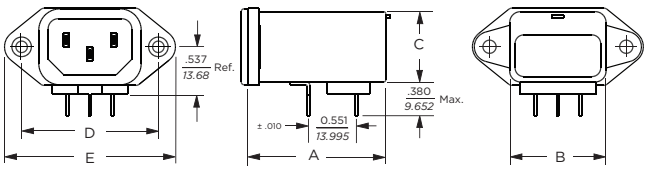

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
PC board pins (3):	.031 [*.07*] square, ± .003 [*.07*]

EAS1 & EBS1

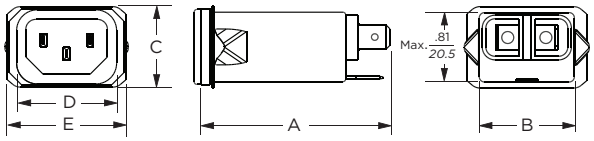

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D ± .010 / ± .25	E (max.)
EEA1, EEB1, EAH1, EBH1	**2.15** *54.6*	**1.12** *28.4*	**0.81** *20.6*	**1.575** *40.01*	**1.98** *50.3*
EEA2, EEB2	**1.54** *39.1*	**1.12** *28.4*	**0.81** *20.6*	**1.575** *40.01*	**1.98** *50.3*
EEAP, EEBP	**1.54** *39.1*	**1.12** *28.4*	**0.81** *20.6*	**1.575** *40.01*	**1.98** *50.3*
EAS1, EBS1	**2.20** *55.88*	**1.15** *29.2*	**.96** *24.38*	**1.185** *30.10*	**1.41** *35.81*

Recommended Panel Cutouts

EEA, EEB, EAH, EBH

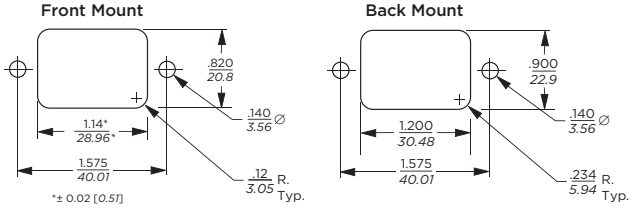

Tolerances ± .005 [*0.13*] unless otherwise noted

Note 1: EEA1, EEB1, EAH1, EBH1 can be front or back mounted
Note 2: EEA2, EEB2, EEAP and EEBP can be back mounted only

EAS, EBS



Front Mount only

Panel Thickness	G Dim. ± .002 [*.05*]
0.031 - 0.052 [*0.79 - 1.32*]	1.260 [*32.00*]
0.046 - 0.068 [*1.17 - 1.73*]	1.350 [*34.29*]

PC Board Layout



Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EEA & EEB Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

EEA, EAS Models

1A



3A



6A



10A



EEB, EBS Models

1A



3A



6A



10A



EAH Models

1A



3A



6A



10A



EBH Models

1A



3A



6A



10A



Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EEA & EEB Series

Performance Data *(continued)*

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .01	.05	.1	.15	.5	1	5	10	30
EEA / EAS Models									
1A	12	23	29	32	41	47	47	47	40
3A	-	10	15	19	30	36	48	50	47
6A	-	1	4	10	22	28	42	48	47
10A	-	1	3	5	14	20	32	38	47
EEB / EBS Models									
1A	12	23	29	32	41	47	47	47	40
3A	-	10	14	18	30	36	48	50	47
6A	-	1	4	10	22	28	42	48	47
10A	-	1	3	5	14	20	32	38	47
EAH Models									
1A	8	21	29	32	42	45	32	30	19
3A	-	5	10	15	25	27	30	27	22
6A	-	-	5	6	19	21	24	20	15
10A	-	-	1	5	9	12	12	12	12
EBH Models									
1A	8	21	29	32	42	45	32	25	19
3A	-	5	10	15	25	27	30	27	22
6A	-	-	5	8	17	20	24	23	18
10A	-	-	-	3	8	12	12	12	12

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .5	1	1.5	3	5	10	30
EEA / EAS Models							
1A	1	9	19	32	42	45	40
3A	2	4	6	20	35	45	40
6A	2	4	6	6	24	40	40
10A	1	4	5	5	5	30	40

	Frequency – MHz .01	.15	.5	1	3	5	10	30
EEB / EBS Models								
1A	1	3	14	23	41	47	50	44
3A	1	2	11	14	25	38	44	40
6A	1	2	10	14	20	33	42	40
10A	1	2	10	16	19	19	39	40

	Frequency – MHz 1	1.5	5	10	30
EAH Models					
1A	5	13	28	32	25
3A	4	6	20	27	28
6A	2	5	19	25	27
10A	1	5	15	22	27

	Frequency – MHz .15	.5	1	10	10	30
EBH Models						
1A	1	10	18	30	31	31
3A	1	10	18	30	31	31
6A	1	10	18	30	31	31
10A	1	10	18	30	31	31

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EEJ Series

Including the EJH/EJHS, EJM/EJMS and EJS Models

UL Recognized
CSA Certified
VDE Approved*

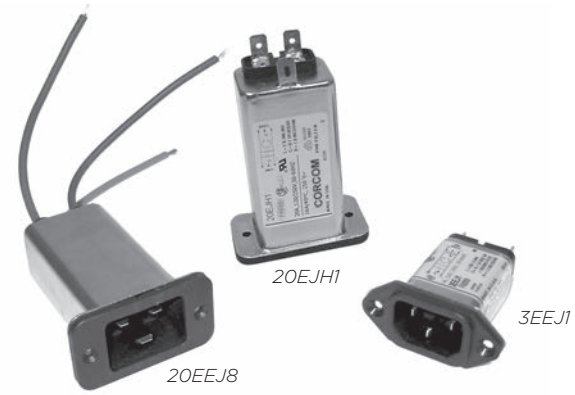

EEJ Series

- Compact EMI filter with IEC 60320-1 C14 Inlet
- Enhanced two element circuit provides medium attenuation to 30MHz
- Compact and cost-effective design
- Supersedes most ED Series versions
- Includes 20A version with standard IEC 60320-1 C20 inlet
- Several termination styles
- Flanged mounting

EJS Models

- Same performance as the EEJ Series
- Snap-in mounting
- Several termination styles
- Includes 20A version with standard IEC 60320-1 C20 inlet

EJH & EJHS Models

- Minimal leakage current suitable for patient-contact medical applications
- Flanged mounting the same as the EEJ Series
- Also available in snap-in versions (EJHS)
- Two element circuit provides modest EMI attenuation above 1MHz
- Capacitive input (refer to the H Series for capacitive output)
- EJHS models feature snap-in mounting

EJM & EJMS Models

- Low leakage current, suitable for most medical applications
- Improved EMI attenuation up to 200MHz
- Mechanically the same as the EEJ Series with flange or snap-in mounting
- EJMS models feature snap-in mounting

Specifications

Maximum leakage current each Line to Ground:

	EEJ/EJS	EJH	EJM
@ 120 VAC 60 Hz:	.22 mA	2 µA	.01 mA
@250 VAC 50 Hz:	.38 mA	5 µA	.017 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max.): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 1 to 20A*

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C

In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematic

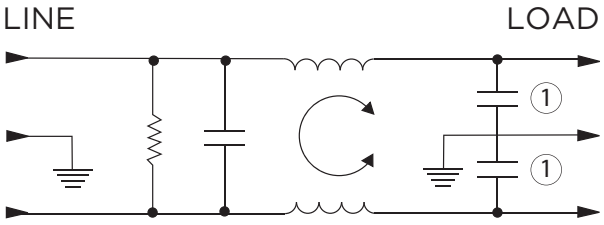

Note 1: Not present in EJH versions

**15A versions are tested by Underwriters Laboratories to US and Canadian requirements and are VDE approved at 10A, 250VAC*
20A versions are tested by Underwriters Laboratories to US and Canadian requirements and are VDE approved at 16A, 250VAC

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

EEJ Series

Including the EJH/EJHS, EJM/EJMS and EJS Models

Ordering Information

3 EEJ 1

Output Styles
1 – .250 [*6.3*] spade terminals *(back)*
2 – .250 [*6.3*] spade terminals *(bottom)*
P – PC board pins
8 – Wire leads

Series
EEJ – Enhanced EMI Inlet Filter
EJS – EEJ in Snap-in Mounting
EJH – Enhanced Medical Inlet Filter
EJHS – EJH in Snap–in Mounting
EJM – Extended Performance Medical Inlet Filter
EJMS – EJM in Snap-in Mounting

Current Rating
1, 3, 6, 10, 15 or 20A

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord

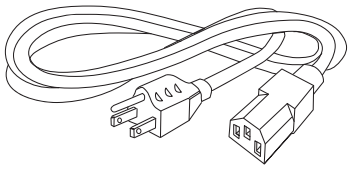

FA601: Insulating Shroud





Available Part Numbers

EEJ Models	EJH Models
1EEJ1	1EJH1
1EEJ2	1EJH2
1EEJP	1EJHP
1EEJ8	1EJH8
3EEJ1	3EJH1
3EEJ2	3EJH2
3EEJP	3EJHP
3EEJ8	3EJH8
6EEJ1	6EJH1
6EEJ2	6EJH2
6EEJP	6EJHP
6EEJ8	6EJH8
10EEJ1	10EJH1
10EEJ2	10EJH2
10EEJP	10EJHP
10EEJ8	10EJH8
15EEJ1	15EJH1
15EEJ2	15EJH2
15EEJP	15EJHP
15EEJ8	15EJH8
20EEJ1	20EJH1
20EEJ8	20EJH8
EJS Models	**EJHS Models**
1EJS1	1EJHS1
1EJS8	1EJHS8
3EJS1	3EJHS1
3EJS8	3EJHS8
6EJS1	6EJHS1
6EJS8	6EJHS8
10EJS1	10EJHS1
10EJS8	10EJHS8
15EJS1	15EJHS1
15EJS8	15EJHS8
20EJS1	
20EJS8	
EJM Models	**EJMS Models**
1EJM1	1EJMS1
1EJM8	1EJMS8
3EJM1	3EJMS1
3EJM8	3EJMS8
6EJM1	6EJMS1
6EJM8	6EJMS8
10EJM1	10EJMS1
10EJM8	10EJMS8
15EJM1	15EJMS1
15EJM8	15EJMS8

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

EEJ Series

Including the EJH/EJHS, EJM/EJMS and EJS Models

Case Styles

EEJ1, EJH1 & EJM1 *(1-15A)*

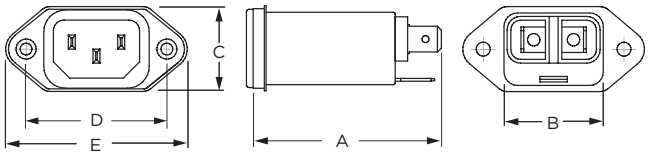

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

EEJ2 & EJH2 *(1-15A)*

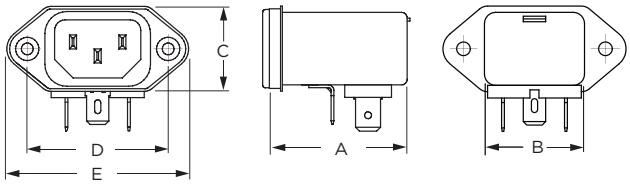

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

EEJP & EJHP *(1-15A)*

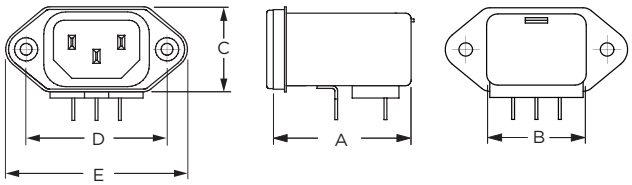

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
PC board pins (3):	.031 [*.07*] square, ± .003 [*.07*]

EJS1, EJHS1 & EJMS1 *(1-15A)*

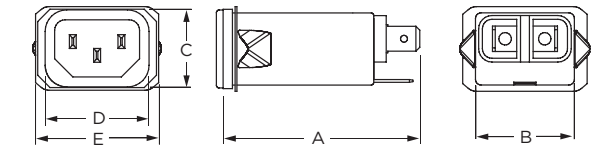

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

EEJ8, EJH8 & EJM8 *(1-15A)*

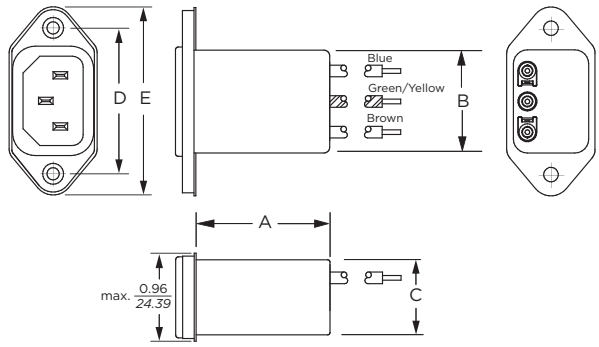

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Wire Leads:	4.0 [*101.6*] Min., 18AWG, UL1015

EJS8, EJHS8 & EJMS8 *(1-15A)*

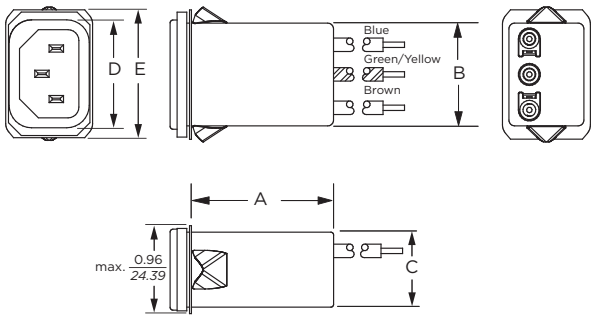

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Wire Leads:	4.0 [*101.6*] Min., 18AWG, UL1015

20EEJ1 & 20EJH1

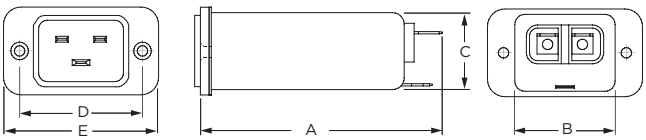

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C20
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

EEJ Series

Including the EJH/EJHS, EJM/EJMS and EJS Models

Case Styles *(continued)*

20EJS1

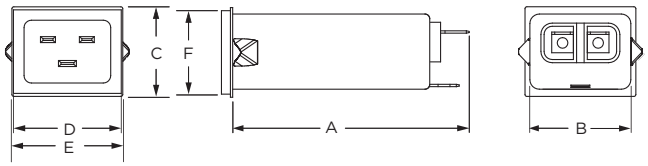

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C20
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

20EEJ8 & 20EJH8

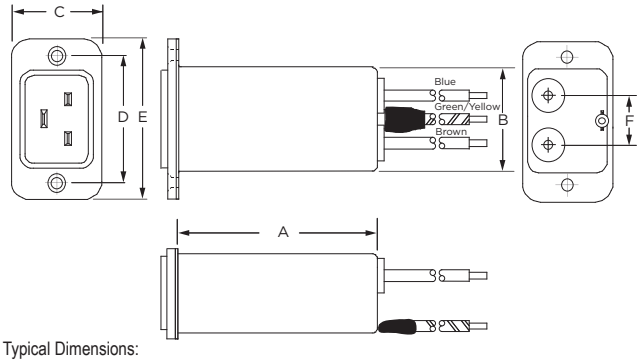

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C20
Wire Leads:	4.0 [*101.6*] Min., 14AWG, UL1015

20EJS8

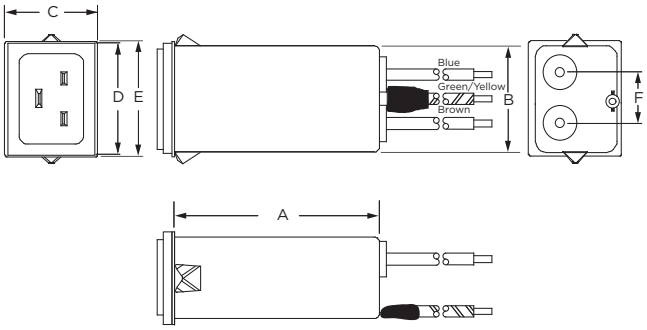

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C20
Wire Leads:	4.0 [*101.6*] Min., 14AWG, UL1015

Recommended Panel Cutouts

1 to 15A EEJ, EJH & EJM

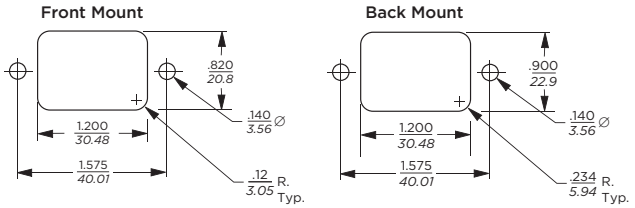

Tolerances ± .005 [*0.13*] unless otherwise noted

Note 1: EEJ/EJH/EJM1 and EEJ/EJH/EJM8 can be front or back mounted
Note 2: EEJ/EJH2 and EEJ/EJHP can be back mounted only

20A EEJ & EJH

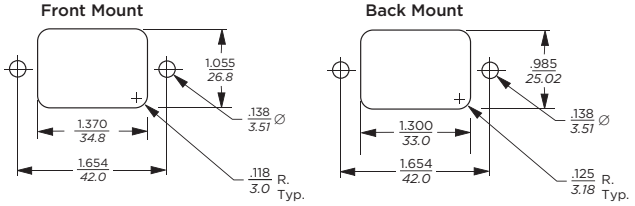

Tolerances ± .005 [*0.13*] unless otherwise noted

Note 1: 20EEJ/EJH1 and 20EEJ/EJH8 can be front or back mounted

1 to 15A EJHS, EJMS & EJS



Tolerance ±.002 *[.050]*

Front Mount only

Panel Thickness	G Dim. ± .002 [*.05*]
0.031 - 0.052 [*0.79 - 1.32*]	1.260 [*32.00*]
0.046 - 0.068 [1.17 - 1.73]	1.350 [*34.29*]

Alternate snap configurations to fit other cut-out sizes also available. Contact TE's Corcom product engineering group for more details.

20A EJS



Tolerance ±.002 *[.050]*

Front Mount only

Panel Thickness
0.031 - 0.047 [*0.79 - 1.19*]

PC Board Layout



*±.015 [*0.38*]

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EEJ Series

Including the EJH/EJHS, EJM/EJMS and EJS Models

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D ± .015 / ± .38	E (max.)	F (ref.)
EEJ1, EJH1	**2.15** *54.61*	**1.13** *28.70*	**0.96** *24.38*	**1.580** *40.00*	**2.04** *51.76*	–
EJM1	**2.02** *51.3*	**1.13** *28.7*	**0.96** *24.4*	**1.58** *40.00*	**2.04** *51.8*	–
1-10A EEJ2, EJH2	**1.54** *39.12*	**1.13** *28.70*	**0.96** *24.38*	**1.580** *40.00*	**2.04** *51.76*	–
15A EEJ2, EJH2	**1.79** *45.47*	**1.13** *28.70*	**0.96** *24.38*	**1.580** *40.00*	**2.04** *51.76*	–
1-10A EEJP, EJHP	**1.54** *39.12*	**1.13** *28.70*	**0.96** *24.38*	**1.580** *40.00*	**2.04** *51.76*	–
15A EEJP, EJHP	**1.79** *45.47*	**1.13** *28.70*	**0.96** *24.38*	**1.580** *40.00*	**2.04** *51.76*	–
EJS1, EJHS1	**2.20** *55.88*	**1.13** *28.70*	**0.96** *24.38*	**1.19** *30.10*	**1.41** *35.81*	–
EJMS1	**2.02** *51.3*	**1.13** *28.7*	**0.96** *24.4*	-	**1.41** *35.8*	–
EEJ8, EJH8	**1.54** *39.12*	**1.13** *28.70*	**0.81** *20.70*	**1.58** *40.00*	**2.04** *51.76*	–
EJM8	**1.50** *38.1*	**1.13** *28.7*	**0.81** *20.7*	**1.58** *40.00*	**2.04** *51.8*	–
EJS8, EJHS8	**1.54** *39.12*	**1.13** *28.70*	**0.81** *20.70*	**1.19** *30.10*	**1.41** *35.81*	–
EJMS8	**1.50** *38.1*	**1.13** *28.7*	**0.96** *24.4*	-	**1.41** *35.8*	–
20EEJ1, 20EJH1	**3.13** *79.38*	**1.37** *34.79*	**1.18** *29.99*	**1.65** *42.01*	**2.09** *53.00*	–
20EJS1	**3.13** *79.38*	**1.35** *34.29*	**1.18** *29.99*	**1.42** *36.07*	**1.46** *37.08*	–
20EEJ8, 20EJH8	**2.65** *67.31*	**1.35** *34.29*	**1.18** *29.99*	**1.65** *42.01*	**2.09** *53.00*	**.62** *15.75*
20EJS8	**2.63** *66.80*	**1.35** *34.29*	**1.18** *29.97*	**1.46** *37.08*	**1.42** *36.08*	**.62** *15.75*

20EJS1 *3EJS1*

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

EEJ & EJS Models

1A



3A



6A



10A



15A



20A



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

EEJ Series

Including the EJH/EJHS, EJM/EJMS and EJS Models

Performance Data *(continued)*

Typical Insertion Loss

Measured in closed 50 Ohm system

EJH & EJHS Models

1A



3A



6A



10A



15A



20A



EJM & EJMS Models

1A



3A



6A



10A



15A



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EEJ Series

Including the EJH/EJHS, EJM/EJMS and EJS Models

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz								
	.01	.05	.1	.15	.5	1	5	10	30
EEJ / EJS Models									
1A	15	27	29	32	41	47	47	47	40
3A	-	10	15	20	30	39	48	50	60
6A	-	1	5	9	21	28	41	44	54
10A	-	1	4	7	14	18	31	36	51
15A	-	-	-	2	5	8	21	26	42
20A	-	-	3	5	14	21	30	33	42
EJH Models									
1A	13	26	33	36	41	41	31	26	18
3A	-	9	15	19	27	31	30	26	20
6A	-	2	6	9	20	22	31	20	18
10A	-	1	4	7	12	17	19	18	18
15A	-	-	1	2	3	3	4	2	2
20A	-	-	3	5	14	16	12	11	11

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz									
	.01	.05	.1	.15	.5	1	5	10	30	
EEJ / EJS Models									EEJ	EJS
1A	-	-	5	8	19	27	45	43	40	9
3A	-	-	5	8	17	20	39	42	40	11
6A	-	-	5	8	17	21	32	40	40	16
10A	-	-	5	8	17	21	23	36	38	16
15A	-	-	5	8	17	23	33	30	38	11
20A	-	-	5	2	17	25	38	48	48	48
EJH Models										
1A	13	26	33	36	41	41	31	26	18	
3A	-	9	15	19	27	31	30	26	20	
6A	-	2	6	9	20	22	31	20	18	
10A	-	1	4	7	12	17	19	18	18	
15A	-	-	1	2	3	3	4	2	2	
20A	-	-	3	5	14	16	12	11	11	

EJM & EJMS Models

Current Rating	Frequency – MHz								
	.05	.5	1	10	20	30	80	150	200
1A	25	41	37	18	15	13	15	14	7
3A	6	27	30	21	19	19	23	13	7
6A	2	17	20	17	17	14	23	13	7
10A	1.5	11	12	9	8	9	20	19	12
15A	0.5	2	3	4	2	10	12	17	11

Current Rating	Frequency – MHz								
	.05	.5	1	10	20	30	80	150	200
1A	1.5	21	28	34	36	29	27	34	28
3A	1.5	17	23	29	31	37	33	32	28
6A	1.5	16	22	28	29	34	37	37	32
10A	2	16	22	28	24	18	27	32	30
15A	1.5	17	23	35	34	29	27	29	25

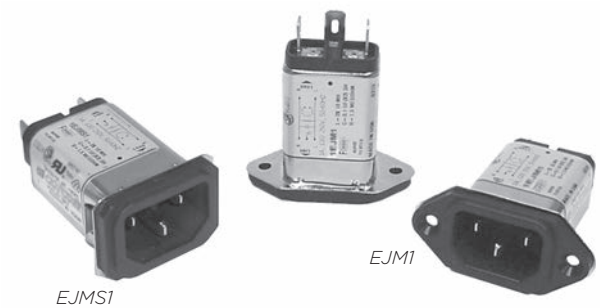

EJMS1

EJM1

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

EF Series

UL Recognized
CSA Certified
VDE Approved*

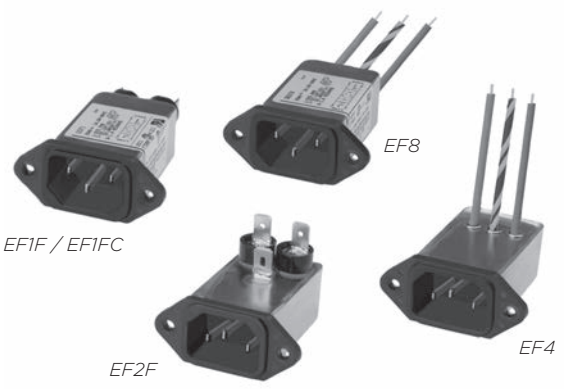

EF Series

- Compact single stage EMI filter with IEC 60320-1 C14 inlet
- Two element circuit provides basic attenuation
- Available with an internal ground-circuit inductor (C suffix versions) to isolate equipment chassis from power line ground at radio frequencies
- Superseded by the EEA Series

Ordering Information

3 EF 1F C

Ground Circuit Inductor
Omit if none

Output Styles
1F – .250 [6.3] spade terminals *(back)*
2F – .250 [6.3] spade terminals *(bottom)*
4 – Wire leads *(bottom)*
8 – Wire leads *(back)*

EF Series

Current Rating
1, 3, 6, 10 or 15A

Available Part Numbers

1EF1F	1EF2F	1EF4	1EF8
3EF1F	3EF2F	3EF4	3EF8
6EF1F	6EF2F	6EF4	6EF8
10EF1F			
15EF1F			
Ground Circuit Inductor Versions			
10EF1FC			

Specifications

Maximum leakage current each Line to Ground:
@ 120 VAC 60 Hz: .21 mA
@250 VAC 50 Hz: .36 mA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max.): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 1 to 15A*

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord

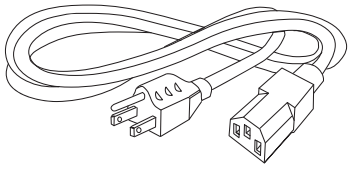

FA601: Insulating Shroud

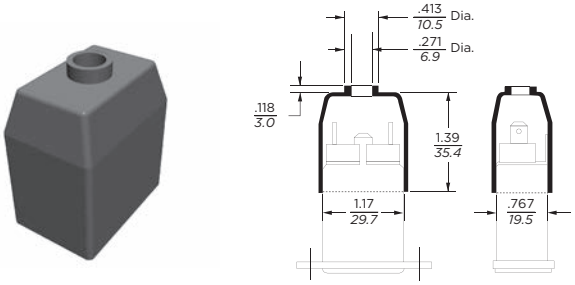

**15A versions are tested by Underwriters Laboratories to US and Canadian requirements and are VDE approved at 10A, 250VAC*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EF Series

Electrical Schematic

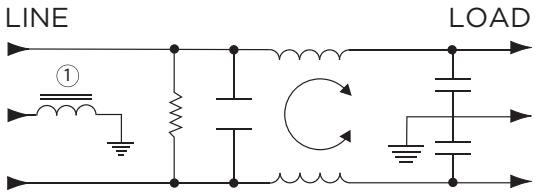

Note 1: C Suffix (ground choke) versions only

Case Styles

EF1F & EF1FC

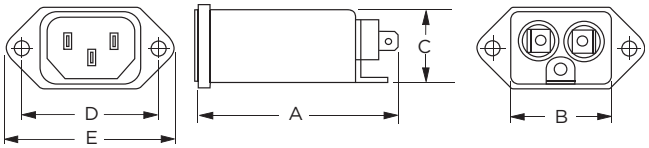

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

EF2F

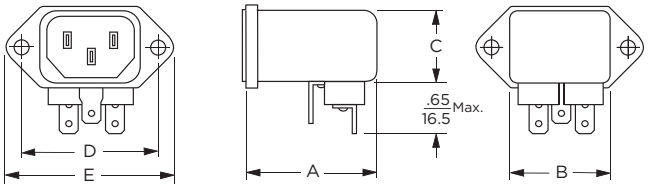

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

EF4

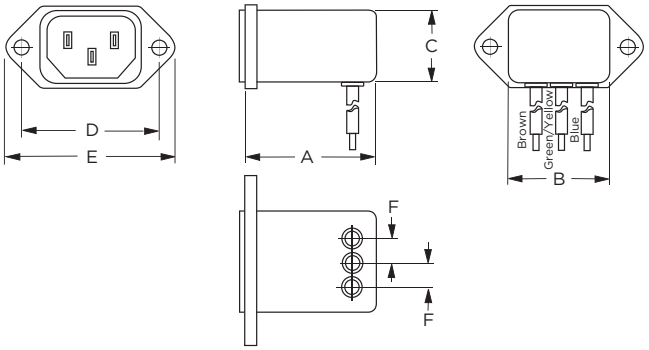

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Wire Leads:	4.0 [*101.6*] Min., 18AWG, UL1015

EF8

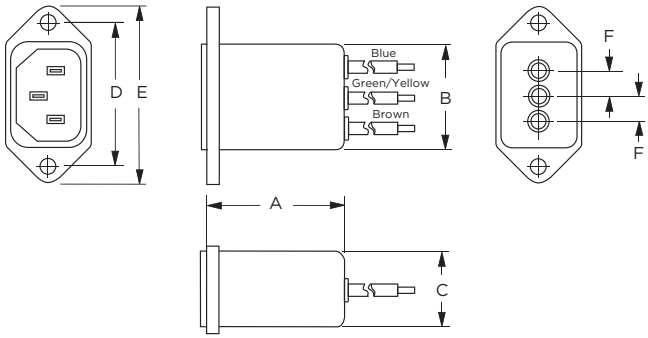

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Wire Leads:	4.0 [*101.6*] Min., 18AWG, UL1015

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D ± .015 / ± .38	E (max.)	F (ref.)
1EF1F, 3EF1F, 6EF1F	**2.21** *56.0*	**1.19** *30.2*	**0.81** *20.6*	**1.575** *40.01*	**1.98** *50.3*	-
1EF2F, 3EF2F, 6EF2F	**1.55** *39.4*	**1.19** *30.2*	**0.85** *21.6*	**1.575** *40.01*	**1.98** *50.3*	-
1EF4, 3EF4, 6EF4	**1.55** *39.4*	**1.19** *30.2*	**0.85** *21.6*	**1.575** *40.01*	**1.98** *50.3*	**.295** *7.5*
1EF8, 3EF8, 6EF8	**1.55** *39.4*	**1.19** *30.2*	**0.81** *20.06*	**1.575** *40.01*	**1.98** *50.3*	**.295** *7.5*
10EF1F, 10EF1FC	**2.62** *66.5*	**1.19** *30.2*	**0.81** *20.6*	**1.575** *40.01*	**1.98** *50.3*	-
15EF1F	**2.62** *66.5*	**1.19** *30.2*	**0.81** *20.6*	**1.575** *40.01*	**1.98** *50.3*	-

Recommended Panel Cutouts

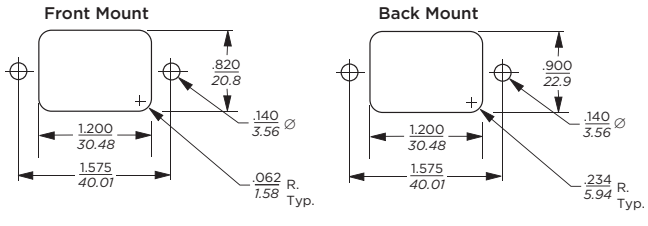

Tolerances ± .005 [*0.13*] unless otherwise noted

Note 1: EF1F, EF1FC and EF8 allow for front or back mounting
Note 2: EF2F and EF4 allow for back mounting only

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EF Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

1EF



3EF



6EF



10EF



15EF



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .15	.5	1	5	10	30
EF1F, EF2F						
1A	22	35	40	46	50	49
3A	15	25	30	45	50	54
6A	9	20	25	41	45	50
10A	8	15	20	34	39	44
15A	-	6	12	20	25	25
EF4, EF8						
1A	22	35	40	46	50	49
3A	15	25	30	45	50	54
6A	9	20	25	41	45	47
EF1FC						
10A	8	15	20	34	39	44

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EJT Series

UL Recognized
CSA Certified
VDE Approved*

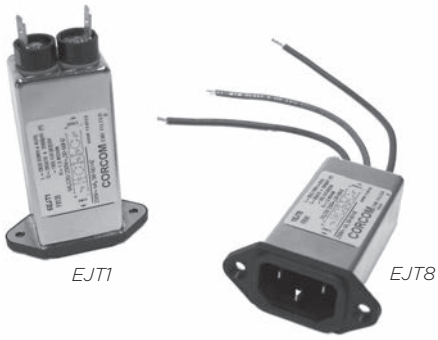

EJT1 EJT8

EJT Series

- Superior EMI filter with IEC 60320-1 inlet
- Double three element differential mode circuit attenuates noise up to 1GHz
- Up to 15A with IEC 60320-1 C14 inlet
- 20A rating with IEC 60320-1 C20 inlet
- Spade terminals or wire leads

Ordering Information

6 EJT 1

- Output Styles
  - 1 – .250 [*6.3*] spade terminals
  - 8 – Wire leads
- EJT Series
- Current Rating
  - 1, 3, 6, 10, 15 or 20A

Available Part Numbers

1EJT1	1EJT8
3EJT1	3EJT8
6EJT1	6EJT8
10EJT1	10EJT8
15EJT1	15EJT8
20EJT1	20EJT8

**15A versions are tested by Underwriters Laboratories to US and Canadian requirements and are VDE approved at 10A, 250VAC.*
20A versions are tested by Underwriters Laboratories to US and Canadian requirements and are VDE approved at 16A, 250VAC.

Specifications

Maximum leakage current each Line to Ground:

	1-15A	20A
@ 120 VAC 60 Hz:	.25 mA	.22 mA
@250 VAC 50 Hz:	.43 mA	.40 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max.): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 1 to 20A*

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord



FA601: Insulating Shroud *(fits 1-15A only)*



Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only.
Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EJT Series

Electrical Schematics

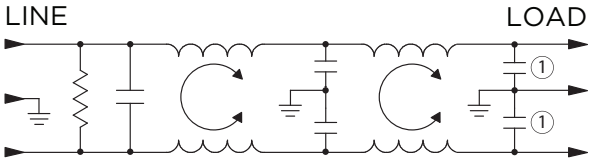

Note 1: 20A versions only

Case Styles

EJT1

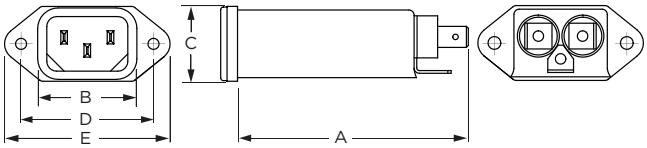

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

20EJT1

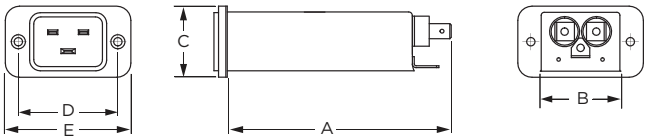

Typical Dimensions:

Mounting holes (2):	.126 [*3.20*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C20
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

EJT8

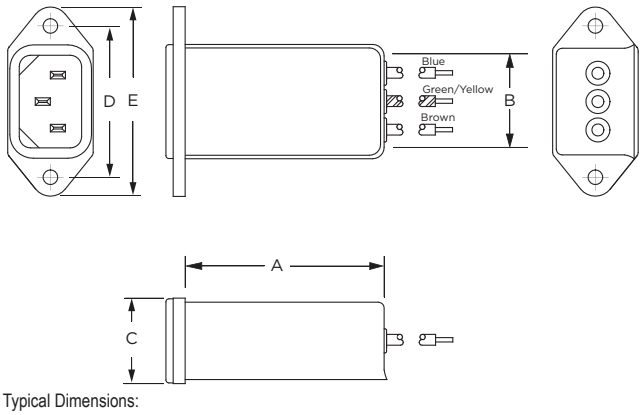

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Wire Leads:	4.0 [*101.6*] Min., 18AWG, UL1015

20EJT8

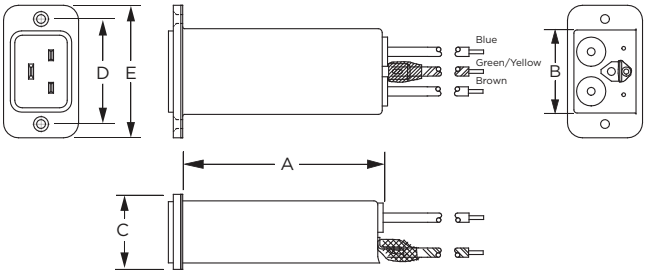

Typical Dimensions:

Mounting holes (2):	.126 [*3.20*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C20
Wire Leads:	4.0 [*101.6*] Min., 14AWG, UL1015

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D (max.)	E (max.)
EJT1	**2.74** *69.6*	**1.19** *30.2*	**0.875** *22.2*	**1.575** *40.0*	**1.98** *50.3*
EJT8	**2.1** *53.3*	**1.19** *30.2*	**0.875** *22.2*	**1.575** *40.0*	**1.98** *50.3*
20EJT1	**3.8** *96.52*	**1.350** *34.29*	**1.18** *29.99*	**1.654** *42.01*	**2.087** *53.00*
20EJT8	**3.2** *81.28*	**1.350** *34.29*	**1.18** *29.99*	**1.654** *42.01*	**2.087** *53.00*

Recommended Panel Cutouts

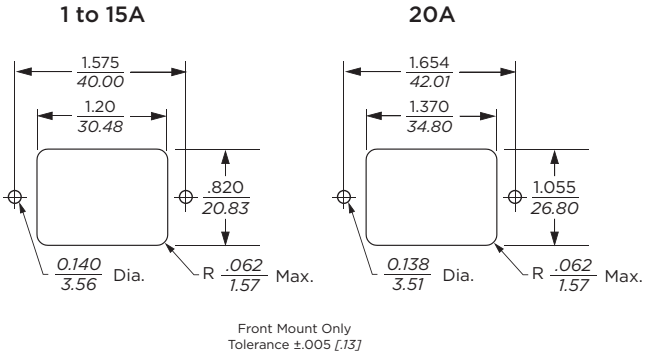

Front Mount Only
Tolerance ±.005 *[.13]*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

EJT Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

1EJT



3EJT



6EJT



10EJT



15EJT



20EJT



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz							
	.15	.5	1	5	10	30	100	1000
1A	27	33	40	59	65	65	61	14
3A	22	30	34	57	63	69	61	10
6A	13	21	27	51	60	65	59	14
10A	7	14	21	43	52	61	61	14
15A	4	10	15	38	48	63	63	14
20A	-	8	15	42	50	60	58	14

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz							
	.15	.5	1	5	10	30	100	1000
1A	10	20	23	43	52	65	45	14
3A	10	20	24	41	51	59	52	17
6A	10	21	24	37	48	65	55	20
10A	10	21	25	28	44	63	53	18
15A	10	20	26	25	36	56	45	23
20A	9	20	26	40	35	48	50	10

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

Smallest Power Entry Module with Metric Fuse Holders

GG & HG Series

UL Recognized
CSA Certified
VDE Approved

GG Series

- Power entry module with enhanced EMI filter
- Single or dual fusing
- Two element circuit provides basic attenuation
- Available with an internal ground-circuit inductor (C versions) to isolate equipment chassis from power line ground at radio frequencies
- Multiple termination and mounting styles

HG Series

- Medical version of our GG Series
- Mechanically identical to GG Series
- Available only with dual fusing

Ordering Information

3 E GG 1 C -2

- **Metric Fuse Holders**
  1 – Single
  2 – Double
- **Ground Circuit Inductor**
  Omit if none
- **Output Styles**
  1 – .250 [*6.3*] spade terminals
  8 – Wire leads
- **GG or HG Series** *(Flange mount)*
  GGS or HGS Series *(Snap-in mount)*
- **Leakage current designation**
  E – Low leakage *(<0.5 mA)*
- **Current Rating**
  1, 3, 6 or 10A

Specifications

Maximum leakage current each Line to Ground:

	HG Models	GG Models
@ 120 VAC 60 Hz:	2 µA	.25 mA
@250 VAC 50 Hz:	5 µA	.42 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max.): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 1 to 10A

Required Fuse(s): 5 x 20mm *(not included)*

Available Part Numbers

Filtered modules			
1EGG1-1	3EGG1-1	6EGG1-1	10EGG1-1
1EGG1-2	3EGG1-2	6EGG1-2	10EGG1-2
1EGG8-1	3EGG8-1	6EGG8-1	10EGG8-1
1EGG8-2	3EGG8-2	6EGG8-2	10EGG8-2
1EGS1-1	3EGS1-1	6EGS1-1	10EGS1-1
1EGS1-2	3EGS1-2	6EGS1-2	10EGS1-2
Filtered modules with ground circuit inductor			
1EGG1C-1	3EGG1C-1	6EGG1C-1	
1EGG1C-2	3EGG1C-2	6EGG1C-2	
1EGG8C-1	3EGG8C-1	6EGG8C-1	
1EGG8C-2	3EGG8C-2	6EGG8C-2	
Medical filter modules			
1EHG1-2	3EHG1-2	6EHG1-2	10EHG1-2
1EHG8-2	3EHG8-2	6EHG8-2	10EHG8-2
1EHGS1-2	3EHGS1-2	6EHGS1-2	10EHGS1-2

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

GG & HG Series

Electrical Schematic

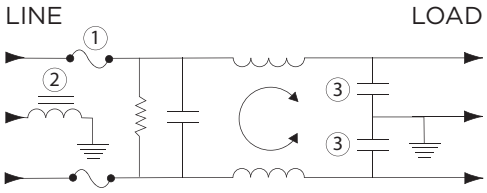

Note 1: Second fuse only in -2 version
Note 2: C versions only
Note 3: Not present in HG versions

Warning: Do not attempt to operate a single-fused model without the fuse door in place.

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord



Case Styles

GG1, GG1C & HG1

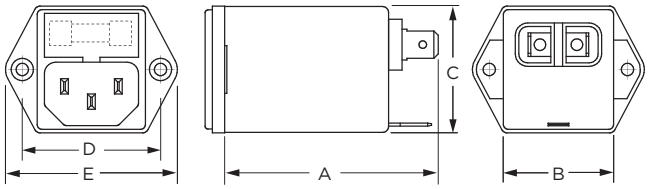

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

GS1 & HGS1

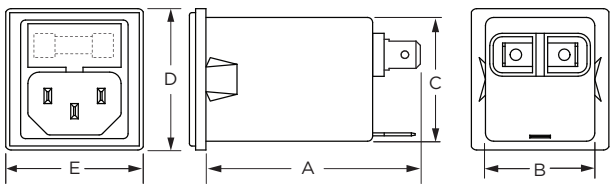

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

GG8 & HG8

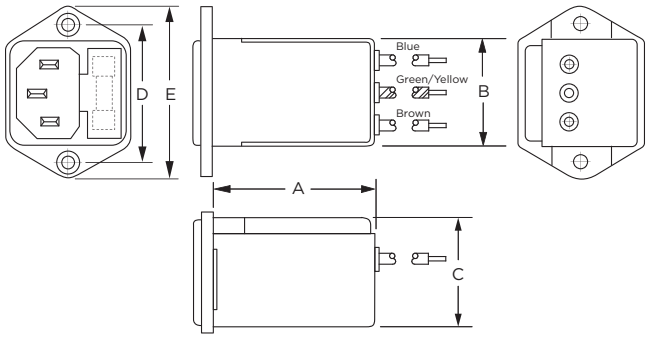

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Wire Leads:	5.0 [*127.0*] Min., 18AWG, UL1015

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D ± .015 / ± .38	E (max.)
GG1 & HG1	**2.13** *54.5*	**1.13** *28.7*	**1.29** *32.8*	**1.417** *36.0*	**1.76** *44.7*
GG1C	**2.45** *62.23*	**1.13** *28.7*	**1.28** *32.5*	**1.417** *36.0*	**1.76** *44.7*
GS1, HGS1	**2.13** *54.0*	**1.13** *28.7*	**1.28** *32.5*	**1.46*** *36.0**	**1.42** *36.1*
GG8, HG8	**2.02** *51.1*	**1.13** *28.7*	**1.29** *32.8*	**1.417** *36.0*	**1.76** *44.7*

*max. dimension

Recommended Panel Cutouts

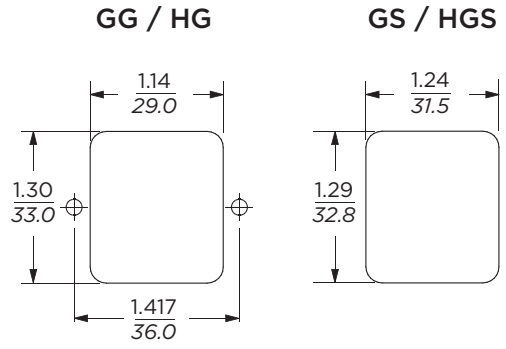

Typical Dimensions:
GS / HGS panel thickness: 0.032 – 0.080 [*0.81 – 2.03*]
Corner radius: 0.138 [*0.35*]

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

GG & HG Series

Performance Data

Typical Insertion Loss Measured in closed 50 Ohm system

GG & GS Models

1A



3A



6A



10A



3A GG1C



6A GG1C



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

HG Models

1A



3A



6A



10A



Minimum Insertion Loss Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .01	.05	.10	.15	.5	1	5	10	30
GG & GS Models									
1A	12	23	29	32	41	47	50	50	55
3A	-	10	15	19	30	36	48	50	53
6A	-	1	4	10	16	22	36	40	50
10A	-	1	2	4	6	8	26	33	28
HG Models									
1A	12	23	29	32	40	40	28	22	18
3A	-	10	15	19	25	26	22	21	21
6A	-	4	10	14	18	18	14	14	14
10A	1	-	-	3	5	6	8	9	10

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .10	.15	.5	1	3	5	10	30
GG & GS Models								
1A	1	3	14	23	41	47	50	44
3A	1	2	11	14	25	38	44	40
6A	1	2	10	13	23	33	39	42
10A	4	7	17	23	-	22	43	38
HG Models								
1A	2	6	19	26	30	35	35	20
3A	1	7	16	23	30	30	30	30
6A	4	7	16	23	30	30	30	30
10A	-	8	16	22	-	37	43	28

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

H Series

UL Recognized
CSA Certified
VDE Approved*

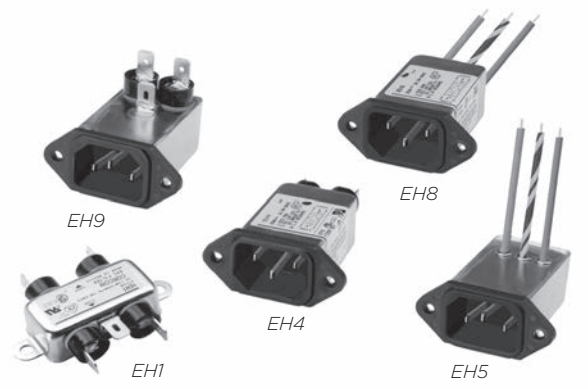

H Series

- Minimal leakage current suitable for medical equipment
- Two element circuit provides basic EMI attenuation above 1 MHz
- Available with an internal ground circuit inductor (C suffix versions) to isolate equipment chassis from power line ground at radio frequencies
- Flanged mounting the same as the EC, ED and EF Series
- Capacitive output (see EAH, EBH and EJH Series for capacitive input)

Ordering Information

3 E H 1 C

Ground Circuit Inductor
Omit if none

Output Styles
Chassis Mount Style
1 – .250 [*6.3*] spade terminals
3 – Wire leads
Power Inlet Style *
4 – .250 [*6.3*] spade terminals *(back)*
5 – Wire leads *(bottom)*
8 – Wire leads *(back)*
9 – .250 [*6.3*] spade terminals *(bottom)*

H Series

Leakage current designation
E – Low Leakage *(<0.5 mA)*

Current Rating
3, 6, 10 or 15A

*IEC 60320-1 C14 inlet mates with C13 connector

Specifications

Maximum leakage current each Line to Ground:
@ 120 VAC 60 Hz: 2 µA
@250 VAC 50 Hz: 5 µA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max.): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3 to 15A*

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematic

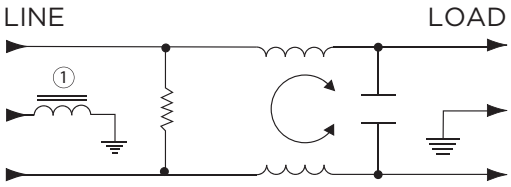

Available Part Numbers

3EH1	6EH8
3EH3	6EH9
6EH1	10EH1
6EH3	10EH3
6EH4	10EH4
6EH5	15EH4
Ground Circuit Inductor Versions	
10EH4C	

15A versions are tested by Underwriters Laboratories to US and Canadian requirements and are VDE approved at 10A, 250VAC

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

H Series

Case Styles

H1 *(Chassis Mount)*

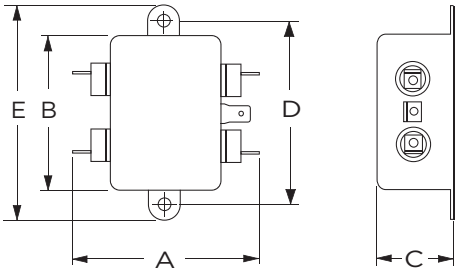

Typical Dimensions:

Mounting Holes:	.188 [*4.78*] Dia.
Line / Load Terminals (4):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

H3 *(Chassis Mount)*

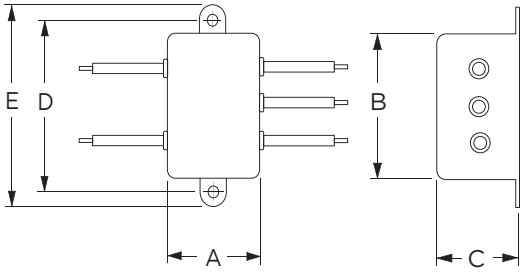

Typical Dimensions:

Mounting Holes:	.188 [*4.78*] Dia.
Wire Leads(5):	4.0 [*101.6*] Min., 18AWG, UL1015

H4 & H4C

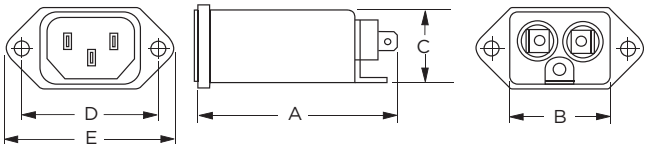

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

H9

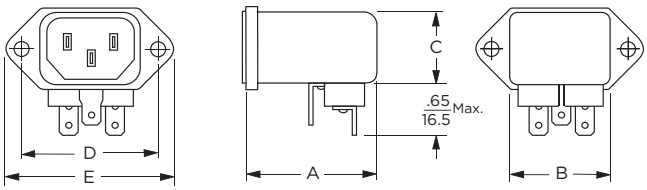

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

H5

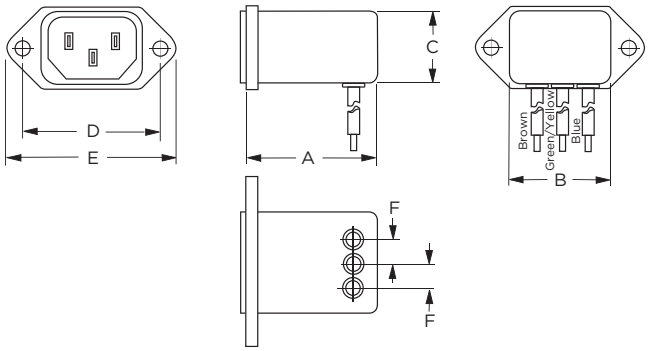

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Wire Leads:	4.0 [*101.6*] Min., 18AWG, UL1015

H8

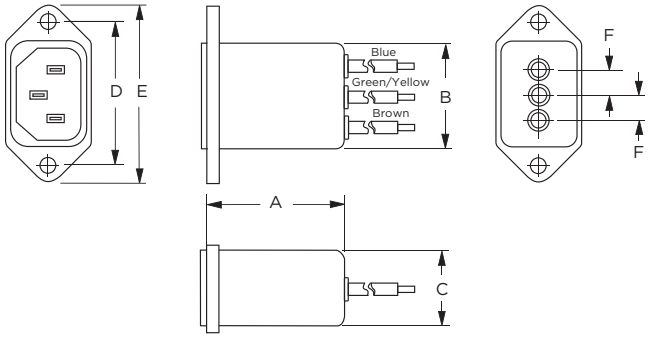

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Wire Leads:	4.0 [*101.6*] Min., 18AWG, UL1015

Recommended Panel Cutouts

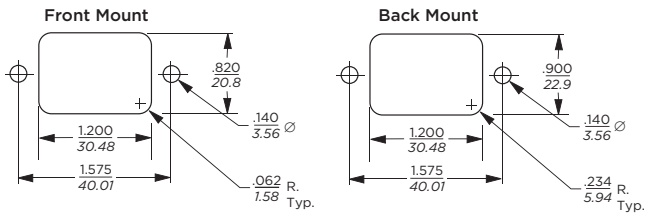

Tolerances ± .005 [*0.13*] unless otherwise noted

Note 1: H4, H4C and H8 allow for front or back mounting
Note 2: H5 and H9 allow for back mounting only

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

H Series

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D ± .015 / ± .38	E (max.)	F (ref.)
H1	**2.25** *57.2*	**1.82** *46.1*	**0.66** *16.7*	**2.125** *53.98*	**2.53** *64.2*	-
H3	**.96** *24.40*	**1.82** *46.1*	**0.66** *16.7*	**2.125** *53.98*	**2.53** *64.2*	-
6EH4	**2.20** *55.9*	**1.19** *30.2*	**0.81** *20.6*	**1.575** *40.01*	**1.98** *50.3*	-
10EH4, 10EH4C	**2.62** *66.5*	**1.19** *30.2*	**0.81** *20.6*	**1.575** *40.01*	**1.98** *50.3*	-
15EH4	**2.62** *66.5*	**1.19** *30.2*	**0.81** *20.6*	**1.575** *40.01*	**1.98** *50.3*	-
H5	**1.55** *39.4*	**1.19** *30.2*	**0.85** *21.6*	**1.575** *40.01*	**1.98** *50.3*	**.295** *7.5*
H8	**1.56** *39.7*	**1.19** *30.2*	**0.81** *20.6*	**1.575** *40.01*	**1.98** *50.3*	**.295** *7.5*
H9	**1.55** *39.4*	**1.19** *30.2*	**0.85** *21.6*	**1.575** *40.01*	**1.98** *50.3*	-

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord

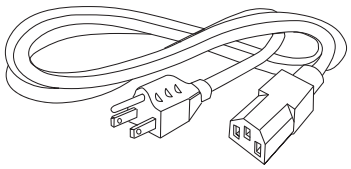

FA601: Insulating Shroud



Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

3EH



6EH



10EH



15EH



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .15	.5	1	5	10	30
3A	18	27	30	30	27	18
6A	9	16	20	26	23	18
10A	7	13	15	17	16	14
15A	5	9	11	12	11	9

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

Power Entry Module with Voltage Selection and Fusing

J Series

UL Recognized
CSA Certified

Front View, all models



6J4

6HJ4

J Series

- Power entry module with North American style 3AG fuse holder
- 2 or 4 voltage selection
- Compact snap-in design
- Two element circuit provides basic EMI attenuation
- Available with minimal leakage current suitable for medical applications (HJ models)
- Also available without filter (VJ models)

Ordering Information

6 H J 4 -4

Available Voltage Selections
1 - Four *(non-filtered versions)*
2 – Two
4 or blank – Four *(filtered versions)*

Filtered Indicator
1 – Non-filtered
4 – Filtered

J Series

Filter Type
H – Medical
V – Non-filtered
Blank – general purpose

Current Rating
6A

Specifications

Maximum leakage current each Line to Ground:

	6J4 Models	6HJ4 or non-filtered
@250 VAC 50 Hz:	500 µA	5 µA

Hipot rating (one minute):

Line to Ground:	1550 VAC
Line to Line:	1450 VDC

Operating Voltage:

suffix - 1 or - 4 models:	100, 120, 220 or 240VAC
suffix - 2 models:	115 or 230 VAC

Operating Frequency: 50/60 Hz

Rated Current: 6A

Required Fuse: .25 x 1.25 *(not included)*

Available Part Numbers

Non-filtered models	
6VJ1	6VJ1-2
General Purpose Filters	
6J4	6J4-2
Medical Filters	
6HJ4-4	6HJ4-2

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

J Series

Electrical Schematics

6VJ1 & 6VJ1-2

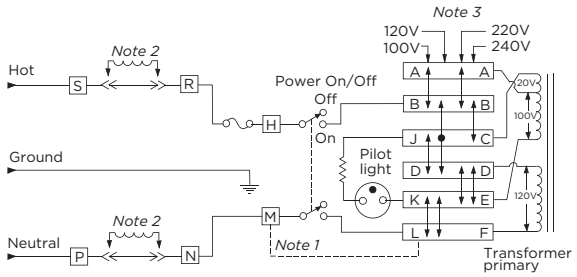

6J4 & 6J4-2

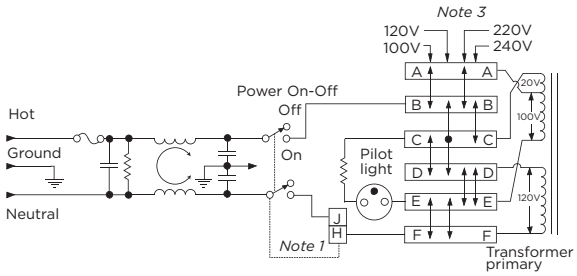

6HJ4-4 & 6J4-2

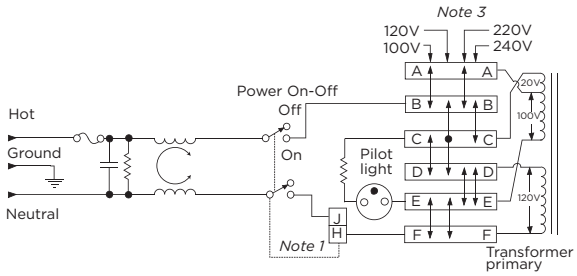

Note 1: Jumper required if only SPST power switch is used
Note 2: Jumpers required if no input filtering is used
Note 3: Use only 120V and 240V positions for 2 volt selection units

Voltage Selection

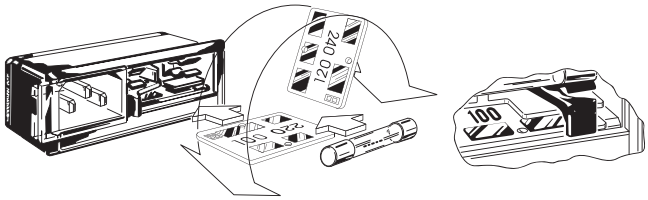

Open cover door and slide fuse-pull lever to left. Select operating voltage by orienting voltage selection card with the desired voltage on top left side. Push card firmly into module slot. Slide fuse-pull lever to right into normal position and re-insert fuse into holders.

Use caution in selecting correct fuse value.

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord

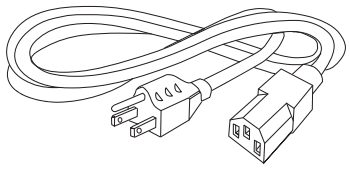

JA302: 2 Voltage Select Card

Comes standard with 6VJ1-2, 6J4-2 and 6HJ4-2

JA304: 4 Voltage Select Card

Comes standard with 6VJ1, 6J4 and 6HJ4-4

JA403: Mounting clips for .105 - .125" panels

JA410-419: Equipment Rating Labels

Self-adhesive, available in multiples of 40
Specify part number

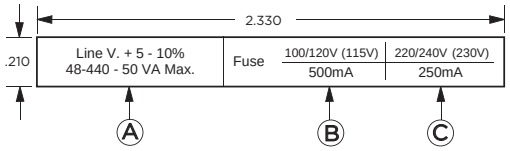

Part No.	A VA max.	B Fuse 100/120 (115)	C Fuse 220/240 (230)
JA410	25	250 mA	125 mA
JA411	50	500 mA	250 mA
JA412	100	1A	500 mA
JA413	200	2A	1A
JA414	250	2.5A	1.25A
JA415	300	3A	1.5A
JA416	400	4 A	2A
JA417	500	5A	2.5A
JA418	600	6A	3A
JA419	Assortment		

JA410-JA418: 40 labels of one part number
JA419: 5 each of JA410 - JA418 (45 labels)

JA500: Voltage Selector Card Extractor Tool

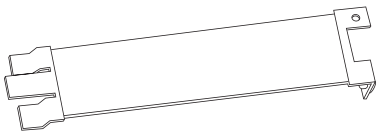

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

J Series

Case Styles

Non-filtered Models

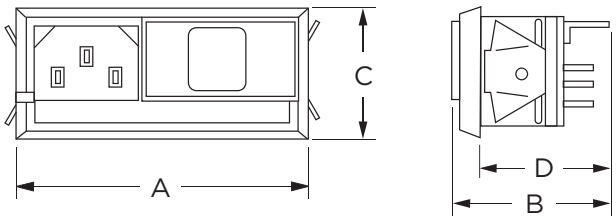

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.110 [*2.79*]

Filtered Models

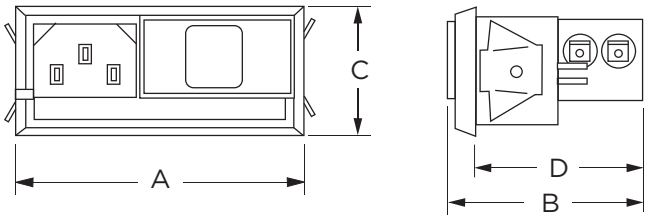

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.110 [*2.79*]

Recommended Panel Cutouts

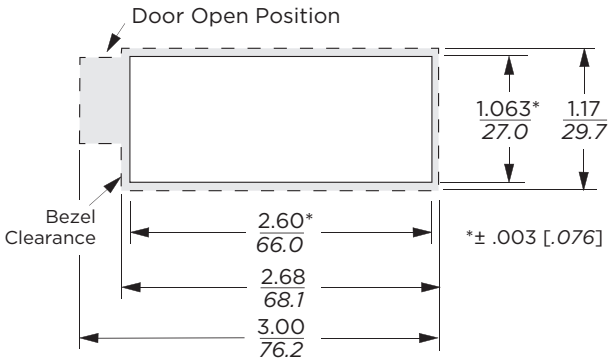

Standard units mount in panel thickness of .060 - .090 [*1.52 -2.29*]
JA403 Mounting clips for .105 - .125" panels available separately
Fuse cover door shown in open position

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D (max.)
6VJ1, 6VJ1-2	**2.68** *68.1*	**1.52** *38.6*	**1.17** *29.7*	**1.23** *31.2*
6J4, 6J4-2, 6HJ4-4, 6HJ4-2	**2.75** *69.9*	**1.87** *47.5*	**1.17** *29.7*	**1.58** *40.1*

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

6J4



6HJ4



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

	Frequency – MHz						
Model No.	**.15**	**.5**	**1**	**5**	**10**	**20**	**30**
6J4	9	20	25	41	45	45	48
6HJ4	9	11	15	19	13	12	10

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

L Series

UL Recognized
CSA Certified
VDE Approved

EDL1S / EHL1S

EDL4C / EHL4C

L Series

- Power entry module with switch or fuse
- For 10A capability and high performance filtering see the P Series on page 192
- Two element circuit provides extended EMI attenuation similar to EAB inlet filter
- North American or metric fuse holders
- Available with minimal leakage current for medical applications (HL models)

Ordering Information

6 E D L 1 S C M

- **Fuseholder Type** *(pre-installed)*
  - M – Metric
  - Omit for North American
- **Mounting Type**
  - C– Snap-In
  - Omit for flange mount
- **Switch Option**
  - S – DPST on/off switch
  - Omit for none
- **Voltage Selection Positions**
  - 1 or 4
- **L Series**
- **Filter Type**
  - D – General Purpose
  - H – Medical
  - omit for none
- **Leakage current designation**
  - E – Low Leakage *(<0.5 mA)*
- **Current Rating**
  - 2, 4 or 6A

Specifications

Maximum leakage current each Line to Ground:

	DL Models	HL Models
@ 120 VAC 60 Hz:	.25 mA	2 µA
@ 250 VAC 50 Hz:	.50 mA	5 µA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Operating Voltage:

1S & 1SC models (fixed):	250 VAC max.
4 & 4C Suffix:	100, 120, 220 or 240 VAC.

Operating Frequency: 50/60 Hz

Rated Current: 2 to 6A

Required Fuse(s):

North American:	one .25 x 1.25" *(not included)*
Metric:	two 5 x 20mm *(not included)*

Switch: DPST
10,000 operations at 51A max. inrush

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

L Series

Available Part Numbers

		North American Fusing		Metric Fusing	
		Flange Mount	Snap-In	Flange Mount	Snap-In
Non-Filtered	Single Voltage, Switched	6EL1S	6EL1SC	6EL1SM	6EL1SCM
	4 Voltage Select, No Switch	6EL4	6EL4C	6EL4M	6EL4CM
General Purpose Filter	Single Voltage, Switched	2EDL1S	2EDL1SC	2EDL1SM	2EDL1SCM
		4EDL1S	4EDL1SC	4EDL1SM	4EDL1SCM
		6EDL1S	6EDL1SC	6EDL1SM	6EDL1SCM
	4 Voltage Select, No Switch	2EDL4	2EDL4C	2EDL4M	2EDL4CM
		4EDL4	4EDL4C	4EDL4M	4EDL4CM
		6EDL4	6EDL4C	6EDL4M	6EDL4CM
Medical Filter	Single Voltage, Switched	6EHL1S	6EHL1SC	6EHL1SM	6EHL1SCM
	4 Voltage Select, No Switch	6EHL4	6EHL4C	6EHL4M	6EHL4CM

Voltage Selection

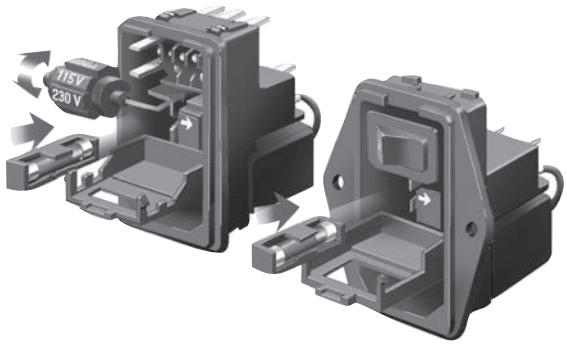

To change selected voltage: disconnect the power cord; open cover using a small blade screwdriver or similar tool; insert the tool into the voltage selection slot and remove wheel from unit; select desired voltage; replace wheel into unit and close cover, making sure the selected voltage appears in connector window.

Recommended Panel Cutouts

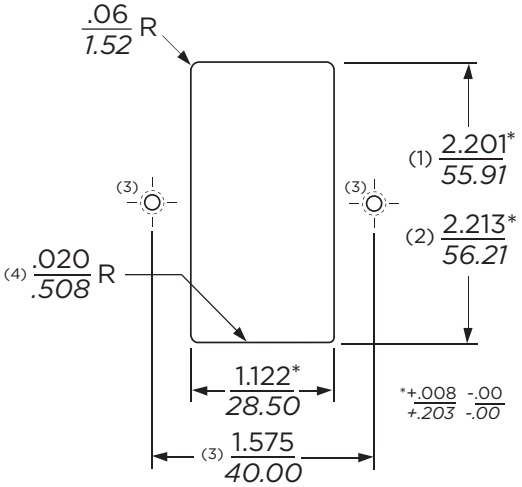

Notes:
(1) For panel thickness of .031 – .079 [*0.8 – 2.0*]
(2) For panel thickness of .083 – .126 [*2.1 – 3.2*]
(3) Mounting Holes .126 [*3.20*] Dia. for flange mounted versions only
(4) For Snap-In applications, the 1.12 [*28.5*] sides of the cutout must have a .02 [*.508*] radius on the installation side. Not required for flange mount versions.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

L Series

Electrical Schematics

DL Models

Single Voltage, Switched (DL1S)

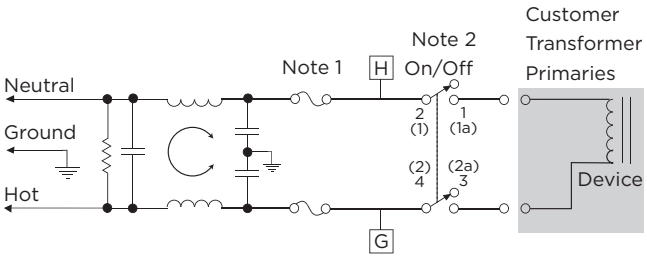

4 Voltage Select, No-Switch (DL4)

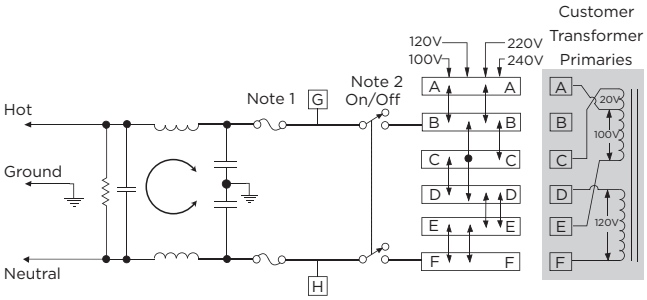

HL Models

Single Voltage, Switched (HL1S)

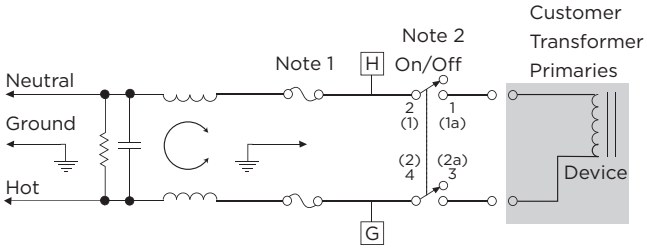

4 Voltage Select, No-Switch (HL4)

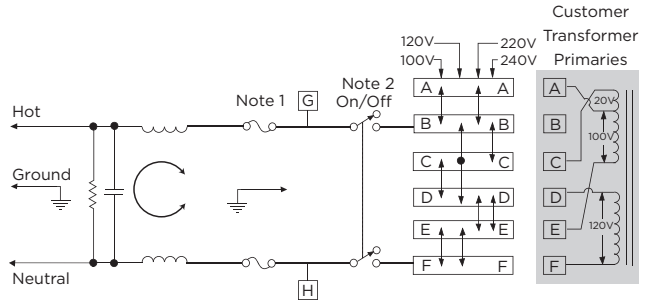

Note 1: Provision for dual Metric style fusing
Note 2: On/Off switch present only with "S" suffix models

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord

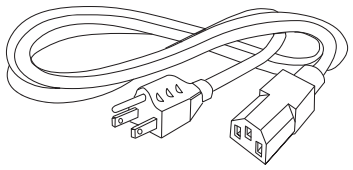

LA303: Voltage Select Wheel, 3 position

Selection drum for use with L4 models.
Marked with 110V, 220V and 240V

LA304: Voltage Select Wheel, 4 position

Selection drum for use with L4 models.
Marked with 100V, 110V, 220V and 240V.
One LA304 comes standard with each L4 model.

LA400: Blank insert

Blank to replace switch in single voltage models

LA601: Insulating Boot

Plastic shroud to cover back of module to prevent inadvertent access

Replacement Fuse Holders

LA200: North American Fuseholder

Accommodates one .25 x 1.25" fuse

LA201: Metric Fuseholder

Accommodates one 5 x 20mm metric fuse



Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

L Series

Case Styles

Flange Models, Non-filtered

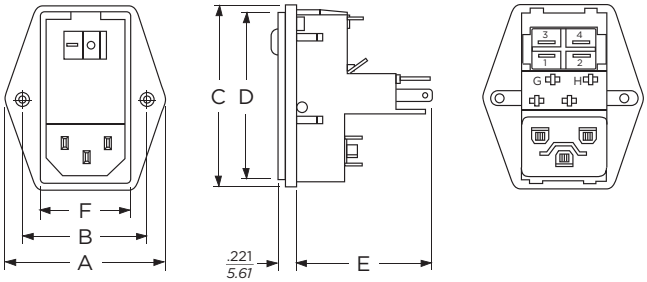

Switched model shown, for non-switched detail refer to snap-in models

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]
Switch Terminals:	.187 [*4.765*] with .07 x .16 [*1.8 x 3.8*] slot

Flange Models, Filtered

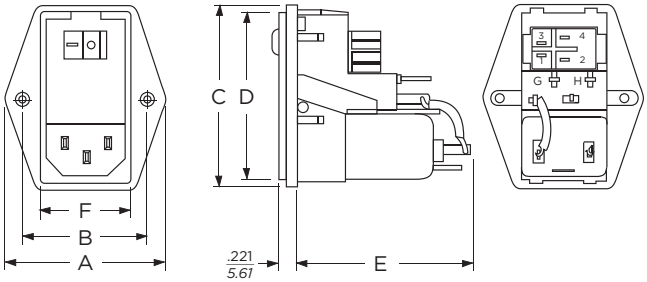

Switched model shown, for non-switched detail refer to snap-in models
Metric fuse models have an additional jumper from filter to module

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]
Switch Terminals:	.187 [*4.765*] with .07 x .16 [*1.8 x 3.8*] slot

Snap-in Models, Non-filtered

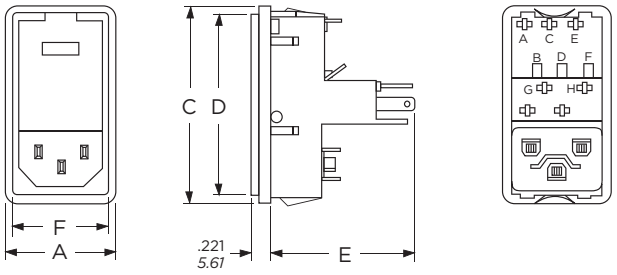

Non-switched model shown, for switched detail refer to flange models

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]
Switch Terminals:	.187 [*4.765*] with .07 x .16 [*1.8 x 3.8*] slot

Snap-in Models, Filtered

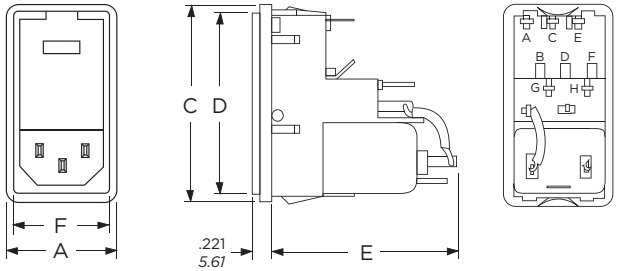

Non-switched model shown, for switched detail refer to flange models
Metric fuse models have an additional jumper from filter to module

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]
Switch Terminals:	.187 [*4.765*] with .07 x .16 [*1.8 x 3.8*] slot

Case Dimensions

Model No.	A (max.)	B ± .015 / ± .38	C (max.)	D (max.)	E (max.)	F (ref.)
Flange Unfiltered	**1.98** *50.29*	**1.575** *40.0*	**2.3** *58.42*	**2.14** *54.36*	**1.66** *42.16*	**1.11** *28.19*
Snap-in Unfiltered	**1.28** *32.51*	-	**2.3** *58.42*	**2.14** *54.36*	**1.66** *42.16*	**1.11** *28.19*
Flange Filtered	**1.98** *50.29*	**1.575** *40.0*	**2.3** *58.42*	**2.14** *54.36*	**2.01** *51.05*	**1.11** *28.19*
Snap-in Filtered	**1.28** *32.51*	-	**2.3** *58.42*	**2.14** *54.36*	**2.01** *51.05*	**1.11** *28.19*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

L Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

2EDL



4EDL



6EDL



6EHL



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz					
	.05	.15	1	5	10	30
EDL Models						
1A	6	14	24	40	45	50
3A	2	8	18	32	38	45
6A	1	6	17	31	37	45
EHL Models						
6A	3	8	15	18	18	18

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz						
	.05	.15.5	1	3	5	10	30
EDL Models							
1A	7	16	21	23	37	47	50
3A	6	14	18	23	26	45	47
6A	6	15	20	25	24	45	50
EHL Models							
6A	4	14	20	28	32		

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

LA Series

UL Recognized
CSA Certified

LA Series

- Power entry module with extended and enhanced low frequency filters
- North American or dual metric fuse holder options
- DPST on/off switch
- 120/240V voltage selection
- The F version provides basic performance two element circuit filter
- The X version provides a three element differential mode circuit with extended EMI attenuation, suitable for meeting FCC Part 15J, Class B conducted emissions limits
- The Z version provides a three element differential mode circuit with enhanced EMI low frequency attenuation, suitable for meeting EN55022 Level B as well as FCC Part 15J limits

Ordering Information

5 E F LA 2S

Case Style
2S - IEC inlet*, selectable fuse holder, DPST switch, spade terminals

LA Series

Filter Type
F – General purpose
X – High performance
Z – Premium performance

Leakage current designation
E – Low Leakage *(<0.5 mA)*

Current Rating
3A or 5A

**IEC 60320-1 C14 inlet mates with C13 connector*

Specifications

Maximum leakage current each Line to Ground:

	FLA Model	XLA or ZLA Model
@120 VAC 60 Hz:	.25 mA	.30 mA
@250 VAC 50 Hz:	.50 mA	.50 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage (max.): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 3 to 5A

Required Fuse(s): one .25 x 1.25" *(not included)* or two 5 x 20mm *(not included)*

Switch: DPST
10,000 operations at 51A max. inrush

Available Part Numbers

5EFLA2S
3EXLA2S
3EZLA2S

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

LA Series

Voltage Selection

To change selected voltage: remove the fuse cartridge using a small blade screwdriver or similar tool; select the desired voltage by matching the arrow on the fuse cartridge to the arrow located on the front of the unit (lower right corner); replace the fuse cartridge making sure the voltage selection arrow aligns with the arrow located on the front of the unit.

Changing Fuses

Remove the fuse cartridge using a small blade screwdriver or similar tool; for Metric fusing pull out the sliding fuse covers located at the top of each fuse compartment; insert desired fuses; push the sliding fuse covers back in place and insert the fuse cartridge back into the unit making sure the voltage selection arrow aligns with the arrow located on the front of the unit. (Note: Single North American or Metric fuse placement is always on the side of the desired voltage selection arrow behind the fuse symbol; the other compartment may be used as a spare or be left blank. Dual Metric fusing capability is available for 220/240 volts only.)

Electrical Schematics

FLA Model

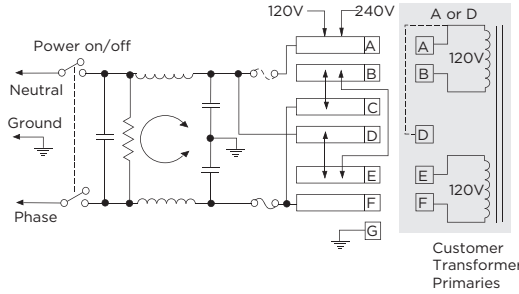

XLA & ZLA Model

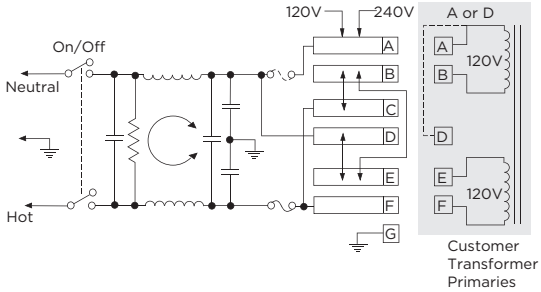

Case Styles

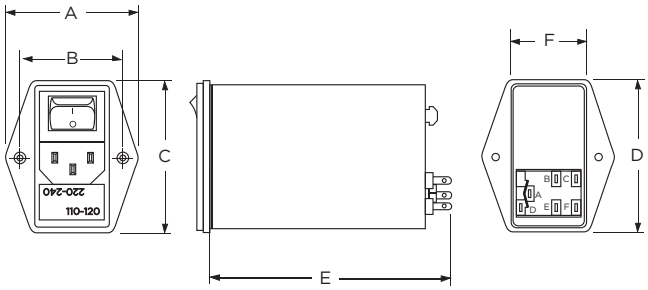

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Mounting Holes (2):	.142 [*3.6*] Dia.
Backplate Terminals(5):	.110 [*2.79*] with .059 [*1.5*] holes
Ground:	.solder lug tab with wire wrap

Case Dimensions

Part No.	A (max.)	B ± .015 / ± .38	C (max.)	D (max.)	E (max.)	F (ref.)
5EFLA2S	**1.99** *50.5*	**1.57** *39.9*	**2.59** *65.79*	**2.41** *61.21*	**3.16** *68.07*	**1.18** *29.97*
3EXLA2S	**1.99** *50.5*	**1.57** *39.9*	**2.59** *65.79*	**2.41** *61.21*	**4.16** *105.7*	**1.18** *29.97*
3EZLA2S	**1.99** *50.5*	**1.57** *39.9*	**2.59** *65.79*	**2.41** *61.21*	**4.16** *105.7*	**1.18** *29.97*

Recommended Panel Cutout

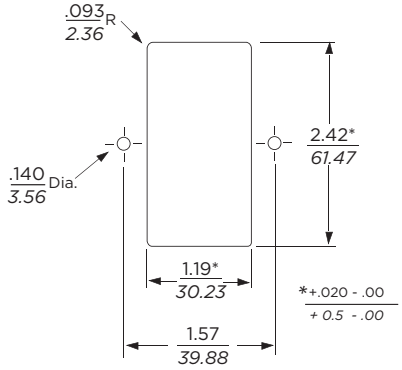

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

LA Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

5EFLA2S



3EXLA2S



3EZLA2S



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

	Frequency – MHz							
Part No.	.01	.05	.15	.5	1	5	10	30
5EFLA2S	-	-	14	21	26	40	46	50
3EXLA2S	2	12	21	35	46	44	44	40
3EZLA2S	14	28	38	42	40	40	40	40

Differential Mode / Symmetrical (Line to Line)

	Frequency – MHz									
Part No.	.02	.03	.05	.07	.15	.5	1	5	10	30
5EFLA2S	-	-	-	-	-	-	-	-	-	-
3EXLA2S	-	-	-	5	33	60	65	60	50	50
3EZLA2S	3	14	29	38	57	72	72	65	55	50

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

M Series

UL Recognized
CSA Certified
VDE Approved

Ordering Information

5 E F M 4 S C

- **Mounting Type**
  - C– Snap-In
  - Omit for flange mount
- **Switch Option**
  - S – DPST on/off switch
  - Omit for none
- **Voltage Selection Positions**
  - 1 or 4
- **M Series**
- **Filter Type**
  - F – General purpose
  - H – Medical
  - X – High performance
  - Z – Premium performance
  - V – Non-filtered
- **Leakage current designation**
  - E – Low leakage *(<0.5 mA)*
  - *(Filtered models only)*
- **Current Rating @120 VAC**
  - 3, 5 or 6A

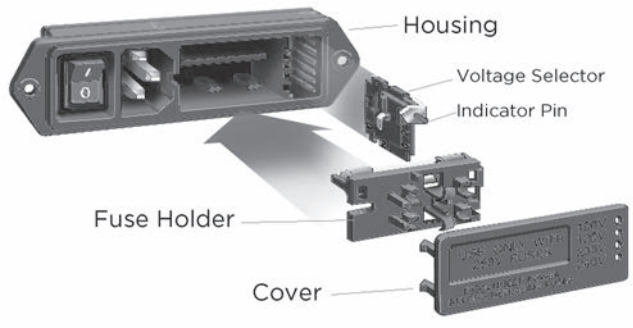

M Series

- Family of slim power entry modules that consume minimal depth behind panel
- Four compact modules each provide a different option combination
- Available non-filtered or with one of four filter circuits designed to meet a wide variety of applications
- Optional voltage selector configured for either 2 or 4 voltage selection
- Optional DPST on/off switch
- Included fuseholder accepts either single 3AG fuse or dual metric fuses
- Snap-in or flange mounting styles

Filter Types

H Models provide a basic performance dual element circuit EMI filter with minimal leakage current, suitable for medical applications, with attenuation similar to the EAH Series power inlet filter.

F Models provide a basic performance dual element circuit EMI filter, with attenuation similar to the EEA Series Power Inlet Filter.

X Models provide a high performance three element differential circuit filter, with extended EMI attenuation similar to the X Series chassis filter, suitable for bringing most digital equipment (including switching power supplies) into compliance with FCC Part 15J, Class B conducted emissions limits.

Z Models provide a premium performance three element differential circuit filter, with enhanced EMI low frequency attenuation similar to the P Series Z models, suitable for bringing most digital equipment (including switching power supplies) into compliance with EN55022 Level B as well as FCC Part 15J. For minimum panel footprint, see the P series on page 192.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

M Series

Specifications

Maximum leakage current each Line to Ground:

	HM	FM	XM/ZM
@ 120 VAC 60 Hz:	2 µA	.25 mA	.30 mA
@250 VAC 50 Hz:	5 µA	.50 mA	.50 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC
Line to Load (switch off) non-filtered:	2500 VAC

Rated Voltage (max.): 250VAC

Operating Frequency: 50/60 Hz

Rated Current @ 120 VAC: 3 to 6A

Rated Current @ 250 VAC:

3A models:	2A
5A models:	4A
6A Switched models:	5A
6A non-switched models:	6A

Required Fuse(s): Reversible fuseholder accepts one .25 x 1.25" (not included) or two 5 x 20mm (not included)

Switch: DPST
100,000 operations at 70A max. inrush

Available Part Numbers

Voltage Selections	Flange Mount		Snap-In	
Non-Filtered Models				
1	6VM1	6VM1S	6VM1C	6VM1SC
2	6VM2	6VM2S		
4	6VM4	6VM4S	6VM4C	6VM4SC
General Purpose Filters				
1	5EFM1	5EFM1S	5EFM1C	5EFM1SC
4	5EFM4	5EFM4S	5EFM4C	5EFM4SC
Medical Filters				
1	5EHM1	5EHM1S		
4	5EHM4	5EHM4S		
High Performance - FCC-B				
1		3EXM1S		
4	3EXM4	3EXM4S		
Premium Performance - EN55022-B				
1		3EZM1S		
4	3EZM4	3EZM4S		

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord

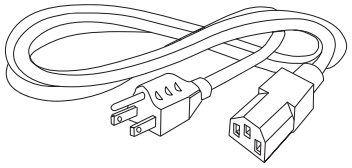

MA100: Power interconnect assembly
For voltage select models. 8.5" wire leads



MA101: Plug only

MA102: Strip of 100 pins for use with MA101

MA104: Individual pins for use with MA101

MA302: Two Voltage Selection Card

Marked 120V/240V. One card comes standard with every 2 voltage M series module

MA304: Four Voltage Selection Card

Marked 100V/120V/230V/240V. One card comes standard with every 4 voltage M series module



MA400: Medical safety bracket assembly

Prevents inadvertent removal of fuse(s)



MA401: Bracket only

MA402: Standoff only

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

M Series

Accessories *(continued)*

MA601 - 604: Insulating Boot

Plastic shroud for back of M series to prevent inadvertent access to connections

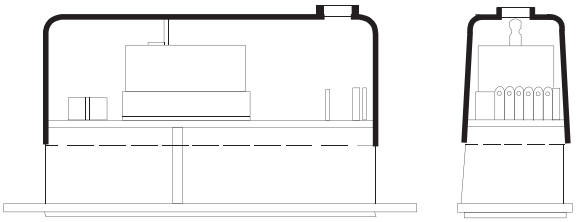

MA601: Fits M4S versions
MA602: Fits M1S versions
MA603: Fits M4 versions
MA604: First M1 versions

Voltage Selection

1. Open cover, using small blade screwdriver or similar tool *(see illustration on right)*
2. Set aside cover/fuse block assembly
3. Pull voltage selector card straight out of housing, using indicator pin
4. Orient selector card so that desired voltage is readable at the bottom
5. Orient indicator pin to point up when desired voltage is readable at bottom *(note that when indicator pin is fixed, successive voltages are selected by rotating the card 90° clockwise)*
6. Insert voltage selector card into housing, printed side of card facing forward toward IEC connector and edge containing the desired voltage first
7. Replace cover, and verify that indicator pin shows the desired voltage



100V



120V



230V



240V

Fuse Installation Instructions

1. Remove power cord

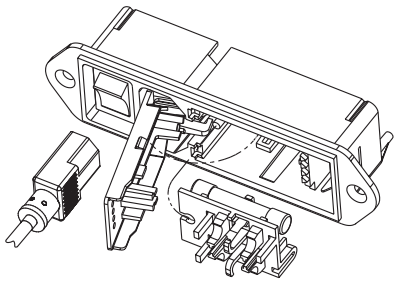

2. Insert a pocket screwdriver at point "X" as shown

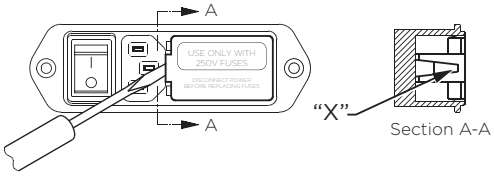

3. Gently lift the entire door UP approximately 1/4" *(minimum)* Once lifted, the door will pivot on it's hinges to expose the fuse holder



4. When the fuse holder is installed in the single fuse position, apply the screwdriver as shown and gently lift up Use screwdriver as shown, do not use fingers

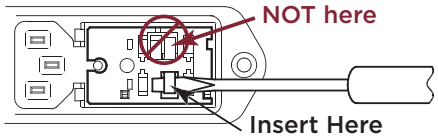

When the fuse holder is installed in the dual fuse position, it will normally release as soon as the door is opened

5. Install one (1) AG fuse or two (2) metric fuses (see below)
6. Replace fuse holder into housing
7. Swing and push to snap door back in place

Fuse Options



North American
single fuse installation



Metric
dual fuse installation

Install fuses on one side only, do not install both AG and metric fuses at the same time

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

M Series

Electrical Schematics

Non-Filtered Models

VM1

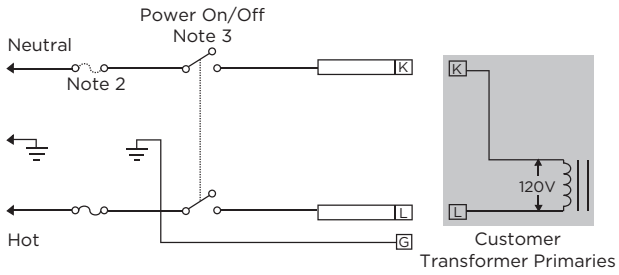

VM2

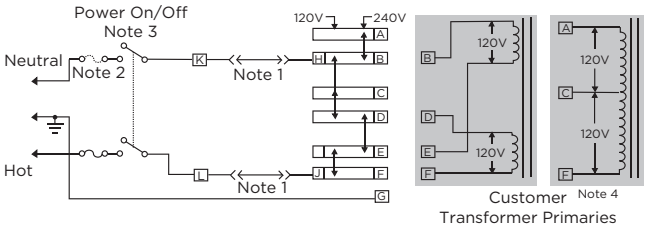

VM4

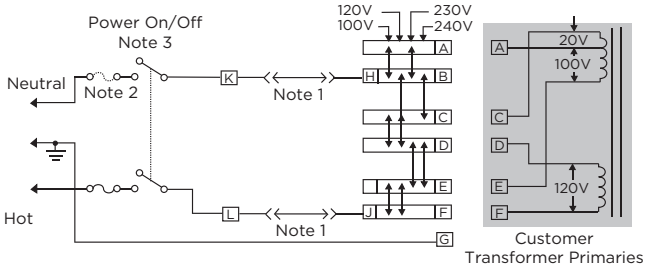

Note 1: Jumper required if no input filter is used
Note 2: Provision for dual Metric style fusing
Note 3: On/off switch present only in "S" suffix models
Note 4: When using a center-tapped transformer, the C-F winding should be the low voltage (high current) winding and must be capable of handling the full primary current in the 120V position

Filtered Models

FM1 & HM1

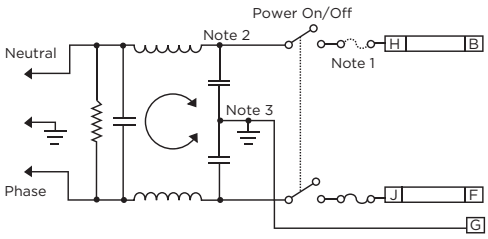

FM4 & HM4

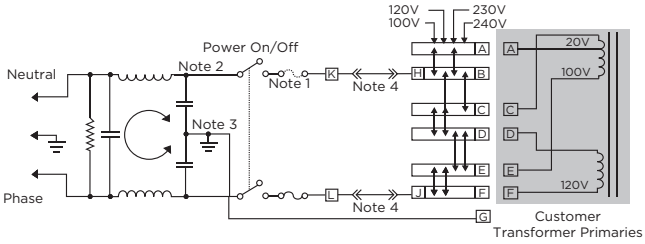

XM1 & ZM1

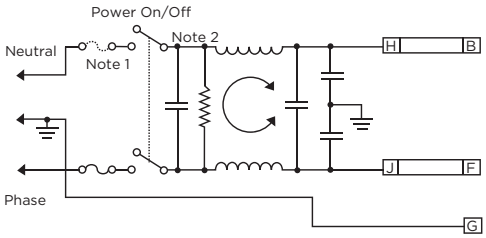

XM4 & ZM4

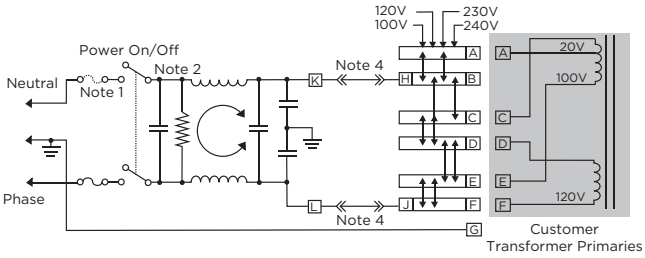

Note 1: Provision for dual Metric style fusing
Note 2: On/off switch present only in "S" suffix models
Note 3: Line to ground capacitor not present on HM models
Note 4: Models HM4, FM4, XM4 and ZM4 have added terminals K and L. External switch or jumper must be placed from K to H and L to J

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

M Series

Case Styles - Non-filtered Models

6VM1

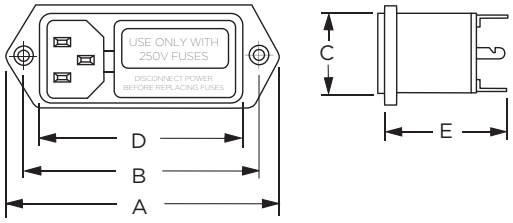

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]
Mounting holes (2):	.155 [*3.94*] Dia. with .279 [*7.08*] Dia. x 82° countersink for #6 flathead screw

6VM1C

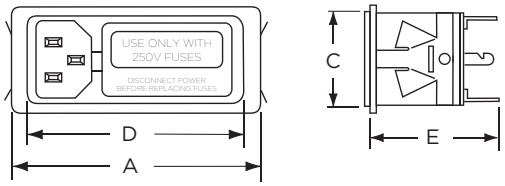

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]

6VM1S

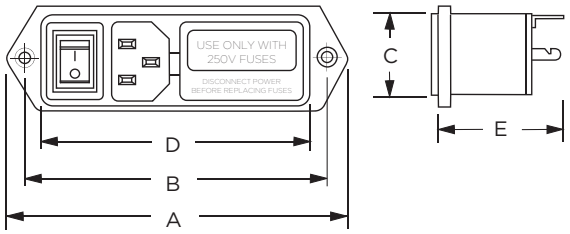

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]
Mounting holes (2):	.155 [*3.94*] Dia. with .279 [*7.08*] Dia. x 82° countersink for #6 flathead screw

6VM1SC

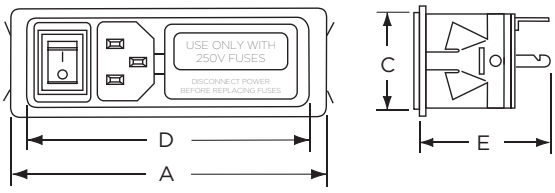

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]

6VM2 & 6VM4

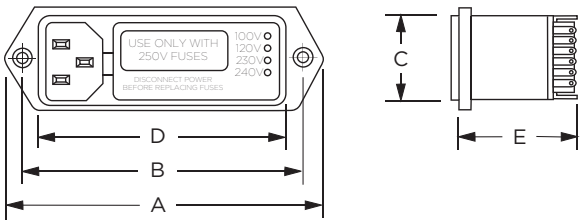

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]
Mounting holes (2):	.155 [*3.94*] Dia. with .279 [*7.08*] Dia. x 82° countersink for #6 flathead screw

6VM4C

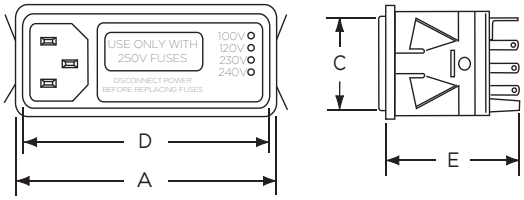

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]

6VM2S & 6VM4S

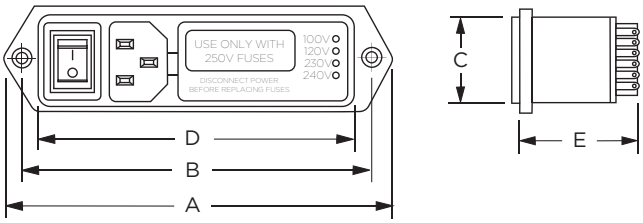

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]
Mounting holes (2):	.155 [*3.94*] Dia. with .279 [*7.08*] Dia. x 82° countersink for #6 flathead screw

6VM4SC

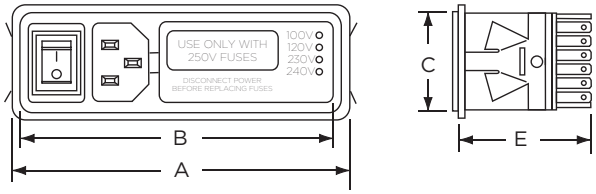

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

M Series

Case Styles - Filtered Models

3EXM1S & 3EZM1S

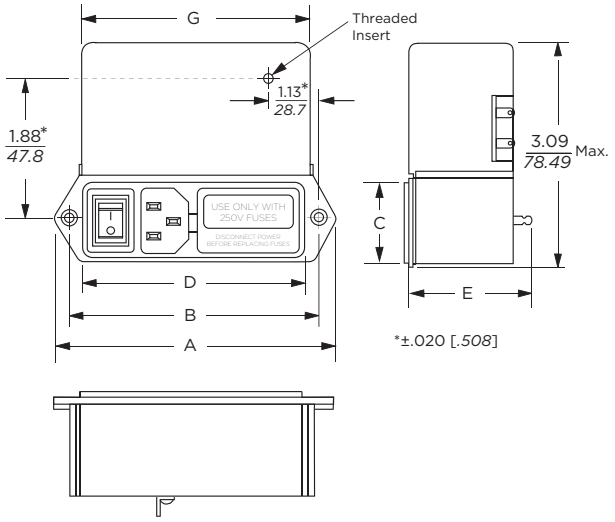

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [2.79]
Threaded insert:	6-32 x .25
Mounting holes (2):	.155 [3.94] Dia. with .279 [7.08] Dia. x 82° countersink for #6 flathead screw

3EXM4S & 3EZM4S

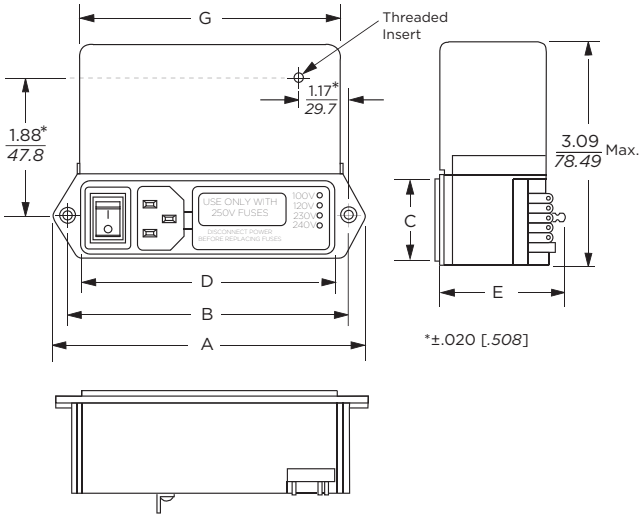

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [2.79]
Threaded insert:	6-32 x .25
Mounting holes (2):	.155 [3.94] Dia. with .279 [7.08] Dia. x 82° countersink for #6 flathead screw

3EXM4 & 3EZM4

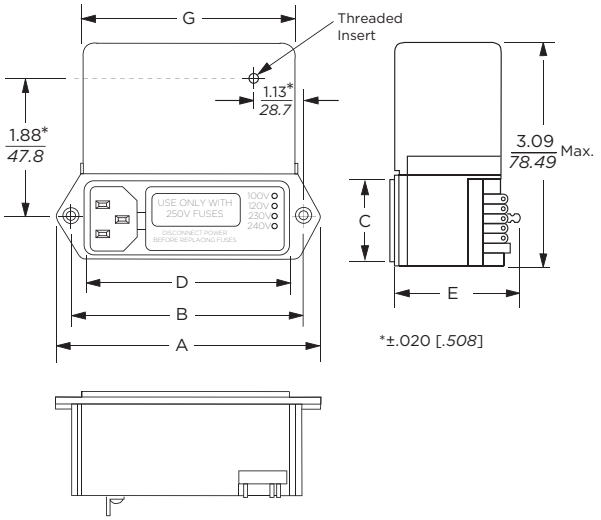

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [2.79]
Threaded insert:	6-32 x .25
Mounting holes (2):	.155 [3.94] Dia. with .279 [7.08] Dia. x 82° countersink for #6 flathead screw

5EHM1 & 5EFM1

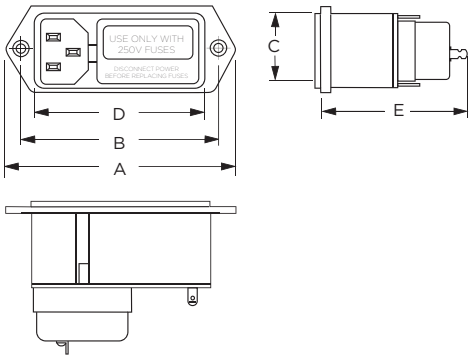

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [2.79]
Mounting holes (2):	.155 [3.94] Dia. with .279 [7.08] Dia. x 82° countersink for #6 flathead screw

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

M Series

Case Styles - Filtered Models *(continued)*

5EFM1C

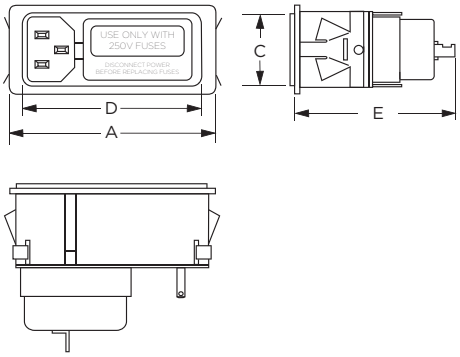

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]

5EHM1S & 5EFM1S

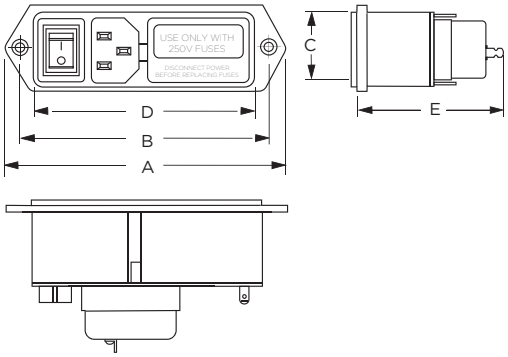

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]
Mounting holes (2):	.155 [*3.94*] Dia. with .279 [*7.08*] Dia. x 82° countersink for #6 flathead screw

5EFM1SC

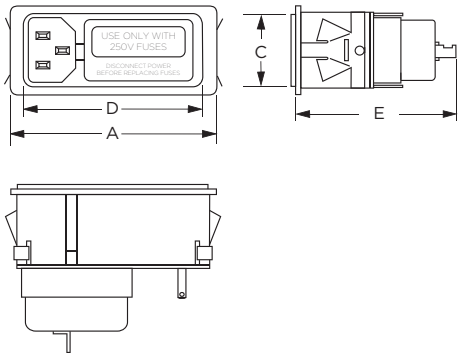

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]

5EHM4 & 5EFM4

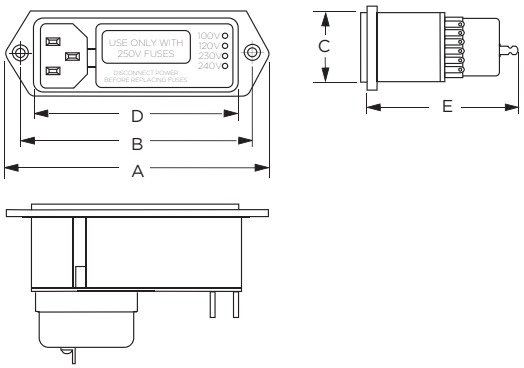

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]
Mounting holes (2):	.155 [*3.94*] Dia. with .279 [*7.08*] Dia. x 82° countersink for #6 flathead screw

5EFM4C

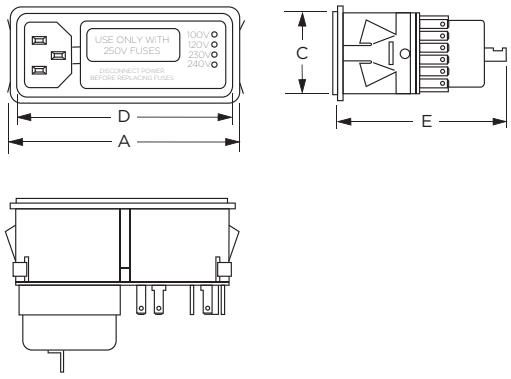

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]

5EHM4S & 5EFM4S

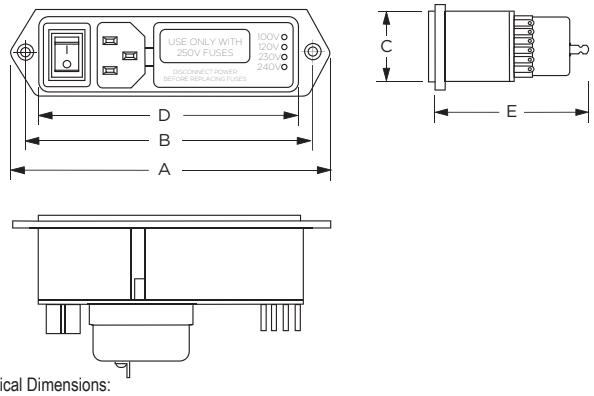

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]
Mounting holes (2):	.155 [*3.94*] Dia. with .279 [*7.08*] Dia. x 82° countersink for #6 flathead screw

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

M Series

Case Styles - Filtered Models *(continued)*

5EFM4SC

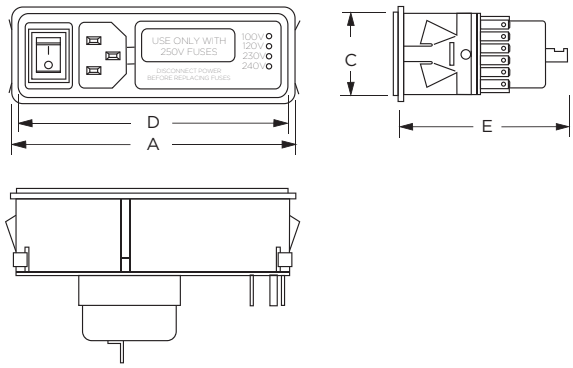

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Backplate Terminals:	.110 [*2.79*]

Recommended Panel Cutouts

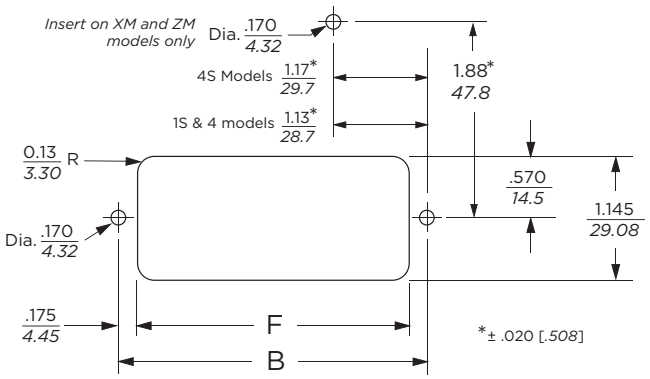

Note:
- XM and ZM models allow back mount only
- FM and HM models allow front or back mounting
- Mounting holes on flange mount models only
- Snap-In models allow front mounting only
- Snap-In models panel thickness: .06 - .09 [*1.53 - 2.29*]

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D ± .015 ± .38	E (max.)	F (ref.)	G (ref.)
6VM1	**3.39** *86.1*	**2.84** *72.1*	**1.14** *29.0*	**2.44** *62.0*	**1.45** *36.8*	**2.5** *63.5*	-
6VM1C	**2.56** *86.1*	-	**1.14** *29.0*	**2.44** *62.0*	**1.45** *36.8*	**2.5** *63.2*	-
6VM1S	**4.17** *105.9*	**3.62** *91.9*	**1.14** *29.0*	**3.22** *81.8*	**1.45** *36.8*	**3.28** *83.3*	-
6VM1SC	**3.34** *84.8*	-	**1.14** *29.0*	**3.27** *83.1*	**1.45** *36.8*	**3.27** *83.1*	-
6VM2 6VM4	**3.88** *98.6*	**3.32** *84.3*	**1.14** *29.0*	**2.92** *74.2*	**1.45** *36.8*	**2.98** *75.7*	-
6VM4C	**3.04** *98.6*	-	**1.14** *29.0*	**2.92** *74.2*	**1.45** *36.8*	**2.97** *75.4*	-
6VM2S 6VM4S	**4.65** *118.1*	**4.1** *104.1*	**1.14** *29.0*	**3.72** *94.5*	**1.45** *36.8*	**3.76** *95.5*	-
6VM4SC	**3.82** *97.0*	-	**1.14** *29.0*	**3.7** *94.0*	**1.45** *36.8*	**3.75** *95.3*	-
3EXM1S 3EZM1S	**4.17** *105.9*	**3.62** *91.9*	**1.14** *29.0*	**3.22** *81.8*	**1.72** *43.7*	**3.28** *83.8*	**3.3** *83.8*
3EXM4 3EZM4	**3.88** *98.6*	**3.32** *84.3*	**1.14** *29.0*	**2.92** *74.2*	**1.72** *43.7*	**2.98** *75.7*	**2.99** *75.9*
3EXM4S 3EZM4S	**4.65** *118.1*	**4.1** *104.1*	**1.14** *29.0*	**3.72** *94.5*	**1.72** *43.7*	**3.76** *95.5*	**3.8** *96.5*
5EHM1 5EFM1	**3.39** *86.1*	**2.84** *72.1*	**1.14** *29.0*	**2.44** *62.0*	**2.19** *55.6*	**2.5** *63.5*	-
5EFM1C	**2.56** *65.0*	-	**1.14** *29.0*	**2.44** *62.0*	**2.19** *55.6*	**2.49** *63.2*	-
5EHM1S 5EFM1S	**4.17** *105.9*	**3.62** *91.9*	**1.14** *29.0*	**3.22** *81.8*	**2.19** *55.6*	**3.28** *83.3*	-
5EFM1SC	**3.34** *84.8*	-	**1.14** *29.0*	**3.27** *83.1*	**2.19** *55.6*	**3.27** *83.1*	-
5EHM4 5EFM4	**3.88** *98.6*	**3.32** *84.3*	**1.14** *29.0*	**2.92** *74.2*	**2.19** *55.6*	**2.98** *75.7*	-
5EFM4C	**3.04** *77.2*	-	**1.14** *29.0*	**2.92** *74.2*	**2.19** *55.6*	**2.97** *74.4*	-
5EHM4S 5EFM4S	**4.65** *118.1*	**4.1** *104.1*	**1.14** *29.0*	**3.7** *94.0*	**2.19** *55.6*	**3.76** *95.5*	-
5EFM4SC	**3.82** *97.0*	-	**1.14** *29.0*	**3.7** *94.0*	**2.19** *55.6*	**3.75** *95.3*	-

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

M Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

5EHM



5EFM



3EXM



3EZM



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

	Frequency – MHz							
Part No.	**.01**	**.05**	**.15**	**.5**	**1**	**5**	**10**	**30**
5EHM Models	-	-	14	18	19	22	22	17
5EFM Models	-	-	14	21	26	40	45	40
3EXM Models	2	13	23	40	46	44	44	44
3EZM Models	15	29	39	46	43	40	40	40

Differential Mode / Symmetrical (Line to Line)

	Frequency – MHz									
Part No.	**.02**	**.03**	**.05**	**.07**	**.15**	**.5**	**1**	**5**	**10**	**30**
3EXM Models	-	-	-	5	34	62	68	60	50	40
3EZM Models	5	13	28	37	55	75	75	62	54	44

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Versatile Power Entry Module with Small Footprint

P Series

UL Recognized
CSA Certified
VDE Approved

PS non-filtered *PE filtered* *PS filtered*

P Series

The P series CHAMELEON power entry module offers the most popular features in a small footprint design

As the first 10A module to provide all five power entry functions in one compact design, the chameleon module readily adapts to its environment and the needs of international markets.

- Snap-in or flange mounting
- Standard IEC 60321-1 C14 power inlet
- Both North American and metric fusing capabilities
- Two voltage selection options (for 4-voltage selection, see the M, L or LA Series)
- Optional DPST on/off switch
- Filter options for general purpose, medical and high-performance EMI filtering

The CHAMELEON module's compact design and modular construction allows selection of the required power entry feature — without altering the panel cutout. And the CHAMELEON module, with its optional adapters, will fit several common panel cutouts.

Filter Types

The CHAMELEON module has four filter and one non-filtered option:

S models provide an extended performance two element circuit EMI filter, with attenuation similar to the EEB Series power inlet filter. It offers protection for general purpose applications with stray Line to Ground and Line to Line noise that must be attenuated at the power inlet. These filters have limited leakage current and are available in current ratings of 3, 6 and 10A.

H models provide susceptibility protection with minimal leakage current, and are suitable for patient care and non-patient care medical equipment.

L models feature a high performance medical filter designed to help bring most digital equipment (including switching power supplies) into compliance with EN55022, Level B (as well as FCC part 15J, Class B) conducted emissions limits. They are available with current ratings of 6 and 10A. These high performance versions are only available with mounting ears, single voltage selection, in a complete RFI shield with options for switch, fuses and current ratings. Mounting extenders are not compatible with the L or Z models.

Z models provide a high performance three element differential mode circuit filter, with extended EMI attenuation similar to the M Series Z models, to help bring most digital equipment (including switching power supplies) into compliance with EN55022, Level B (as well as FCC Part 15J, Class B) conducted emissions limits. They are available with current ratings of 6 and 10A. These high performance versions are only available with mounting ears, single voltage selection, in a complete RFI shield with options for switch, fuses and current ratings. Mounting extenders are not compatible with the L or Z models. For minimum depth behind the panel, see the M Series

B models are non-filtered and incorporate an interconnection block. The block connects the voltage selection terminals of an unfiltered CHAMELEON module with an IEC connector and an optional switch to reduce external wiring. Compatible with the A or B RFI shield options.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

P Series

Ordering Information

Part numbers are constructed by selecting the alphanumeric character which represents the desired feature.
Note: For any option where shown as "0" use the digit ZERO (0) not the letter (O).

Mounting Style	Extender Options[1]	Switch Options*	Voltage Select[2]	Fuse Options	Filter Type	Filter Current	Shield Options[1]
P	S	J	0	X	S	S	6	0

Mounting Style
E = Mounting ears (Horizontal axis)
S = Snap-in
M = Mounting ears (Vertical axis)

Extender Option
0 = None
C = FN260
J = J Series
L = L Series[1]

Switch Option
0 = Blank
S = Double pole single throw (DPST)

Input Voltage Select
0 = Single voltage
S = Dual voltage[2] select (SMPS)
X = Dual voltage[2] select (series/parallel)

Fuse Options
D = Dual fuse
S = Single fuse

Filter Type
0 = No filter
B = Interconnection block[3]
H = Medical Filter
L = High Performance Medical[4]
S = General purpose
Z = High Performance[4]

Filter Current
0 = No filter
3 = 3A
6 = 6A
X = 10A

Shield Options
0 = No shield
A = Filter shield
B = Complete Shield
C = Complete can (for L & Z models)

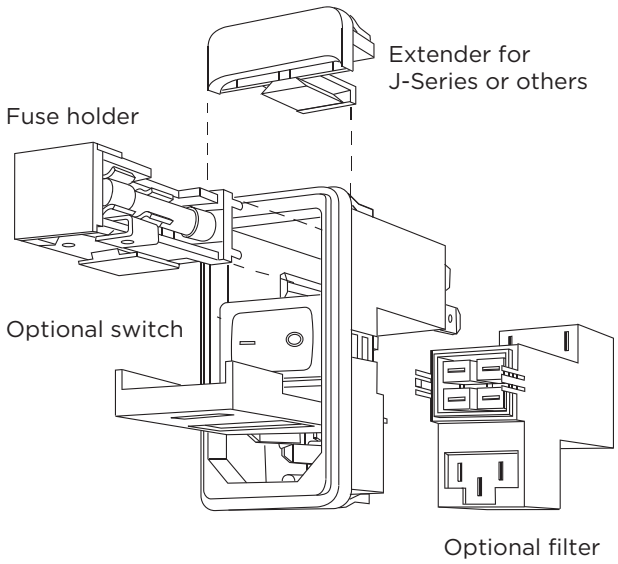

Notes:

1 L Series extender cannot be added to units with a shield. No style of extender can be added to units with B or C shields.

2 Dual voltage options are not available with L or Z Filter Types

3 When using the interconnection block, the last 3 digits of the part number are BX (0, A, or B)

4 High performance versions (L or Z filter types) are available with any switch or fuse option but only in 6 or 10A with horizontal (PE) or vertical (PM) mounting ears, single voltage (0), complete shield (C) and no extenders

* For alternative switch orientation options, please contact technical support or your Corcom product sales representative

The part number **PS0SXSS6B** would represent:

P Series (P) with a snap-in mount (S) with no extender (0) a switch (S) dual voltage select (X) single fusing (S) general purpose filter (S) for 6A (6) with a B shield (B)

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

P Series

Voltage Selection

P series power entry modules include the voltage selector integral with the fuse holder. Three voltage selection options are each supported by one of three different fuse holders. The fifth digit of the part number specifies which of the three fuse holders is included to provide the desired voltage selection. The single voltage fuse holder (option "0") has no voltage indication markings. The dual voltage options select 115V or 230V by removing the fuse holder, flipping it over, and reinstalling it. Voltage selection is indicated through a window in the P Series door. The "SMPS" fuse holder (option "S") jumpers two independent P Series terminals to indicate 230V operation to a switching mode power supply. The "PRSR" parallel/serial fuse holder (option "X") connects the windings of the equipment's dual primary transformer (not included) to step down the voltage or double up the current. The markings on the voltage selection fuse holders also remind the user to install the appropriate fuse for the current at the selected voltage.

Input Voltage Selection Schemes

S - "SPMS" Jumper Type

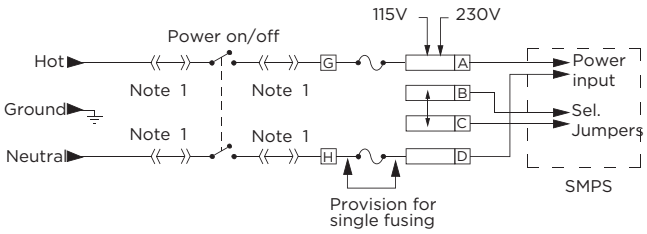

X - "PRSR" Parallel / Serial Type for Dual Primary Transformer

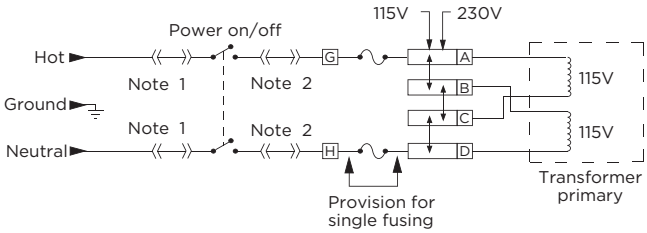

Note 1: Additional jumper wiring is required if a filter or interconnection module is not used.
Note 2: Location of optional filter. Additional jumper wiring is required if a filter or interconnection block is not used.

Shield Options

The P series offers several RF shield options. The metal shield, optional on S, H and B filtered models, provides shielding from radiated emissions and provides an RF ground for the filter to the panel. This shield is available in two versions; a shield of the filter components (designated by an A as the final digit) and a complete shield (designated by B as the final digit).

The A shield covers the filter portion of the module and increases performance of the filter by protecting the components from RFI coupling. This shield allows the use of the C or J extender.

The B shield covers the entire power entry module with metal, protecting the filter from RFI coupling, and covering the mounting cut-out to block RFI entering or leaving the equipment. The B shield cannot be used with any extender.

A complete metal enclosure is integral to both the high performance L and Z models, and must be specified by a C in the part number's final digit. This option is only available with the L or Z models.

"A" Shield

"B" Shield

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

P Series

Fuseholder

Another feature of the P series power entry module is the versatile fusing arrangement. The fuse holder can hold two 1/4" x 1-1/4" (3AG) or 5 x 20mm (metric) fuses. Single fusing is supported with a conversion clip that shorts one of the two fuse positions, and is designated by an S in the sixth part number digit. A module designated for a single fuse may be reconfigured by the manufacturer or the user to accept two fuses by simply removing the shorting clip. For applications intended for dual fusing, specify a D in the sixth part number digit.

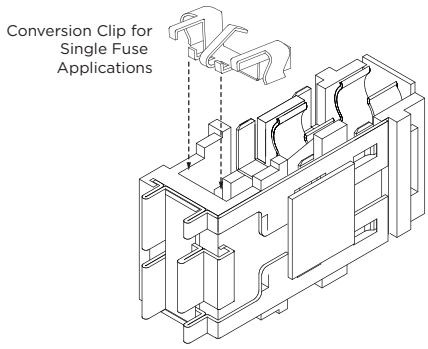

Interconnection Block

Installation of the unfiltered versions of the P series requires wiring of the IEC socket terminals to the optional switch and the switch to the fuse holder. Labor can be eliminated by ordering the module with an interconnection block. This feature, designated by "BX" in the seventh and eighth digits, pre wires the module so that only connection to the equipment must be done during installation. The interconnection block includes a plastic case to prevent access to the internal connections.

The dimensions of this alternative are the same as the filtered versions.



Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord

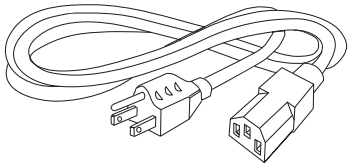

PA100: Power interconnect assembly
For voltage select models. Designed for use with either filtered or non-filtered units, 6" wire leads

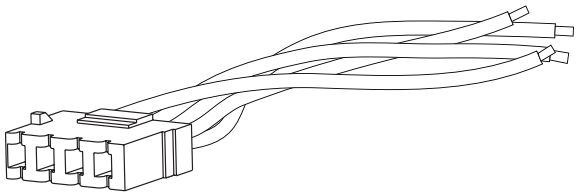

PA101: Plug only

PA102: Pins only for use with PA101

PA105: Same as PA100 but with two wires for units with no voltage selection

PA400: J Extender
Extends P Series height to fit J panel cutout

PA410: L Extender
Extends P Series width to fit L panel cutout

PA420: C Extender
Extends P Series height to fit C panel cutout



PA400
J Series Extender

C & L Extenders can not be used with B Shields.

L Extender can not be used with shields

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

P Series

Specifications

Maximum leakage current each Line to Ground:

	H & L Models	S & Z Models
@ 120 VAC 60 Hz:	2 µA	.25 mA
@ 250 VAC 50 Hz:	5 µA	.50 mA

Hipot rating (one minute):

Line to Ground:	2250 VDC
Line to Line:	1450 VDC

Rated Voltage(max.): 250VAC

Operating Voltages:
Selectable or Fixed 115/230 VAC

Operating Frequency: 50/60 Hz

Rated Current: Non-Filtered – 10A

Filtered – 3, 6 or 10A

Fuseholder: Accepts one or two fuses .25 x 1.25"(not included) or 5 x 20mm (not included)

Switch: DPST
10,000 operations at 51A max. inrush

Electrical Schematics

H Model

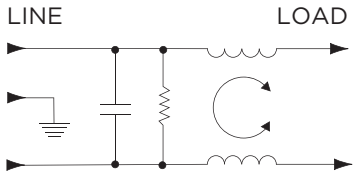

S Model

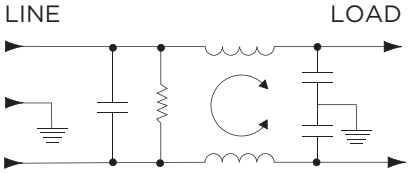

L Model

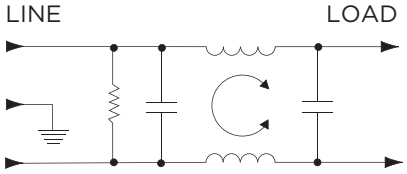

Z Model

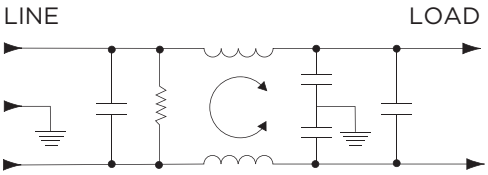

Case Styles

Front View

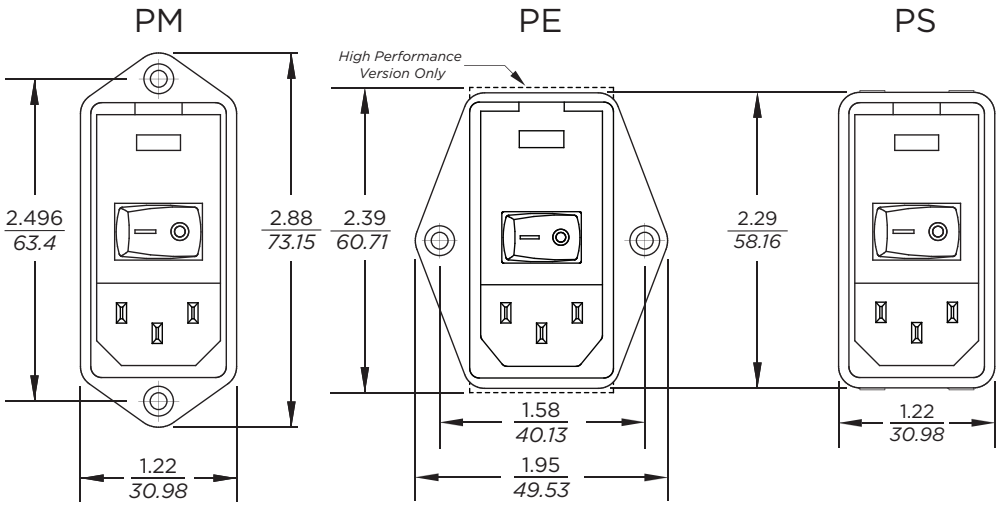

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Mounting holes (2):	.135 [*3.43*] Dia. with .23 [*5.9*] Dia. x 82° countersink for #4 flathead screw (PM, PE only)

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

P Series

Case Styles *(continued)*

Extender Options

C Extender - FN260

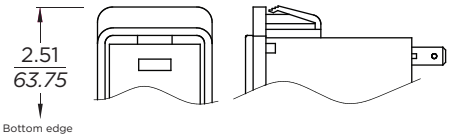

J Extender - J Series

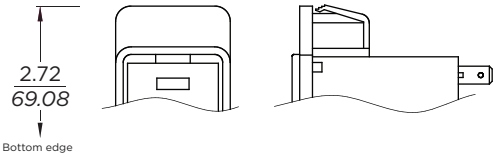

Standard Models - Side and Rear View

Non-Filtered

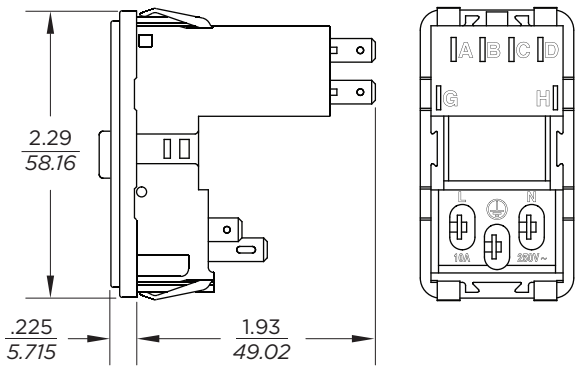

Filtered

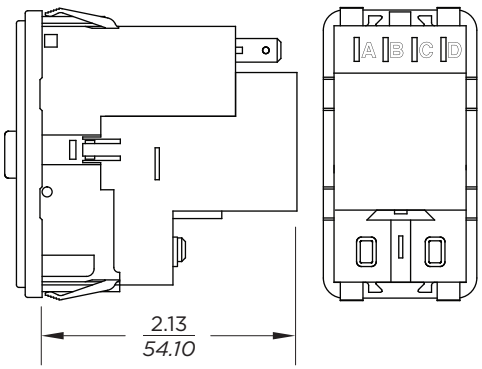

Typical Dimensions:

Terminals:	.187 [*4.8*] with .055 [*1.4*] Dia. hole. Recommended for use with mating connectors - no solder
Ground Terminal (1):	.187 [*4.8*] with .112 x .06 [*2.8 x 1.5*] slot. Recommended for use with mating connectors - no solder

High Performance Models - Side and Rear View

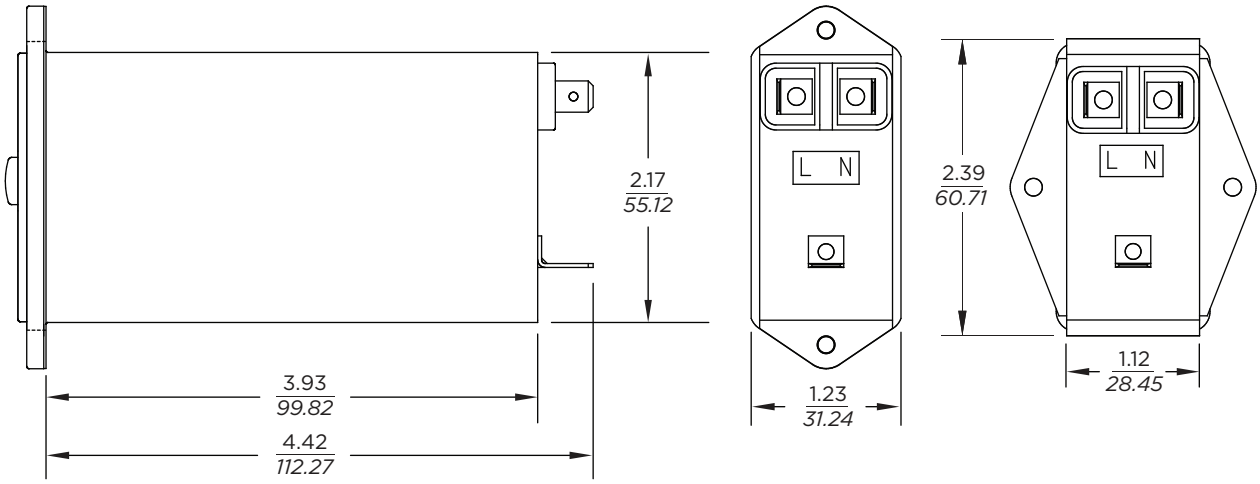

Typical Dimensions:

Terminals:	.250 [*6.4*] with .07 [*1.8*] Dia. hole. Recommended for use with mating connectors - no solder
Ground Terminal (1):	.250 [*6.4*] with .16 x .07 [*4.1 x 1.8*] slot. Recommended for use with mating connectors - no solder

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

P Series

Case Styles *(continued)*

Shield Options

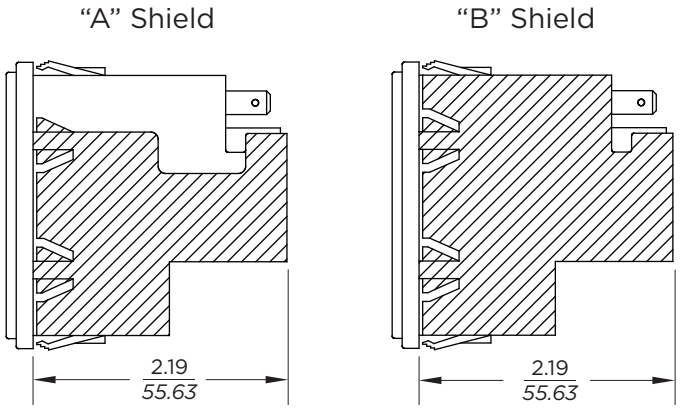

Note: Shields can only be used with filtered models. B shield may not be used with J or C extender

Recommended Panel Cutout

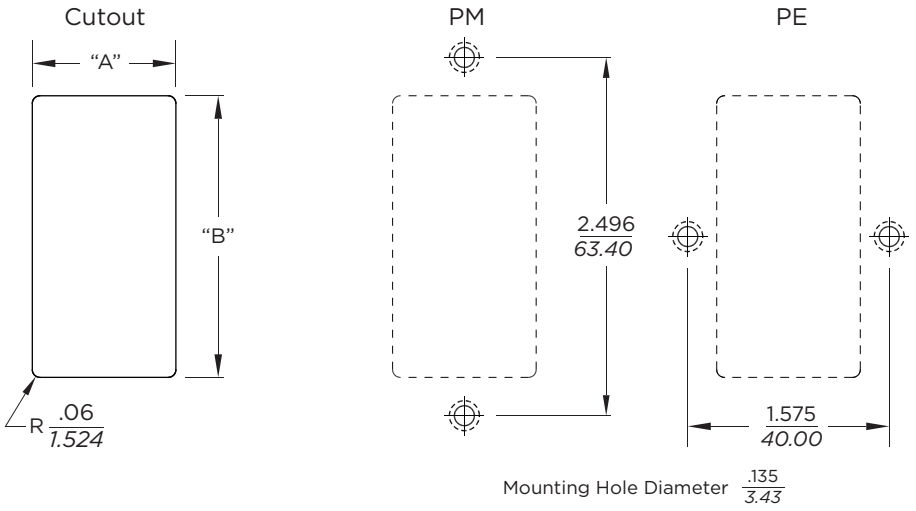

Note: For snap-in applications, the "A" sides must have a .020 [.508] radius on the installation side. Dimensions are for front mount applications. Rear mount dimensions should be determined based on customer's application parameters. Snap-in models allow for front mounting only. Not recommended for use in plastic panels.

Style	Dimension "A" +.008 - .000			Dimension "B" +.008 - .000	
	No Shield	Shielded	High Performance	Standard	High Performance
PM	1.06 [*26.92*]	1.12 [*28.45*]	1.12 [*28.45*]	2.13 [*54.10*]	2.201 [*55.91*]
PE	1.12 [*28.45*]	1.12 [*28.45*]	1.15 [*29.21*]	2.201 [*55.91*]*	2.201 [*55.91*]
PS	1.06 [*26.92*]	1.12 [*28.45*]	-	2.201 [*55.91*]*	-
PSC	1.06 [*26.92*]	1.12 [*28.45*]	-	2.52 [*64.01*]	-
PSJ	1.06 [*26.92*]	1.12 [*28.45*]	-	2.60 [*66.04*]	-
PSL	1.12 [*28.45*]	-	-	2.201 [*55.91*]*	-

**For panel thickness of 0.031 - 0.079 [0.787 - 2.01] only. Use 2.213 [56.21] for panel thickness of 0.083 - 0.114 [2.0 - 2.90]*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

P Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

S Models

3A



6A



10A



H Models

3A



6A



10A



L Models

6A



10A



Z Models

6A



10A



Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

P Series

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz								
	.03	.1	.15	.5	1	3	5	10	30
S Models									
3A	7	17	21	27	33	40	44	50	32
6A	-	8	12	17	23	32	36	44	30
10A	-	3	5	10	13	23	27	35	27
H Models									
3A	7	17	21	27	30	29	26	23	15
6A	-	8	11	15	17	19	18	16	13
10A	3	5	8	10	12	11	11	10	10

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz							
	.10	.15	.5	1	3	5	10	30
S Models								
3A	2	4	12	15	30	48	50	45
6A	2	4	12	15	22	42	55	45
10A	2	4	12	15	22	42	55	45
H Models								
3A	2	4	12	18	31	40	48	41
6A	2	4	12	16	26	35	40	35
10A	2	4	12	16	26	33	40	32

Current Rating	Frequency – MHz								
	.01	.05	.1	.15	.5	1	5	10	30
L Models									
6A	8	21	27	29	34	35	25	21	16
10A	5	17	22	23	24	25	21	18	14
Z Models									
6A	8	21	27	30	37	43	49	52	42
10A	5	17	22	24	27	32	52	47	40

Current Rating	Frequency – MHz								
	.01	.05	.1	.15	.5	1	5	10	30
L Models									
6A	10	15	34	44	75	75	75	70	60
10A	10	20	20	35	67	75	75	70	60
Z Models									
6A	10	15	34	44	75	75	75	70	60
10A	10	20	20	35	67	75	75	70	60

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

SR Series

UL Recognized
CSA Certified
VDE Approved*

SR Series

- Full Line of popular AC receptacles
- Male and female power line connectors
- Snap-in and flange mount versions
- IEC60320-1 C-13 & C14 inlets rated up to 15A
- IEC60320-1 C-19 & C-20 inlets rated up to 20A

Ordering Information

6 E SR M - P

- **Rear Connector Styles**
  - 2 – .187 [*4.8*] spade terminals
  - 3 – .250 [*6.3*] spade terminals
  - P – PC board pins
    - Fits .063 [*1.6*] hole
- **Mounting Style**
  - C – Snap-In
  - – Flange
- **Front Connector Styles**
  - M – Male
    - *15A = IEC 60320-1 C-14*
    - *20A = IEC 60320-1 C-20*
  - F – Female
    - *15A = IEC 60320-1 C-13*
- **SR Series**
- **Leakage current designation**
  - E – Low Leakage *(<0.5 mA)*
- **Current Rating Indicator**
  - 6 = 15A max.*
  - 20 = 20A max.*

**15A versions are VDE approved at 10A, 250VAC max.*
20A versions are VDE approved at 16A, 250VAC max.

Specifications

Rated Voltage (max.): 250 VAC

Materials:

Insulator: Thermoplastic UL 94V-0 flame rating

Prongs: Solid brass, nickel plated

Terminals: Brass, tin plated

Temperature Rating: For “cold” connections, 65°C

Available Part Numbers

Type	Male Connector	Female Connector
PC Pins	6ESRM-P	
Snap-In	6ESRMC2	6ESRFC3
Flange Mount	6ESRM-3	6ESRF-3
Snap-In	20ESRMC2	
Flange Mount	20ESRM-3	

Case Styles

6ESRM-P

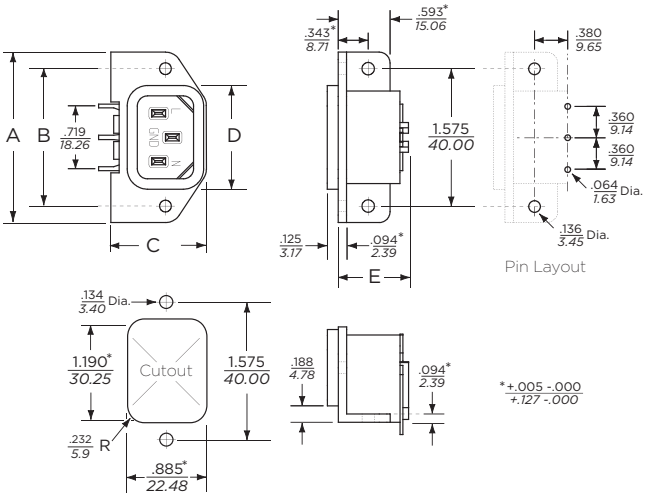

3

Power Inlet Filters & Power Entry Modules

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

SR Series

Case Styles *(continued)*

6ESRMC2

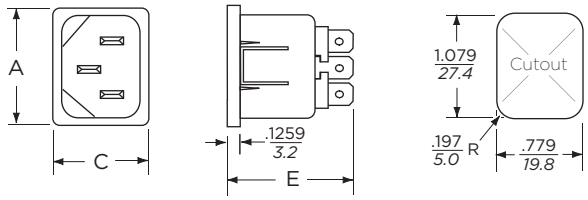

Typical Dimensions:

Front Connector:	IEC 60320-1 C14
Rear Terminals:	.187 [*4.8*] with .07 [*1.8*] Dia. hole

6ESRFC3

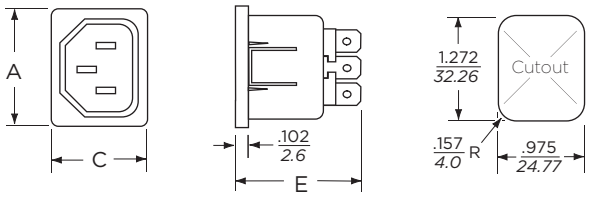

Typical Dimensions:

Front Connector:	IEC 60320-1 C13
Rear Terminals:	.25 [*6.3*] with .07 [*1.8*] Dia. hole

6ESRM-3

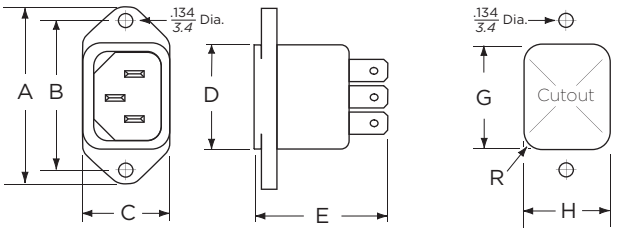

Cutout Dimensions:

	Rear Mount	Front Mount
G:	1.19 [*30.23*]	1.079 [*27.4*]
H:	0.894 [*22.7*]	0.779 [*19.8*]
R:	0.232 [*5.9*]	0.197 [*5.0*]

Typical Dimensions:

Front Connector:	IEC 60320-1 C14
Rear Terminals:	.25 [*6.3*] with .07 [*1.8*] Dia. hole

6ESRF-3

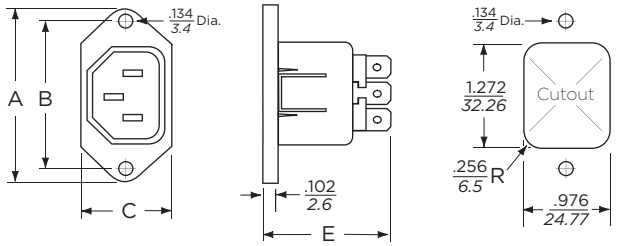

Typical Dimensions:

Front Connector:	IEC 60320-1 C13
Rear Terminals:	.25 [*6.3*] with .07 [*1.8*] Dia. hole

20ESRMC2

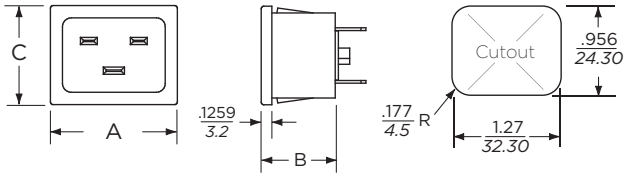

Typical Dimensions:

Front Connector:	IEC 60320-1 C20
Rear Terminals:	.25 [*6.3*] with .07 [*1.8*] Dia. hole

20ESRM-3

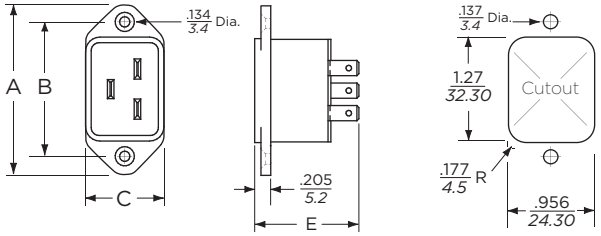

Typical Dimensions:

Front Connector:	IEC 60320-1 C20
Rear Terminals:	.25 [*6.3*] with .07 [*1.8*] Dia. hole

Case Dimensions

Part No.	A (max.)	B +.017 -.006 / +.43 -.15	C (max.)	D (max.)	E (max.)
6ESRM-P	**1.96** *49.8*	**1.575** *40.0*	**1.094** *27.8*	**1.118** *28.39*	**.807** *20.5*
6ESRMC2	**1.182** *30.00*	-	**.885** *22.5*	-	**1.192** *30.3*
6ESRFC3	**1.39** *35.5*	-	**1.09** *27.8*	-	**1.496** *38.0*
6ESRM-3	**1.96** *49.8*	**1.575** *40.0*	**.885** *22.5*	**1.19** *30.23*	**1.275** *32.4*
6ESRF-3	**1.953** *49.6*	**1.575** *40.0*	**1.133** *28.8*	-	**1.496** *38.0*
20ESRMC2	**1.377** *35.0*	**.921** *23.4*	**1.06** *27.0*	-	-
20ESRM-3	**2.087** *53.0*	**1.653** *42.0*	**.999** *25.4*	-	**1.318** *33.5*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Minimum Depth, Cost-effective Shielded Power Inlet Filter

SRB Series

UL Recognized
CSA Certified
VDE Approved*

SRB Series

- Smallest depth Corcom RFI filter available
- Complete shield
- Wide range of capacitor values
- Attenuates coupled EMI up to 300MHz
- Minimal to low leakage current versions are suitable for patient and non-patient contact medical equipment.
- Full range of mounting and termination options including unique vertical and horizontal orientation slide in mounts eliminate the need for mounting hardware

Ordering Information

15 SRB S 1 - Q

Capacitor ID
See Chart
Omit if none

Output Styles
1 – Spade terminals *(back)*
2 – Spade terminals *(bottom)*
8 – Wire leads
P – PC board pins

Mounting Style
S – Snap-in
X – Slide-in (*short edge / horizontal*)
Y – Slide-in (*long edge / vertical*)
Omit for flange mount

SRB Series

Current Rating
15A

**15A versions are tested by Underwriters Laboratories to US and Canadian requirements and are VDE approved at 10A, 250VAC*

Specifications

Maximum leakage current each Line to Ground:

Capacitor ID / Value	@120 VAC 60 Hz	@250 VAC 50 Hz
Blank / None	2 µA	5 µA
Q / 33 pF	2.1 µA	3.65 µA
R / 100 pF	9.6 µA	16.6 µA
S / 220 pF	19.2 µA	33.2 µA
T / 330 pF	24.0 µA	41.5 µA
W / 470 pF	0.04 mA	0.07 mA
X / 1000 pF	0.07 mA	0.13 mA
Y / 2200 pF	0.16 mA	0.28 mA
Z / 3300 pF	0.24 mA	0.42 mA

Hipot rating (one minute):
Line to Ground: 2250 VDC
Line to Line: 1450 VDC

Rated Voltage (max.): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 15A*

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Capacitor Options

Capacitor ID	Capacitor Value
Q	33 pF
R	100 pF
S	220 pF
T	330 pF
W	470 pF
X	1000 pF
Y*	2200 pF
Z*	3300 pF

**Not available in SRB8, SRBX or SRBY styles*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

SRB Series

Available Part Numbers

Flange Mount			
15SRB1	15SRB2	15SRBP	15SRB8
15SRB1-Q	15SRB2-Q	15SRBP-Q	15SRB8-Q
15SRB1-R	15SRB2-R	15SRBP-R	15SRB8-R
15SRB1-S	15SRB2-S	15SRBP-S	15SRB8-S
15SRB1-T	15SRB2-T	15SRBP-T	15SRB8-T
15SRB1-W	15SRB2-W	15SRBP-W	15SRB8-W
15SRB1-X	15SRB2-X	15SRBP-X	15SRB8-X
15SRB1-Y	15SRB2-Y	15SRBP-Y	
15SRB1-Z	15SRB2-Z	15SRBP-Z	
Snap-In		**Slide-In**	
15SRBS1	15SRBS8	15SRBX8	15SRBY8
15SRBS1-Q	15SRBS8-Q	15SRBX8-Q	15SRBY8-Q
15SRBS1-R	15SRBS8-R	15SRBX8-R	15SRBY8-R
15SRBS1-S	15SRBS8-S	15SRBX8-S	15SRBY8-S
15SRBS1-T	15SRBS8-T	15SRBX8-T	15SRBY8-T
15SRBS1-W	15SRBS8-W	15SRBX8-W	15SRBY8-W
15SRBS1-X	15SRBS8-X	15SRBX8-X	15SRBY8-X
15SRBS1-Y			
15SRBS1-Z			

Electrical Schematic

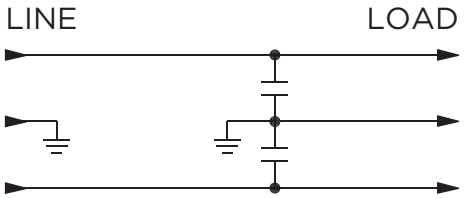

Accessories

GA400: NEMA 5-15P to IEC 60320-1 C-13 line cord

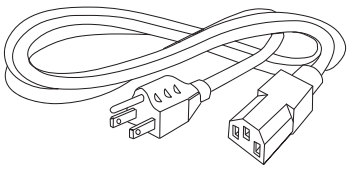

Case Styles

SRB1

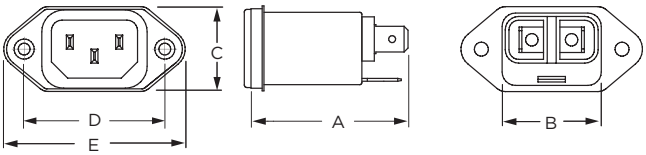

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

SRB2

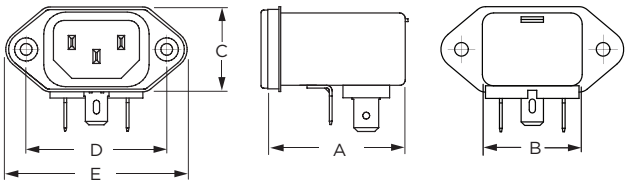

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

SRBP

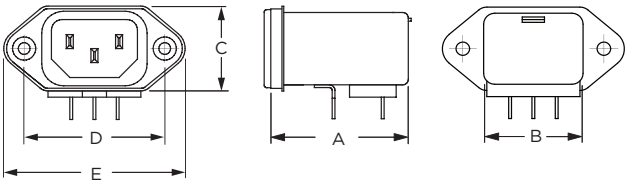

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
PC board pins (3):	.031 [*0.7*] square, ± .003 [*.07*]

SRBS1

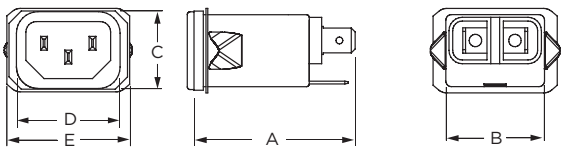

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

SRB Series

Case Styles *(continued)*

SRB8

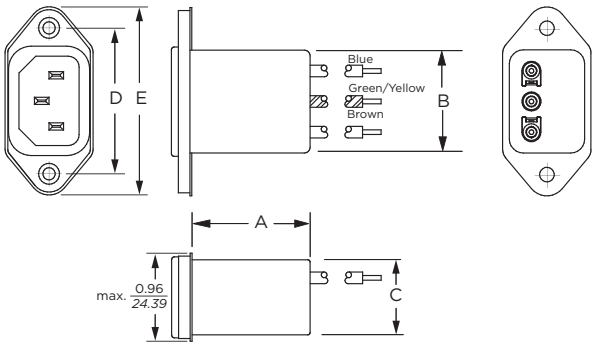

Typical Dimensions:

Mounting holes (2):	.132 [*3.35*] Dia. with .236 [*5.99*] Dia. x 90° countersink for #4 flathead screw
Line Inlet (1):	IEC 60320-1 C14
Wire Leads:	4.0 [*101.6*] Min., 18AWG, UL1015

SRBS8

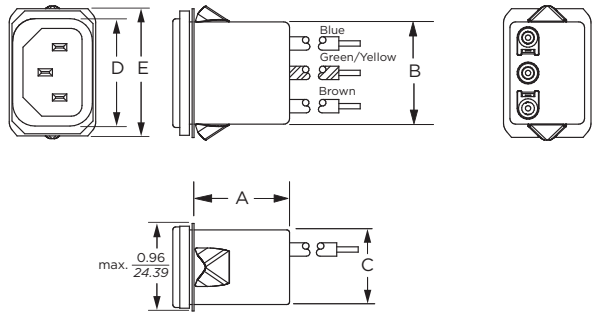

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Wire Leads:	4.0 [*101.6*] Min., 18AWG, UL1015

SRBX8

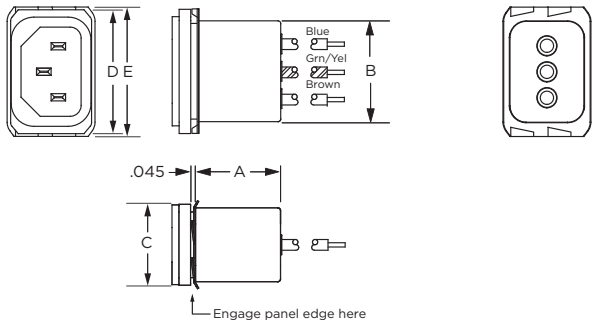

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Wire Leads:	4.0 [*101.6*] Min., 18AWG, UL1015

SRBY8

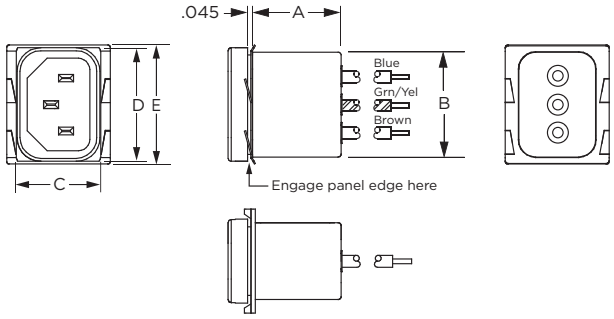

Typical Dimensions:

Line Inlet (1):	IEC 60320-1 C14
Wire Leads:	4.0 [*101.6*] Min., 18AWG, UL1015

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D ± .015 / ± .38	E (max.)
15SRB1	**1.75** *44.45*	**1.13** *28.70*	**0.96** *24.38*	**1.58** *40.00*	**2.04** *51.76*
15SRB2	**1.54** *39.12*	**1.13** *28.70*	**0.96** *24.38*	**1.58** *40.00*	**2.04** *51.76*
15SRBP	**1.54** *39.12*	**1.13** *28.70*	**0.96** *24.38*	**1.58** *40.00*	**2.04** *21.76*
15SRBS1	**1.75** *44.45*	**1.13** *28.70*	**0.96** *24.38*	**1.19** *30.10*	**1.41** *35.81*
15SRB8	**0.95** *24.13*	**1.13** *28.70*	**0.96** *24.38*	**1.58** *40.00*	**2.04** *51.76*
15SRBS8	**.95** *24.13*	**1.13** *28.70*	**0.96** *24.38*	**1.19** *30.10*	**1.41** *35.81*
15SRBX8	**0.95** *24.1*	**1.11** *28.2*	**0.89** *22.61*	**1.35*** *34.29**	**1.41** *35.81*
15SRBY8	**0.95** *24.1*	**1.11** *28.2*	**0.89** *22.61*	**1.30*** *33.02**	**1.36** *34.54*

*max.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

SRB Series

Recommended Panel Cutouts

SRB1, SRB2, SRBP & SRB8

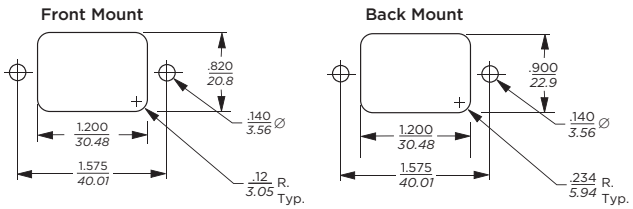

Tolerances ± .005 [*0.13*] unless otherwise noted

Note 1: SRB1 and SRB8 can be front or back mounted

Note 2: SRB2 and SRBP can be back mounted only

SRBS



Front Mount only

Panel Thickness	G Dim. ± .002 [*.05*]
0.031 - 0.052 [*0.79 - 1.32*]	1.260 [*32.00*]
0.046 - 0.068 [1.17 - 1.73]	1.350 [*34.29*]

Tolerance ±.002 *[.050]*

SRBX

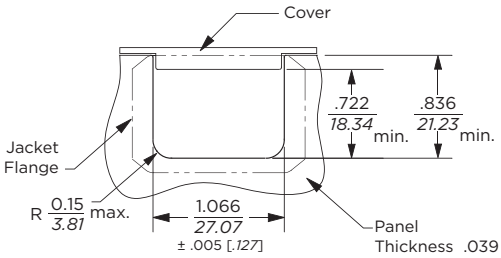

SRBY

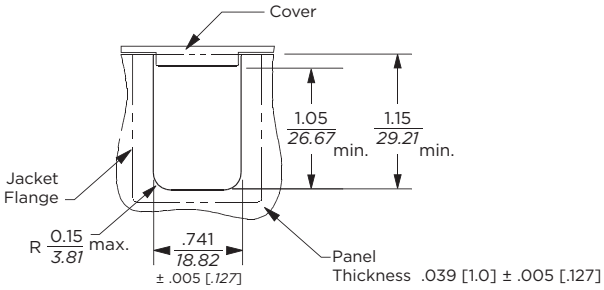

PC Board Layout

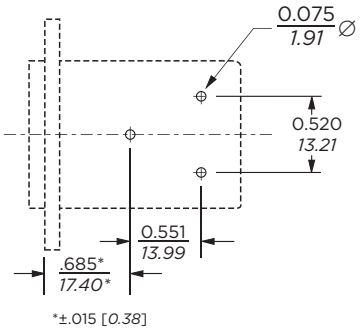

*±.015 [*0.38*]



SRBX8

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

SRB Series

Performance Data

Typical Insertion Loss

Measured in closed 50 Ohm system

Q



R



S



T



W



X



Y



Z



Common Mode / Asymmetrical (L-G)
Differential Mode / Symmetrical (L-L)

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz					
	1	5	10	50	100	300
Q	-	-	-	-	-	20
R	-	-	-	3	6	22
S	-	-	1	6	17	19
T	-	-	2	13	13	19
W	-	2	4	18	13	20
X	-	5	9	25	10	17
Y	1	10	15	20	8	22
Z	2	14	18	17	7	15

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

Engineering Notes

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

4. DC Filters — Table of Contents

Introduction 210
Selector Chart 211
DA Series 212
DB Series 214
DC Series 217
P Series 223

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Introduction

STAY CONNECTED WITH CORCOM PRODUCTS

TE Connectivity (TE) is a world leader in EMI-RFI filtering technology. Since 1955, TE has been providing EMI-RFI solutions to leading computer, industrial and telecommunications companies worldwide. Whether you are meeting FCC and international EMC standards on EMI-RFI emissions or developing a newly designed piece of equipment from being disturbed by EMI-RFI in the environment, a power line filter will help your equipment with compliance.

This section highlights TE's product offering of DC rated products. Whether the issues involve filtering noise on the data lines or on the power lines, TE can provide the needed solutions for both susceptibility and to help achieve system emissions and immunity compliance.

As new technologies in the Telecom-Datacom industry are developed and introduced, TE continues to design and develop new products to address the EMI-RFI filtering issues. TE's design engineers are very actively working with telecom and datacom system engineers to solve EMI-RFI issues.

In working with two of the leading North American communications equipment companies, TE engineers solved the EMI-RFI issues present by applying 48 VDC filters at the primary input of the DC power supply. One of the applications was on network routing equipment and required a two-stage 48VDC filter on the input to the DC power supply. TE applied high-frequency attenuating 48VDC filters on the load side of the DC power supplies to solve high-frequency EMI-RFI issues.

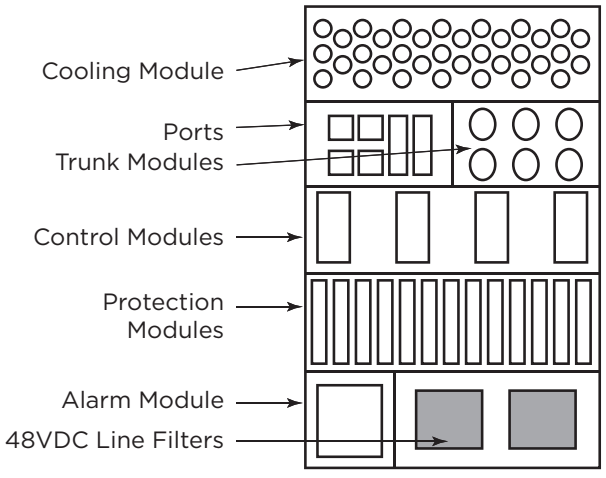

Typical Piece of Communications Equipment Utilizing 48VDC Filters

TE has provided solutions in both power line filtering and signal line filtering applications for many leading communications companies. As data transmission speeds increase and EMI-RFI issues multiply, TE has developed products to better solve the newer challenges communications companies encounter.

Corcom DC power line and signal line filters have been included in:

- Network routing equipment
- Servers
- Modems
- Switching equipment
- Wireless cabinets
- Ethernet hubs
- Base stations
- Repeater stations
- Power supplies for all types of communications equipment

TE has developed DC filter products specifically for the communications industry including:

- DC power line clean-up filters
- Medium and multiple-stage high-performance DC power line filters
- High frequency DC power line filters (up to 3GHz)
- High current DC power line filters (up to 60A)
- Data-transmission signal line filters

Corcom DC filters are available in versions that can solve a wide variety of EMI-RFI issues. TE has solved basic EMI-RFI issues with simple cleanup DC filters and has solved more complex EMI-RFI issues with mid-range and multiple-stage high performing DC filters. TE has also solved high-frequency noise problems (up to 3GHz) encountered with high-speed data transmission and switching power supplies.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Selector Chart

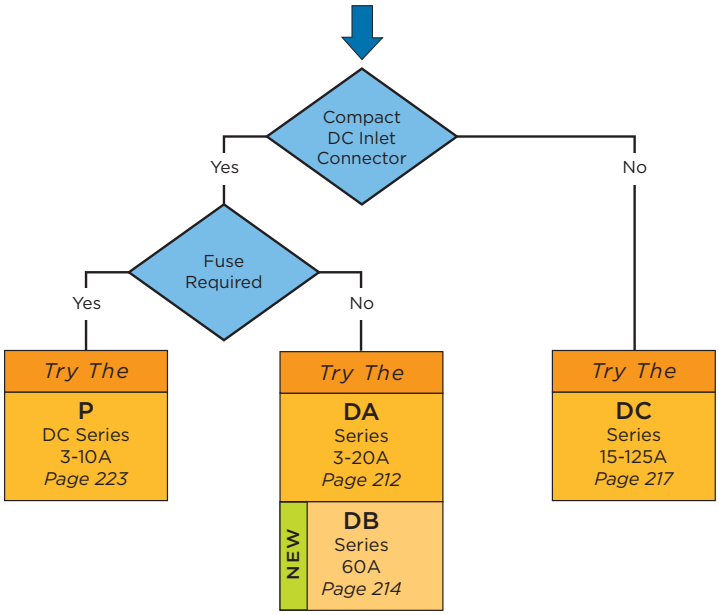

Series	Input	Output	Mounting	Options	Current Rating
P	2-pin Inlet	1/4" Terminal	Snap In Panel *or* Flange Panel	Fuse	3, 6, 10A
DA / DAS	3-pin Inlet	1/4" Terminal *or* PC Board	Snap In Panel *or* Flange Panel	—	3, 6, 10, 15A
DB	2-pin High Current Inlet	Wire Leads	Flange Panel and Rear Mount	Compact, Standard, Feedthrough & Hi-Performance Filters and Unfiltered Inlet & Plug available Separately	60A
DC	Redundant Stud Terminal Block	Redundant Stud *or* Terminal Block	Bulkhead *or* Flange Chassis	Circuit Breaker *and/or* High Frequency Performance	15, 30, 60, 100, 125A

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Compact RFI Line Filter with DC Inlet Connection

DA Series

UL Recognized
CSA Certified
TUV Certified

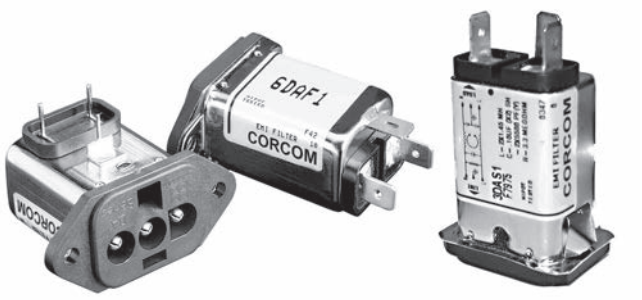

DAFP *DAF1* *DAS1*

DA Series

- General purpose line filters for DC applications up to 125VDC.
- Compact with a 3-pin inlet connector
- Available in 3, 6, 10 and 15A versions
- Flange mount with 1/4" or PCB terminals
- Mates with a standard MOLEX* connector (HCS Series)

Ordering Information

3 DA F 1

- **Output Styles**
  1 – .250 [6.3] spade terminals
  P – PC board mount pins
- **Case Style**
  F – Flange mount
  S – Snap-in
- **DA Series**
- **Current Rating**
  3, 6, 10 or 15A

Available Part Numbers

3DAF1	10DAF1
3DAS1	10DAS1
3DAFP	10DAFP
6DAF1	15DAF1
6DAS1	15DAS1
6DAFP	15DAFP

Specifications

Hipot rating (one minute):
Line to Ground: 2250 VDC
LIne to Line: 1450 VDC

Rated Voltage (max): 125 VDC

Rated Current: 3 to 15A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +55°C
In an ambient temperature (T_a) higher than +55°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

Electrical Schematic

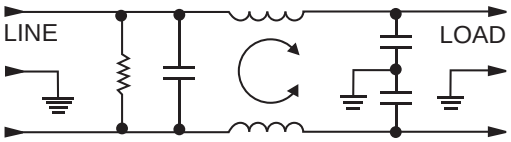

Accessories

Red
Green/Yellow
Black

GA310 – (shown above) Pre-assembled connector housing and terminals with three 36" long 18 gauge wires to mate with DA Series filters

MOLEX* connector part numbers:

03-12-1036	Connector housing for DA Series
18-12-1222	Female terminals (3 per connector)

*MOLEX is a trademark of MOLEX Incorporated

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

DA Series

Case Styles

DAF1

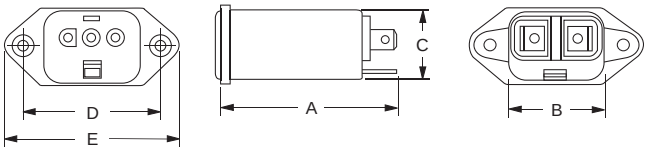

Typical Dimensions:

Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot
Mounting Holes (2):	.187 ± .008 [*4.75 ± .20*] Dia. 90° countersunk for # 4 flathead screw

DAS1

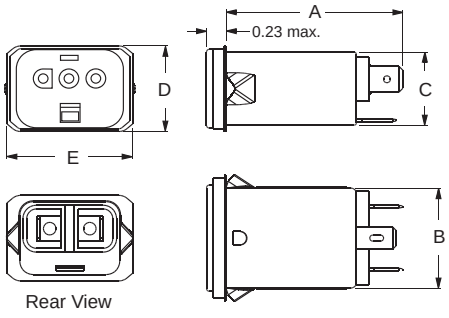

Typical Dimensions:

Load Terminals (2):	.250 [*6.3*] with .07 [*1.8*] Dia. hole
Ground Terminal (1):	.250 [*6.3*] with .07 x .16 [*1.8 x 3.8*] slot

DAFP

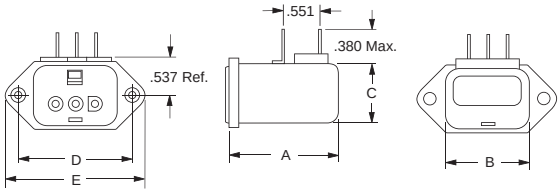

Typical Dimensions:

Pins (3):	.031 x .06 ± .003
Mounting Holes (2):	0.187 ± .008 [*4.75 ± .20*] Dia. 90° countersunk for # 4 flathead screw

PC Board Layout

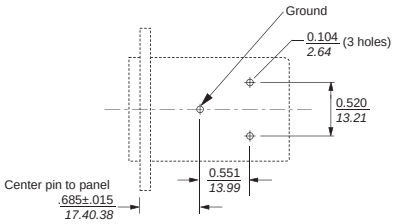

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D ± .010 ± .25	E (max.)
DAF1	**2.15** *54.61*	**1.12** *28.45*	**0.81** *20.57*	**1.575** *40.01*	**1.98** *50.29*
DAS1	**1.98** *50.29*	**1.10** *27.94*	**0.81** *20.57*	**0.96*** *24.38*	**1.41** *35.81*
DAFP	**1.54** *39.12*	**1.12** *28.45*	**0.81** *20.57*	**1.575** *40.01*	**1.98** *50.29*

*Represents max. dimension

Recommended Panel Cutouts

DAF

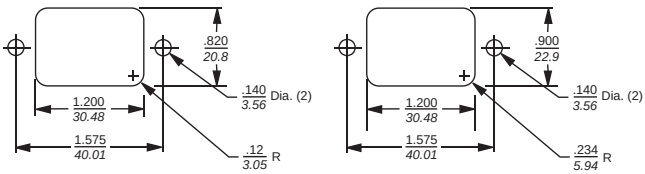

DAS



Panel Thickness	"A" Dim. ± .002
0.031 – 0.052 [*.79 – 1.32*]	1.260 [*32.00*]
0.046 – 0.068 [*1.17 – 1.73*]	1.350 [*34.29*]

Performance Data

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .05	.1	.15	.5	1	3	5	10	30	100	200
3A	6	9	11	26	41	48	52	55	46	22	16
6A	2	4	6	18	30	37	42	48	42	-	-
10A	-	1	4	8	17	25	30	36	38	21	11
15A	-	-	-	3	5	13	19	25	29	10	14

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .05	.1	.15	.5	1	3	5	10	30	100	200
3A	-	4	7	16	18	37	47	50	43	31	36
6A	-	4	7	19	21	27	40	53	41	-	-
10A	2	4	6	17	22	23	32	48	38	30	26
15A	-	-	2	17	19	29	33	37	37	31	28

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

DB Series

UL Recognized
CSA Certified
TUV Certified

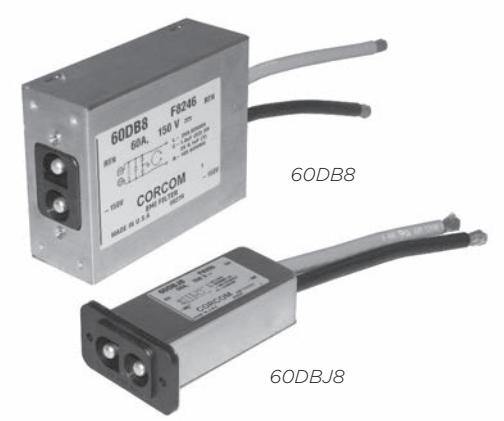

DB Series

- Compact connector for high-current DC applications
- Reliable performance in a compact assembly
- Polarized mating scheme
- Easy customer termination of power source
- Plug and receptacle available pre-terminated in standard wire lengths
- Available filtered or unfiltered

Ordering Information

60 DB F 8

- **Output Styles**
  - Filtered Models
    - 8 – 6” Wire leads
  - Connector Only
    - L1 – 1’ Cable pair
    - L3 – 3’ Cable pair
    - L9 – 9’ Cable pair
    - Omit for none
- **Type**
  - R – Receptacle with clips
  - P – Plug with clips
  - J – Compact filter
  - F – Feedthrough capacitors
  - X – High performance
  - Blank – Standard filter
- **DB Series**
- **Current Rating**
  - 60A

Specifications

Hipot rating (one minute):

	Filtered Models	DBR & DBP
Line to Ground:	2121 VDC	n/a
LIne to Line:	1768 VDC	1600 VAC

Rated Voltage (max): 150VDC* 300 VDC

Rated Current: 60A *(all versions)*

Operating Ambient Temperature Range (at rated current I_r): -10°C to +55°C

In an ambient temperature (T_a) higher than +55°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/30}$

*Certified to 120V for TUV

Available Part Numbers

Filtered Models	
60DB8	60DBJ8
60DBF8	60DBX8

Connectors Only	
60DBR	60DBP
60DBRL1	60DBPL1
60DBRL3	60DBPL3
	60DBPL9

WARNING

This is not approved for hot swap or current interruption in DC applications. Doing so will result in irreparable damage to contacts.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

DB Series

Electrical Schematics

DB8 & DBJ8

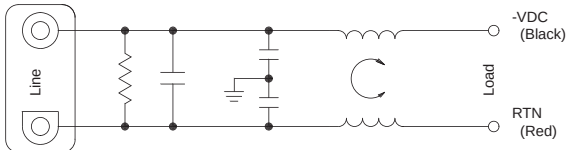

DBF8

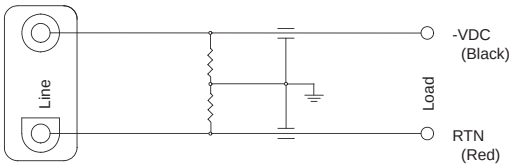

DBX8

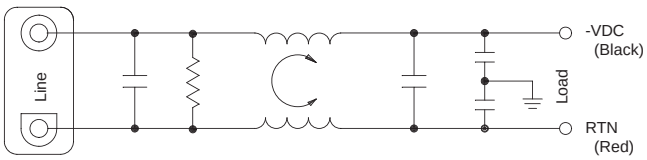

60DBPL *60DBRL*

Available as connector only (shown)
or with pre-installed 6AWG 300V Extra Flexible wire

Case Styles

DBJ8

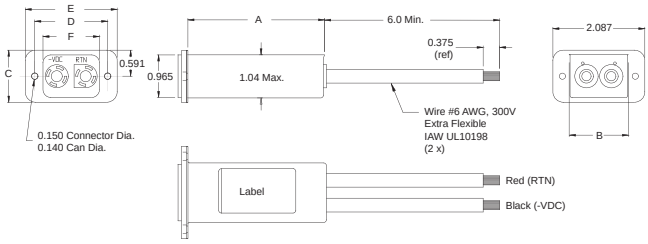

DB8 & DBF8

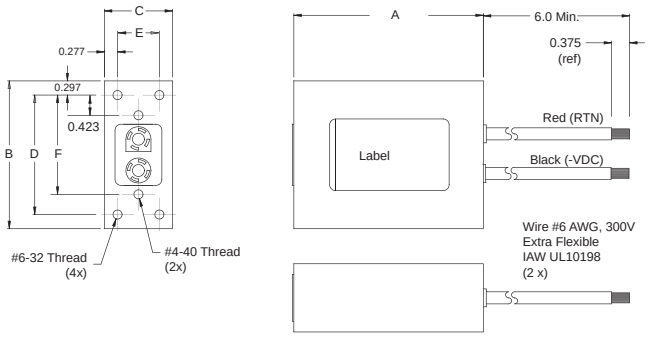

DBX8

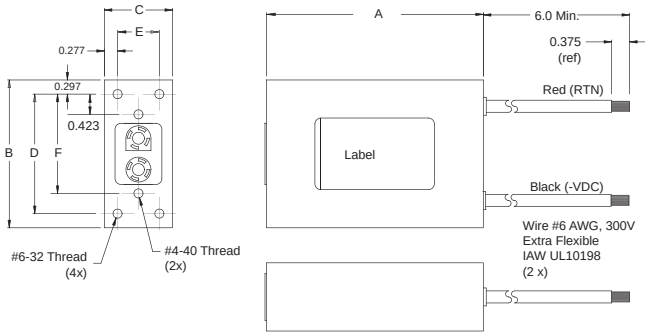

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

DB Series

Case Styles *(continued)*

DBPL

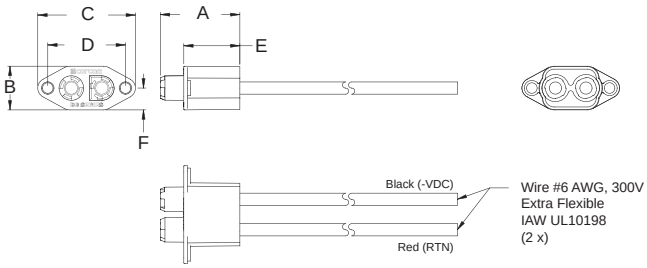

DBRL

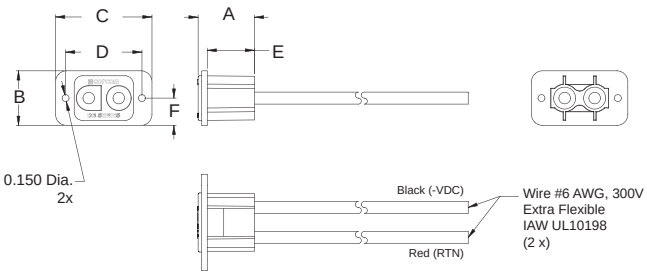

Recommended Panel Cutout

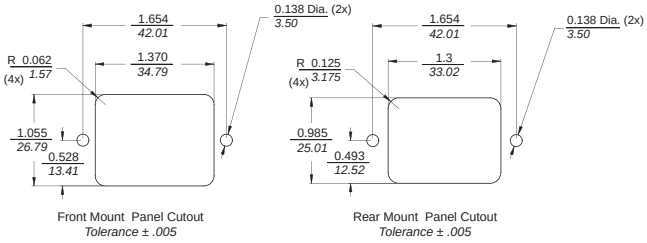

Minimum cable lengths:

DBRL1 / DBPL1:	12 [*304.8*]
DBRL3 / DBPL3:	36 [*914.4*]
DBPL9:	108 [*2743.2*]

Accessories / Tooling

Insertion/Extraction Tool:	1643922-1*
Crimp per TE spec:	114-13206
Crimp tool:	M22520/23-01
Indenter head:	M22520/23-04
Locator:	M22520/23-11
Connector system locking kit[1]:	Contact TE

*for DBR / DBP Only

[1]Tool required to disengage mated connector when using locking kit

Case Dimensions

Part No.	A (max)	B (max)	C ±.025 ±.635	D ±.025 ±.635	E ±.025 ±.635	F ±.025 ±.635
60DBJ8	**3.2** *81.28*	**1.36** *34.544*	**1.181** *29.997*	**1.654** *42.012*	**2.087** *53.01*	**1.28** *32.512*
60DB8 60DBF8	**4.06** *103.12*	**3.20** *81.28*	**1.45** *36.83*	**2.50** *63.50*	**0.875** *22.23*	**2.077** *52.76*
60DBX	**6.06** *153.92*	**3.50** *88.90*	**1.45** *36.83*	**2.876** *73.05*	**0.875** *22.23*	**2.265** *57.53*
60DBRL	**1.22*** *30.99**	**1.181*** *29.99*	**2.087** *53.009*	**1.654** *42.011*	**1.023** *25.984*	**0.591** *15.011*
60DBPL	**1.695*** *43.05**	**0.93*** *23.62**	**2.08** *52.832*	**1.654** *42.011*	**1.195** *30.353*	**0.465** *11.811*

*± 0.025 [*0.635*]

Performance Data

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

	Frequency – MHz									
Part No.	0.1	0.15	0.5	1	5	1	20	30	50	100
60DBJ8	-	-	-	1	13	21	30	40	30	20

	Frequency – MHz									
Part No.	0.05	0.1	0.15	.5	1	3	5	10	20	30
60DB8	2	7	10	23	30	48	38	28	20	16
60DBF8	15	22	25	35	42	50	58	54	38	36
60DBX8	-	10	16	40	48	54	60	51	40	36

Differential Mode / Symmetrical (Line to Line)

	Frequency – MHz									
Part No.	0.1	0.15	0.5	1	5	1	20	30	50	100
60DBJ8	5	8	19	26	34	26	20	16	-	-

	Frequency – MHz									
Part No.	0.05	0.1	0.15	.5	1	3	5	10	20	30
60DB8	20	26	29	43	53	30	30	24	20	18
60DBF8	9	15	18	30	34	40	44	44	48	52
60DBX8	31	30	30	70	70	54	50	60	54	50

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

DC Series

UL Recognized
CSA Certified
TUV Certified

60DCF6B 15DCF10

DC Series

- General purpose line filters for DC applications up to 125VDC
- Available with or without a circuit breaker
- Available with feedthrough capacitors for added high frequency performance
- Available in both flange mound (DCF) and bulkhead mount (DCB) configuration

Ordering Information

60 DC B 6 B

- **Options**
  - B – Circuit breaker
  - F – Feedthrough capacitors
  - BF – Circuit breaker and feedthrough
  - *F and BF available only in bulkhead (B) mounting style*
  - Omit for none
- **Input / Output Styles**
  - 6 – Redundant stud
  - 10 – Phoenix terminal
- **Mounting Style**
  - F = Flange
  - B = Bulkhead and rack
  - *Required for F or BF options*
- **DC Series**
- **Current Rating**
  - 15, 30, 60, 100 or 125A

Specifications

Hipot rating (one minute):
Line to Ground: 2250 VDC
LIne to Line: 1450 VDC

Rated Voltage (max): 80 VDC

Rated Current: 15 to 125A

Operating Ambient Temperature Range (at rated current I_r): -10°C to +55°C

In an ambient temperature (T_a) higher than +55°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/30}$

Electrical Schematics

Standard Performance

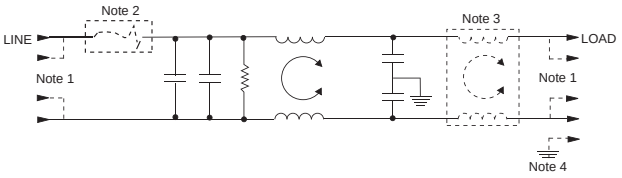

High Frequency Performance *(F & BF Styles)*

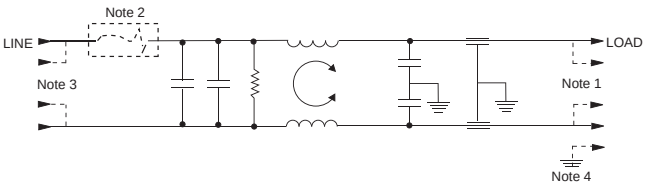

Note 1: Depicts redundant style 6 terminals.
Note 2: Depicts optional circuit breaker.
Note 3: For 100 & 125A versions delete second coil.
Note 4: Depicts style 10 terminal versions which have separate ground stud.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

DC Series

Available Part Numbers

Standard Performance		High Performance	
15DCF6	15DCF10	15DCB10F	15DCB6F
30DCF6	30DCF10	30DCB10F	30DCB6F
60DCF6	60DCF10	60DCB10F	60DCB6F
100DCF6	100DCF10	100DCB10F	100DCB6F
125DCF6	125DCF10	125DCB10F	125DCB6F
15DCF6B	15DCF10B	15DCB6BF	
30DCF6B	30DCF10B	30DCB6BF	
60DCF6B	60DCF10B	60DCB6BF	
100DCF6B	100DCF10B	100DCB6BF	
125DCF6B	125DCF10B	125DCB6BF	
15DCB6	15DCB10	15DCB10BF	
30DCB6	30DCB10	30DCB10BF	
60DCB6	60DCB10	60DCB10BF	
100DCB6	100DCB10	100DCB10BF	
125DCB6	125DCB10	125DCB10BF	
15DCB6B	15DCB10B		
30DCB6B	30DCB10B		
60DCB6B	60DCB10B		
100DCB6B	100DCB10B		
125DCB6B	125DCB10B		

Termination Options

Style 6 (15, 30 & 60A)

- Supplied with #10-32 redundant studs
- 0.625 [*15.88*] spacing like polarity
- 0.750 [*19.05*] spacing opposing polarity
- Torque specification: 27 ±3 in-lb.

Style 10 (15 & 30A)

- PHOENIX CONTACT* part number: VDFK4
- Accepts 12 AWG stranded wire
- Wire strip length: 0.315 [*8.0*]
- Torque specification: 5.5 – 7.0 in-lb.
- Ground stud: 8-32

Style 10 (100A)

- PHOENIX CONTACT* part number: HDFK 25-VP
- Accepts 4 AWG stranded wire
- Wire strip length: 0.748 [*19.0*]
- Torque specification: 35.4 – 39.9 in-lb.
- Ground stud: 1/4-20

Style 6 (100 & 125A)

- Supplied with 1/4-20 redundant studs
- 0.750 [*19.05*] spacing like polarity
- 1.00 [*25.4*] spacing opposing polarity
- Torque specification: 45 ±2 in-lb

Style 10 (60A)

- PHOENIX CONTACT* part number: HDFK 16-VP
- Accepts 6 AWG stranded wire
- Wire strip length: 0.630 [*16.0*]
- Torque specification: 17.7 – 21.2 in-lb.
- Ground stud: 10-32

Style 10 (125A)

- PHOENIX CONTACT* part number: HDFK 50-VP
- Accepts 1 AWG stranded wire
- Wire strip length: 0.945 [*24.0*]
- Torque specification: 35.4 – 39.9 in-lb.
- Ground stud: 1/4-20

*PHOENIX CONTACT is a trademark of Phoenix Contact GmbH & Co. KG.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

DC Series

Recommended Panel Cutouts

DCB6(F) & DCB10(F)

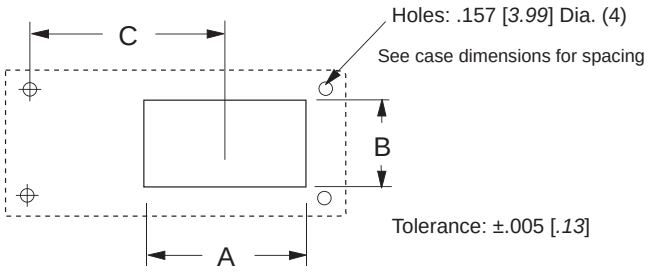

DCB6B(F) & DCB10B(F) 15 to 60A

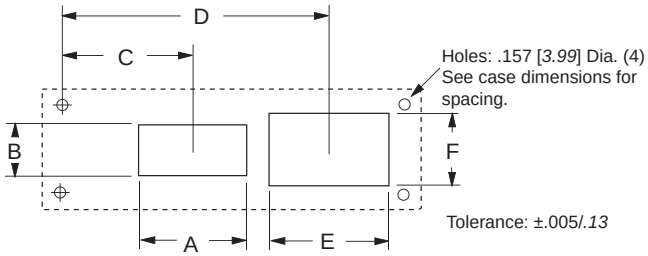

DCB6B(F) & DCB10B(F) 100 to 125A

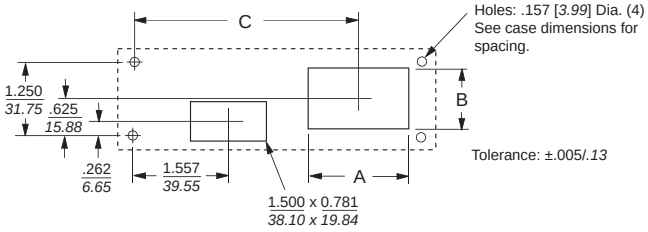

Cutout Dimensions

DCB6(F) & DCB10(F)

Part No.	A	B	C
15DCB6(F) 30DCB6(F)	**1.375** *34.93*	**1.249** *31.72*	**3.472** *88.19*
15DCB10(F) 30DCB10(F)	**1.250** *31.75*	**1.000** *25.40*	**3.472** *88.19*
60DCB6(F)	**1.375** *34.93*	**1.249** *31.72*	**3.472** *88.19*
60DCB10(F)	**1.674** *42.52*	**1.010** *25.65*	**3.443** *87.45*
100DCB6(F) 125DCB6(F)	**1.700** *43.18*	**1.549** *39.34*	**3.472** *88.19*
100DCB10(F)	**1.954** *49.63*	**1.500** *38.10*	**2.830** *71.20*
125DCB10(F)	**2.250** *57.15*	**1.590** *40.39*	**2.725** *69.22*

DCB6B(F) & DCB10B(F) 15 to 60A

Part No.	A	B	C	D	E	F
15DCB6B(F) 15DCF6B	**1.50** *38.10*	**0.781** *19.84*	**1.308** *33.22*	**3.472** *88.19*	**1.375** *34.93*	**1.249** *31.72*
15DCB10B(F) 15DCF10B	**1.50** *38.10*	**0.781** *19.84*	**1.308** *33.22*	**3.472** *88.19*	**1.250** *31.75*	**1.00** *25.40*
30DCB6B(F) 30DCF6B	**1.50** *38.10*	**0.781** *19.84*	**1.308** *33.22*	**3.472** *88.19*	**1.375** *34.93*	**1.249** *31.72*
30DCB10B(F) 30DCF10B	**1.50** *38.10*	**0.781** *19.84*	**1.308** *33.22*	**3.472** *88.19*	**1.250** *31.75*	**1.00** *25.40*
60DCB10B(F) 60DCF10B	**1.50** *38.10*	**0.781** *19.84*	**1.308** *33.22*	**3.443** *87.45*	**1.674** *42.52*	**1.010** *25.65*
60DCF6B(F) 60DCF6B	**1.50** *38.10*	**0.781** *19.84*	**1.308** *33.22*	**3.472** *88.19*	**1.375** *34.93*	**1.249** *31.72*

DCB6B(F) & DCB10B(F) 100 to 125A

Part No.	A	B	C
100DCB6B(F) 100DCF6B 125DCB6B(F) 125DCF6B	**1.70** *43.18*	**1.549** *39.34*	**4.222** *107.23*
100DCB10B(F) 100DCF10B	**1.954** *49.63*	**1.50** *38.10*	**4.295** *109.09*
125DCB10B(F)	**2.25** *57.15*	**1.59** *40.39*	**4.147** *105.33*
125DCF10B	**2.25** *57.15*	**1.59** *40.39*	**2.725** *105.33*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

DC Series

Case Styles

DCB6 & DCB6B

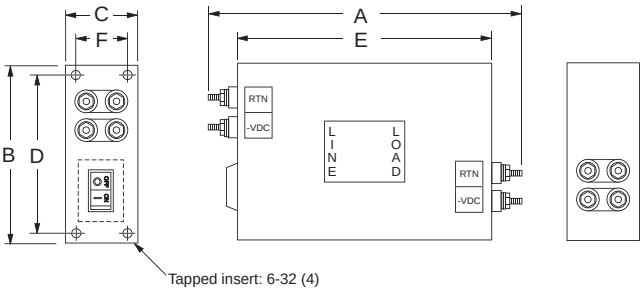

Note: Delete circuit breaker for DCB6 models

DCF6

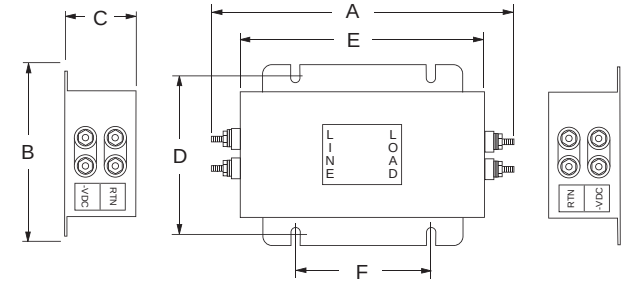

Typical Dimensions:

Mounting Slots (4): .260 x .39 [*6.6 x 9.9*] 60 to 125A versions
Mounting Holes (4) .203 x .156 [*5.2 x 4.0*] 15 & 30A versions

DCF6B

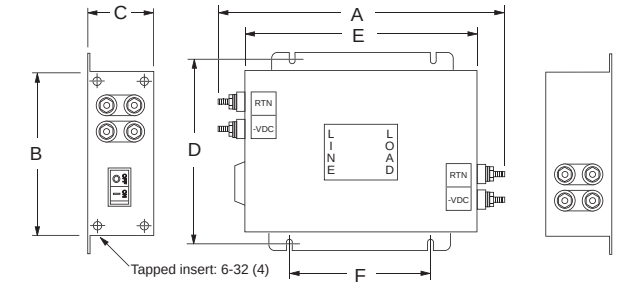

Typical Dimensions:

Mounting Slots (4): .260 x .39 [*6.6 x 9.9*]

DCB10 & DCB10B (15 to 30A)

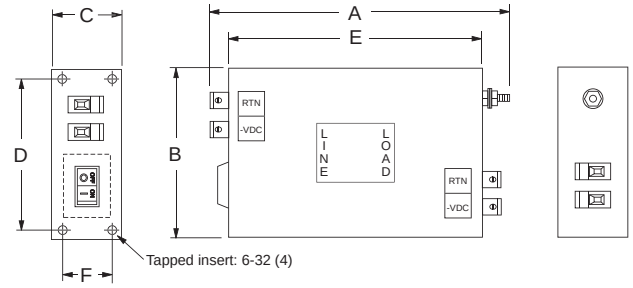

Note: Delete circuit breaker for DCB10 models

DCB10 & DCB10B (60 to 125A)

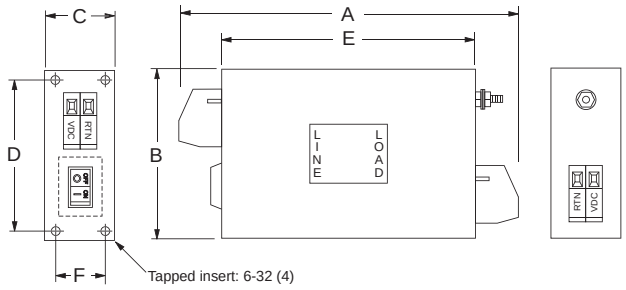

Note: Delete circuit breaker for DCB10 models

DCF10 (15 & 30A)

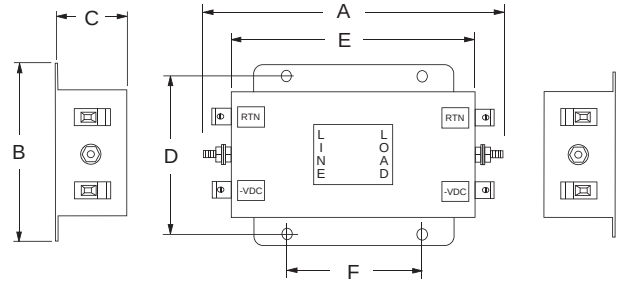

Typical Dimensions:

Mounting Holes (4) .203 x .156 [*5.2 x 4.0*]

DCF10 (60 to 125A)

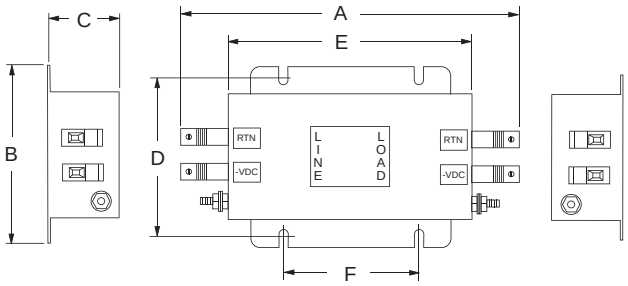

Typical Dimensions:

Mounting Slots (4): .260 x .39 [*6.6 x 9.9*]

DCF10B (15 & 30A)

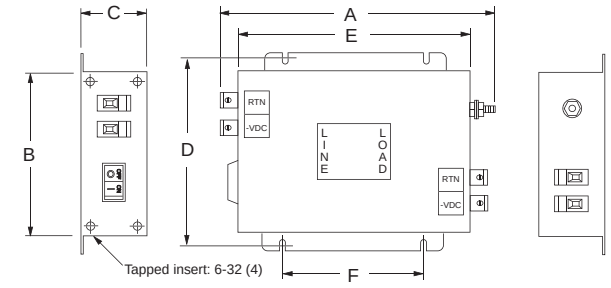

Typical Dimensions:

Mounting Slots (4): .260 x .39 [*6.6 x 9.9*]

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

DC Series

Case Styles *(continued)*

DCF10B (60 TO 125A)

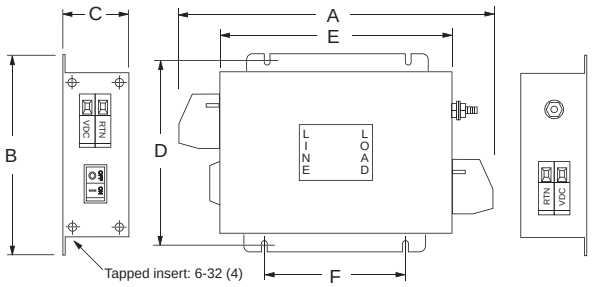

Typical Dimensions:
Mounting Slots (4): .260 x .39 *[6.6 x 9.9]*

Case Dimensions

Part No.	A (max)	B (max)	C (max)	D ±.020 ±.51	E (max)	F ±.020 ±.51
15DCB6(F)	**5.69** *144.5*	**5.06** *128.5*	**1.48** *37.6*	**4.50** *114.3*	**4.06** *103.1*	**0.950** *24.13*
15DCB6B(F)	**7.69** *195.3*	**5.06** *128.5*	**1.48** *37.6*	**4.50** *114.3*	**6.06** *153.9*	**0.950** *24.13*
15DCB10(F)	**5.06** *128.5*	**5.06** *128.5*	**1.48** *37.6*	**4.50** *114.3*	**4.06** *103.1*	**0.950** *24.13*
15DCB10B(F)	**7.06** *179.3*	**5.06** *128.5*	**1.48** *37.6*	**4.50** *114.3*	**6.06** *153.9*	**0.950** *24.13*
15DCF6	**5.33** *135.4*	**3.10** *78.7*	**1.78** *45.2*	**2.677** *68.0*	**3.70** *94.0*	**2.00** *50.80*
15DCF6B(F)	**7.69** *195.3*	**5.06** *128.5*	**1.48** *37.6*	**5.740** *145.8*	**6.06** *153.9*	**3.52** *89.41*
15DCF10	**4.75** *120.7*	**3.10** *78.7*	**1.78** *45.2*	**2.677** *68.0*	**3.70** *94.0*	**2.0** *50.8*
15DCF10B(F)	**7.06** *179.3*	**5.06** *128.5*	**1.48** *37.6*	**5.740** *145.80*	**6.06** *153.9*	**3.520** *89.41*
30DCB6(F)	**7.69** *195.3*	**5.06** *128.5*	**1.48** *37.6*	**4.50** *114.3*	**6.06** *153.9*	**0.95** *24.13*
30DCB6B(F)	**8.69** *220.7*	**5.06** *128.5*	**1.48** *37.6*	**4.50** *114.3*	**7.06** *179.3*	**0.95** *24.13*
30DCB10(F)	**7.06** *179.3*	**5.06** *128.5*	**1.48** *37.6*	**4.50** *114.3*	**6.06** *153.9*	**0.95** *24.13*
30DCB10B(F)	**8.06** *204.7*	**5.06** *128.5*	**1.48** *37.6*	**4.50** *114.3*	**7.06** *179.3*	**0.95** *24.13*
30DCF6	**6.19** *157.2*	**3.96** *100.6*	**2.18** *55.4*	**3.50** *88.9*	**4.56** *115.8*	**2.00** *50.8*
30DCF6B	**8.69** *220.73*	**5.0** *127.0*	**1.48** *37.6*	**5.74** *145.8*	**7.06** *179.3*	**4.52** *114.81*
30DCF10	**5.56** *141.2*	**3.96** *100.58*	**2.18** *55.4*	**3.5** *88.9*	**4.56** *115.8*	**2.0** *50.8*
30DCF10B	**8.06** *204.7*	**5.06** *128.52*	**1.48** *37.6*	**5.74** *145.8*	**7.06** *179.3*	**4.52** *114.81*

Case Dimensions *(continued)*

Part No.	A (max)	B (max)	C (max)	D ±.020 ±.51	E (max)	F ±.020 ±.51
60DCB6(F)	**8.69** *220.73*	**5.06** *128.52*	**1.48** *37.6*	**4.50** *114.3*	**7.06** *179.3*	**0.95** *24.13*
60DCB6B(F)	**10.69** *271.5*	**5.06** *128.52*	**1.48** *37.6*	**4.50** *114.3*	**9.06** *230.1*	**0.95** *24.13*
60DCF6	**7.56** *192.0*	**5.48** *139.2*	**2.55** *64.8*	**4.92** *124.97*	**5.94** *150.9*	**2.756** *70.0*
60DCF6B	**10.69** *271.5*	**5.06** *128.52*	**1.48** *37.6*	**5.74** *145.8*	**9.06** *230.1*	**6.52** *165.61*
60DCF10	**8.56** *217.4*	**5.48** *139.2*	**2.55** *64.8*	**4.92** *124.97*	**5.94** *150.9*	**2.576** *65.43*
60DCF10B	**11.75** *298.5*	**5.06** *128.5*	**1.48** *37.6*	**5.74** *145.8*	**9.06** *230.1*	**6.52** *165.61*
100DCB6(F)	**10.31** *261.9*	**5.06** *128.5*	**1.78** *45.2*	**4.50** *114.3*	**8.06** *204.7*	**1.25** *31.75*
100DCB6B(F)	**12.31** *312.7*	**6.06** *153.9*	**1.78** *45.2*	**5.50** *139.7*	**10.06** *255.5*	**1.25** *31.75*
100DCB10(F)	**11.13** *282.6*	**5.06** *128.5*	**1.78** *45.2*	**4.50** *114.3*	**8.06** *204.7*	**1.25** *31.75*
100DCB10B(F)	**13.13** *333.5*	**6.06** *153.9*	**1.78** *45.2*	**5.50** *139.7*	**10.06** *255.5*	**1.25** *31.75*
100DCF6	**10.60** *269.2*	**6.30** *160.0*	**2.52** *64.0*	**5.70** *144.78*	**8.46** *214.9*	**4.52** *114.81*
100DCF6B	**12.31** *312.7*	**6.06** *153.9*	**1.78** *45.2*	**6.74** *171.2*	**10.06** *255.5*	**7.52** *191.01*
100DCF10	**11.50** *292.1*	**6.30** *160.0*	**2.52** *64.0*	**5.70** *144.78*	**8.46** *214.9*	**4.52** *114.81*
100DCF10B	**13.13** *333.5*	**6.06** *153.9*	**1.78** *45.2*	**6.74** *171.2*	**10.06** *255.5*	**7.52** *191.01*
125DCB6(F)	**10.31** *261.9*	**5.06** *128.5*	**1.78** *45.2*	**4.50** *114.3*	**8.06** *204.7*	**1.25** *31.75*
125DCB6B(F)	**12.31** *312.7*	**6.06** *153.9*	**1.78** *45.2*	**5.50** *139.7*	**10.06** *255.5*	**1.25** *31.75*
125DCB10(F)	**11.50** *292.1*	**5.06** *128.5*	**1.78** *45.2*	**4.50** *114.30*	**8.06** *204.7*	**1.25** *31.75*
125DCB10B(F)	**13.50** *342.9*	**6.06** *153.9*	**1.78** *45.2*	**5.50** *139.7*	**10.06** *255.5*	**1.25** *31.75*
125DCF6	**10.60** *269.2*	**6.30** *160.0*	**2.52** *64.0*	**5.70** *144.78*	**8.46** *214.9*	**4.52** *114.81*
125DCF6B	**12.31** *312.7*	**6.06** *153.9*	**1.78** *45.2*	**6.74** *171.2*	**10.06** *255.5*	**7.52** *191.01*
125DCF10	**11.86** *301.2*	**6.30** *160.0*	**2.52** *64.0*	**5.70** *144.78*	**8.46** *214.9*	**4.52** *114.81*
125DCF10B	**13.50** *342.9*	**6.06** *153.9*	**1.78** *45.2*	**6.74** *171.2*	**10.06** *255.5*	**7.52** *191.01*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

DC Series

Performance Data *(continued)*

Minimum Insertion Loss

Measured in closed 50 Ohm system

Standard Performance

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz									
	.01	.05	.1	.15	.5	1	3	5	10	30
15A	-	1	12	20	41	45	61	63	47	39
30A	-	4	15	23	47	59	64	56	44	36
60A	-	-	9	17	38	40	59	50	39	34
100A	-	-	10	18	38	39	53	50	35	21
125A	-	-	12	18	30	32	44	49	29	18

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz									
	.01	.05	.1	.15	.5	1	3	5	10	30
15A	7	22	27	30	30	36	56	49	38	31
30A	7	22	28	31	32	59	56	51	41	28
60A	15	30	36	40	40	35	60	51	39	32
100A	14	29	35	39	33	30	53	53	41	30
125A	14	24	35	39	40	28	53	60	42	33

High Frequency Performance (F & BF Styles)

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz										50 to 300	300 to 3000
	.01	.05	.1	.15	.5	1	3	5	10	20		
15A	-	1	12	20	41	45	55	50	45	25	50	30
30A	-	4	15	20	46	58	60	60	48	35	50	30
60A	-	-	9	16	38	42	52	60	48	26	40	30
100A	-	-	9	16	38	42	52	60	42	26	40	30
125A	-	-	9	16	28	34	46	54	34	34	40	30

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz									
	.01	.05	.1	.15	.5	1	3	5	10	20
15A	7	22	27	30	30	50	60	60	60	36
30A	7	22	27	30	33	56	60	60	60	40
60A	15	30	36	40	37	26	46	54	48	30
100A	14	29	35	39	33	30	56	53	41	30
125A	14	29	35	39	40	28	53	60	42	33

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

The CHAMELEON Adaptable Module for DC Applications

P Series

UL Recognized
CSA Certified
TUV Certified

P Series

- Full flexibility of design in the most compact package
- General purpose designed for DC applications
- Mates with a standard MOLEX* connector (HCS Series) which prevents accidental connection to AC Power

Ordering Information

PS000DD3D

- Shield Options: D = Complete Shield *(DC Version)*
- Current Rating: 3 = 3A; 6 = 6A; X = 10A
- Filter Type: D = DC version
- Fuse Options: D = Dual fuse; S = Single fuse
- Input Voltage Select: 0 = Single voltage
- Switch Options: 0 = No switch
- Extender Options: 0 = None
- Mounting Style: E = Mounting ears; S = Snap-in

Specifications

Hipot rating (one minute):
Line to Ground: 2250 VDC
LIne to Line: 1450 VDC

Rated Voltage (max): 80 VDC

Rated Current: 3 to 10A

Fuseholder*: .25 x 1.25" or 5 x 20 mm

Terminals: .187 x .032 [*4.8 x .81*] terminal tabs

Operating Ambient Temperature Range (at rated current I_r): -10°C to +40°C
In an ambient temperature (T_a) higher than +40°C the maximum operating current (I_o) is calculated as follows: $I_o = I_r \sqrt{(85-Ta)/45}$

*Holds one or two fuses. Conversion clip provided on fuseholder for single fuse models.

Electrical Schematic

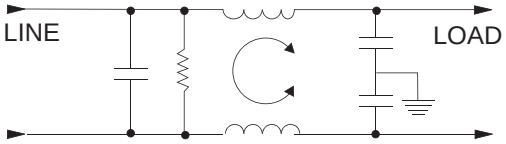

Available Part Numbers

PE000DD3D	PS000DD3D
PE000DD6D	PS000DD6D
PE000DDXD	PS000DDXD
PE000SD3D	PS000SD3D
PE000SD6D	PS000SD6D
PE000SDXD	PS000SDXD

*MOLEX is a trademark of MOLEX Incorporated

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

P Series

Case Styles

PE

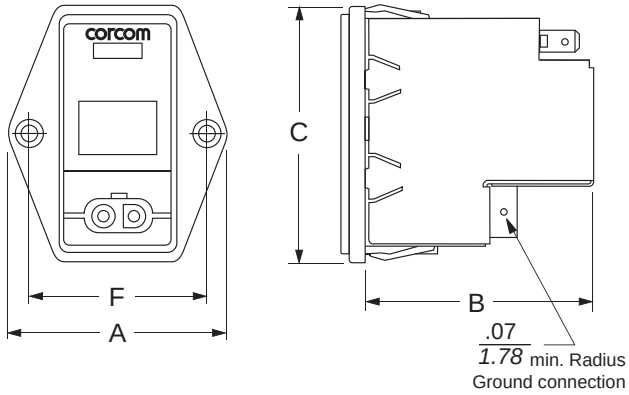

PS

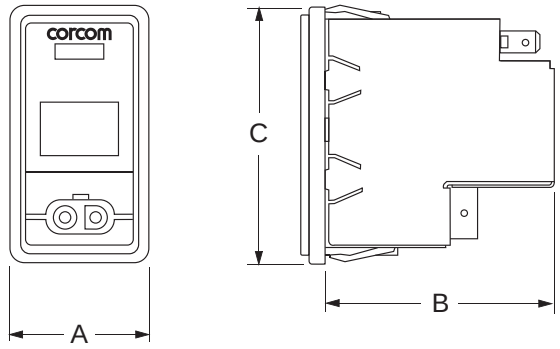

Accessories

GA210 – (shown above) Pre-assembled connector housing with two 36" long 18 gauge wires to mate with P Series DC filters

MOLEX Part Numbers:

03-12-1026	DC Connector housing for P Series
18-12-1222	Female terminals (2 per connector)

Case Dimensions

Part No.	A (max.)	B (max.)	C (max.)	D *see note	E *see note	F (ref.)
PE	**1.98**	**2.13**	**2.31**	**1.12**	**2.201**	**1.575**
	50.29	*54.10*	*58.67*	*28.45*	*55.91*	*40.0*
PS	**1.24**	**2.13**	**2.31**	**1.06**	**2.201**	-
	31.50	*54.10*	*58.67*	*26.93*	*55.91*	

*+ .008 / – .000 [+.20 / – .00]

Recommended Panel Cutouts

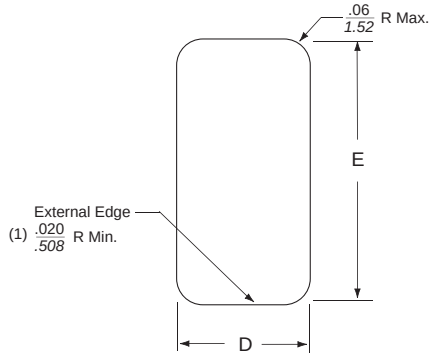

Note: The external edges (installation side) on the "D" sides of the cutout should have a minimum .020" radius. For optimal retention against extraction, the corresponding inner edge should be sharp, without paint or coatings. Edge coatings, including anodization are also discouraged for good shield contact.

Performance Data

Minimum Insertion Loss

Measured in closed 50 Ohm system

Common Mode / Asymmetrical (Line to Ground)

Current Rating	Frequency – MHz .03	.1	.15	.5	1	3	5	10	30
3A	7	17	21	27	33	40	44	50	32
6A	-	8	12	17	23	32	36	44	30
15A	-	3	5	10	13	23	27	35	27

Differential Mode / Symmetrical (Line to Line)

Current Rating	Frequency – MHz .1	.15	.5	1	3	5	10	30
3A	2	4	12	15	30	48	50	45
6A	2	4	12	15	22	42	55	45
15A	2	4	12	15	22	42	55	45

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

5. Feedthrough Filters and Capacitors — Table of Contents

Feedthrough Application Selector Chart 225
Introduction 226
FFA Series 228
FFD Series 231
AFC Series 234
DFC Series 237

Feedthrough Application Selector Chart

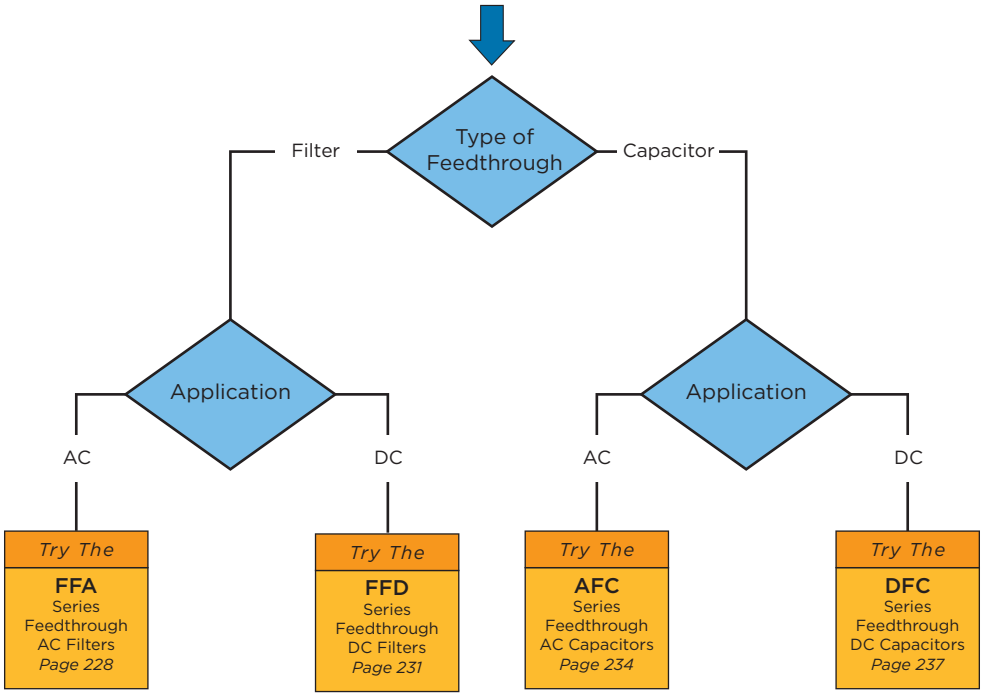

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Introduction – Corcom Feedthrough Filters and Capacitors

Installation, Background and Safety

Feedthrough capacitors and filters are designed for through-bulkhead mounting for offering high frequency filtering in line-to-ground applications. They should be mounted through a metal bulkhead or chassis. The bulkhead mounting surface should be clean and unpainted to offer a low impedance path from the capacitor or filter to the equipment chassis. Poor earth bonding will limit the available performance of the product and could compromise safety.

Conductive paint finishes should be avoided as they do not usually provide adequate conductivity. Two wrenches (or spanners) should be used when making electrical connections to the terminals and maximum tightening torque figures quoted should be observed.

Relevant safety standards have been adhered to in the design and manufacture of these products. However, all capacitors will store charge after power has been removed and must be treated with respect as this can be lethal when the voltage and charge are high enough. The filters and capacitors contained within this catalog do not contain internal discharge resistors. It is therefore recommended that they are fitted with external discharge resistors to discharge the capacitors after the power has been removed. Where necessary, terminals should be enclosed by the user to prevent any danger of electric shock or accidental shorting. In all cases, capacitors and filters should always be shorted to earth prior to touching to ensure they are fully discharged.

The user should ensure he/she is familiar with restrictions on capacitance value, earth leakage current, test voltage, and safety labeling requirements, which may be applicable to his/her particular installation. In particular, safety standards IEC950 and EN60950, which most electrical equipment needs to comply with, contain a number of specific requirements for capacitors, which may be applicable.

Applications

Offers reliability and performance in high frequency applications such as:

- Servers
- Base stations
- Routers
- Main power supplies
- Telecom systems / racks
- MRI rooms
- High power microwave lines
- Military vehicles and equipment
- High current switch mode power supplies
- Power amplifier and generators
- Industrial controls
- Screened rooms
- High frequency welding equipment
- Secure communications
- Computer facilities

Key Features

- Designed to meet EN133200 and EN132400 safety requirements
- Custom designs available where special packaging, mounting, terminations, or multiple lines are required.
- RoHS compliant

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Feedthrough Capacitor Performance

- Normal two-terminal capacitors resonate with their lead inductance in the region of 1 to 10MHz
- This limits their use as suppression components above a few MHz
- Feedthrough capacitors have no major resonance as they have no lead inductance
- Performance continues to increase with frequency
- Feedthrough capacitors are essential for good high frequency performance
- Feedthrough filters incorporate feedthrough capacitors for the same benefits
- As an example, the graph in Figure 1 compares the performance of a 1µF feedthrough capacitor with a 1µF two-terminal capacitor

Figure 1: Feedthrough Filters Performance

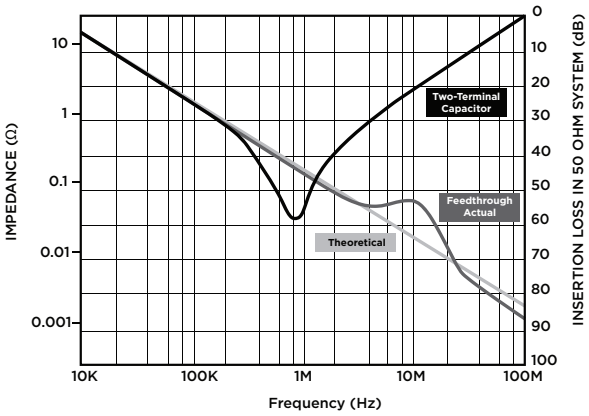

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

FFA Series

c UL us

Component Recognized by UL to US and Canadian Requirements

FFA Series

- AC feedthrough filters
- Current Ratings from 10 to 300A
- Designed to meet the very stringent safety requirements of EN133200 class Y2 including the 5000V pulse test
- Custom versions available

Ordering Information

10 FFA6 – BA

- BA: Filter ID (See Table)
- FFA6: FFA Series Screw Terminals
- 10: Current Rating *(in A)*

Filter Options / Specifications

Filter ID	Value (nF)	Inductance (nH)	Max. Leakage Current (mA)*	DC Resistance (mΩ) Max.
BA	2 x 4.7	70	0.9	6
CA	2 x 10	70	1.9	4
CE	2 x 10	140	1.9	7
DG	2 x 22	170	4.2	4
DH	2 x 22	180	4.2	4
GB	2 x 47	80	8.9	3
GJ	2 x 47	210	8.9	9
HC	2 x 100	90	19	2
HD	2 x 100	120	19	1
HF	2 x 100	160	19	< 1
HN	2 x 100	250	19	6
JK	2 x 150	240	29	3
NP	2 x 470	330**	89	< 2
PP	2 x 1000	330	188	< 2

*@ 250 VAC 60 Hz
**240 for 100A Version

Specifications

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 10 to 300A

Test Voltage (two seconds): 5000 VDC

Capacitor Class (EN133200): Designed to meet Y2

Pulse Test (EN133200): 5000V Peak

Insulation Resistance (within 1 minute):
For C < 0.33µF, R> 15000MΩ
For C > 0.33µF, RC(MΩ*µF)>5000s

Operating Ambient Temperature Range (at rated current I_r):
10 to 100A: -40°C to +60°C
200A: -40°C to +50°C
250 & 300A: -40°C to +40°C

Category Temperature Range: -40°C to +85°C

Current Derating Above Ambient:
10-100A: For temperature, θ $I_\theta = IR\sqrt{(85-\theta)/25}$
200A: For temperature, θ $I_\theta = IR\sqrt{(85-\theta)/35}$
250 & 300A: For temp., θ $I_\theta = IR\sqrt{(85-\theta)/45}$

Climatic Category: 40/85/21

MTBF: > 5 million hours typical

Insulating Materials Flammability Rating: UL94V-0

Case & Terminal Material: Nickel Plated Brass

Electrical Schematic



Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

FFA Series

Case Style

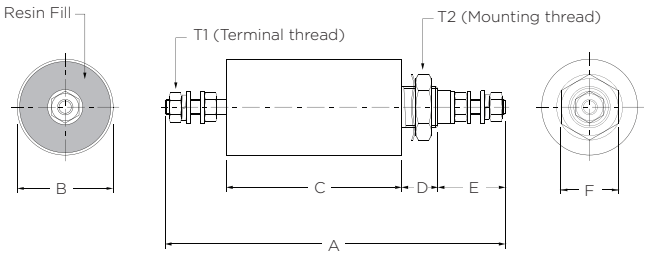

T1 – Terminal Thread

Part No.	Thread	Torque max. in.lb.
10FFA6-BA/CE/CJ	M3	4
16FFA6-CA/DG/HN 32FFA6-CA/DH/HN	M4	11
63FFA6-GB/JK/NP	M6	22
100FFA6-HC/NP/PP	M8	44
200FFA6-HD/NP/PP	M10	70
250FFA6-HF/NP/PP	M12	97
300FFA6-HF/NP/PP	M16	177

T2 – Mounting Thread

Part No.	Thread	Torque max. in.lb.
10FFA6-BA/CE/CJ 16FFA6-CA 32FFA6-CA	M12 x 1	35
16FFA6-DG/HN 32FFA6-DH/HN 63FFA6-GB	M16 x 1	62
63FFA6-JK 100FFA6-HC	M20 x 1	89
100FFA6-NP 200FFA6-HD	M24 x 1	124
63FFA6-NP 100FFA6-PP 200FFA6-NP/PP	M27 x 1.5	142
250FFA6-HF/NP/PP 300FFA6-HF/NP/PP	M32 x 1.5	212

Case Dimensions

Part No.	A ± .04 *1*	B ± .02 *0.5*	C ± .08 *2*	D ± .04 *1*	E ± .08 *2*	F (max)
10FFA6-BA	**3.86** *98*	**0.79** *20*	**2.24** *57*	**0.47** *12*	**0.63** *16*	**0.67** *17*
16FFA6-CA 32FFA6-CA	**4.17** *106*	**0.79** *20*	**2.40** *61*	**0.47** *12*	**0.71** *18*	**0.67** *17*
63FFA6-GB	**6.30** *160*	**0.98** *25*	**3.70** *94*	**0.55** *14*	**1.02** *26*	**0.87** *22*
100FFA6-HC	**7.24** *184*	**1.26** *32*	**4.09** *104*	**0.63** *16*	**1.26** *32*	**1.06** *27*
200FFA6-HD	**8.23** *209*	**1.50** *38*	**4.41** *112*	**0.75** *19*	**1.57** *40*	**1.06** *27*
300FFA6-HF	**7.87** *200*	**2.13** *54*	**3.66** *93*	**0.75** *19*	**1.81** *46*	**1.57** *40*
10FFA6-CE	**4.21** *107*	**0.79** *20*	**2.60** *66*	**0.47** *12*	**0.63** *16*	**0.67** *17*
16FFA6-DG 32FFA6-DH	**4.57** *116*	**0.98** *25*	**2.72** *69*	**0.55** *14*	**0.71** *18*	**0.87** *22*
63FFA6-JK	**6.81** *173*	**1.26** *32*	**4.13** *105*	**0.63** *16*	**1.02** *26*	**1.06** *27*
100FFA6-NP	**8.98** *228*	**1.50** *38*	**5.71** *145*	**0.75** *19*	**1.26** *32*	**1.06** *27*
200FFA6-NP	**9.57** *243*	**2.13** *54*	**5.75** *146*	**0.75** *19*	**1.57** *40*	**1.57** *40*
250FFA6-NP 300FFA6-HN	**10.51** *267*	**2.13** *54*	**6.30** *160*	**0.75** *19*	**1.81** *46*	**1.57** *40*
10FFA6-GJ	**5.51** *140*	**0.79** *20*	**3.90** *99*	**0.47** *12*	**0.63** *16*	**0.67** *17*
16FFA6-HN 32FFA6-HN	**5.83** *148*	**0.98** *25*	**3.98** *101*	**0.55** *14*	**0.71** *18*	**0.87** *22*
63FFA6-NP	**7.44** *189*	**2.13** *54*	**4.65** *118*	**0.75** *19*	**1.02** *26*	**1.57** *40*
100FFA6-PP	**8.94** *227*	**2.13** *54*	**5.67** *144*	**0.75** *19*	**1.26** *32*	**1.57** *40*
200FFA6-PP	**9.57** *243*	**2.13** *54*	**5.75** *146*	**0.75** *19*	**1.57** *40*	**1.57** *40*
250FFA6-PP 300FFA6-PP	**10.51** *267*	**2.13** *54*	**6.3** *160*	**0.75** *19*	**1.81** *46*	**1.57** *40*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

FFA Series

Available Part Numbers

Standard Performance	High Performance	Extended Performance
10FFA6-BA	10FFA6-CE	10FFA6-GJ
16FFA6-CA	16FFA6-DG	16FFA6-HN
32FFA6-CA	32FFA6-DH	32FFA6-HN
63FFA6-GB	63FFA6-JK	63FFA6-NP
100FFA6-HC	100FFA6-NP	100FFA6-PP
200FFA6-HD	200FFA6-NP	200FFA6-PP
250FFA6-HF	250FFA6-NP	250FFA6-PP
300FFA6-HF	300FFA6-NP	300FFA6-PP

Performance Data

Typical Insertion Loss — Line to Ground in 50 Ohm circuit

Filter ID	Frequency – MHz							
	0.01	0.03	0.1	0.3	1	10	100	1000
BA	-	-	-	-	4	18	80	100
CA	-	-	2	4	10	22	65	100
CE	-	-	2	3	10	28	65	100
DG	-	-	3	7	15	40	72	100
DH	-	-	3	7	15	40	72	100
GB	-	-	6	11	21	50	85	100
GJ	-	-	5	12	21	60	90	100
HC	-	2	10	18	27	60	100	100
HD	-	2	10	18	27	60	100	100
HF	-	2	10	18	27	60	100	100
HN	2	4	10	17	24	75	90	100
JK	3	8	15	21	28	72	100	100
NP	7	15	24	31	44	80	100	100
PP	12	20	29	33	56	80	100	100

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

FFD Series

c UL us

Component Recognized by UL to US and Canadian Requirements

FFD Series

- DC feedthrough filters
- Current ratings from 10 to 200A
- Designed to meet the very stringent safety requirements of EN133200 class Y4 including the 2500V pulse test
- Custom versions available

Ordering Information

10 FFD6 – CA

- CA: Filter ID (See Table)
- FFD6: FFD Series Screw Terminals
- 10: Current Rating *(in A)*

Filter Options / Specifications

Filter ID	Value (nF)	Inductance (nH)	DC Resistance (mΩ) Max.
CA	2 x 10	70	6
HB	2 x 100	80	3
HE	2 x 100	140	8
NC	2 x 470	90	2
ND	2 x 470	120	1
NH	2 x 470	180	3
PK	2 x 1000	240	2
RP	2 x 4700	330	2

Specifications

Rated Voltage (max): 130 VDC

Rated Current: 10 to 200A

Test Voltage (two seconds): 2500 VDC

Capacitor Class (EN133200): Designed to meet Y4

Pulse Test (EN133200): 2500V Peak

Insulation Resistance (within 1 minute):
For C < 0.33µF, R> 15000MΩ
For C > 0.33µF, RC(MΩ*µF)>5000s

Operating Ambient Temperature Range (at rated current I_r):
10 to 100A: -40°C to +60°C
200A: -40°C to +50°C

Category Temperature Range: -40°C to +85°C

Current Derating Above Ambient:
10-100A: For temperature, θ $I_\theta = IR \sqrt{(85-\theta)/25}$
200A: For temperature, θ $I_\theta = IR \sqrt{(85-\theta)/35}$

Climatic Category: 40/85/21

MTBF: > 5 million hours typical

Insulating Materials Flammability Rating: UL94V-0

Case & Terminal Material: Nickel Plated Brass

Electrical Schematic



Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

FFD Series

Case Style

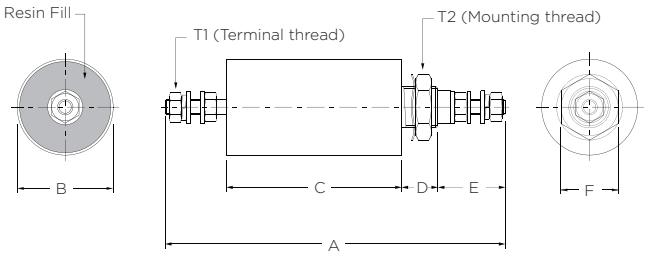

T1 – Terminal Thread

Part No.	Thread	Torque max. in.lb.
10FFD6-CA/HE	M3	4
16FFD6-CA/HE 32FFD6-CA/HE	M4	11
63FFD6-HB/NH	M6	22
100FFD6-NC/PK	M8	44
200FFD6-ND/RP	M10	70

T2 – Mounting Thread

Part No.	Thread	Torque max. in.lb.
10FFD6-CA/HE 16FFD6-CA/HE 32FFD6-CA/HE	M12 x 1	35
63FFD6-HB/NH	M20 x 1	89
100FFD6-NC/PK	M24 x 1	124
200FFD6-ND/RP	M27 x 1.5	142

Case Dimensions

Part No.	A ± .04 *1*	B ± .02 *0.5*	C ± .08 *2*	D ± .04 *1*	E ± .08 *2*	F (max)
10FFD6-CA	**3.54** *90*	**0.79** *20*	**1.93** *49*	**0.47** *12*	**0.63** *16*	**0.67** *17*
16FFD6-CA 32FFD6-CA	**3.86** *98*	**0.79** *20*	**2.09** *53*	**0.47** *12*	**0.71** *18*	**0.67** *17*
63FFD6-HB	**6.30** *160*	**0.98** *25*	**3.70** *94*	**0.55** *14*	**1.02** *26*	**0.87** *22*
100FFD6-NC	**7.24** *184*	**1.26** *32*	**4.09** *104*	**0.63** *16*	**1.26** *32*	**1.06** *27*
200FFD6-ND	**8.23** *209*	**1.50** *38*	**4.41** *112*	**0.75** *19*	**1.57** *40*	**1.06** *27*
10FFD6-HE	**5.12** *130*	**0.79** *20*	**3.50** *89*	**0.47** *12*	**0.63** *16*	**0.67** *17*
16FFD6-HE 32FFD6-HE	**5.47** *139*	**0.79** *20*	**3.70** *94*	**0.47** *12*	**0.71** *18*	**0.67** *17*
63FFD6-NH	**6.81** *173*	**1.26** *32*	**4.13** *105*	**0.63** *16*	**1.02** *26*	**1.06** *27*
100FFD6-PK	**8.98** *173*	**1.50** *32*	**5.71** *105*	**0.75** *16*	**1.26** *26*	**1.06** *27*
200FFD6-RP	**10.98** *279*	**2.13** *54*	**7.17** *182*	**0.75** *19*	**1.57** *40*	**1.57** *40*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

FFD Series

Available Part Numbers

Standard Performance	High Performance
10FFD6-CA	10FFD6-HE
16FFD6-CA	16FFD6-HE
32FFD6-CA	32FFD6-HE
63FFD6-HB	63FFD6-NH
100FFD6-NC	100FFD6-PK
200FFD6-ND	200FFD6-RP

Performance Data

Typical Insertion Loss — Line to Ground in 50 Ohm circuit

Filter ID	Frequency – MHz							
	0.01	0.03	0.1	0.3	1	10	100	1000
CA	-	-	2	4	10	23	65	100
HB	2	4	10	18	27	62	95	100
HE	2	4	10	18	27	67	95	100
NC	7	14	23	30	32	70	100	100
ND	7	14	23	30	32	70	100	100
NH	7	14	23	31	35	75	100	100
PK	14	21	30	34	53	75	100	100
RP	20	32	40	52	85	100	100	100

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

AFC Series

Component Recognized by
UL to US and Canadian Requirements

AFC Series

- AC feedthrough capacitors
- Current ratings from 10 to 300A
- Designed to meet the very stringent safety requirements of EN132400 class Y2 including the 5000V pulse test
- Custom versions available

Ordering Information

10 AFC6 – A

- A — Filter ID, See Table
- AFC6 — AFC Series Screw Terminals
- 10 — Current Rating *(in A)*

Filter Options / Specifications

Filter ID	Value (nF)	Max. Leakage Current (mA)*
A	2.2	0.21
B	4.7	0.44
C	10	0.94
F	33	3.1
G	47	4.4
H	100	9.4
K	220	21
N	470	44
P	1000	94

*@250VAC 60 Hz

Specifications

Rated Voltage (max): 250 VAC

Operating Frequency: 50/60 Hz

Rated Current: 10 to 300A

Test Voltage (two seconds): 5000 VDC

Capacitor Class (EN132400): Designed to meet Y2

Pulse Test (EN132400): 5000V Peak

Insulation Resistance (within 1 minute):
For C < 0.33µF, R> 15000MΩ
For C > 0.33µF, RC(MΩ*µF)>5000s

Operating Ambient Temperature Range (at rated current I_r):
10 to 200A: -40°C to +60°C
250 & 300A: -40°C to +40°C

Category Temperature Range: -40°C to +85°C

Current Derating Above Ambient:
10-200A: For temperature, θ $I_\theta = IR\sqrt{(85-\theta)/25}$
250 & 300A: For temp., θ $I_\theta = IR\sqrt{(85-\theta)/45}$

Climatic Category: 40/85/21

MTBF: > 10 million hours typical

Insulating Materials Flammability Rating: UL94V-0

Case & Terminal Material: Nickel Plated Brass

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

AFC Series

Case Style

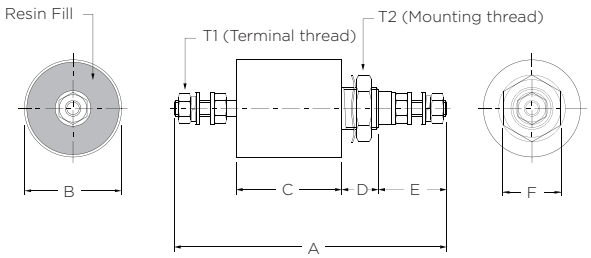

T1 – Terminal Thread

Part No.	Thread	Torque max. in.lb.
10AFC6-A/B	M3	4
16AFC6-B/C/G/H 20AFC6-B 32AFC6-B/C/F/G/H	M4	11
63AFC6-C/G/H	M6	22
100AFC6-G/H/K/N	M8	44
200AFC6-H/K/N/P	M10	71
250AFC6-H/K/N/P	M12	97
300AFC6-H/K/N/P	M16	177

T2 – Mounting Thread

Part No.	Thread	Torque max. in.lb.
10AFC6-A/B	M10 x 1	27
16AFC6-B/C/G 20AFC6-B 32AFC6-B/C/G/F	M12 x 1	35
16AFC6-H 32AFC6-H 63AFC6-C/G/H	M16 x 1	62
100AFC6-G/H	M20 x 1	89
100AFC6-K/N 200AFC6-H/K	M24 x 1	124
200AFC6-N/P	M27 x 1.5	142

Case Dimensions

Part No.	A ± .04 *1*	B ± .02 *0.5*	C ± .08 *2*	D ± .04 *1*	E ± .08 *2*	F (max)
10AFC6-A 10AFC6-B	**2.24** *57*	**0.59** *15*	**0.71** *18*	**0.39** *10*	**0.63** *16*	**0.51** *13*
16AFC6-B 16AFC6-C	**2.48** *63*	**0.79** *20*	**0.71** *18*	**0.47** *12*	**0.71** *18*	**0.67** *17*
16AFC6-G	**2.95** *75*	**0.79** *20*	**1.18** *30*	**0.47** *12*	**0.71** *18*	**0.67** *17*
16AFC6-H	**3.03** *77*	**0.98** *25*	**1.18** *30*	**0.55** *14*	**0.71** *18*	**0.87** *22*
20AFC6-B	**2.48** *63*	**0.79** *20*	**0.71** *18*	**0.47** *12*	**0.71** *18*	**0.67** *17*
32AFC6-B 32AFC6-C	**2.48** *63*	**0.79** *20*	**0.71** *18*	**0.47** *12*	**0.71** *18*	**0.67** *17*
32AFC6-F 32AFC6-G	**2.95** *75*	**0.79** *20*	**1.18** *30*	**0.47** *12*	**0.71** *18*	**0.67** *17*
32AFC6-H	**3.03** *77*	**0.98** *25*	**1.18** *30*	**0.55** *14*	**0.71** *18*	**0.87** *22*
63AFC6-C 63AFC6-G	**3.78** *96*	**0.98** *25*	**1.18** *30*	**0.55** *14*	**1.02** *26*	**0.87** *22*
63AFC6-H	**3.78** *96*	**0.98** *25*	**1.18** *30*	**0.55** *14*	**1.02** *26*	**0.87** *22*
100AFC6-G 100AFC6-H	**4.45** *113*	**1.26** *32*	**1.30** *33*	**0.63** *16*	**1.26** *32*	**1.06** *27*
100AFC6-K	**4.57** *116*	**1.50** *38*	**1.30** *33*	**0.75** *19*	**1.26** *32*	**1.06** *27*
200AFC6-H 200AFC6-K	**5.24** *133*	**1.50** *38*	**1.97** *50*	**0.75** *19*	**1.26** *32*	**1.06** *27*
200AFC6-N 200AFC6-P	**5.12** *130*	**1.50** *38*	**1.30** *33*	**0.75** *19*	**1.57** *40*	**1.06** *27*
250AFC6-H 250AFC6-K	**5.79** *147*	**2.13** *54*	**1.97** *50*	**0.75** *19*	**1.57** *40*	**1.57** *40*
250AFC6-N 250AFC6-P	**5.83** *148*	**2.13** *54*	**1.65** *42*	**0.75** *19*	**1.81** *46*	**1.57** *40*
300AFC6-H 300AFC6-K	**6.30** *160*	**2.13** *54*	**2.13** *54*	**0.75** *19*	**1.81** *46*	**1.57** *40*
300AFC6-N 300AFC6-P	**5.83** *148*	**2.13** *54*	**1.65** *42*	**0.75** *19*	**1.81** *46*	**1.57** *40*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

AFC Series

Available Part Numbers

10AFC6-A	32AFC6-H	200AFC6-P
10AFC6-B	63AFC6-C	250AFC6-H
16AFC6-B	63AFC6-G	250AFC6-K
16AFC6-C	63AFC6-H	250AFC6-N
16AFC6-G	100AFC6-H	250AFC6-P
16AFC6-H	100AFC6-H	300AFC6-H
20AFC6-B	100AFC6-K	300AFC6-K
32AFC6-B	100AFC6-N	300AFC6-N
32AFC6-C	200AFC6-H	300AFC6-P
32AFC6-F	200AFC6-K	
32AFC6-G	200AFC6-N	

Performance Data

Typical Insertion Loss — Line to Ground in 50 Ohm circuit

Filter ID	Frequency – MHz							
	0.01	0.03	0.1	0.3	1	10	100	1000
A	-	-	-	-	-	8	38	45
B	-	-	-	-	-	14	43	60
C	-	-	-	-	3	21	45	70
F	-	-	-	4	12	30	48	90
G	-	-	2	6	15	34	50	90
H	-	2	5	11	20	40	65	90
K	-	4	11	18	27	45	85	90
N	6	9	16	22	33	33	90	90
P	10	15	22	30	40	42	90	90

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

DFC Series

Component Recognized by
UL to US and Canadian Requirements

DFC Series

- DC feedthrough capacitors
- Current ratings from 10 to 300A
- Designed to meet the very stringent safety requirements of EN132400 class Y4 including the 2500V pulse test
- Custom versions available

Ordering Information

10 DFC6 – C

- Filter ID — See Table
- DFC Series Screw Terminals
- Current Rating *(in A)*

Filter Options / Specifications

Filter ID	Value (nF)
C	10
G	47
H	100
N	470
P	1000
Q	3300
R	4700
T	8000

Specifications

Rated Voltage (max): 130 VDC

Rated Current: 10 to 300A

Test Voltage (two seconds): 2500 VDC

Capacitor Class (EN132400): Designed to meet Y4

Pulse Test (EN132400): 2500V Peak

Insulation Resistance (within 1 minute):
For C < 0.33µF, R> 15000MΩ
For C > 0.33µF, RC(MΩ*µF)>5000s

Operating Ambient Temperature Range (at rated current I_r):
10 to 200A: -40°C to +60°C
250 & 300A: -40°C to +40°C

Category Temperature Range: -40°C to +85°C

Current Derating Above Ambient:
10-200A: For temperature, θ $I_\theta = IR\sqrt{(85-\theta)/25}$
250 & 300A: For temp., θ $I_\theta = IR\sqrt{(85-\theta)/45}$

Climatic Category: 40/85/21

MTBF: > 10 million hours typical

Insulating Materials Flammability Rating: UL94V-0

Case & Terminal Material: Nickel Plated Brass

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

DFC Series

Case Style

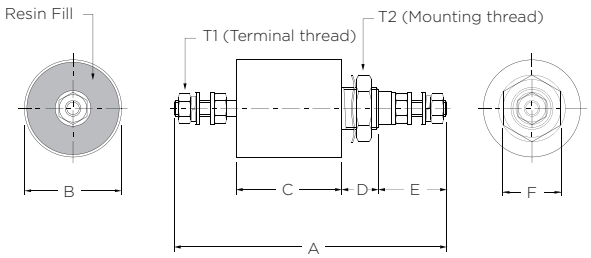

T1 – Terminal Thread

Part No.	Thread	Torque max. in.lb.
10DFC6-C	M3	4
16DFC6-C/G/H/N 32DFC6-C/G/H/N	M4	11
63DFC6-C/G/H/N	M6	22
100FDC6-G/H/N/P	M8	44
200DFC6-H/N/P/R	M10	71
250DFC6-P/Q/T	M12	97
300DFC6-P/Q/T	M16	177

T2 – Mounting Thread

Part No.	Thread	Torque max. in.lb.
10DFC6-C	M10 x 1	27
16DFC6-C/G/H 32DFC6-C/G/H	M12 x 1	35
63DFC6-C/G/H	M16 x 1	62
16DFC6-N 32DFC6-N 63DFC6-N 100DFC6-G/H/N	M20 x 1	89
100DFC6-P 200DFC6-H/N/P	M24 x 1	124
200FFC6-R	M27 x 1.5	142

Case Dimensions

Part No.	A ± .04 *1*	B ± .02 *0.5*	C ± .08 *2*	D ± .04 *1*	E ± .08 *2*	F (max)
10DFC6-C	**2.24** *57*	**0.59** *15*	**0.71** *18*	**0.39** *10*	**0.63** *16*	**0.51** *13*
16DFC6-C	**2.48** *63*	**0.79** *20*	**0.71** *18*	**0.47** *12*	**0.71** *18*	**0.67** *17*
16DFC6-G 16DFC6-H	**2.95** *75*	**0.79** *20*	**1.18** *30*	**0.47** *12*	**0.71** *18*	**0.67** *17*
16DFC6-N	**3.23** *82*	**1.26** *32*	**1.30** *33*	**0.63** *16*	**0.71** *18*	**1.06** *27*
32DFC6-C	**2.48** *63*	**0.79** *20*	**0.71** *18*	**0.47** *12*	**0.71** *18*	**0.67** *17*
32DFC6-G 32DFC6-H	**2.95** *75*	**0.79** *20*	**1.18** *30*	**0.47** *12*	**0.71** *18*	**0.67** *17*
32DFC6-N	**3.23** *82*	**1.26** *32*	**1.30** *33*	**0.63** *16*	**0.71** *18*	**1.06** *27*
63DFC6-C 63DFC6-G 63DFC6-H	**3.78** *96*	**0.98** *25*	**1.18** *30*	**0.55** *14*	**1.02** *26*	**0.87** *22*
63DFC6-N	**3.98** *101*	**1.26** *32*	**1.30** *33*	**0.63** *16*	**1.02** *26*	**1.06** *27*
100DFC6-G 100DFC6-H 100DFC6-N	**4.45** *113*	**1.26** *32*	**1.30** *33*	**0.63** *16*	**1.26** *32*	**1.06** *27*
100DFC6-P	**5.24** *133*	**1.50** *38*	**1.97** *50*	**0.75** *19*	**1.26** *32*	**1.06** *27*
200DFC6-H 200DFC6-N	**5.12** *130*	**1.26** *32*	**1.30** *33*	**0.75** *19*	**1.57** *40*	**1.06** *27*
200DFC6-P	**5.79** *147*	**1.50** *38*	**1.97** *50*	**0.75** *19*	**1.57** *40*	**1.06** *27*
200DFC6-R	**6.50** *165*	**2.13** *54*	**2.68** *68*	**0.75** *19*	**1.57** *40*	**1.57** *40*
250DFC6-P 300DFC6-P	**5.83** *148*	**2.13** *54*	**1.65** *42*	**0.75** *19*	**1.81** *46*	**1.57** *40*
250DFC6-Q 300DFC6-Q	**6.30** *160*	**2.13** *54*	**2.13** *54*	**0.75** *19*	**1.81** *46*	**1.57** *40*
250DFC6-T 300DFC6-T	**7.01** *178*	**2.13** *54*	**2.83** *72*	**0.75** *19*	**1.81** *46*	**1.57** *40*

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

DFC Series

Available Part Numbers

10DFC6-C	32DFC6-H	100DFC6-H	250DFC6-P
16DFC6-C	32DFC6-N	100DFC6-N	250DFC6-Q
16DFC6-G	63DFC6-C	100DFC6-P	250DFC6-T
16DFC6-H	63DFC6-G	200DFC6-H	300DFC6-P
16DFC6-N	63DFC6-H	200DFC6-N	300DFC6-Q
32DFC6-C	63DFC6-N	200DFC6-P	300DFC6-T
32DFC6-G	100DFC6-G	200DFC6-R	

Performance Data

Typical Insertion Loss — Line to Ground in 50 Ohm circuit

Filter ID	Frequency – MHz							
	0.01	0.03	0.1	0.3	1	10	100	1000
C	-	-	-	-	3	21	45	70
G	-	-	2	6	15	34	50	90
H	-	2	5	11	20	40	65	90
N	6	9	15	22	33	33	90	90
P	10	15	24	32	42	50	90	90
Q	13	21	31	42	50	58	90	90
R	18	26	36	45	42	70	90	90
T	22	31	41	52	62	82	90	90

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Engineering Notes

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

6. Signal Line Products — Table of Contents

Introduction 242
SignalSentry Filtered Modular Jacks 243
SignalSentry Product Part Number Matrix / Ordering Information 244
SignalSentry Product Selector Chart 245
L Series 247
L – Ganged Series 248
LC Series 249
LCT Series 250
N Series 251
X Series 252
Z Series 253
Model Dimensions 255
L, LC, LCT and X Series RJ Jack Dimensions 255
N and Z Series RJ Jack Dimensions 257

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Introduction

Corcom brand SignalSentry filtered modular jack series product combines different levels of filtering with RJ45 and RJ11 modular jacks to solve signal line noise problems and crosstalk.

Corcom brand SignalSentry filtered modular jack series product has expanded into 80 different products for filtering the signal line, including inductor and capacitor, shielded, ganged, low profile and surface mountable versions. Designs not only save valuable panel space, but also place the filtering elements where they can be most effective in eliminating RFI.

The L and N series RJ11 and RJ45 jacks offer filtering with inductance and optional shielding, while the LC and LCT series combine inductance with 82pF or 820pF capacitors. The X and Z series complete the offering with unfiltered versions of our standard profile and low profile jacks.

Use the selector chart to combine your filtering performance with the RJ11 or RJ45 jacks. Mechanical dimensions are listed following the series information.

For the latest information and additional technical articles, find Corcom products on the Internet at www.corcom.com.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

SignalSentry Filtered Modular Jacks

Corcom brand SignalSentry filtered modular jacks are a space saving and cost-effective solution to RFI problems on signal lines. Its inductive and optional capacitive elements effectively strip common-mode noise from the incoming signal, and at the same time limit the signal line's ability to radiate emissions like an antenna.

The SignalSentry filtered modular jack series has expanded into 80 different products for filtering the signal line, including inductor and capacitor, shielded, ganged, low profile and surface mountable versions. Filtered RJ jacks provide interference suppression at the optimal location by integrating the filtering into the RJ jack itself. Our new ganged jacks are the only RJ11 filtered ganged jacks available in the market.

SignalSentry filtered modular jack products are useful for any electronic equipment that sends or receives data on unshielded twisted pair or other multi-conductor cabling systems. Modems, PBX's, LAN, ISDN, and local I/O interfaces that use RJ connectors are all candidates.

Jack design and component selection compatible with equipment registered under FCC part 68.

UL Recognized

CSA Certified

Applications

A fax/modem board was being certified for FCC Class B emissions at an independent test laboratory. The board caused every computer it was tested in to exceed the radiated limits above 30 MHz, at multiples of each microprocessor's clock frequency, on the telephone line. The test lab replaced the modem's unfiltered RJ11 jack with a **Corcom RJ11-4L-B** filtered modular jack out of their sample kit, and the board/computer combinations passed with 4 dB margin worst case.

An RISC workstation designed to operate in a twisted-pair Local Area Network required two DIP package inductors and 12 chip capacitors to meet

FCC radiated emissions limits. All 14 discrete components were eliminated by replacing the two RJ45 connectors with two **Corcom RJ45-8LC1-B** shielded and filtered jacks, and the margin of compliance actually improved.

A secure telephone set failed hardened application testing at a government facility, due to intelligible emanations radiated from the coiled handset cord. The unit passed after the handset connector in the desk set was replaced by a **Corcom RJH-4L-B** filtered handset jack.



A medical manufacturer was designing a heart monitor which would transfer data over a signal line to the nurses' station so they could monitor patients. When the doctors used their modems, the data coming from the monitor became distorted. This occurred due to the close proximity of the modem card and monitor communication card placed next to each other. A **Corcom low profile RJ45-8N3-B** modular jack was designed in to filter out the unwanted noise.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help**
corcom.com

SignalSentry Part Number Matrix / Ordering Information

WHAT TYPE OF CONNECTOR DO YOU NEED?

Handset jack four pin connector	RJH
RJ11 six pin connector	RJ11
RJ45 eight pin connector	RJ45

RJ11-4L1-B

HOW MANY TERMINALS WILL BE LOADED? (See below)

4 on RJH
2, 4 or 6 on RJ11
6 or 8 on RJ45

RJ11-**4**L1-B

WHAT LEVEL OF FILTERING PERFORMANCE DO YOU NEED?

No filter, standard profile	X models
Inductor (block or sleeve), standard profile	L models
Inductor plus capacitors with shield	LC models
Inductor, 82 pF cap. and shield	LCT model
Inductor (block or sleeve), low profile	N models
No filter, low profile	Z models

RJ11-4**L**1-B

DO YOU WANT A SHIELDED JACK? (Optional on L, X, N, Z models, required on LC or LCT.)

WHAT TYPE OF GROUND?

[1]Panel and board ground (spring fingers on panel interface)	1
[1]Board ground pins only	2
[2]Panel, board and cable ground (low profile versions)	3
[2]Board ground and cable ground (low profile versions)	4

RJ11-4L**1**-B

[1]L, LC, LCT, X models
[2]N, Z models

WHAT TYPE OF INDUCTORS DO YOU NEED?

Sleeve — Average performance	S
Block — Higher performance	B

RJ11-4L1-**B**

Sleeve inductance is recommended in cases where crosstalk may be a problem.

RJ11 Model Contact Loading Program

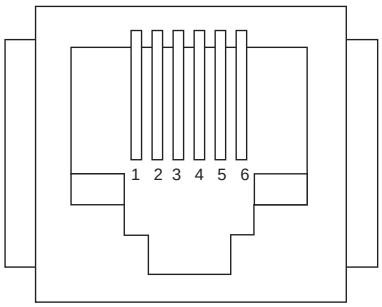

Jack Designation	Lead Frame Position					
	1	2	3	4	5	6
RJ11 – 2			X	X		
RJ11 – 4		X	X	X	X	
RJ11 – 6	X	X	X	X	X	X

RJ45 Model Contact Loading Program

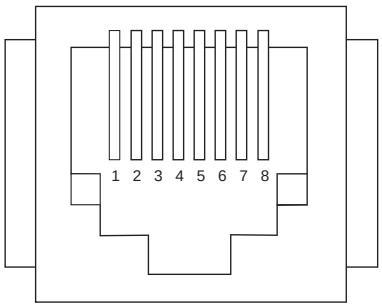

Jack Designation	Lead Frame Position							
	1	2	3	4	5	6	7	8
RJ45 – 6		X	X	X	X	X	X	
RJ45 – 8	X	X	X	X	X	X	X	X

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

SignalSentry Selector Chart

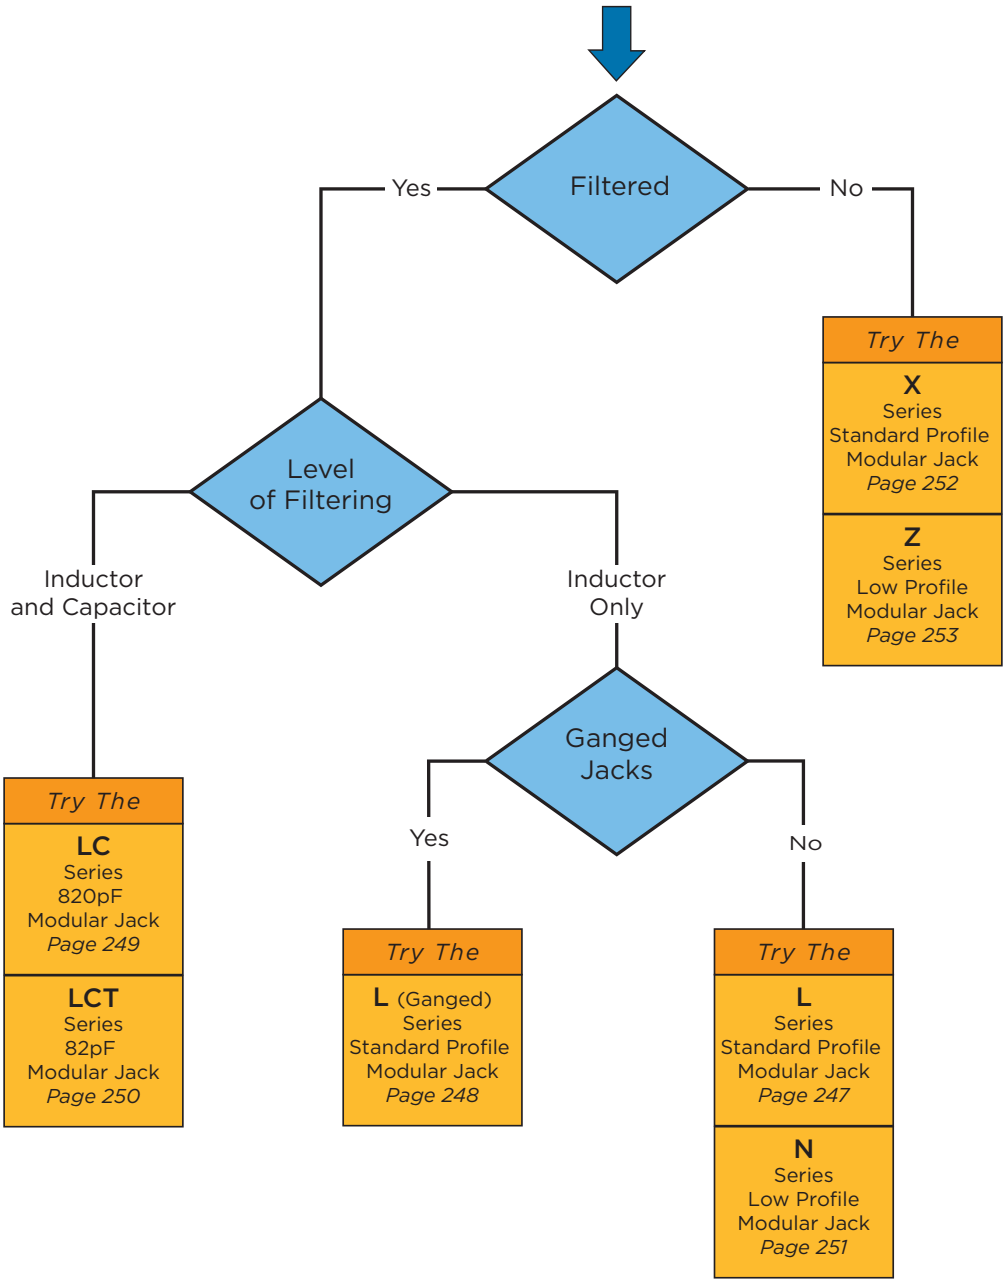

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Engineering Notes

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

L Series

UL Recognized
CSA Certified

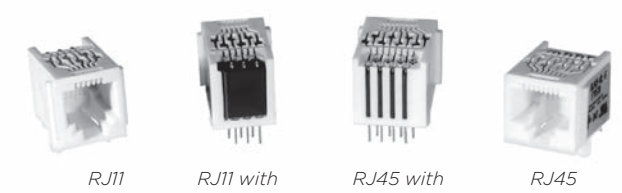

RJ11 *RJ11 with Block Filter* *RJ45 with Sleeve Filter* *RJ45*

L Series

- Inductive filtering in standard RJ11, RJ45, or handset jacks.
- Available with standard ferrite sleeve inductors or higher performance ferrite blocks
- Available unshielded or shielded with board grounded shield or spring fingered panel ground interface

Available Part Numbers

Inductor Filter	
RJH-4L-B	RJ45-6L-S
RJ11-2L-S	RJ45-6L-B
RJ11-2L-B	RJ45-8L-S
RJ11-4L-S	RJ45-8L-B
RJ11-4L-B	
RJ11-6L-S	
RJ11-6L-B	
Inductor Filter and Shield	
RJ11-2L2-B	RJ45-6L1-S
RJ11-4L1-S	RJ45-6L1-B
RJ11-4L1-B	RJ45-6L2-S
RJ11-4L2-S	RJ45-6L2-B
RJ11-4L2-B	RJ45-8L1-S
RJ11-6L1-S	RJ45-8L1-B
RJ11-6L1-B	RJ45-8L2-S
RJ11-6L2-S	RJ45-8L2-B
RJ11-6L2-B	

Shield 2 Shield 1

Specifications

Contacts:
Material: Phosphor Bronze
Plating: 50 microinches gold
Barrier underplating: 100 microinches nickel
Resistance:
Initial: 20 mΩ max.
After 500 mating cycles: 30 mΩ max.

Ferrites:
Type: High resistivity, nickel zinc ceramic
Sleeves: Single-aperture cylinders
Block: Multi-aperture rectangular prism

Shield Material: Tin-plated copper alloy

Housing Material: Glass-filled polyester (UL94V-0)

Dielectric Withstanding Voltage:
Line to Line and Line to Ground: 1000 VAC for 60 seconds

Printed Circuit Board Retention:
Before soldering: 1 lb. minimum
After soldering: 20 lb. minimum

Typical Impedance in Ohms

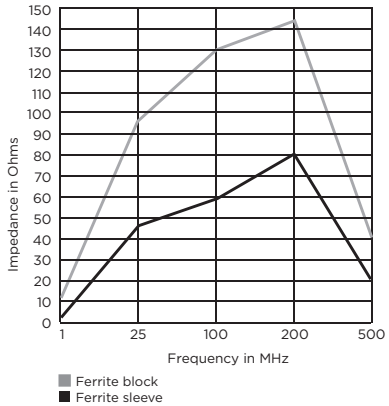

Model dimensions and PC board layout on pages 255-259

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

L – Ganged Series

UL Recognized
CSA Certified

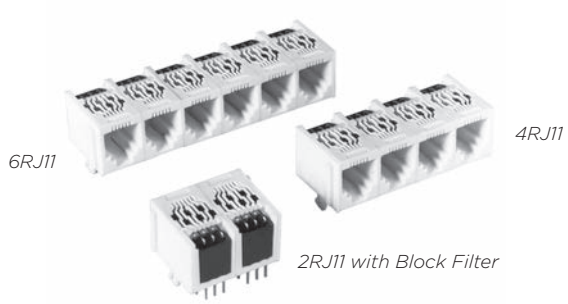

L – Ganged Series

- Ganged version of our L Series filtered jacks
- Available in RJ11 models with block inductors
- Available in gangs of 2, 4 or 6
- Retrofits existing unfiltered ganged jack footprints

Dimensions and PC Board Layout

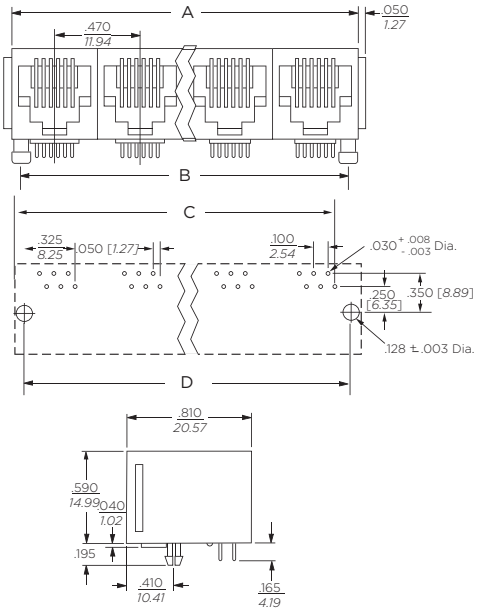

Ports	A	B	C	D
2	**0.99** *25.15*	**0.87** *22.1*	**0.795** *20.19*	**.87** *22.1*
4	**1.93** *49.02*	**1.81** *45.97*	**1.735** *44.07*	**1.81** *25.97*
6	**2.87** *72.9*	**2.75** *69.85*	**2.675** *67.95*	**2.75** *69.85*

Specifications

Contacts:

Material:	Phosphor Bronze
Plating:	50 microinches gold
Barrier underplating:	100 microinches nickel
Resistance:	
Initial:	20 mΩ max.
After 500 mating cycles:	30 mΩ max.

Ferrites:

Type:	High resistivity, nickel zinc ceramic
Block:	Multi-aperture rectangular prism

Housing Material: Glass-filled polyester (UL94V-0)

Dielectric Withstanding Voltage:

Line to Line and Line to Ground:	1000 VAC for 60 seconds

Printed Circuit Board Retention:

Before soldering:	1 lb. minimum
After soldering:	20 lb. minimum

Available Part Numbers

2RJ11-6L-B	4RJ11-6L-B
6RJ11-6L-B	

Typical Impedance in Ohms

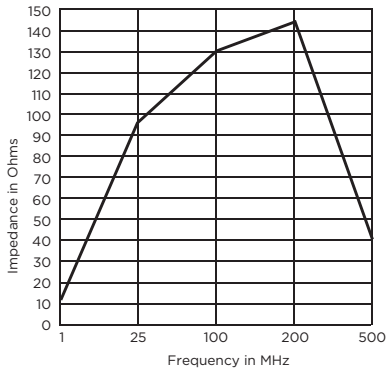

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

LC Series

UL Recognized
CSA Certified

Shield 2 RJ11 *Shield 1 RJ11* *Shield 2 RJ45* *Shield 1 RJ45*

LC Series

- Chip capacitors provide enhanced filtering performance on each line
- Available with block or sleeve inductance
- Available with board grounded shield or spring fingered panel ground interface

Performance Data

Typical Insertion Loss

Line to ground (stop band) in 50 Ohm circuit

	Frequency – MHz						
Model	**30**	**60**	**80**	**100**	**200**	**500**	**1000**
S – Ferrite Sleeves	28	40	51	40	27	24	22
B – Ferrite Blocks	30	41	59	40	31	28	24

Line to line (pass band) in 50 Ohm circuit

	Frequency – MHz						
Model	**2**	**5**	**10**	**30**	**50**	**70**	**100**
S – Ferrite Sleeves	-	4	8	18	24	30	40
B – Ferrite Blocks	1	8	11	21	28	33	37

Model dimensions and PC board layout on pages 255-259

Specifications

Contacts:
Material: Phosphor Bronze
Plating: 50 microinches gold
Barrier underplating: 100 microinches nickel
Resistance:
Initial: 20 mΩ max.
After 500 mating cycles: 30 mΩ max.

Capacitors:
Type: Monolithic ceramic chip
Standard Value: 820 pF
Standard Tolerance: ± 20%

Ferrites:
Type: High resistivity, nickel zinc ceramic
Sleeves: Single-aperture cylinders
Block: Multi-aperture rectangular prism

Shield Material: Tin-plated copper alloy

Housing Material: Glass-filled polyester (UL94V-0)

Dielectric Withstanding Voltage:
Line to Line and Line to Ground: 1000 VAC for 60 seconds

Printed Circuit Board Retention:
Before soldering: 1 lb. minimum
After soldering: 20 lb. minimum

Available Part Numbers

RJ11-2LC1-S	RJ11-6LC2-S
RJ11-2LC1-B	RJ11-6LC2-B
RJ11-2LC2-S	RJ45-6LC1-S
RJ11-2LC2-B	RJ45-6LC1-B
RJ11-4LC1-S	RJ45-6LC2-S
RJ11-4LC1-B	RJ45-6LC2-B
RJ11-4LC2-S	RJ45-8LC1-S
RJ11-4LC2-B	RJ45-8LC1-B
RJ11-6LC1-S	RJ45-8LC2-S
RJ11-6LC1-B	RJ45-8LC2-B

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

LCT Series

UL Recognized
CSA Certified

Shield 2 RJ11 *Shield 1 RJ11* *Shield 2 RJ45* *Shield 1 RJ45*

LCT Series

- Low capacitance model for improved performance.
- Particularly suited for ethernet applications
- Available with block or sleeve inductance
- Available with board grounded shield or spring fingered panel ground interface

Performance Data

Typical Insertion Loss

Line to ground (stop band) in 50 Ohm circuit

	Frequency – MHz						
Model	**40**	**100**	**200**	**250**	**300**	**500**	**1000**
S – Ferrite Sleeves	8	12	27	50	38	25	20
B – Ferrite Blocks	10	18	22	55	40	28	24

Line to line (pass band) in 50 Ohm circuit

	Frequency – MHz						
Model	**2**	**5**	**10**	**30**	**50**	**70**	**100**
S – Ferrite Sleeves	-	1.2	1.9	4	5	7	10
B – Ferrite Blocks	1	2	3	5	8	10	13

Model dimensions and PC board layout on pages 255-259

Specifications

Contacts:
Material: Phosphor Bronze
Plating: 50 microinches gold
Barrier underplating: 100 microinches nickel
Resistance:
Initial: 20 mΩ max.
After 500 mating cycles: 30 mΩ max.

Capacitors:
Type: Monolithic ceramic chip
Standard Value: 82 pF
Standard Tolerance: ± 20%

Ferrites:
Type: High resistivity, nickel zinc ceramic
Sleeves: Single-aperture cylinders
Block: Multi-aperture rectangular prism

Shield Material: Tin-plated copper alloy

Housing Material: Glass-filled polyester (UL94V-0)

Dielectric Withstanding Voltage:
Line to Line and Line to Ground: 1000 VAC for 60 seconds

Printed Circuit Board Retention:
Before soldering: 1 lb. minimum
After soldering: 20 lb. minimum

Available Part Numbers

RJ11-6LCT1-S	RJ45-8LCT1-S
RJ11-6LCT1-B	RJ45-8LCT1-B
RJ11-6LCT2-S	RJ45-8LCT2-S
RJ11-6LCT2-B	RJ45-8LCT2-B

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

N Series

UL Recognized
CSA Certified

Shield 3
RJ11

Shield 4
RJ45

N Series

- Low profile SignalSentry filtered jack
- Available with sleeve or block inductors
- Available unshielded or shielded with board grounded shield or spring fingered panel ground interface

Typical Impedance in Ohms

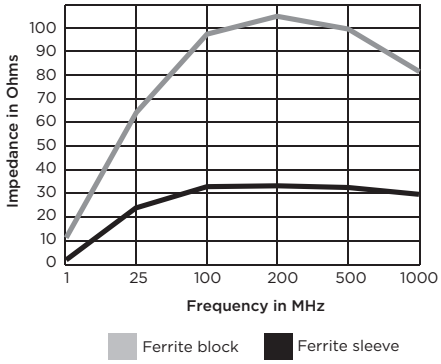

Unshielded
Ferrite Block

Specifications

Contacts:

Material:	Phosphor Bronze
Plating:	50 microinches gold
Barrier underplating:	100 microinches nickel
Resistance:	
Initial:	20 mΩ max.
After 500 mating cycles:	30 mΩ max.

Ferrites:

Type:	High resistivity, nickel zinc ceramic
Sleeves:	Single-aperture cylinders
Block:	Multi-aperture rectangular prism

Shield Material: Tin-plated copper alloy

Housing Material: Black glass-filled polyamide (STANYL TE250F3)

Dielectric Withstanding Voltage:
Line to Line and Line to Ground: 1000 VAC for 60 seconds

Printed Circuit Board Retention:

Before soldering:	1 lb. minimum
After soldering:	20 lb. minimum

Available Part Numbers

RJ11-6N-B	RJ45-8N-B
	RJ45-8N-S
RJ11-6N3-B	RJ45-8N3-B
	RJ45-8N3-S
RJ11-6N4-B	RJ45-8N4-B
	RJ45-8N4-S

Model dimensions and PC board layout on pages 255-259

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

X Series

UL Recognized
CSA Certified

RJ45

RJ11

X Series

- Unfiltered standard jack
- RJ11 or RJ45
- 2, 4, 6 or 8 loaded contacts
- Available unshielded or shielded with board grounded shield or spring fingered panel ground interface

Shield 1

Shield 2

Specifications

Contacts:

Material:	Phosphor Bronze
Plating:	50 microinches gold
Barrier underplating:	100 microinches nickel
Resistance:	
Initial:	20 mΩ max.
After 500 mating cycles:	30 mΩ max.

Shield Material: Tin-plated copper alloy

Housing Material: Glass-filled polyester (UL94V-0)

Dielectric Withstanding Voltage:

Line to Line and Line to Ground:	1000 VAC for 60 seconds

Printed Circuit Board Retention:

Before soldering:	1 lb. minimum
After soldering:	20 lb. minimum

Available Part Numbers

RJ11-2X	RJ45-6X
RJ11-4X	RJ45-8X
RJ11-6X	RJ45-8X1
	RJ45-8X2

Model dimensions and PC board layout on pages 255-259

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Z Series

UL Recognized
CSA Certified

Shield 3
RJ11

Shield 4
RJ45

Z Series

- Low profile
- Unfiltered
- Available unshielded or shielded with board grounded shield or spring fingered panel ground interface

Available Part Numbers

RJ11-6Z	RJ45-8Z
RJ11-6Z3	RJ45-8Z3
RJ11-6Z4	RJ45-8Z4

Specifications

Contacts:

Material:	Phosphor Bronze
Plating:	50 microinches gold
Barrier underplating:	100 microinches nickel
Resistance:	
Initial:	20 mΩ max.
After 500 mating cycles:	30 mΩ max.

Shield Material: Tin-plated copper alloy

Housing Material: Black glass-filled polyester (VALOX 457)

Dielectric Withstanding Voltage:
Line to Line and Line to Ground: 1000 VAC for 60 seconds

Printed Circuit Board Retention:

Before soldering:	1 lb. minimum
After soldering:	20 lb. minimum

Model dimensions and PC board layout on pages 255-259

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Engineering Notes

L, LC, LCT and X Series RJ Jack Dimensions

RJ11 – No Shield

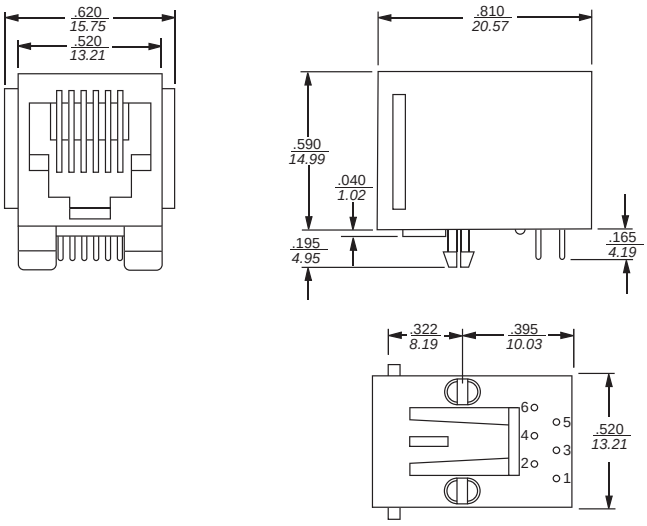

Part No.		
RJ11-2L-S	RJ11-2L-B	RJ11-2X
RJ11-4L-S	RJ11-4L-B	RJ11-4X
RJ11-6L-S	RJ11-6L-B	RJ11-6X

RJ11 – Style 1 Shield

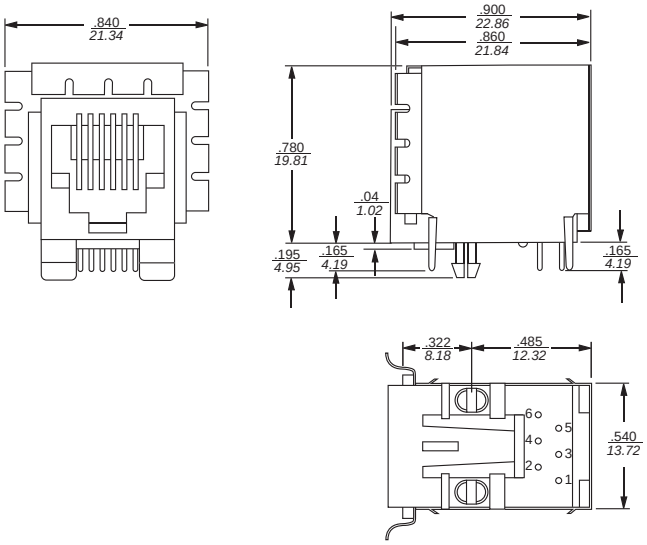

Part No.			
RJ11-2LC1-S	RJ11-2LC1-B	RJ11-4L1-S	RJ11-6L1-B
RJ11-4LC1-S	RJ11-4LC1-B	RJ11-6L1-S	RJ11-6LCT1-S
RJ11-6LC1-S	RJ11-6LC1-B	RJ11-4L1-B	RJ11-6LCT1-B

RJ11 – Style 2 Shield

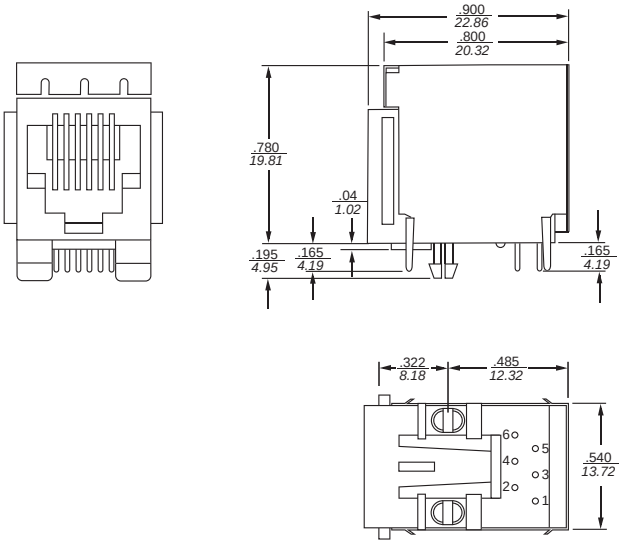

Part No.			
RJ11-2LC2-S	RJ11-2LC2-B	RJ11-4L2-S	RJ11-6L2-B
RJ11-4LC2-S	RJ11-4LC2-B	RJ11-6L2-S	RJ11-6LCT2-S
RJ11-6LC2-S	RJ11-6LC2-B	RJ11-4L2-B	RJ11-6LCT2-B

RJ11 – PC Board Layout

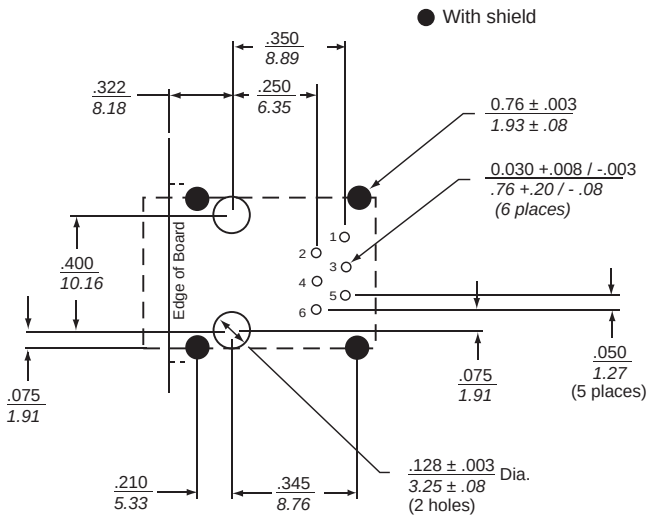

For all RJ11 L, LC, LCT and X Series Models Shown from Component Side

All tolerances ± 0.010 [0.25] unless otherwise noted

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

L, LC, LCT and X Series RJ Jack Dimensions *(continued)*

RJ45 – No Shield

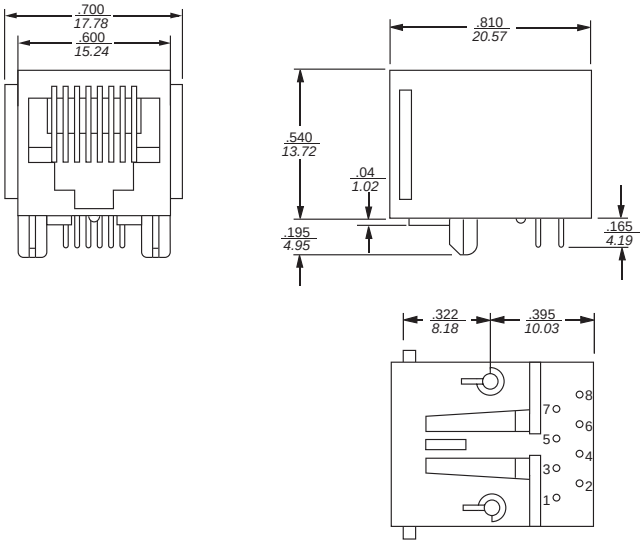

Part No.	
RJ45-6L-S	RJ45-8L-B
RJ45-8L-S	RJ45-6X
RJ45-6L-B	RJ45-8X

RJ45 – Style 2 Shield

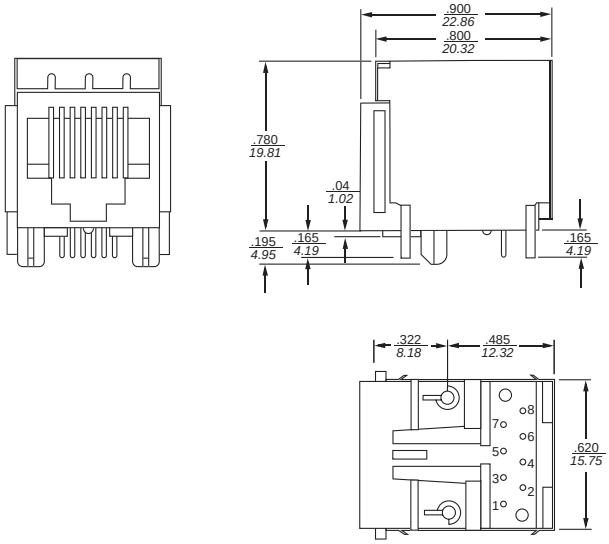

Part No.			
RJ45-6LC2-S	RJ45-8LC2-S	RJ45-6LC2-B	RJ45-8LC2-B
RJ45-6L2-S	RJ45-8L2-S	RJ45-6L2-B	RJ45-8L2-B
RJ45-8LCT2-S	RJ45-8LCT2-B		

RJ45 – Style 1 Shield

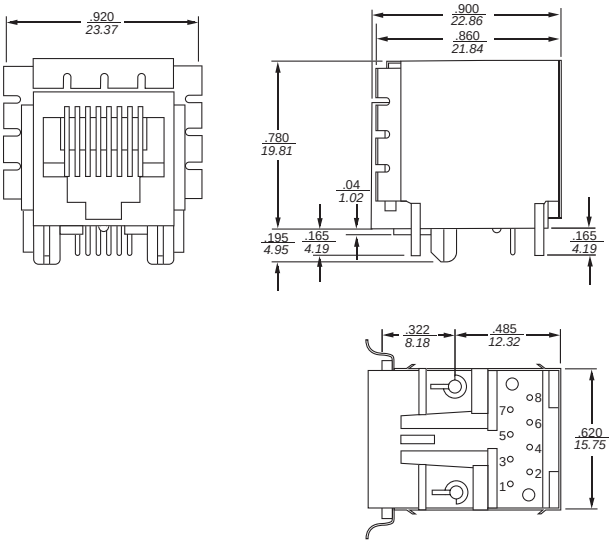

Part No.		
RJ45-6LC1-S	RJ45-8LC1-S	RJ45-6LC1-B
RJ45-6L1-S	RJ45-8L1-S	RJ45-6L1-B
RJ45-8LCT1-S	RJ45-8LCT1-B	RJ45-8LC1-B
		RJ45-8L1-B

RJ45 – PC Board Layout

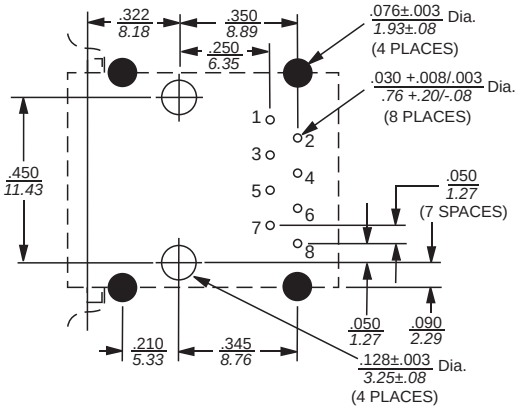

For all RJ45 L, LC, LCT and X Series Models Shown from Component Side

All tolerances ± 0.010 [*0.25*] unless otherwise noted

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

L, LC, LCT and X Series RJ Jack Dimensions *(continued)*

RJH – No Shield

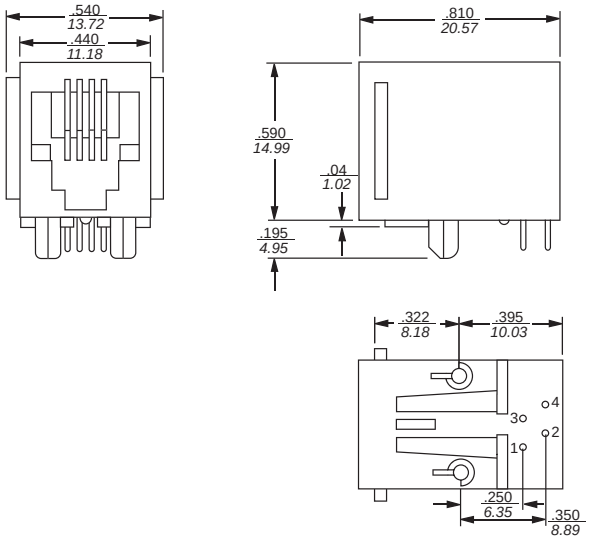

Part No.
RJH-4-L-B

RJH – PC Board Layout

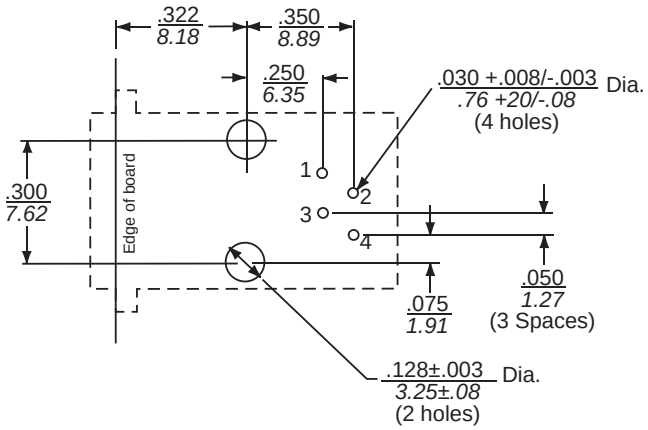

N and Z Series RJ Jack Dimensions

RJ11 – Low Profile, No Shield

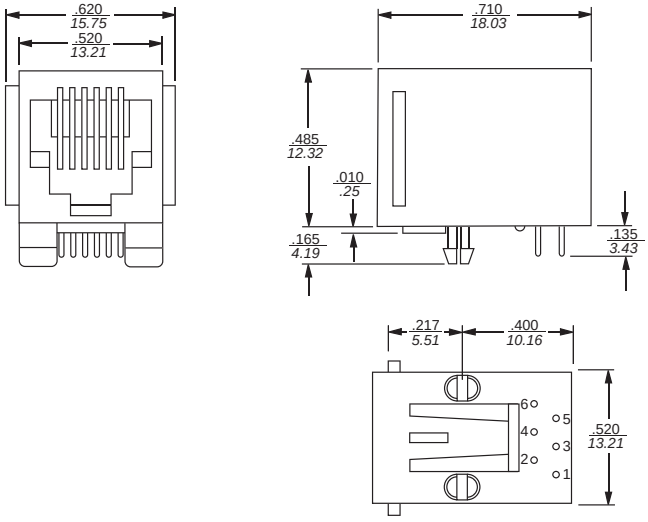

Part No.	
RJ11-6N-B	RJ11-6Z

RJ11 Low Profile, Style 3 Shield

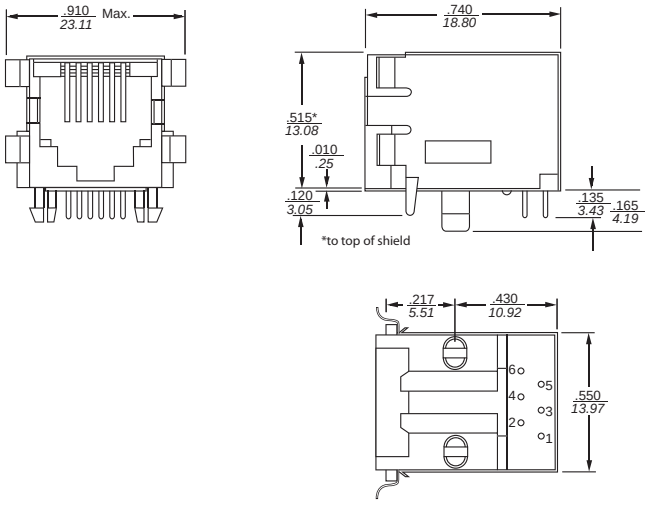

Part No.	
RJ11-6N3-B	RJ11-6Z3

All tolerances ± 0.010 [*0.25*] unless otherwise noted

257

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

N and Z Series RJ Jack Dimensions *(continued)*

RJ11 Low Profile, Style 4 Shield

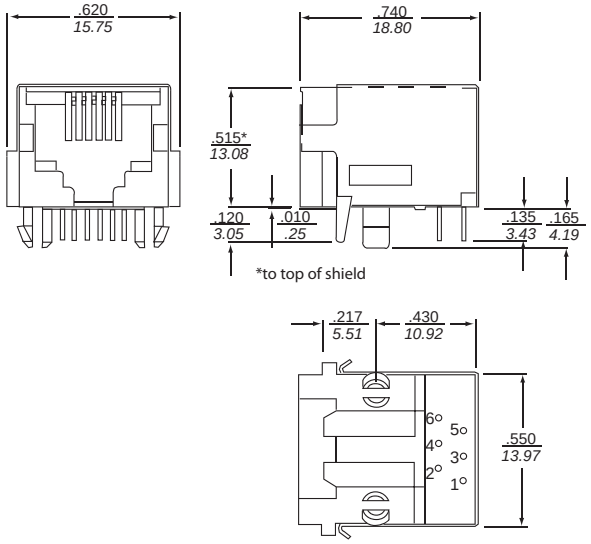

Part No.	
RJ11-6N4-B	RJ11-6Z4

RJ11 Low Profile, PC Board Layout

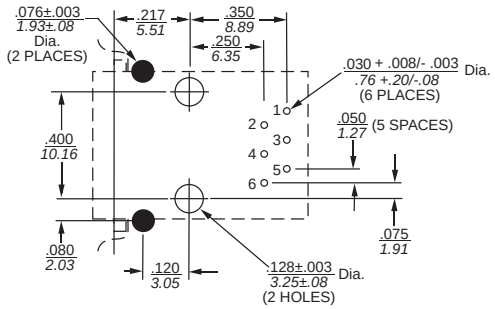

For all RJ11 N and Z Series Models
Shown from Component Side

RJ45 – Low Profile, No Shield

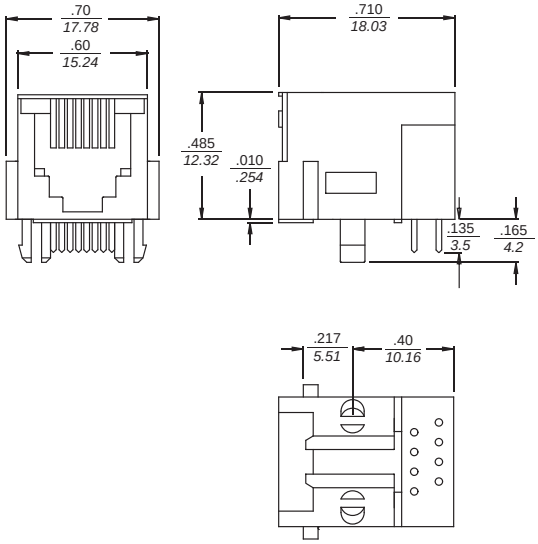

Part No.		
RJ45-8N-B	RJ45-8N-S	RJ45-8Z

RJ45 – Low Profile, Style 3 Shield

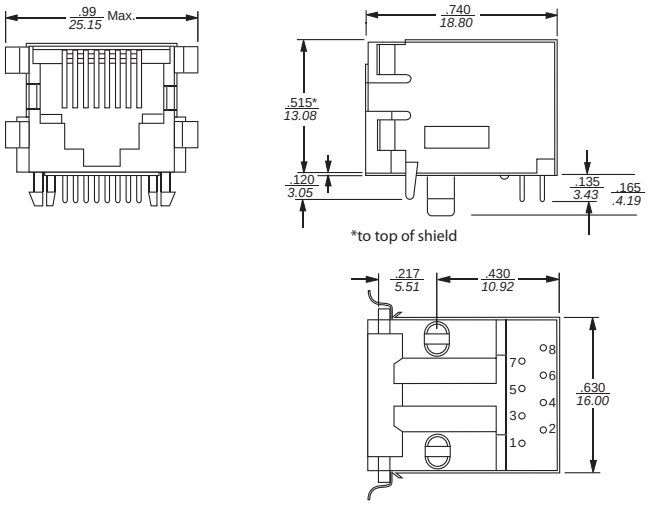

Part No.		
RJ45-8N3-B	RJ45-8N3-S	RJ45-8Z3

All tolerances ± 0.010 [*0.25*] unless otherwise noted

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Model Dimensions *(continued)*

N and Z Series RJ Jack Dimensions *(continued)*

RJ45 Low Profile, Style 4 Shield

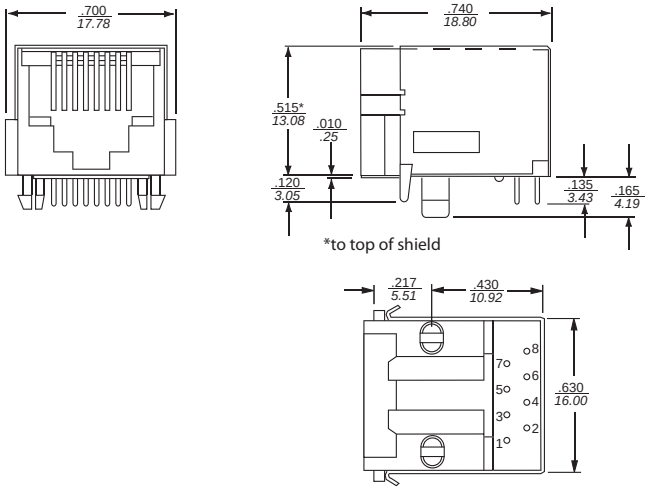

Part No.		
RJ45-8N4-B	RJ45-8N4-S	RJ45-8Z4

RJ45 Low Profile PC Board Layout

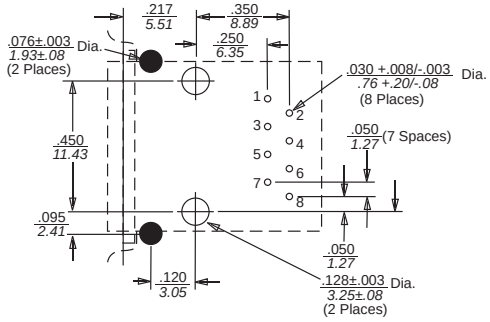

For all RJ45 N and Z Series Models
Shown from Component Side

All tolerances ± 0.010 [*0.25*] unless otherwise noted

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Engineering Notes

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

7. Technical Notes — Table of Contents

Introduction 262
Understanding RFI Power Line Filters 263
Understanding Hipot Testing 266
Understanding Leakage Current (Touch Current) 267
Understanding Insertion Loss 268
Appendix A - Conducted RFI Emissions Testing 269
Appendix B - Conducted RFI Susceptibility Testing 270
Appendix C - Health Care Equipment 270
Appendix D - Safety Agency File Numbers 271

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Introduction

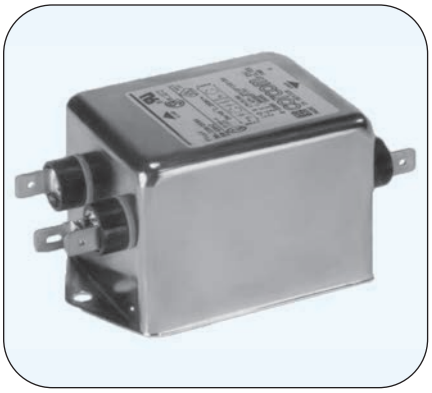

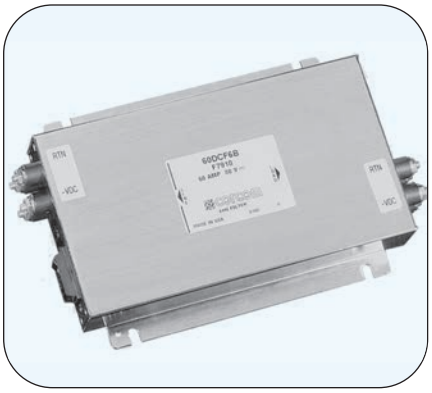

TE Connectivity (TE) has established itself as a world leader in RFI technology by introducing the first line of catalog filter products over 50 years ago. Today, TE continues to pursue the latest in RFI filter design through testing and evaluating power supplies and studying their effects.

Changing international standards obligate designers to constantly review and evaluate their filtering needs. The following section provides some basic information on RFI terminology and filter selection.

Additional information can be accessed through TE's Corcom product internet pages at **www.corcom.com**

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Understanding RFI Power Line Filters

What Is Radio Frequency Interference (RFI)?

RFI is unwanted electromagnetic energy in the frequency range generally used for radio communications. The frequency ranges of interest are 10kHz to 30MHz for conducted phenomena and 30MHz to 1GHz for radiated phenomena.

What are the modes of propagation of RFI?

RFI is propagated via radiation (electromagnetic waves in free space) and by conduction over signal lines and AC power systems.

Radiated - One of the most significant contributors to radiated RFI from electronic equipment is the AC power cord. The power cord is often an efficient antenna since its length approaches a quarter wave length for the RFI frequencies present in digital equipment and switching power supplies.

Conducted - RFI is conducted over the AC power system in two modes. Common mode (asymmetrical) RFI is present on both the line and neutral current paths with reference to the ground or earth path. Differential mode (symmetrical) RFI is present as a voltage between the line and neutral leads.

Why Be Concerned with RFI?

The designers and manufacturers of digital equipment must concern themselves with RFI for two reasons. (1) Their equipment must operate properly in the application environment, often in the presence of significant levels of RFI. (2) Their equipment must not emit RFI that interferes with RF communications often vital to health and safety. The necessity for reliable RF communications has given rise to legal regulations ensuring RFI control for electronic equipment.

What are the FCC requirements?

The U.S. Federal Communications Commission (FCC) has established regulations to reduce the interference potential of electronic computing devices (FCC Rules, Part 15, Subpart J). A computing device is defined as any electronic device or system that generates and uses timing signals or pulses at a rate in excess of 10,000 per second and that uses digital techniques. It is important to note that a switching power supply does not itself fall into this category, but that its emissions must still meet the limits when it is installed in a piece of equipment that is subject to the regulations.

The level of emissions the equipment must meet depends on whether it is marketed for use in a residential environment (Class B) or in a commercial, industrial, or business environment (Class A). The limits for Class B are more stringent than those for Class A (see Appendix A). Most Class B equipment must undergo certification, meaning that emissions test data must be submitted to the FCC for type approval. Class A and all other Class B equipment must be verified—i.e. the manufacturer conducts his own emissions testing and verifies that he complies with the limits, but no forms need to be filed with the FCC.

Further details on FCC requirements can be obtained from the FCC, RF Devices Branch (Authorization and Standards Division), Washington, DC 20554, (301) 725-1585.

What are CE markings and RFI filters?

As of January 1, 1996, electrical and electronic equipment shipped to Europe is required to be labeled with the CE marking. In order to apply the CE marking, equipment must meet the General Product Safety Directive and Electromagnetic Compatibility Directive.

RFI power line filters are components and therefore not covered by the CE requirements, but they are used in electronic systems to meet EMC specifications.

Two of the most common emission specifications are EN 55011 for industrial, science, and medical equipment, and EN 55022 for information technology equipment. The conducted emission limits for these specifications are the same and broken down to Class “A” and Class “B” limits. Electronic equipment that may be connected to a power main shared with a residential area must comply with the more stringent Class “B” limits. The measurement technique is done using quasi-peak and average detection, with different limits for each measure in dB above one microvolt.

There are several immunity tests to which electronic equipment must comply, one of which is the electrically fast transient (EFT), IEC 61000-4-4. The equipment must continue to operate during this test. The transient wave form is a 5ns rise time with a 50ns duration. A burst is induced onto the power line at 1kV with a repetition rate of 5kHz lasting 15ms and repeated every 300ms. The test simulates switching of inductive loads and contacts.

To pass the EFT test, it is important that the RFI filter’s enclosure have a good RF ground with the system’s chassis ground. This provides a lower impedance path from the safety ground to the system ground. The shielding effect of the RFI filter’s metal enclosure eliminates radiation into the system’s cabinet induced by the conducted EFT burst. Stray capacitance may occur from any of the three input power wires to chassis ground where voltage can build up from the EFT burst and cause system interrupts. The RFI filter’s inductor offers an impedance to the burst.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Understanding RFI Power Line Filters *(continued)*

In cases where the stray capacitances have caused multiple RF ground planes or where plastic enclosures are used, an inductive choke may be needed to provide isolation of the safety ground from the chassis ground.

What Is a Power Line Interference Filter?

A power line interference filter is a primary tool available to the designer of electronic equipment to control conducted RFI both into the equipment (potential equipment malfunction) and out of the equipment (potential interference to other system elements or RF communication). By controlling the RFI conducted onto the power cord, a power line filter also contributes significantly to the amount of radiated RFI.

A power line filter is a multiple-port network of passive components arranged as a dual low-pass filter; one network for common mode attenuation, another network for differential mode attenuation. The network provides attenuation of RF energy in the stopband of the filter (typically above 10kHz), while passing the power current (50-60Hz) with little or no attenuation.

How Does a Power Line Interference Filter Work?

Power line interference filters, as passive, bilateral networks, have complex transfer characteristics, which are extremely dependent upon source and load impedance. The magnitude of this transfer characteristic describes the attenuation performance of the filter. In the power line environment, however, the source and load impedances are not defined. Therefore the industry has standardized upon the practices of verifying filter uniformity through measurement of attenuation with 50 Ohm resistive source and load terminations. This measurement is defined to the Insertion Loss (I.L.) of the filter.

$$\text{I.L.} = 10 \log \frac{P_L \text{ (Ref)}}{P_L}$$

where P_L (Ref) is the power transferred from the source to the load without the filter, and P_L is the power transferred when a filter is inserted between the source and load. The Insertion Loss may also be expressed in terms of voltage or current ratios as shown:

$$\text{I.L.} = 20 \log \frac{V_L \text{ (Ref)}}{V_L}$$

$$\text{I.L.} = 20 \log \frac{I_L \text{ (Ref)}}{I_L}$$

where V_L (Ref) and I_L are measured without a filter and V_L and I_L are measured with a filter.

It is important to note that Insertion Loss does not describe the RFI attenuation provided by a filter in the power line environment. In the power line environment the relative magnitudes of the source and load impedances must be estimated and the appropriate filter configuration selected such that the greatest possible impedance mismatch occurs at each termination.

This dependence of filter performance on terminated impedances is the basis for the concept of "mismatching networks."

What is the concept of power line filters as "Impedance Mismatching Networks"?

RFI power line filters can be thought of as "impedance mismatching networks" at higher frequencies in the attenuation band. Network analysis shows that the greater the mismatch of filter impedance to terminating impedance, the more effective the filter is in attenuating RF energies.

Common mode power line impedance is considered to be low (on the order of 50 Ohms). Thus, following the concept of an impedance mismatch, Corcom power line filters employ a high common mode impedance (series inductance) on the power line side of the filter.

For load (equipment) side common mode impedance mismatch, Corcom products are available with a high impedance (series inductance) or a low impedance (shunt capacitance).

High (common mode) impedance filters for use with low impedance equipment include the EP, H, 6A Q, R and V series. Low (common mode) impedance filters for use with high impedance equipment include the B, EC, ED, EF, G, K, N, 3A Q, S, SK, T, W, X, Y, and Z series.

Knowing the input impedance of your equipment, then, may be useful in initially selecting the filter series most likely to solve your RFI problems. However, since this impedance is almost certainly complex (having both resistive and reactive components), it may vary widely over the RFI frequency range. Hence a variety of series should be evaluated in your quest for the most effective filter in any one application.

Do all filter networks with the same circuit and element values perform identically?

All filter networks with the same circuit and element values do not perform identically. Element values are specified and measured at a single frequency (usually 1kHz). Filter performance is required over the entire frequency spectrum, not just at the frequency of component measurement. The type of component construction and method of incorporation into a filter are extremely important to filter performance.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Figure 1 illustrates the high-frequency performance difference between the three leaded capacitor construction employed by TE and a conventional method of construction. Both units would be specified by the same nominal 1kHz component value, approximately 5000pF.

Figure 1: Insertion Loss

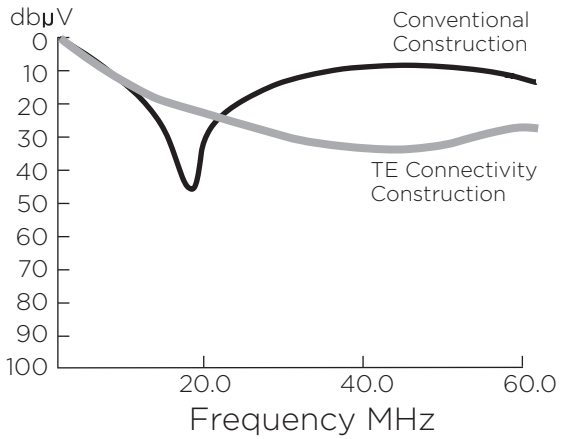

How Do You Select a Power Line Interference Filter?

The only way to select and qualify a power line interference filter is to test the unit in your equipment. As mentioned above, the performance is highly dependent on equipment load impedance. Filter performance cannot be derived from single impedance (50 Ohm) insertion loss data. Performance is a complex function of filter element impedances and equipment impedances which vary in magnitude and phase over the frequency spectrum of interest. Filter selection testing should be performed in your equipment to your required level of performance for both conducted emission control (FCC, VDE) and susceptibility control.

How do you perform conducted emission tests?

Conducted emission testing requires a quiet RF environment—usually a shielded enclosure—a line impedance stabilization network, and an RF voltage instrument such as a tuned receiver or a spectrum analyzer. Additional testing information is given in Appendix A. The RF ambient of the test environment should be at least 20 dB below the desired compliance limit for accurate results. The line impedance stabilization network (LISN) is required to establish a desired source impedance for the power line input. This is an important part of the test procedure, since this impedance directly affects the measured emission levels. The correct bandwidth for the measurement receiver is also a critical test parameter.

How do you perform susceptibility testing?

Susceptibility testing involves injection of noise onto the power input lines while monitoring the equipment for proper operation. Quantification of the noise levels to be found in the equipment environment is difficult at best. Through analysis of solutions to specific susceptibility problems, TE has developed recommended noise injection levels, which proved a high level of confidence for reliable equipment operation in the real world environment. The test methods and injection noise levels are found in Appendix B.

Is installation important to filter performance?

Mounting and wiring of the filter are critical influences on its performances. A power line filter is best installed at the power line input point of your equipment. The filter is a barrier to high frequency signals. Its purpose must not be defeated by stray capacitance coupling the power input leads to the power output leads, or to any other conductors in the protected equipment.

Normally the case of the filter is bolted to the framework or chassis of the electronic equipment it protects. The line side leads should be kept short and well separated from the load side leads. The ideal isolation system is a bulkhead-mounted filter incorporating a line cord connector, such as the Corcom EC, ED, or EF power line filter series.

How Do You Know Which Filter To Test?

A filter, or ordered group of filters, likely to solve your interference control problem can be obtained by using the selector chart at the front of each section. Every Corcom filter series is available in a range of current ratings and packages. Detailed specifications, including prices, are listed on the individual series' catalog sheets referenced in the selector chart. Telephone numbers of distributors who stock all TE products are listed on the back cover of this catalog.

Why Be Concerned with Safety Agency Requirements?

All components in the AC power system, including power line filters, must be safe from potential fire and shock hazard. The standards set by the various safety agencies, like UL, CSA, VDE, and SEV, provide guidelines to assist the designer in specifying safe and reliable components. Components which carry the compliance symbols from these agencies have been designed and manufactured to comply with these standards. A summary of safety agency requirements can be found in Appendix C.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to **te.com/help** **corcom.com**

Understanding RFI Power Line Filters *(continued)*

What are the significant requirements of UL and CSA?

UL and CSA are primarily concerned with high potential withstand capability, temperature rise, creepage distances, and material temperature capability at the time of manufacture.

What are the additional aspects of VDE safety requirements?

In addition to the requirements of UL and CSA, VDE specifies limits of hipot, insulation resistance, and change of component values, at the conclusion of extreme environmental conditioning. The conditioning includes life tests at elevated temperatures, long term humidity, and temperature/humidity cycling. Components that bear the VDE symbol of safety have been designed and tested not only for initial safety but also for safety over the life of the product.

How Do You Specify a Power Line Filter?

The filter you have selected through system testing can best be specified by the data parameters found on the appropriate catalog page. Combining the product family parameters listed under the "specifications" with the package style and dimensional data from your specific filter will adequately define your selection.

Are there other parameters that need to be specified?

There are three additional requirements that are often specified. Below are our recommended values:

1. Insulation Resistance: 6000 MΩ @ 100VDC

2. Current Overload: 6 X rated current for 8 seconds

3. Humidity: 21 days at 40°C 95% RH

What are the test methods for verification of the important specification parameters?

Some filter specifications may be unfamiliar to you or may require slightly different measuring techniques than you have been using for other components. It is very important that supplier and customer use the same techniques for verification of electrical specifications, in order to assure an uninterrupted flow of quality components. Three specifications that must be clearly understood are hipot testing, leakage current, and insertion loss.

Understanding Hipot Testing

The term "hipot" is an acronym for "high potential." Hipot testing stresses the insulation and capacitors of a filter assembly by applying a voltage much higher than is usually experienced in normal operation. The purpose of hipot specifications is to assure safety and reliability.

All the major safety agencies require hipot testing for qualification of power line filters, and also require that each production unit undergo hipot testing to verify the integrity of the line-to-ground components and insulation. Every Corcom filter is hipot tested twice: once during assembly and again after completion. Applying hipot testing as an incoming inspection procedure requires a thorough understanding of its uses and limitations.

Hipot test voltages are applied from each line (both lines tied together for VDE) to ground and from line-to-line. The line-to-ground voltages are always higher. Test voltages may be specified as AC or DC, with the DC voltages at least 1.414 times the AC voltages.

For incoming inspection testing, TE recommends using the voltages given as "hipot rating" for each filter in the catalog. These DC voltages will always be equal to or higher than the peak AC voltage carried by any safety agency whose approval the filter carries. A DC hipot test is generally used.

A variety of hipot testers is available from a number of manufacturers. The tester chosen should have at least a 500VA rating.

The following precautions must be observed to insure the safety of the operator and the validity of the test:

1. THESE VOLTAGES CAN BE LETHAL—use the utmost safety precautions to protect the test operator.

2. The possibility of high surge currents and oscillatory overvoltage during sudden application of the test voltage requires some method of limiting the applied current or increasing the voltage comparatively slowly.

3. For AC hipot tests, use an oscillograph to monitor the applied voltage. The current limiting circuit may react with the filter circuit to distort the 60Hz waveform. This may produce a peak voltage that exceeds the expected peak value of a sinusoidal voltage having the specified rms value. The peak voltage should be 1.414 times the rms value. Higher voltages may cause unwarranted failures due to the peak currents exceeding the trip setting.

4. For line-to-line hipot testing, remember that most filters have a bleeder resistor (typical value 100kΩ to 10MΩ) to discharge the line-to-line capacitors. Be sure to set the trip point of the hipot tester above the current level that will flow through the bleeder resistor: 10mA is usually a safe value.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Understanding Leakage Current (Touch Current)

Leakage current (also referred to as "touch current") is an important specification of power line filters. There has always been an undeserved negative connotation to this term. Leakage current is not a function of the quality of components, but is a direct function of the line-to-ground capacitance value. The larger the capacitance, the lower the impedance to common mode currents, and the greater the common mode interference rejection. Hence, leakage current is a measure of filter performance—the higher, the better.

Why, then, do safety agencies specify a maximum allowable leakage current? This is done in order to limit the magnitude of expected ground return currents. The line-to ground capacitors provide a path for 50/60Hz current to flow to the chassis. As long as the equipment is grounded, these currents will flow in the ground circuit and present no hazard. However, in the unlikely but always possible circumstance where the ground circuit is faulty, the earth connection may be established by the body of a person. If this should occur, the maximum leakage current specification limits the ground return current to a safe value, typically 0.5 to 5.0mA. The limits set by safety agencies are based on end user equipment specifications, such as those given below.

Capacitive Current Limits

Country	Specification	Limits for Class I Grounded Equipment
U.S.A.	UL 60950	3.5 mA, 120V, 60Hz
Canada	C22.2 No. 60950	3.5 mA, 120V, 60Hz
Europe	EN 60950	3.5 mA, 250V, 50Hz

Since the largest component of leakage current is usually from the power line filter, it is prudent to set a maximum leakage current limit for the filter itself. There has been a tendency in the industry to specify the minimum leakage current to comply with all agency requirements, usually 0.5mA. This specification decision should not be made arbitrarily, because often the size and cost of the filter can be reduced by allowing a greater maximum leakage current.

Figure 2: Leakage Current Measurement

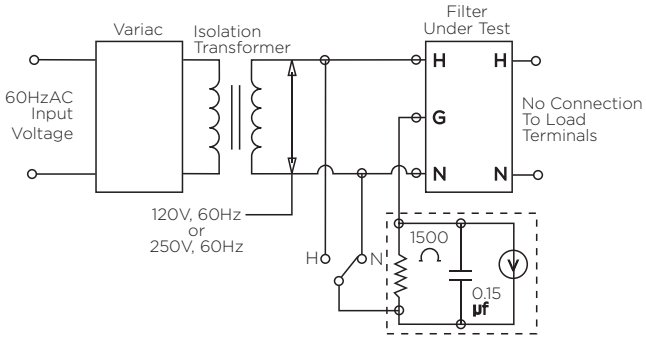

Note that filter case must be floating, not grounded.

The circuit of Figure 2 illustrates the measurement technique for leakage current. The leakage limits apply to each side of the line independently. The test circuit provides the correct value by shunting the line-to-ground path that is not being measured by the millimeter impedance. This test is realistic, because power to a system is provided by a hot line and a neutral line, with the neutral basically at ground potential, thus providing no addition to the leakage.

Note that the leakage current is directly proportional to line voltage and frequency. Hence, it is unwise to specify an operation frequency greater than 60Hz (e.g., 400Hz) when leakage current limits must also be met.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Understanding Insertion Loss

What is insertion loss?

Insertion loss is the ratio (expressed in dB) of the signal voltage transferred from source to load without a filter, to the signal voltage transferred from source to load when the filter is inserted. As discussed above ("How Does a Power Line Interference Filter Work?"), insertion loss is not a measure of filter performance in the power line equipment environment.

How is it measured?

If the terminating impedances are standardized, then it becomes meaningful to measure insertion loss, but the results so obtained can be applied only to an identical circuit. The most popular set-up is to make the source and load impedances each 50 Ohms, resistive.

The most important aspect of insertion loss measurement is consistency. It is particularly critical that supplier and user employ the same measurement techniques. The standard method of insertion loss measurement used by TE is as follows:

Insertion loss is easily measured with a spectrum analyzer or tuned receiver and a tracking generator. A zero dB reference is established without the filter. Then the filter is inserted, and the attenuation provided over the desired frequency range is recorded.

For a power line filter we are interested in signal attenuation in two different modes:

Common Mode (CM) — signals present on both sides of the line (hot and neutral) referenced to ground.

Differential Mode (DM) — signals present on one side of the line, referenced to the other.

Accordingly, we may deal with CM insertion loss or DM insertion loss or both.

For the common mode, the line and neutral terminals are at the same potential (same magnitude and phase) and may be considered as being in parallel. CM current circulates between this pair and the common (ground) lead. CM insertion loss is measured by strapping the line and neutral terminals together on both sides of the filter (Figure 3). All CM insertion loss data published in the Corcom product catalog are measured this way.For differential mode, the signals on the line and neutral terminals are of the same magnitude but opposite phase. Current circulates between the line and neutral leads only. DM insertion loss is tested with 50 Ohm 180° power splitters as shown in Figure 4. All DM insertion loss data published in the Corcom product catalog are measured this way.

Figure 3: CM Insertion Loss Measurement

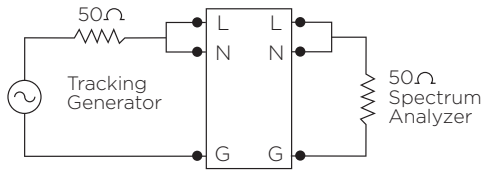

Test Connection

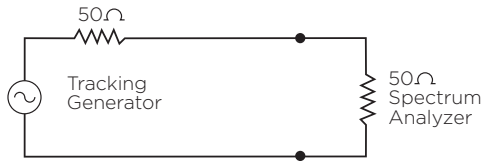

Reference Connection

For differential mode, the signals on the line and neutral terminals are of the same magnitude but opposite phase. Current circulates between the line and neutral leads only. DM insertion loss is tested with 50 Ohm 180° power splitters as shown in Figure 4. All DM insertion loss data published in the Corcom product guide are measured this way.

Figure 4: DM Insertion Loss Measurement

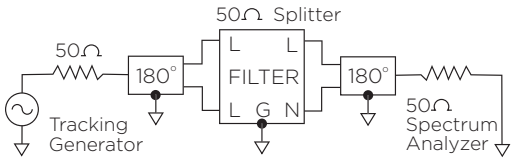

Test Connection

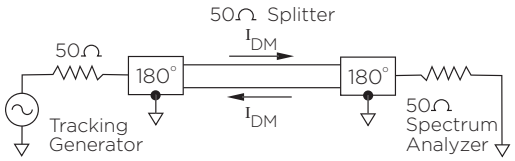

Reference Connection

Note that all signal leads in Figures 3 and 4 are 50 Ohm coaxial cables.

1. Make your 0dB reference measurement over the entire frequency range, not just at one or two points.

2. Make sure the filter case has a good RF ground connection.

3. Make sure the wiring to the load side of the filter is well separated from the wiring to the line side, to avoid RF coupling around the filter.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Understanding Insertion Loss *(continued)*

What can it be used for?

Standardized insertion loss data will not accurately predict a filter's performance in your equipment. However, it does serve as an important tool for verifying product consistency through incoming inspection.

The criterion for acceptance would be that the measured insertion loss must either meet or exceed the published data when tested in the standardized manner.

Accordingly, "typical" insertion loss data is not meaningful. The data to which you test should be minimum values. Most of the insertion loss data published by TE are guaranteed minimums, and as such can be tested for a positive indication of component consistency.

Appendix A - Conducted RFI Emissions Testing

Conducted RFI Emissions Testing

Since conducted emissions testing is usually done to insure that your equipment will comply with the limits of FCC Part 15 or EN55022, the test methods used should conform to the specifications of these two agencies. You will need the following equipment:

1. Shielded room, to allow measurement with minimal background interference.
2. Two 50 Ohm line impedance stabilization networks (LISNs), fixing the line-side impedances as mandated by FCC and CISPR.
3. Spectrum analyzer or tuned receiver, with CISPR quasipeak detector, covering the range from 10kHz to 30MHz.

Figure A1

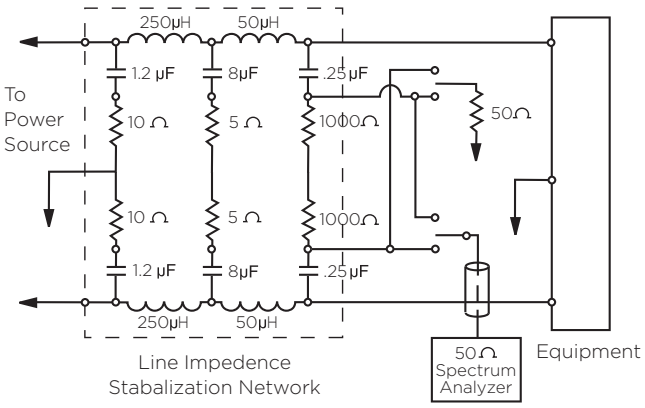

The limits for FCC Part 15 and EN55022 are shown in Figure A2. To which one or more of these limits you will test is determined by whether your equipment is marketed in the United States (FCC) or Europe (EN55022) and into which class of operation it falls at each agency.

Figure A2

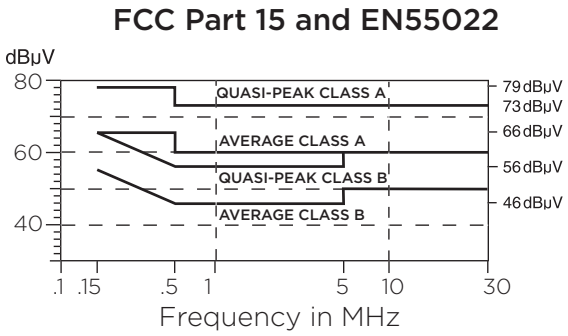

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Appendix B - Conducted RFI Susceptibility Testing

Conducted RFI Susceptibility Testing

You can determine whether or not your equipment is susceptible to conducted RFI by subjecting it to predetermined levels of CM and DM interferences, and noting any malfunctions that occur. Such a test approximates real-world interference by standardized test conditions, according to previous experience. TE's recommendation for conducted susceptibility testing follows. The equipment required will be:

1. Shielded room, to eliminate spurious signals.
2. Two 50 Ohm line impedance stabilization networks (LISNs).
3. 50 Ohm signal generator, 1 Watt output.
4. 50 Ohm (or less) pulse generator, 0 to 300 Volts output.

CW signals should be injected common-mode, using peak levels of:

7 Volts from 10kHz to 150kHz
2 Volts from 150kHz to 500kHz
1 Volt from 500kHz to 30MHz

Pulse waveforms should be injected common mode and differential mode, pulse width 10 microseconds, rise time 1 microsecond, repetition rate 60Hz and varied in phase 0 to 360 degrees on the 60Hz power waveform. CM pulses should have peak levels of 2 volts; DM pulses should have peak levels of twice the rated line voltage.

These levels are based on emission data gathered at TE and are considered typical of the levels encountered close to high noise sources.

Figure A3

A. Common Mode

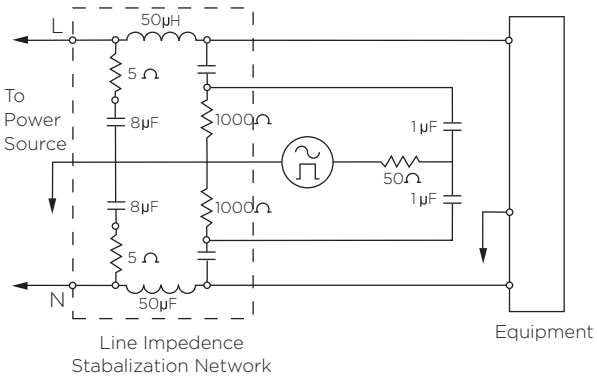

B. Differential Mode

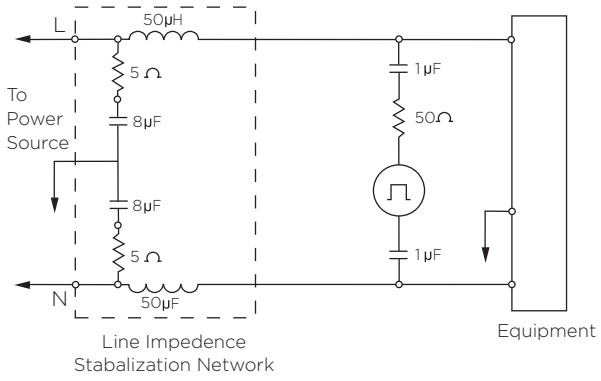

Appendix C - Health Care Equipment

UL 60601-1 Medical Electrical Equipment

The major safety standard for electro-medical devices is the IEC 60601 series, with the IEC 60601-1 standard covering all generic requirements. This standard is the basis of the various harmonized equivalents, the European equivalent is EN 60601, the UL equivalent is UL60601-1 and the CSA equivalent is C22.2 No. 60601-1

Underwriters Laboratories' medical electrical equipment specification is broken down into two basic categories.

A. Patient Care Equipment: "Equipment that is intended to be used on or with, or likely to be contacted by, a patient in a health care facility in the course of his treatment." This equipment can have a maximum leakage current of 100 µA at 120VAC, 60Hz.

B. Non-patient Equipment: "Equipment primarily for use in a health care facility that is intended for use where contact with a patient is unlikely." This equipment can have a maximum leakage current of 300 µA at 120VAC, 60Hz.

All filters starting with "H" and "M" are for medical equipment applications. They can be used in both patient care equipment and non-patient equipment. All other Corcom products with an "E" in the part number are suitable for use only in (120V) non-patient equipment.

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Appendix D - Safety Agency File Numbers

Filters

UL Recognition
Guide FOKY2, File E48570
All except IK series

Guide ECBT2, File E106884
Non-filtered DB Series connectors only

Component Recognized by UL to Canadian Requirements
Guide ECBT8, File E106884
Non-filtered DB Series connectors only

Component Recognized by UL to Canadian Requirements
UL Guide FOKY2, File E48570
CSA Guide FOKY8, File E48570
AFC, FFA, FFD and DFC Series only

UL Listing
Guide FNFT, File E117533
Model 3FL3 ballast filter

CSA Certification
Class 2221, File LR46870
All except IK series

VDE Approval
File 706400-4730
All except IK series

TUV Approval
File E2173035
DAF, DAS Series
File E2173028.01
DCB, DCF Series
File T72091763.01
Filtered DB Series
File T72081913.01
Non-filtered DB Series (Connectors)

Signal Sentry Modular Jacks

UL Recognition
Guide DUXR2, File E136872

CSA Certification
Class 4872, File LR96220

Power Entry Modules

UL Recognition
Guide FOKY2, File E48570
All filtered power entry modules

Guide AXUT2, File E61290
All non-filtered fuseless modules and 15SRB with suffix 1, 2, 8, P, S1 or S8

Guide AYVZ2, File E59193
All non-filtered fused modules

Component Recognized by UL to Canadian Requirements
Guide AXUT8, File E61290
Models: 15CE1, 15CS1, 15CBE1, 15CBS1 and 15CU Series

CSA Certification
Class 2221, File LR46870
Filtered modules

Class 6221, File LR68190
Non-filtered modules

TUV Approval
File T72051210.01
Non-filtered DC rated P Series with VDE rating only

VDE Approval
File 706400-4730
All filtered modules except J Series
File 706400-1550
All non-filtered modules except J Series

Accessories

UL Recognition
Guide ECBT2, File E106884
MA100

Guide XUHT2 File E106794
TS Series

CSA Certification
Class 6233, File LR88865
MA100

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Engineering Notes

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Part Number Index and Cross Reference

Catalog Number	TE Ordering Number	Page Number
1CFE1	6609113-1	130
1CFS1	6609113-2	130
1CHE1	6609114-1	130
1CHS1	6609114-2	130
1CUFE1	2-1609113-2	134
1CUFF1	2-1609114-2	134
1CUFS1	2-1609113-7	134
1EAH1	6609002-1	149
1EAS1	6609005-6	149
1EB1	6609020-1	15
1EB3	6609020-2	15
1EBF1	6609018-1	138
1EBF4	6609018-2	138
1EBH1	6609003-1	149
1EBP	6609063-1	21
1EBS1	1-6609005-1	149
1EC1	6609017-1	141
1EC2	6609017-2	141
1EC4	6609017-3	141
1EC8	6609017-4	141
1ED1	6609016-1	144
1ED2	6609016-2	144
1ED4	6609016-3	144
1ED8	6609016-4	144
1EDK1	6609033-1	18
1EDK3	6609033-2	18
1EDP	6609065-1	21
1EEA1	6609000-1	149
1EEA2	6609000-2	149
1EEAP	6609000-3	149
1EEB1	6609001-1	149
1EEB2	6609001-2	149
1EEBP	6609001-3	149
1EEJ1	6609006-1	154
1EEJ2	6609006-2	154
1EEJ8	3-6609006-2	154
1EEJP	6609006-3	154
1EF1F	6609015-1	160
1EF2F	6609015-2	160
1EF4	6609014-3	160
1EF8	6609014-4	160
1EGG1-1	6609115-1	166
1EGG1-2	6609115-3	166
1EGG1C-1	6609115-4	166
1EGG1C-2	6609115-5	166
1EGG8-1	6609115-6	166
1EGG8-2	6609115-7	166
1EGG8C-1	6609115-8	166
1EGG8C-2	6609115-9	166
1EGS1-1	6609117-1	166
1EGS1-2	6609117-2	166
1EHG1-2	6609116-1	166
1EHG8-2	1-1609117-4	166
1EHGS1-2	1609988-1	166
1EJH1	6609008-1	154
1EJH2	6609008-6	154
1EJH8	2-6609008-8	154
1EJHP	6609008-7	154
1EJHS1	1-6609008-6	154
1EJHS8	2-6609008-2	154
1EJM1	6609985-1	154
1EJM8	1-6609985-3	154
1EJMS1	6609985-7	154
1EJMS8	1-6609985-8	154
1EJS1	6609006-4	154
1EJS8	3-6609006-7	154
1EJT1	2-6609006-1	163
1EJT8	2-6609006-6	163
1EK1	6609027-1	49
1EK3	6609027-2	49
1EOP	6609064-1	21
1ER1	6609031-1	61
1ER3	6609031-2	61
1EZP	6609062-1	92
1IK1C	1-6609085-1	46
1VB1	6609021-1	15
1VB3	6609021-2	15
1VDK1	6609034-1	18
1VDK3	6609034-2	18
1VK1	6609028-1	49
1VK3	6609028-2	49
1VR1	6609032-1	61
1VR3	6609032-2	61
2EB1	6609020-3	15
2EB3	6609020-4	15
2EDL1S	6609122-1	176
2EDL1SC	6609122-2	176
2EDL1SCM	6609122-3	176
2EDL1SM	6609122-4	176
2EDL4	6609122-5	176
2EDL4C	6609122-7	176
2EDL4CM	6609122-9	176
2EDL4M	1-6609122-0	176
2EK1	6609027-3	49
2EK3	6609027-4	49
2ER1	1609031-3	61

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Part Number Index and Cross Reference

Catalog Number	TE Ordering Number	Page Number
2ER3	6609031-4	61
2EYP	6609061-2	92
2EZP	6609062-2	92
2RJ11-6L-B	3-6609208-6	248
2VB1	6609021-3	15
2VB3	6609021-4	15
2VK1	6609028-3	49
2VK3	6609028-4	49
2VR1	6609032-3	61
2VR3	6609032-4	61
3AYO1	6609066-1	111
3CFE1	6609113-5	130
3CFS1	6609113-6	130
3CHE1	6609114-5	130
3CHS1	6609114-6	130
3CUFE1	2-1609113-3	134
3CUFF1	2-1609114-3	134
3CUFS1	2-1609113-8	134
3DAF1	6609075-4	212
3DAFP	6609075-3	212
3DAS1	1-6609075-7	212
3EAH1	6609002-2	149
3EAS1	6609005-7	149
3EB1	6609020-5	15
3EB3	6609020-6	15
3EBF1	6609018-3	138
3EBF4	6609018-4	138
3EBH1	6609003-2	149
3EBP	6609063-2	21
3EBS1	1-6609005-2	149
3EC1	6609017-5	141
3EC2	6609017-6	141
3EC4	6609017-7	141
3EC8	6609017-8	141
3ED1	6609016-5	144
3ED2	6609016-6	144
3ED4	6609016-7	144
3ED8	6609016-8	144
3EDK1	6609033-3	18
3EDK3	6609033-4	18
3EDP	6609065-2	21
3EEA1	6609000-4	149
3EEA2	6609000-5	149
3EEAP	6609000-6	149
3EEB1	6609001-4	149
3EEB2	6609001-5	149
3EEBP	6609001-6	149
3EEJ1	6609006-5	154
3EEJ2	6609006-6	154
3EEJ8	3-6609006-3	154
3EEJP	6609006-7	154
3EF1F	6609015-3	160
3EF2F	6609015-4	160
3EF4	6609014-7	160
3EF8	6609014-8	160
3EGG1-1	1-6609115-1	166
3EGG1-2	1-6609115-2	166
3EGG1C-1	1-6609115-3	166
3EGG1C-2	1-6609115-5	166
3EGG8-1	1-6609115-7	166
3EGG8-2	1-6609115-8	166
3EGG8C-1	1-6609115-9	166
3EGG8C-2	2-6609115-0	166
3EGS1-1	6609117-3	166
3EGS1-2	6609117-4	166
3EH1	6609012-1	169
3EH3	6609012-2	169
3EHG1-2	6609116-2	166
3EHG8-2	1-1609117-5	166
3EHGS1-2	1609988-2	166
3EHQ1	6609054-1	37
3EHQ3	6609054-2	37
3EHQ8	6609054-3	37
3EHQ8M	6609054-4	37
3EHQ8M	6609054-4	37
3EHT1	6609053-1	40
3EHT3	6609053-2	40
3EHT7	6609053-3	40
3EHT7M	6609053-4	40
3EHZ1	6609055-1	43
3EJH1	6609008-2	154
3EJH2	6609008-8	154
3EJH8	2-6609008-9	154
3EJHP	6609008-9	154
3EJHS1	1-6609008-7	154
3EJHS8	2-6609008-3	154
3EJM1	6609985-2	154
3EJM8	1-6609985-4	154
3EJMS1	6609985-8	154
3EJMS8	1-6609985-9	154
3EJS1	6609006-8	154
3EJS8	3-6609006-8	154
3EJT1	2-6609006-2	163
3EJT8	2-6609006-7	163
3EK1	6609027-5	49
3EK3	6609027-6	49

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Part Number Index and Cross Reference

Catalog Number	TE Ordering Number	Page Number
3EK7	6609027-7	49
3EK7M	6609027-8	49
3EMC1	1-6609037-1	24
3EMC3	1-6609037-8	24
3EOP	6609064-2	21
3EP1	6609037-1	27
3EP3	6609037-2	27
3EP7	6609037-3	27
3EP7M	6609037-4	27
3EQ1	6609048-1	58
3EQ3	6609048-2	58
3EQ8	6609048-3	58
3EQ8M	6609048-4	58
3ER1	6609031-5	61
3ER3	6609031-6	61
3ER7	6609031-7	61
3ER7M	6609031-8	61
3ERK1	1-1609036-7	65
3ESK1	6609035-1	75
3ESK3	6609035-2	75
3ESK7	6609035-3	75
3ESK7M	6609035-4	75
3ET1	6609046-1	80
3ET3	6609046-2	80
3ET7	6609046-3	80
3EX1	6609059-1	92
3EXLA2S	6609119-1	180
3EXM1S	6609131-7	184
3EXM4	6609131-8	184
3EXM4S	6609131-9	184
3EXP	6609060-3	92
3EYP	6609061-3	92
3EZ1	6609059-2	92
3EZLA2S	6609120-1	180
3EZM1S	6609132-8	184
3EZM4	6609132-9	184
3EZM4S	1-6609132-0	184
3EZP	6609062-3	92
3FL3	2-6609092-3	33
3MV1	6609056-1	54
3VAQ3	6609057-1	12
3VAQ8F	6609058-1	12
3VAQ8FS	6609058-2	12
3VB1	6609021-5	15
3VB3	6609021-6	15
3VDK1	6609034-3	18
3VDK3	6609034-4	18
3VK1	6609028-5	49
3VK3	6609028-6	49
3VK7	6609028-7	49
3VK7M	6609028-8	49
3VQ1	6609049-1	58
3VQ3	6609049-2	58
3VQ8	6609049-3	58
3VQ8M	6609049-4	58
3VR1	6609032-5	61
3VR3	6609032-6	61
3VR7	6609032-7	61
3VR7M	6609032-8	61
3VS1	6609042-1	68
3VSK1	6609036-1	75
3VSK3	6609036-2	75
3VSK7	6609036-3	75
3VSK7M	6609036-4	75
3VV1	6609043-1	86
3VW1	6609044-1	86
3VW1	6609044-1	86
4EDL1S	1-6609122-1	176
4EDL1SC	1-6609122-2	176
4EDL1SCM	1-6609122-3	176
4EDL1SM	1-6609122-4	176
4EDL4	1-6609122-5	176
4EDL4C	1-6609122-6	176
4EDL4CM	1-6609122-7	176
4EDL4M	1-6609122-8	176
4EXP	6609060-4	92
4EYP	6609061-4	92
4RJ11-6L-B	6609213-1	248
5EB1	6609020-7	15
5EB3	6609020-8	15
5EFLA2S	6609118-1	180
5EFM1	2-6609129-1	184
5EFM1C	2-6609129-2	184
5EFM1S	2-6609129-3	184
5EFM1SC	2-6609129-5	184
5EFM4	2-6609129-6	184
5EFM4C	2-6609129-7	184
5EFM4S	2-6609129-8	184
5EFM4SC	3-6609129-0	184
5EHM1	1-6609130-1	184
5EHM1S	1-6609130-3	184
5EHM4	1-6609130-4	184
5EHM4S	1-6609130-5	184
5EK1	6609027-9	49
5EK3	1-6609027-0	49
5EK7	1-6609027-1	49

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Part Number Index and Cross Reference

Catalog Number	TE Ordering Number	Page Number
5EK7M	1-6609027-2	49
5ER1	6609031-9	61
5ER3	1-6609031-0	61
5ER7	1-6609031-1	61
5ER7M	1-6609031-2	61
5VB1	6609021-7	15
5VB3	6609021-8	15
5VK1	6609028-9	49
5VK3	1-6609028-0	49
5VK7	1-6609028-1	49
5VK7M	1-6609028-2	49
5VR1	6609032-9	61
5VR3	1-6609032-0	61
5VR7	1-6609032-1	61
5VR7M	1-6609032-2	61
6AYO1	6609066-2	111
6CFE1	6609113-9	130
6CFS1	1-6609113-0	130
6CHE1	6609114-9	130
6CHS1	1-6609114-0	130
6CUFE1	2-1609113-4	134
6CUFF1	2-1609114-4	134
6CUFS1	2-1609113-9	134
6DAF1	6609075-6	212
6DAFP	6609075-5	212
6DAS1	2-6609075-1	212
6EAH1	6609002-3	149
6EAS1	6609005-8	149
6EBF1	6609018-5	138
6EBF4	6609018-6	138
6EBH1	6609003-3	149
6EBS1	1-6609005-3	149
6EC1	6609017-9	141
6EC2	1-6609017-0	141
6EC4	1-6609017-1	141
6EC8	1-6609017-2	141
6ED1	6609016-9	144
6ED1C	1-6609016-1	144
6ED2	1-6609016-0	144
6ED4	1-6609016-2	144
6ED4C	1-6609016-4	144
6ED8	1-6609016-3	144
6ED8C	1-6609016-5	144
6EDK1	6609033-5	18
6EDK3	6609033-6	18
6EDL1S	1-6609122-9	176
6EDL1SC	2-6609122-0	176
6EDL1SCM	2-6609122-1	176
6EDL1SM	2-6609122-2	176
6EDL4	2-6609122-3	176
6EDL4C	2-6609122-4	176
6EDL4CM	2-6609122-5	176
6EDL4M	2-6609122-6	176
6EDP	6609065-3	21
6EEA1	6609000-7	149
6EEA2	6609000-8	149
6EEAP	6609000-9	149
6EEB1	6609001-7	149
6EEB2	6609001-8	149
6EEBP	6609001-9	149
6EEJ1	6609006-9	154
6EEJ2	1-6609006-0	154
6EEJ8	3-6609006-4	154
6EEJP	1-6609006-1	154
6EF1F	6609015-5	160
6EF2F	6609015-6	160
6EF4	1-6609014-1	160
6EF8	1-6609014-2	160
6EG1	6609050-1	35
6EGG1-1	2-6609115-2	166
6EGG1-2	2-6609115-3	166
6EGG1C-1	2-6609115-4	166
6EGG1C-2	2-6609115-6	166
6EGG8-1	2-6609115-8	166
6EGG8-2	2-6609115-9	166
6EGG8C-1	3-6609115-0	166
6EGG8C-2	3-6609115-1	166
6EGS1-1	6609117-5	166
6EGS1-2	6609117-6	166
6EH1	6609012-3	169
6EH3	6609012-4	169
6EH4	6609013-1	169
6EH5	6609013-4	169
6EH8	6609013-3	169
6EH9	6609013-2	169
6EHG1-2	6609116-3	166
6EHG8-2	1-1609117-6	166
6EHGS1-2	1609988-3	166
6EHL1S	6609123-1	176
6EHL1SC	6609123-2	176
6EHL1SCM	6609123-3	176
6EHL1SM	6609123-4	176
6EHL4	6609123-5	176
6EHL4C	6609123-6	176
6EHL4CM	6609123-7	176
6EHL4M	6609123-8	176

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Part Number Index and Cross Reference

Catalog Number	TE Ordering Number	Page Number
6EHQ1	6609054-5	37
6EHQ3	6609054-6	37
6EHQ8	6609054-7	37
6EHT1	6609053-5	40
6EHT3	6609053-6	40
6EHT7	6609053-7	40
6EHT7M	6609053-8	40
6EJH1	6609008-3	154
6EJH2	1-6609008-0	154
6EJH8	3-6609008-0	154
6EJHP	1-6609008-1	154
6EJHS1	1-6609008-8	154
6EJHS8	2-6609008-4	154
6EJM1	6609985-3	154
6EJM8	1-6609985-5	154
6EJMS1	6609985-9	154
6EJMS8	2-6609985-0	154
6EJS1	1-6609006-2	154
6EJS8	3-6609006-9	154
6EJT1	2-6609006-3	163
6EJT8	2-6609006-8	163
6EL1S	6609121-1	176
6EL1SC	6609121-2	176
6EL1SCM	6609121-3	176
6EL1SM	6609121-4	176
6EL4	6609121-5	176
6EL4C	6609121-6	176
6EL4CM	6609121-7	176
6EL4M	6609121-8	176
6EMC1	1-6609037-2	24
6EMC3	1-6609037-9	24
6EOP	6609064-3	21
6EP1	6609037-5	27
6EP3	6609037-6	27
6EQ1	6609048-5	58
6EQ3	6609048-6	58
6EQ8	6609048-7	58
6EQ8M	6609048-8	58
6ERK1	1-1609036-8	65
6ESB1	1-1609034-1	71
6ESK1	6609035-5	75
6ESK3	6609035-6	75
6ESK7	6609035-7	75
6ESK7M	6609035-8	75
6ESRF-3	1609133-1	201
6ESRFC3	1609133-2	201
6ESRM-3	1609133-3	201
6ESRMC2	1609133-4	201
6ESRM-P	1609078-1	201
6ET1	6609046-4	80
6ET3	6609046-5	80
6ET7	6609046-6	80
6EU1	6609045-2	84
6EUP	6609045-1	84
6EXP	6609060-6	92
6FC10	6609069-1	30
6FCD10	6609070-1	119
6HJ4-2	6609126-1	172
6HJ4-4	6609126-2	172
6IK1	1609973-4	46
6J4	6609125-1	172
6J4-2	6609125-2	172
6MV1	6609056-2	54
6RJ11-6L-B	6609213-2	248
6VAQ3	6609057-3	12
6VAQ8F	6609058-3	12
6VAQ8FS	6609058-4	12
6VDK1	6609034-5	18
6VDK3	6609034-6	18
6VG1	6609051-1	35
6VJ1	6609124-1	172
6VJ1-2	6609124-2	172
6VM1	2-6609128-6	184
6VM1C	2-6609128-7	184
6VM1S	2-6609128-8	184
6VM1SC	2-6609128-9	184
6VM2	3-6609128-0	184
6VM2S	3-6609128-1	184
6VM4	3-6609128-3	184
6VM4C	3-6609128-4	184
6VM4S	3-6609128-5	184
6VM4SC	3-6609128-7	184
6VN1	6609052-1	56
6VS1	6609042-2	68
6VSB1	1-1609034-2	71
6VSK1	6609036-5	75
6VSK3	6609036-6	75
6VSK7	6609036-7	75
6VSK7M	6609036-8	75
6VV1	6609043-2	86
7BCF10	1609989-1	113
7EP1	2-6609037-4	27
7EP3	2-6609037-5	27
10AFC6-A	1609990-1	236
10AFC6-B	1609990-2	236
10AYO1	6609066-3	111

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Part Number Index and Cross Reference

Catalog Number	TE Ordering Number	Page Number
10CBE1	1609112-1	130
10CBS1	1609112-2	130
10CE1	1609112-3	130
10CFE1	1-6609113-3	130
10CFS1	1-6609113-4	130
10CHE1	1-6609114-3	130
10CHS1	1-6609114-4	130
10CS1	1609112-8	130
10CUFE1	2-1609113-5	134
10CUFF1	2-1609114-5	134
10CUFS1	2-1609114-0	134
10DAF1	6609075-8	212
10DAFP	6609075-7	212
10DAS1	2-6609075-5	212
10DFC6-C	1609992-1	239
10EAH1	6609002-5	149
10EAS1	6609005-9	149
10EB1	6609020-9	15
10EB3	1-6609020-0	15
10EBF1	6609018-7	138
10EBF4	6609018-8	138
10EBH1	6609003-4	149
10EBS1	1-6609005-4	149
10EC1	1-1609017-3	141
10ED1	1-6609016-6	144
10ED1C	1-6609016-7	144
10EDK1	6609033-7	18
10EDK3	6609033-8	18
10EDP	6609065-4	21
10EEA1	1-6609000-0	149
10EEA2	1-6609000-1	149
10EEAP	1-6609000-2	149
10EEB1	1-6609001-0	149
10EEB2	1-6609001-1	149
10EEBP	1-6609001-2	149
10EEJ1	1-6609006-3	154
10EEJ2	1-6609006-4	154
10EEJ8	3-6609006-5	154
10EEJP	1-6609006-5	154
10EF1F	6609015-7	160
10EF1FC	6609015-8	160
10EG1	6609050-2	35
10EGG1-1	3-1609115-4	166
10EGG1-2	3-1609115-3	166
10EGG8-1	3-1609115-5	166
10EGG8-2	3-1609115-6	166
10EGS1-1	1609117-7	166
10EGS1-2	1609117-8	166
10EH1	6609012-5	169
10EH3	6609012-6	169
10EH4	6609013-5	169
10EH4C	6609013-6	169
10EHG1-2	6609116-4	166
10EHG8-2	6609116-5	166
10EHGS1-2	1609116-6	166
10EHT1	6609053-9	40
10EHT3	1-6609053-0	40
10EJH1	6609008-4	154
10EJH2	1-6609008-2	154
10EJH8	3-6609008-1	154
10EJHP	1-6609008-3	154
10EJHS1	1-6609008-9	154
10EJHS8	2-6609008-5	154
10EJM1	6609985-4	154
10EJM8	1-6609985-6	154
10EJMS1	1-6609985-0	154
10EJMS8	2-6609985-1	154
10EJS1	1-6609006-6	154
10EJS8	4-6609006-0	154
10EJT1	2-6609006-4	163
10EJT8	2-6609006-9	163
10EK1	1-6609027-3	49
10EK3	1-6609027-4	49
10EK7	1-6609027-5	49
10EK7M	1-6609027-6	49
10EMC1	1-6609037-3	24
10EMC3	2-6609037-0	24
10EMC6	2-6609037-1	24
10EOP	6609064-4	21
10EP1	6609037-7	27
10EP3	6609037-8	27
10ER1	1-6609031-3	61
10ER3	1-6609031-4	61
10ER7	1-6609031-5	61
10ER7M	1-6609031-6	61
10ERK1	2-1609089-5	65
10ESB1	1-1609034-3	71
10ESB6	1-1609034-4	71
10ESK1	6609035-9	75
10ESK3	1-6609035-0	75
10ESK7	1-6609035-1	75
10ESK7M	1-6609035-2	75
10ET1	6609046-7	80
10ET3	6609046-8	80
10FFA6-BA	1609991-1	230
10FFA6-CE	1609991-9	230

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Part Number Index and Cross Reference

Catalog Number	TE Ordering Number	Page Number
10FFA6-GJ	1-1609991-8	230
10FFD6-CA	1609993-1	233
10FFD6-HE	1609993-7	233
10MV1	6609056-3	54
10VB1	6609021-9	15
10VB3	1-6609021-0	15
10VB6	1-6609021-2	15
10VDK1	6609034-7	18
10VDK3	6609034-8	18
10VG1	6609051-2	35
10VK1	1-6609028-3	49
10VK3	1-6609028-4	49
10VK6	1-6609028-8	49
10VK7	1-6609028-5	49
10VK7M	1-6609028-6	49
10VN1	6609052-2	56
10VR1	1-6609032-3	61
10VR3	1-6609032-4	61
10VR6	1-6609032-5	61
10VR7	1-6609032-6	61
10VR7M	1-6609032-7	61
10VS1	6609042-3	68
10VSB1	1-1609034-5	71
10VSB6	1-1609034-6	71
10VSK1	6609036-9	75
10VSK3	1-6609036-0	75
10VSK7	1-6609036-1	75
10VSK7M	1-6609036-2	75
10VT1	6609047-1	80
10VT3	6609047-2	80
10VV1	6609043-3	86
10VW1	6609044-3	86
12EP1	2-6609037-6	27
12EP3	2-6609037-7	27
12FC10	6609069-2	30
12FC10B	1609976-3	30
12FCD10	6609070-2	119
12FCD10B	6609974-4	119
15CBE1	1-1609112-4	130
15CBS1	1-1609112-3	130
15CE1	1-1609112-2	130
15CS1	1-1609112-1	130
15CU10BS1	1-1609112-7	134
15CU10S1	1-1609112-6	134
15CU15BS1	1-1609112-9	134
15CU15S1	1-1609112-8	134
15CUBE1	2-1609114-8	134
15CUBS1	1-1609112-5	134
15CUE1	2-1609114-7	134
15CUFE1	2-1609113-6	134
15CUFF1	2-1609114-6	134
15CUFS1	2-1609114-1	134
15CUS1	2-1609114-9	134
15DAF1	1-6609075-0	212
15DAFP	6609075-9	212
15DAS1	2-6609075-9	212
15DCB10	4-6609074-1	218
15DCB10B	4-6609074-3	218
15DCB10BF	4-6609074-4	218
15DCB10F	4-6609074-2	218
15DCB6	2-6609074-1	218
15DCB6B	2-6609074-3	218
15DCB6BF	2-6609074-4	218
15DCB6F	2-6609074-2	218
15DCF10	1-6609074-1	218
15DCF10B	1-6609074-2	218
15DCF6	6609074-1	218
15DCF6B	6609074-2	218
15ED1	1-6609016-8	144
15ED8	1-6609016-9	144
15EEJ1	1-6609006-7	154
15EEJ2	1-6609006-9	154
15EEJ8	3-6609006-6	154
15EEJP	2-6609006-0	154
15EF1F	6609015-9	160
15EH4	6609013-7	169
15EHT1	1-6609053-1	40
15EHT6	1-6609053-2	40
15EJH1	6609008-5	154
15EJH2	1-6609008-4	154
15EJH8	3-6609008-2	154
15EJHP	1-6609008-5	154
15EJHS1	2-6609008-0	154
15EJHS8	2-6609008-6	154
15EJM1	6609985-5	154
15EJM8	1-6609985-7	154
15EJMS1	1-6609985-1	154
15EJMS8	2-6609985-2	154
15EJS1	1-6609006-8	154
15EJS8	4-6609006-1	154
15EJT1	2-6609006-5	163
15EJT8	3-6609006-0	163
15EMC1	1-6609037-4	24
15EMC3	2-6609037-2	24
15EMC6	2-6609037-3	24
15ERK1	2-1609089-6	65

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Part Number Index and Cross Reference

Catalog Number	TE Ordering Number	Page Number
15ET1	6609046-9	80
15ET6	1-6609046-0	80
15SRB1	6609987-9	204
15SRB1-Q	6609987-1	204
15SRB1-R	6609987-2	204
15SRB1-S	6609987-3	204
15SRB1-T	6609987-4	204
15SRB1-W	6609987-5	204
15SRB1-X	6609987-6	204
15SRB1-Y	6609987-7	204
15SRB1-Z	6609987-8	204
15SRB2	5-6609987-4	204
15SRB2-Q	4-6609987-6	204
15SRB2-R	4-6609987-7	204
15SRB2-S	4-6609987-8	204
15SRB2-T	4-6609987-9	204
15SRB2-W	5-6609987-0	204
15SRB2-X	5-6609987-1	204
15SRB2-Y	5-6609987-2	204
15SRB2-Z	5-6609987-3	204
15SRB8	1-6609987-8	204
15SRB8-Q	1-6609987-0	204
15SRB8-R	1-6609987-1	204
15SRB8-S	1-6609987-2	204
15SRB8-T	1-6609987-3	204
15SRB8-W	1-6609987-4	204
15SRB8-X	1-6609987-5	204
15SRBP	4-6609987-5	204
15SRBP-Q	3-6609987-7	204
15SRBP-R	3-6609987-8	204
15SRBP-S	3-6609987-9	204
15SRBP-T	4-6609987-0	204
15SRBP-W	4-6609987-1	204
15SRBP-X	4-6609987-2	204
15SRBP-Y	4-6609987-3	204
15SRBP-Z	4-6609987-4	204
15SRBS1	2-6609987-7	204
15SRBS1-Q	1-6609987-9	204
15SRBS1-R	2-6609987-0	204
15SRBS1-S	2-6609987-1	204
15SRBS1-T	2-6609987-2	204
15SRBS1-W	2-6609987-3	204
15SRBS1-X	2-6609987-4	204
15SRBS1-Y	2-6609987-5	204
15SRBS1-Z	2-6609987-6	204
15SRBS8	3-6609987-6	204
15SRBS8-Q	2-6609987-8	204
15SRBS8-R	2-6609987-9	204
15SRBS8-S	3-6609987-0	204
15SRBS8-T	3-6609987-1	204
15SRBS8-W	3-6609987-2	204
15SRBS8-X	3-6609987-3	204
15SRBX8	5-1609987-6	204
15SRBX8-Q	5-1609987-7	204
15SRBX8-R	5-1609987-8	204
15SRBX8-S	5-1609987-9	204
15SRBX8-T	6-1609987-0	204
15SRBX8-W	6-1609987-1	204
15SRBX8-X	6-1609987-2	204
15SRBY8	6-1609987-5	204
15SRBY8-Q	6-1609987-6	204
15SRBY8-R	6-1609987-7	204
15SRBY8-S	6-1609987-8	204
15SRBY8-T	6-1609987-9	204
15SRBY8-W	7-1609987-0	204
15SRBY8-X	7-1609987-1	204
15VT1	6609047-3	80
15VT6	6609047-4	80
16AFC6-B	1609990-3	236
16AFC6-C	1609990-4	236
16AFC6-G	1609990-5	236
16AFC6-H	1609990-6	236
16AYA10	6609977-1	104
16AYA6	6609068-1	104
16AYA6A	6609068-2	104
16AYC10B	6609067-1	108
16BCF10	1609989-2	113
16DFC6-C	1609992-2	239
16DFC6-G	1609992-3	239
16DFC6-H	1609992-4	239
16DFC6-N	1609992-5	239
16FC10	6609069-3	30
16FC10B	1609976-1	30
16FCD10	6609070-3	119
16FCD10B	6609974-5	119
16FFA6-CA	1609991-2	230
16FFA6-DG	1-1609991-1	230
16FFA6-HN	1-1609991-9	230
16FFD6-CA	1609993-2	233
16FFD6-HE	1609993-8	233
16IK10	6609973-1	46
16WGA1	2-6609089-4	89
16WGA3	7-6609089-6	89
16WGA7	3-1609090-8	89
16WGB1	4-6609089-0	89
16WGB3	7-6609089-7	89

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Part Number Index and Cross Reference

Catalog Number	TE Ordering Number	Page Number
16WGB7	3-1609090-9	89
16WGC1	4-6609089-1	89
16WGC3	7-6609089-8	89
16WGC7	4-1609090-0	89
16WGD1	4-6609089-6	89
16WGD3	7-6609089-9	89
16WGD7	4-1609090-1	89
16WGE1	4-6609089-7	89
16WGE3	8-6609089-0	89
16WGE7	4-1609090-2	89
16WGF1	4-6609089-8	89
16WGF3	8-6609089-1	89
16WGF7	4-1609090-3	89
20AFC6-B	1609990-7	236
20AYO1	6609066-4	111
20AYP6C	6609072-1	99
20AYT6C	6609073-1	99
20EB1	1-6609020-1	15
20EDK1	6609033-9	18
20EEJ1	6609007-3	154
20EEJ8	6609007-6	154
20EJH1	6609009-4	154
20EJH8	6609009-5	154
20EJS1	6609007-5	154
20EJS8	6609007-7	154
20EJT1	6609007-8	163
20EJT8	3-6609006-1	163
20EK1	1-6609027-7	49
20EMC1	1-6609037-5	24
20EMC6	1-6609037-7	24
20EP1	6609037-9	27
20EP6	1-6609037-0	27
20EQ1	6609048-9	58
20ER1	1-6609031-7	61
20ERK1	2-1609089-7	65
20ESB1	1-1609034-7	71
20ESB6	1-1609034-8	71
20ESK6	1-6609035-3	75
20ESRM-3	4-1609134-7	201
20ESRMC2	4-1609134-8	201
20ET1	1-6609046-1	80
20ET6	1-6609046-2	80
20MV1	6609056-4	54
20VB1	1-6609021-1	15
20VB6	1-6609021-3	15
20VDK1	6609034-9	18
20VDK6	1-6609034-0	18
20VK1	1-6609028-7	49
20VK6	1-6609028-9	49
20VP1	6609038-1	27
20VP6	6609038-2	27
20VQ1	6609049-5	58
20VR1	1-6609032-8	61
20VR6	1-6609032-9	61
20VS1	6609042-4	68
20VS6	6609042-5	68
20VSB1	1-1609034-9	71
20VSB6	2-1609034-0	71
20VSK6	1-6609036-3	75
20VT1	6609047-5	80
20VT6	6609047-6	80
20VV1	6609043-4	86
20VV6	6609043-5	86
20VW1	6609044-4	86
20VW6	6609044-5	86
25AYA6	6609068-3	104
25AYA6A	6609977-2	104
25AYC10B	6609068-4	108
25FC10	6609069-4	30
25FC10B	6609976-2	30
25FCD10	6609070-4	119
25FCD10B	6609974-9	119
30AYP6C	6609072-2	99
30AYT6C	6609073-2	99
30BCF10	1609989-3	113
30DCB10	4-6609074-5	218
30DCB10B	4-6609074-7	218
30DCB10BF	4-6609074-8	218
30DCB10F	4-6609074-6	218
30DCB6	2-6609074-5	218
30DCB6B	2-6609074-7	218
30DCB6BF	2-6609074-8	218
30DCB6F	2-6609074-6	218
30DCF10	1-6609074-3	218
30DCF10B	1-6609074-4	218
30DCF6	6609074-3	218
30DCF6B	6609074-4	218
30EMC6	1-6609037-6	24
30ESB6	2-1609034-1	71
30ESK6	1-6609035-4	75
30ESK6C	1-6609035-5	75
30VB6	1-6609021-4	15
30VK6	2-6609028-0	49
30VK6C	2-6609028-1	49
30VSB6	2-1609034-2	71
30VSK6	1-6609036-4	75

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Part Number Index and Cross Reference

Catalog Number	TE Ordering Number	Page Number
30VSK6C	1-6609036-5	75
32AFC6-B	1609990-8	236
32AFC6-C	1609990-9	236
32AFC6-F	1-1609990-1	236
32AFC6-G	1-1609990-2	236
32AFC6-H	1-1609990-3	236
32DFC6-C	1609992-6	239
32DFC6-G	1609992-7	239
32DFC6-H	1609992-8	239
32DFC6-N	1609992-9	239
32FFA6-CA	1609991-3	230
32FFA6-DH	1-1609991-2	230
32FFA6-HN	2-1609991-1	230
32FFD6-CA	1609993-3	233
32FFD6-HE	1609993-9	233
35IK10	6609973-2	46
36AYA10	6609068-6	104
36AYA6	6609068-5	104
36AYA6A	6609977-3	104
36AYC10B	6609067-2	108
36FC10	6609069-5	30
36FC10B	1609976-4	30
36FCD10	6609070-5	119
36FCD10B	1-6609974-1	119
40VK6	2-6609028-3	49
40VK6C	2-6609028-4	49
40VSK6	1-6609036-6	75
42BCF10	1609989-4	113
45AYP6C	6609072-3	99
45AYT6C	6609073-3	99
50AYA6	6609068-7	104
50AYA6A	6609068-8	104
50FC10	6609069-6	30
50FC10B	6609069-7	30
50FCD10	6609070-6	119
50FCD10B	1-6609974-3	119
50FCD10BS	1-6609974-6	119
50FCD10BS	1-6609974-6	119
50IK10	1609973-5	46
55BCF10	1609989-5	113
60AYP6C	6609072-4	99
60AYT6C	6609073-4	99
60DB8	4-1609075-4	214
60DBF8	4-1609075-5	214
60DBJ8	4-1609075-6	214
60DBP	5-1609075-7	214
60DBPL1	4-1609075-9	214
60DBPL3	5-1609075-0	214
60DBPL9	5-1609075-1	214
60DBR	5-1609075-6	214
60DBRL1	6-1609075-4	214
60DBRL3	6-1609075-5	214
60DBX8	4-1609075-7	214
60DCB10	4-6609074-9	218
60DCB10B	5-6609074-1	218
60DCB10BF	5-6609074-2	218
60DCB10F	5-6609074-0	218
60DCB6	2-6609074-9	218
60DCB6B	3-6609074-1	218
60DCB6BF	3-6609074-2	218
60DCB6F	3-6609074-0	218
60DCF10	1-6609074-5	218
60DCF10B	1-6609074-6	218
60DCF6	6609074-5	218
60DCF6B	6609074-6	218
60VK6	2-6609028-5	49
60VS6	1609042-6	68
63ADT6	1609071-2	101
63ADT6S	1609071-1	101
63AFC6-C	1-1609990-4	236
63AFC6-G	1-1609990-5	236
63AFC6-H	1-1609990-6	236
63AYA10	1609977-5	104
63AYA6A	6609977-8	104
63AYC10B	6609067-3	108
63DFC6-C	1-1609992-1	239
63DFC6-G	1-1609992-2	239
63DFC6-H	1-1609992-3	239
63DFC6-N	1-1609992-4	239
63FFA6-GB	1609991-4	230
63FFA6-JK	1-1609991-3	230
63FFA6-NP	2-1609991-2	230
63FFD6-HB	1609993-4	233
63FFD6-NH	1-1609993-1	233
75BCF10	1609989-6	113
80AYC10B	6609067-4	108
80FCD10B	6609070-7	119
80FCD10BS	1-6609974-7	119
80IK10	6609973-3	46
100ADT6	1609071-4	101
100ADT6S	1609071-3	101
100AFC6-H	1-1609990-8	236
100AFC6-H	1-1609990-8	236
100AFC6-K	1-1609990-9	236
100AFC6-N	2-1609990-1	236
100AYA6A	6609977-7	104

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Part Number Index and Cross Reference

Catalog Number	TE Ordering Number	Page Number
100BCF10	1609989-7	113
100DCB10	5-6609074-3	218
100DCB10B	5-6609074-5	218
100DCB10BF	5-6609074-6	218
100DCB10F	5-6609074-4	218
100DCB6	3-6609074-3	218
100DCB6B	3-6609074-5	218
100DCB6BF	3-6609074-6	218
100DCB6F	3-6609074-4	218
100DCF10	1-6609074-7	218
100DCF10B	1-6609074-8	218
100DCF6	6609074-7	218
100DCF6B	6609074-8	218
100DFC6-G	1-1609992-5	239
100DFC6-H	1-1609992-6	239
100DFC6-N	1-1609992-7	239
100DFC6-P	1-1609992-8	239
100FFA6-HC	1609991-5	230
100FFA6-NP	1-1609991-4	230
100FFA6-PP	2-1609991-3	230
100FFD6-NC	1609993-5	233
100FFD6-PK	1-1609993-2	233
110AYC10B	6609067-5	108
110FCD10B	6609070-8	119
110FCD10BS	1-6609974-8	119
125DCB10	5-6609074-7	218
125DCB10B	5-6609074-9	218
125DCB10BF	6-6609074-0	218
125DCB10F	5-6609074-8	218
125DCB6	3-6609074-7	218
125DCB6B	3-6609074-9	218
125DCB6BF	4-1609074-0	218
125DCB6F	3-6609074-8	218
125DCF10	1-6609074-9	218
125DCF10B	2-6609074-0	218
125DCF6	6609074-9	218
125DCF6B	1-6609074-0	218
130BCF10	1609989-8	113
150AYC10B	6609067-6	108
150AYC10B-95	1609067-7	108
150FCD10B	6609070-9	119
150FCD10B-95	3-6609974-3	119
150FCD10BS	2-6609974-0	119
150FCD10BS-95	1-6609974-9	119
160ADT6	1609071-6	101
160ADT6S	1609071-5	101
180AYC10B	6609977-6	108
180BCF10	1609989-9	113
180FCD10B	1-6609070-0	119
180FCD10BS	2-6609974-1	119
200ADT6	1609071-8	101
200ADT6S	1609071-7	101
200AFC6-H	2-1609990-2	236
200AFC6-K	2-1609990-3	236
200AFC6-N	2-1609990-4	236
200AFC6-P	2-1609990-5	236
200AYC10B	1609067-8	108
200DFC6-H	1-1609992-9	239
200DFC6-N	2-1609992-1	239
200DFC6-P	2-1609992-2	239
200DFC6-R	2-1609992-3	239
200FFA6-HD	1609991-6	230
200FFA6-NP	1-1609991-5	230
200FFA6-PP	2-1609991-4	230
200FFD6-ND	1609993-6	233
200FFD6-RP	1-1609993-3	233
230FCD10B	1-6609070-2	119
230FCD10BS	3-6609974-6	119
250AFC6-H	2-1609990-6	236
250AFC6-K	2-1609990-7	236
250AFC6-N	2-1609990-8	236
250AFC6-P	2-1609990-9	236
250DFC6-P	2-1609992-4	239
250DFC6-Q	2-1609992-5	239
250DFC6-T	2-1609992-6	239
250FFA6-HF	1609991-7	230
250FFA6-NP	1-1609991-6	230
250FFA6-PP	2-1609991-5	230
300AFC6-H	3-1609990-1	236
300AFC6-K	3-1609990-2	236
300AFC6-N	3-1609990-3	236
300AFC6-P	3-1609990-4	236
300CFN12	1609978-1	116
300DFC6-P	2-1609992-7	239
300DFC6-Q	2-1609992-8	239
300DFC6-T	2-1609992-9	239
300FFA6-HF	1609991-8	230
300FFA6-NP	1-1609991-7	230
300FFA6-PP	2-1609991-6	230
400CFN12	1-1609979-7	116
500CFN12	6609978-3	116
600CFN12	6609978-4	116
PE000DD3D	6609110-1	223
PE000DD6D	6609110-3	223
PE000DDXD	6609110-5	223
PE000SD3D	6609110-2	223

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Part Number Index and Cross Reference

Catalog Number	TE Ordering Number	Page Number
PE000SD6D	6609110-4	223
PE000SDXD	6609110-6	223
PS000DD3D	6609111-3	223
PS000DD6D	6609111-5	223
PS000DDXD	6609111-7	223
PS000SD3D	6609111-4	223
PS000SD6D	6609111-6	223
PS000SDXD	6609111-8	223
RJ11-2L2-B	1-1609208-2	247
RJ11-2L-B	6609208-4	247
RJ11-2LC1-B	6609209-2	249
RJ11-2LC1-S	6609209-1	249
RJ11-2LC2-B	6609209-4	249
RJ11-2LC2-S	6609209-3	249
RJ11-2L-S	6609208-1	247
RJ11-2X	6609214-1	252
RJ11-4L1-B	2-1609208-2	247
RJ11-4L1-S	2-6609208-1	247
RJ11-4L2-B	2-6609208-7	247
RJ11-4L2-S	2-6609208-5	247
RJ11-4L-B	1-6609208-7	247
RJ11-4LC1-B	6609209-8	249
RJ11-4LC1-S	6609209-6	249
RJ11-4LC2-B	1-6609209-3	249
RJ11-4LC2-S	1-6609209-0	249
RJ11-4L-S	1-6609208-5	247
RJ11-4X	6609214-3	252
RJ11-6L1-B	4-6609208-0	247
RJ11-6L1-S	3-6609208-8	247
RJ11-6L2-B	4-6609208-5	247
RJ11-6L2-S	4-6609208-3	247
RJ11-6L-B	3-6609208-1	247
RJ11-6LC1-B	1-6609209-8	249
RJ11-6LC1-S	1-6609209-6	249
RJ11-6LC2-B	2-6609209-1	249
RJ11-6LC2-S	2-6609209-0	249
RJ11-6LCT1-B	6609211-4	250
RJ11-6LCT1-S	6609211-1	250
RJ11-6LCT2-B	6609211-8	250
RJ11-6LCT2-S	6609211-6	250
RJ11-6L-S	2-6609208-9	247
RJ11-6N3-B	6609212-6	251
RJ11-6N4-B	6609212-8	251
RJ11-6N-B	6609212-4	251
RJ11-6X	6609214-5	252
RJ11-6Z	6609215-1	253
RJ11-6Z3	6609215-2	253
RJ11-6Z4	6609215-3	253
RJ45-6L1-B	5-6609208-0	247
RJ45-6L1-S	4-6609208-9	247
RJ45-6L2-B	5-6609208-2	247
RJ45-6L2-S	5-6609208-1	247
RJ45-6L-B	4-6609208-8	247
RJ45-6LC1-B	2-6609209-7	249
RJ45-6LC1-S	2-6609209-6	249
RJ45-6LC2-B	2-6609209-9	249
RJ45-6LC2-S	2-6609209-8	249
RJ45-6L-S	4-6609208-7	247
RJ45-6X	1-6609214-0	252
RJ45-8L1-B	5-6609208-7	247
RJ45-8L1-S	5-6609208-5	247
RJ45-8L2-B	6-6609208-0	247
RJ45-8L2-S	5-6609208-9	247
RJ45-8L-B	5-6609208-4	247
RJ45-8LC1-B	3-6609209-3	249
RJ45-8LC1-S	3-6609209-0	249
RJ45-8LC2-B	4-6609209-1	249
RJ45-8LC2-S	3-6609209-6	249
RJ45-8LCT1-B	1-6609211-1	250
RJ45-8LCT1-S	1-6609211-0	250
RJ45-8LCT2-B	1-6609211-3	250
RJ45-8LCT2-S	1-6609211-2	250
RJ45-8L-S	5-6609208-3	247
RJ45-8N3-B	1-6609212-3	251
RJ45-8N3-S	1-6609212-4	251
RJ45-8N4-B	1-6609212-5	251
RJ45-8N4-S	1-6609212-6	251
RJ45-8N-B	1-6609212-0	251
RJ45-8N-S	1-6609212-2	251
RJ45-8X	1-6609214-1	252
RJ45-8X1	1-6609210-4	252
RJ45-8X2	1-6609214-3	252
RJ45-8Z	6609215-4	253
RJ45-8Z3	6609215-5	253
RJ45-8Z4	6609215-6	253
RJH-4L-B	6-6609208-1	247

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Engineering Notes

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

North American Sales Representatives

ALABAMA

CARTWRIGHT & BEAN, INC.	HUNTSVILLE, AL	800-242-5876

ALASKA

TE CONNECTIVITY	MUNDELEIN, IL	847-573-6504

ARIZONA

LUSCOMBE ENGINEERING	PHOENIX, AZ	602-678-1955

ARKANSAS

ELECTRA REPS	PLANO, TX	972-599-2130

CALIFORNIA

LUSCOMBE ENGINEERING (SOUTH)	CAMARILLO, CA	805-987-4880
LUSCOMBE ENGINEERING (SOUTH)	COSTA MESA, CA	714-546-4880
LUSCOMBE ENGINEERING (SOUTH)	SAN DIEGO, CA	858-385-2655
STRAUBE ASSOCIATES (NORTH)	MOUNTAIN VIEW, CA	650-969-6060

CANADA

WEISS COMPANY	MONTREAL	514-337-6769
WEISS COMPANY	OTTAWA	613-599-8787
WEISS COMPANY	TORONTO	905-238-9548
WEISS COMPANY	VANCOUVER	604-276-8735

COLORADO

STRAUBE ASSOCIATES ROCKY MOUNTAINS, INC.	WESTMINSTER, CO	303-426-0890

CONNECTICUT

CONTI-YOUNGER ASSOCIATES	MARLBORO, MA	508-485-7204

DELAWARE

ASTROREP MID-ATLANTIC, INC.	DOYLESTOWN, PA	267-880-6321

DISTRICT OF COLUMBIA

ASTROREP MID-ATLANTIC, INC.	DOYLESTOWN, PA	267-880-6321

FLORIDA

CBX ELECTRONICS	CASSELBERRY, FL	407-774-9100

GEORGIA

CARTWRIGHT & BEAN, INC.	NORCROSS, GA	800-242-5876

ILLINOIS

RATHSBURG ASSOCIATES (NORTH)	ITASCA, IL	630-625-5100
RATHSBURG ASSOCIATES (SOUTH)	ST. LOUIS, MO	636-946-1001

IDAHO

HALBAR-RTS, INC.	KIRKLAND, WA	425-893-8400

INDIANA

RATHSBURG ASSOCIATES	CARMEL, IN	317-818-7055

IOWA

RATHSBURG ASSOCIATES	BLOOMINGTON, MN	952-893-1400

KANSAS

RATHSBURG ASSOCIATES	OLATHE, KS	913-829-2800

KENTUCKY

RATHSBURG ASSOCIATES	EASTERN	248-615-4000
RATHSBURG ASSOCIATES	WESTERN	317-818-7055

LOUISIANA

ELECTRA REPS	PLANO, TX	972-599-2130

MAINE

CONTI-YOUNGER ASSOCIATES	MARLBORO, MA	508-485-7204

MARYLAND

ASTROREP MID-ATLANTIC, INC.	DOYLESTOWN, PA	267-880-6321

MASSACHUSETTS

CONTI-YOUNGER ASSOCIATES	MARLBORO, MA	508-485-7204

MEXICO

TE CONNECTIVITY	MUNDELEIN, IL	847-573-6504

MICHIGAN

RATHSBURG ASSOCIATES	NOVI, MI	248-615-4000

MINNESOTA

RATHSBURG ASSOCIATES	BLOOMINGTON, MN	952-893-1400

MISSISSIPPI

CARTWRIGHT & BEAN, INC.	HUNTSVILLE, AL	800-242-5876

MISSOURI

RATHSBURG ASSOCIATES	ST. LOUIS, MO	636-946-1001

MONTANA

HALBAR-RTS, INC.	KIRKLAND, WA	425-893-8400

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

North American Sales Representatives

NEBRASKA

RATHSBURG ASSOCIATES	OLATHE, KS	913-829-2800

NEVADA

STRAUBE ASSOCIATES	MOUNTAIN VIEW, CA	650-969-6060
LUSCOMBE ENGINEERING (LAS VEGAS)	PHOENIX, AZ	602-678-1955

NEW HAMPSHIRE

CONTI-YOUNGER ASSOCIATES	MARLBORO, MA	508-485-7204

NEW JERSEY

ASTROREP MID-ATLANTIC, INC. (SOUTH)	DOYLESTOWN, PA	267-880-6321
ASTROREP, INC. (NORTH)	BABYLON, NY	631-422-2500

NEW MEXICO

LUSCOMBE ENGINEERING	PHOENIX, AZ	602-678-1955

NEW YORK

EMPIRE TECHNICAL ASSOCIATES (UPSTATE)	SKANEATELES, NY	315-685-5703
ASTROREP INC.	BABYLON, NY	631-422-2500

NORTH CAROLINA

CARTWRIGHT & BEAN, INC. (WEST)	CHARLOTTE, NC	800-242-5876
CARTWRIGHT & BEAN, INC. (EAST)	RALEIGH, NC	800-242-5876

NORTH DAKOTA

RATHSBURG ASSOCIATES	BLOOMINGTON, MN	952-893-1400

OHIO

RATHSBURG ASSOCIATES	COLUMBUS, OH	248-615-4000

OKLAHOMA

ELECTRA REPS	PLANO, TX	972-599-2130

OREGON

HALBAR-RTS, INC.	BEAVERTON, OR	503-624-5741

PENNSYLVANIA

ASTROREP MID-ATLANTIC, INC. (EAST)	DOYLESTOWN, PA	267-880-6321
RATHSBURG ASSOCIATES (WEST)	PITTSBURGH, PA	248-615-4000

PUERTO RICO

CBX ELECTRONICS	ALTAMONTE SPRINGS, FL	407-774-9100

RHODE ISLAND

CONTI-YOUNGER ASSOCIATES	MARLBORO, MA	508-485-7204

SOUTH CAROLINA

CARTWRIGHT & BEAN, INC.	CHARLOTTE, NC	800-242-5876

SOUTH DAKOTA

RATHSBURG ASSOCIATES	BLOOMINGTON, MN	952-893-1400

TENNESSEE

CARTWRIGHT & BEAN (EAST)	NORCROSS, GA	800-242-5876
CARTWRIGHT & BEAN (WEST)	HUNTSVILLE, AL	800-242-5876

TEXAS

ELECTRA REPS	PLANO, TX	972-599-2130
ELECTRA REPS	AUSTIN	512-249-1101
ELECTRA REPS	HOUSTON	281-516-1122
LUSCOMBE ENGINEERING (EL PASO)	EL PASO, TX	602-678-1955

UTAH

STRAUBE ASSOCIATES ROCKY MOUNTAINS, INC.	WESTMINSTER, CO	303-426-0890

VERMONT

CONTI-YOUNGER ASSOCIATES	MARLBORO, MA	508-485-7204

VIRGINIA

ASTROREP MID-ATLANTIC, INC.	DOYLESTOWN, PA	267-880-6321

WASHINGTON

HALBAR-RTS, INC.	KIRKLAND, WA	425-893-8400

WEST VIRGINIA

RATHSBURG ASSOCIATES	COLUMBUS, OH	248-615-4000

WISCONSIN

RATHSBURG ASSOCIATES	MUSKEGO, WI	262-679-8250
RATHSBURG ASSOCIATES	HARTFORD, WI	262-670-6513

WYOMING

STRAUBE ASSOCIATES ROCKY MOUNTAINS, INC.	WESTMINSTER, CO	303-426-0890

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Authorized Corcom Product Distributors and Resellers

All American www.allamerican.com 1-800-573-ASAP	**Hammond Electronics** www.hammondelec.com 1-800-929-2677
Allied Electronics, Inc. www.alliedelec.com 1-800-433-5700	**Heilind Electronics** www.heilind.com 1-800-400-7041
Arrow Electronics www.arrow.com 1-800-777-2776	**Marsh Electronics** www.marshelectronics.com 1-800-236-8327
Avnet www.avnet.com US: 1-800-332-8638	**Master Distributors** www.masterdistributors.com 1-888-473-5297
Carlton Bates Company www.carlton-bates.com 1-866-600-6040	**Mouser Electronics** www.mouser.com 1-800-346-6873
Digi-Key Corporation www.digikey.com 1-800-344-4539	**Newark Electronics** www.newark.com 1-800-463-9275
Electro Sonic www.e-sonic.com 1-800-567-6642	**Norvell Electronics** www.norvell.com 1-800-893-0593
Future Electronics www.futureelectronics.com US & Canada: 1-800-FUTURE-1 (388-8731)	**Sager Electronics** www.sager.com 1-800-SAGER-800
Genie Group www.geniegroup.com 1-615-771-9412	**Simcona Electronics** www.simcona.com US: 1-800-274-6266 Canada: 1-519-652-1130
Gopher Electronics www.gopherelectronics.com 1-800-592-9519	**TTI Inc.** www.ttiinc.com 1-800-CALL-TTI

Dimensions are in inches and millimeters unless otherwise specified. Values in italics are metric equivalents. Dimensions are shown for reference purposes only. Specifications subject to change.

For email, phone or live chat, please go to
te.com/help
corcom.com

Global Contacts

Americas

Argentina – Buenos Aires
Phone: +54-11-4733-2200
Fax: +54-11-4733-2211

Brasil – São Paulo
Phone: +55-11-2103-6000
Fax: +55-11-2103-6030

Chile – Santiago
Phone: +56-2-345-0361
Fax: +56-2-223-1477

Canada – Toronto
Phone: +905-475-6222
Fax: +905-474-5520
Product Information Center:
Phone: +905-470-4425
Fax: +905-474-5525

Colombia – Bogota
Phone: +57-1-319-8959
Fax: +57-1-319-8960

Mexico – Mexico City
Phone: +52-55-1106-0800
+01-800-733-8926
Fax: +52-55-1106-0901

For Latin/South American Countries not shown
Phone: +54-11-4733-2015
Fax: +54-11-4733-2083

United States
Harrisburg, PA
Phone: +1-717-564-0100
Fax: +1-717-986-7575
Product Information Center:
Phone: +1-800-522-6752
Fax: +1-717-986-7575

Mundelein, IL
Phone: +1-847-680-7400
Fax: +1-847-680-8169

Asia/Pacific

Australia – Sydney
Phone: +61-2-9554-2600
Fax: +61-2-9502-2556
Product Information Center:
Phone: +61-2-9840-8200
Fax: +61-2-9634-6188

India – Bangalore
Phone: +91-80-285-40800
Fax: +91-80-285-40820

Indonesia – Jakarta
Phone: +65-6482-0311
Fax: +65-6482-1012

Japan – Kawasaki, Kanagawa
Phone: +81-44-844-8111
Fax: +81-44-812-3207
Product Information Center:
Phone: +81-44-844-8013
Fax: +81-44-812-3200

Korea – Seoul
Phone: +82-2-3415-4500
Fax: +82-2-3486-3810

Malaysia – Selangor
Phone: +60-3-7805-3055
Fax: +60-3-7805-3066

New Zealand – Auckland
Phone: +64-9-634-4580
Fax: +64-9-634-4586

Philippines – Makati City
Phone: +632-848-0171
Fax: +632-867-8661

People's Republic of China
Hong Kong
Phone: +852-2735-1628
Fax: +852-2735-0243

Shanghai
Phone: +86-21-2407-1588
Fax: +86-21-2407-1599

Singapore – Singapore
Phone: +65-6482-0311
Fax: +65-6482-1012

Taiwan – Taipei
Phone: +886-2-8768-2788
Fax: +886-2-8768-2268

Thailand – Bangkok
Phone: +66-2-955-0500
Fax: +66-2-955-0505

Vietnam – Ho Chi Minh City
Phone: +84-8-930-5546
Fax: +84-8-930-3443

Europe/Middle East/Africa

Austria – Vienna
Phone: +43-1-905-60-0
Fax: +43-1-905-60-1333
Product Information Center:
Phone: +43-1-905-60-1228
Fax: +43-1-905-60-1333

Belarus – Minsk
Phone: +375 17 237 47 94
Fax: +375 17 237 47 94

Belgium – Kessel-Lo
Phone: +32-16-352-300
Fax: +32-16-352-355

Bulgaria – Sofia
Phone: +359-2-971-2152
Fax: +359-2-971-2153

Czech Republic and Slovakia
Czech Republic – Kurim
Phone: +420-541-162-111
Fax: +420-541-162-223
Product Information Center:
Phone: +420-541-162-113
Fax: +420-541-162-104

Denmark – Glostrup
Phone: +45-43-48-04-00
Fax: +45-43-44-14-14

Egypt – Cairo
Phone: +202-419-2334
Fax: +202-417-7647

Estonia – Tartu
Phone: +372-5138-274
Fax: +372-7400-779

Finland – Helsinki
Phone: +358-95-12-34-20
Fax: +358-95-12-34-250

France - Cergy-Pontoise Cedex
Phone: +33-1-3420-8888
Fax: +33-1-3420-8600
Product Information Center:
Phone: +33-1-3420-8686
Fax: +33-1-3420-8623

France Export Divisions –
Cergy-Pontoise Cedex
Phone: +33-1-3420-8804
Fax: +33-1-3420-8699

Germany – Bensheim
Phone: +49-6251-133-0
Fax: +49-6251-133-1600
Product Information Center:
Phone: +49-6251-133-1999
Fax: +49-6251-133-1988

Greece – Athens
Phone: +30-210-9370-396/397
Fax: +30-210-9370-655

Hungary – Budapest
Phone: +36-1-289-1000
Fax: +36-1-289-1010
Product Information Center:
Phone: +36-1-289-1016
Fax: +36-1-289-1017

Ireland – Dublin
Phone: +353-1-866-5612
Fax: +353-1-866-5714

Israel – Petach-Tikva
Phone: +972-3-929-0999
Fax: +972-3-919-1088

Italy – Collegno (Torino)
Phone: +39-011-4012-111
Fax: +39-011-4031-116
Product Information Center:
Phone: +39-011-4012-632
Fax: +39-011-40-287-632

Lithuania and Latvia
Lithuania – Vilnius
Phone: +370-5-213-1402
Fax: +370-5-213-1403
Product Information Center:
Phone: +370-5-211-3016
Fax: +370-5-213-1403

Netherlands –
's-Hertogenbosch
Phone: +31-73-6246-246
Fax: +31-73-6212-365
Product Information Center:
Phone: +31-73-6246-999
Fax: +31-73-6246-998

Norway – Nesbru
Phone: +47-66-77-88-50
Fax: +47-66-77-88-55

Poland – Warsaw
Phone: +48-22-4576-700
Fax: +48-22-4576-720
Product Information Center:
Phone: +48-22-4576-704
Fax: +48-22-4576-720

Romania – Bucharest
Phone: +40-21-311-3479/3596
Fax: +40-21-312-0574
Russia – Moscow
Phone: +7-495-790-7902
Fax: +7-495-721-1893
Product Information Center:
Phone: +7-495-790-7902-404
Fax: +7-495-790-7902-401

Russia – St. Petersburg
Phone: +7-812-718-8192
Fax: +7-812-718-8193

Slovenia – Ljubljana
Phone: +386-1561-3270
Fax: +386-1561-3240

South Africa – Port Elizabeth
Phone: +27-41-503-4500
Fax: +27-41-581-0440

Spain – Barcelona
Phone: +34-93-291-0330
Fax: +34-93-201-7879

Sweden – Upplands Väsby
Phone: +46-8-50-72-50-00
Fax: +46-8-50-72-50-01

Switzerland – Steinach
Phone: +41-71-447-0447
Fax: +41-71-447-0444

Turkey – Istanbul
Phone: +90-212-281-8181/2/3
+90-212-282-5130/5430
Fax: +90-212-281-8184

Ukraine – Kiev
Phone: +380-44-206-2265
Fax: +380-44-206-2264
Product Information Center:
Phone: +380-44-206-2265
Fax: +380-44-206-2264

United Kingdom –
Stanmore, Middlesex
Phone: +44-8706-080208
Fax: +44-208-954-6234
Product Information Center:
Freephone (UK only):
+0800-267-666
Phone: +44-8706-080208
Fax: +44-208-420-8095

FOR MORE INFORMATION
te.com/industry/commercial-building-technology
corcom.com

TE Technical Support Center

Internet:	te.com/help
USA:	+1 (800) 522-6752
Canada:	+1 (905) 475-6222
Mexico	+52 (0) 55-1106-0800
Latin/S. America:	+54 (0) 11-4733-2200
Germany:	+49 (0) 6251-133-1999
UK:	+44 (0) 800-267666
France:	+33 (0) 1-3420-8686
Netherlands:	+31 (0) 73-6246-999
China:	+86 (0) 400-820-6015

Part numbers in this brochure are RoHS Compliant*, unless marked otherwise.
*as defined www.te.com/leadfree

te.com
corcom.com

© 2011 Tyco Electronics Corporation, a TE Connectivity Ltd. company. All Rights Reserved.

1654001 CIS JG 06/2011

Corcom, TE Connectivity, TE connectivity (logo) and TE (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners.

While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

TE connectivity

Общество с ограниченной ответственностью «МосЧип» ИНН 7719860671 / КПП 771901001
Адрес: 105318, г.Москва, ул.Щербаковская д.3, офис 1107

Данный компонент на территории Российской Федерации

Вы можете приобрести в компании MosChip.

Для оперативного оформления запроса Вам необходимо перейти по данной ссылке:

http://moschip.ru/get-element

Вы можете разместить у нас заказ для любого Вашего проекта, будь то серийное производство или разработка единичного прибора.

В нашем ассортименте представлены ведущие мировые производители активных и пассивных электронных компонентов.

Нашей специализацией является поставка электронной компонентной базы двойного назначения, продукции таких производителей как XILINX, Intel (ex.ALTERA), Vicor, Microchip, Texas Instruments, Analog Devices, Mini-Circuits, Amphenol, Glenair.

Сотрудничество с глобальными дистрибьюторами электронных компонентов, предоставляет возможность заказывать и получать с международных складов практически любой перечень компонентов в оптимальные для Вас сроки.

На всех этапах разработки и производства наши партнеры могут получить квалифицированную поддержку опытных инженеров.

Система менеджмента качества компании отвечает требованиям в соответствии с ГОСТ Р ИСО 9001, ГОСТ РВ 0015-002 и ЭС РД 009

Офис по работе с юридическими лицами:

105318, г.Москва, ул.Щербаковская д.3, офис 1107, 1118, ДЦ «Щербаковский»

Телефон: +7 495 668-12-70 (многоканальный)

Факс: +7 495 668-12-70 (доб.304)

E-mail: info@moschip.ru

Skype отдела продаж:
moschip.ru
moschip.ru_4
moschip.ru_6
moschip.ru_9